

Cucumber Report

20 Oct, 2022 9:14:33 PM

Start : Oct 20, 9:14:30.557 PM

End : Oct 20, 9:14:32.103 PM

Duration : 1.546 s

Features

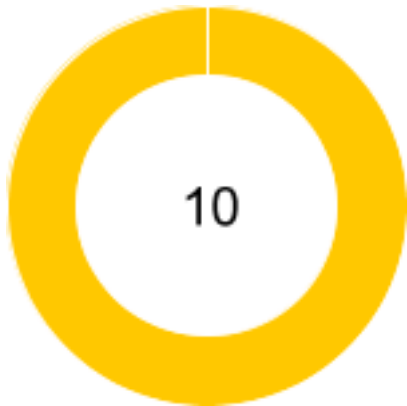
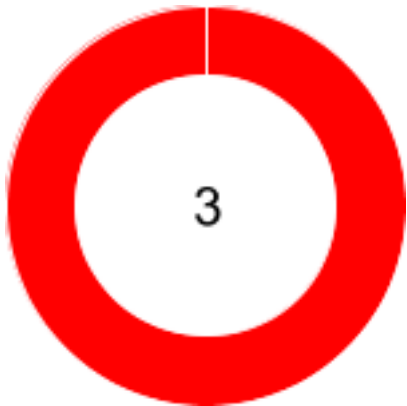
Scenarios

Steps

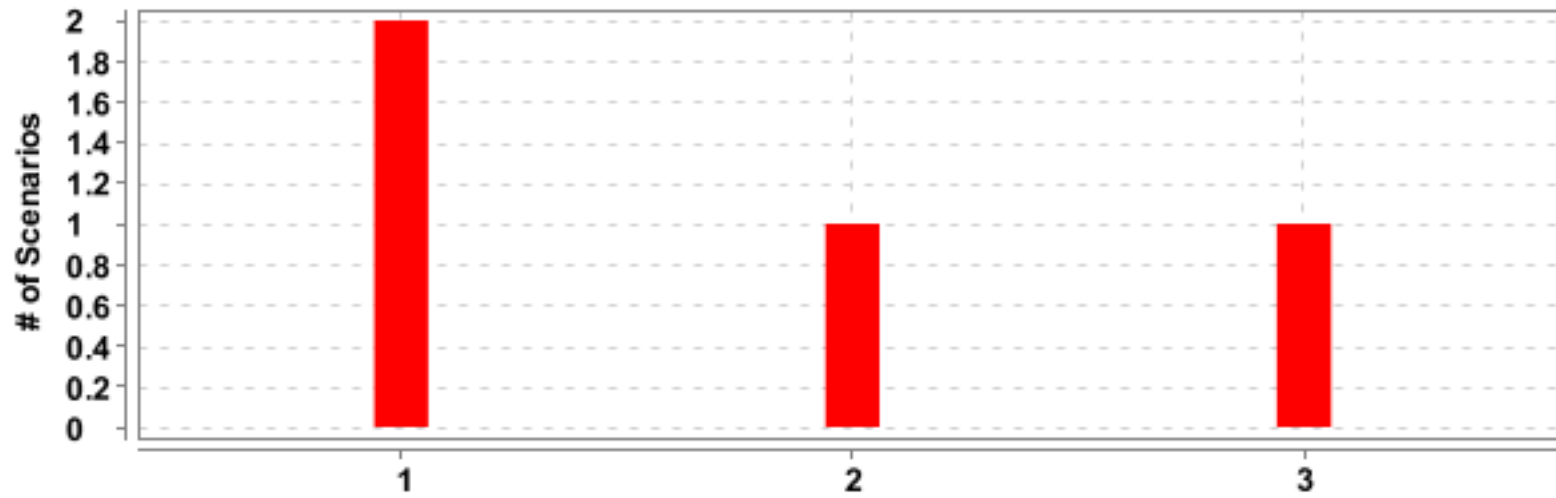
PASSED - 0
FAILED - 3
SKIPPED - 0

PASSED - 0
FAILED - 4
SKIPPED - 0

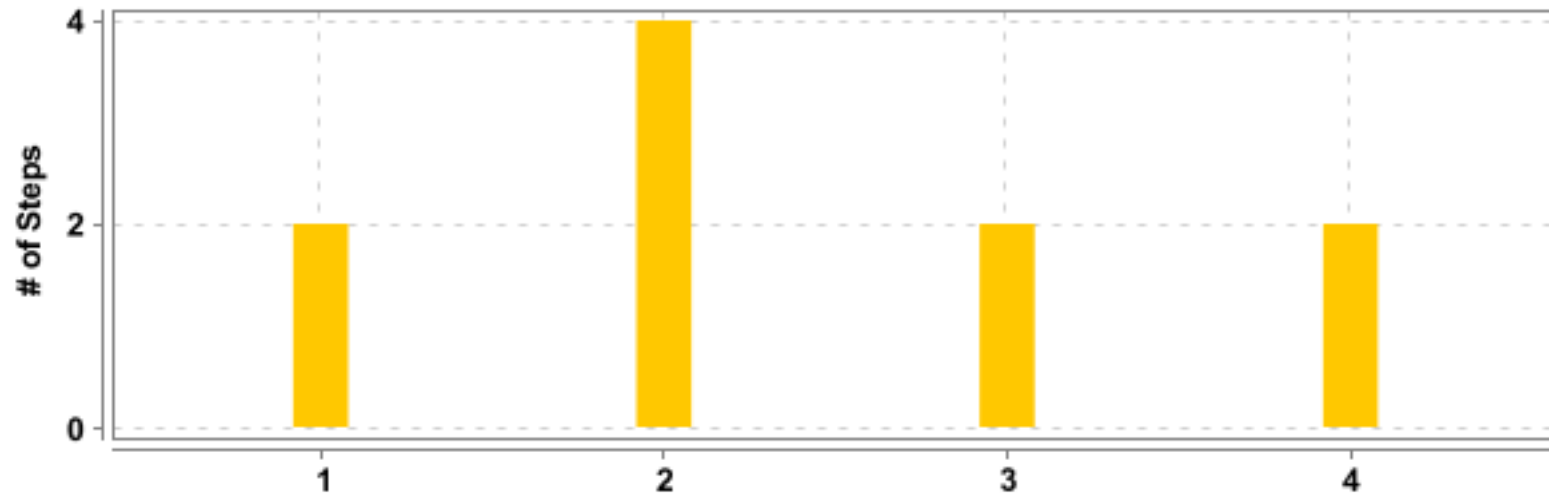
PASSED - 0
FAILED - 0
SKIPPED - 10



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>This is to test Items added to Cart on RahulShetty Academy Registration page</u>	1.333 s	2	0	2	0	6	0	0	6
<u>This is to test facebook.com</u>	0.096 s	1	0	1	0	2	0	0	2
<u>This is to test google.com</u>	0.098 s	1	0	1	0	2	0	0	2





#	Feature Name	T	P	F	S	Duration
1	<u>This is to test Items added to Cart on RahulShetty Academy Registration page</u>	2	0	2	0	1.333 s
2	<u>This is to test facebook.com</u>	1	0	1	0	0.096 s
3	<u>This is to test google.com</u>	1	0	1	0	0.098 s



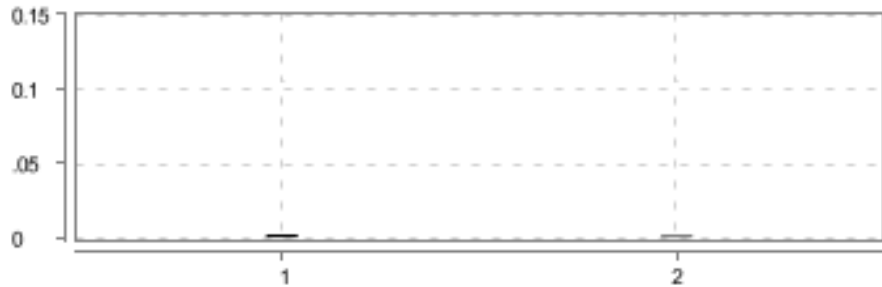

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>This is to test Items added to Cart on RahulShetty Academy Registration *</u>	<u>Add Item to Cart in Rahul Shetty academy Shopping Application</u>	2	0	0	2	1.208 s
2	<u>This is to test Items added to Cart on RahulShetty Academy Registration *</u>	<u>Login with correct credentials</u>	4	0	0	4	0.101 s
3	<u>This is to test facebook.com</u>	<u>To test the facebook URL opening on browser</u>	2	0	0	2	0.096 s
4	<u>This is to test google.com</u>	<u>To test the URL opening on browser</u>	2	0	0	2	0.097 s

* The feature name and/or scenario name has been cropped to fit in the available space.

This is to test Items added to Cart on RahulShetty Academy Registration page

FAILED	DURATION - 1.333 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 6 Pass - 0 Fail - 0 Skip - 6	
/ 9:14:30.557 PM // 9:14:31.890 PM /					

Add Item to Cart in Rahul Shetty academy Shopping Application

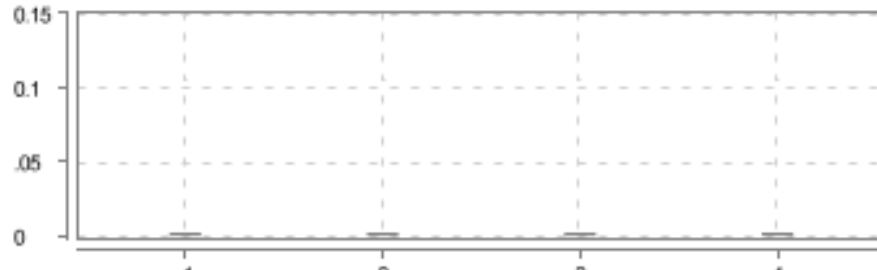

FAILED		DURATION - 1.208 s			Steps Total - 2 Pass - 0 Fail - 0 Skip - 2	
/ 9:14:30.561 PM // 9:14:31.769 PM /						
This is to test Items added to Cart on RahulShetty Academy Registration page						

#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser() org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33) Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision: 'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version: FirefoxDriver at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)	FAILED	1.171 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33) at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source) at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source) at java.lang.reflect.Method.invoke(Unknown Source) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.TestCase.run(TestCase.java:98) at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </pre>		
1	Given User enters the website through URL	SKIPPED	0.002 s
2	Then User gets the title of the page "Let's Shop"	SKIPPED	0.001 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	<pre> java.lang.NullPointerException at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46) </pre>		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.000 s
	<pre> java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38) </pre>		

Login with correct credentials



FAILED		DURATION - 0.101 s			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 4</div>		
/ 9:14:31.789 PM // 9:14:31.890 PM /							
This is to test Items added to Cart on RahulShetty Academy Registration page							

#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser()	FAILED	0.091 s
	<pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) </pre>		

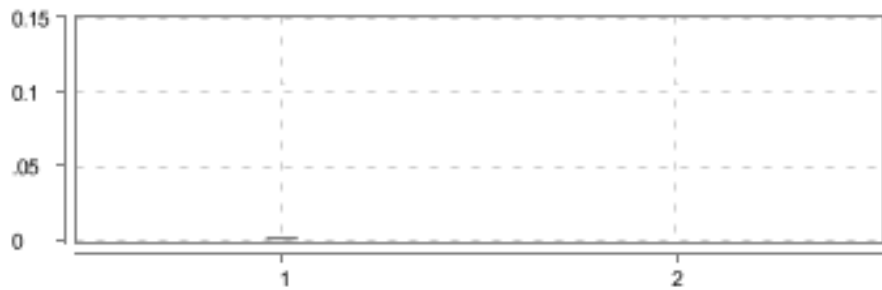

#	Step / Hook Details	Status	Duration
	<p>at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)</p> <p>Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision: 'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version: FirefoxDriver</p> <p>at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157)</p> <p>at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110)</p> <p>at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98)</p> <p>at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94)</p> <p>at com.Factory.DriverFactory.init_driver(DriverFactory.java:33)</p> <p>at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)</p> <p>at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)</p> <p>at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)</p> <p>at java.lang.reflect.Method.invoke(Unknown Source)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:64)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:98)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)</p>		

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	Given user is on login page	SKIPPED	0.001 s
2	When user enters email "keer26@gmail.com"	SKIPPED	0.001 s
3	And user enters password "Keerthu@1988"	SKIPPED	0.001 s
4	And user clicks on Login button	SKIPPED	0.001 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.000 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)		

This is to test facebook.com

FAILED	DURATION - 0.096 s	Scenarios		Steps	
/ 9:14:31.900 PM // 9:14:31.996 PM /		Total - 1		Total - 2	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 2	

To test the facebook URL opening on browser



<div>FAILED</div> <div>DURATION - 0.096 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 2</div>	
/ 9:14:31.900 PM // 9:14:31.996 PM /				
This is to test facebook.com				

#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser() org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33) Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision: 'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version: FirefoxDriver at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33) at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source) at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source) at java.lang.reflect.Method.invoke(Unknown Source) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24)	FAILED	0.088 s

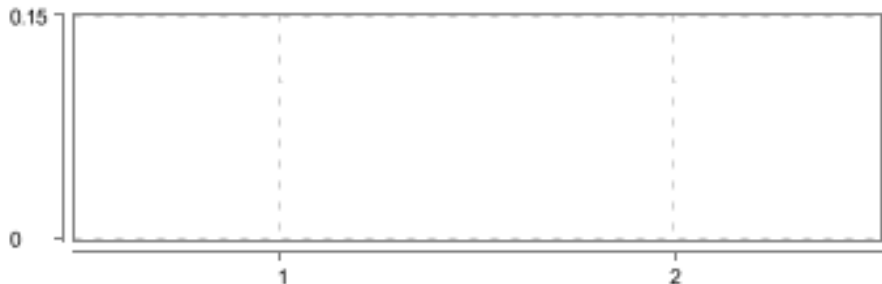

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.TestCase.run(TestCase.java:98) at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	When User enters the facebook URL in the browser	SKIPPED	0.001 s
2	Then the facebook has to opened in the driver	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.000 s
	java.lang.NullPointerException		

#	Step / Hook Details	Status	Duration
	at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser() java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)	FAILED	0.001 s

This is to test google.com

FAILED	DURATION - 0.098 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 2 Pass - 0 Fail - 0 Skip - 2	
/ 9:14:32.005 PM // 9:14:32.103 PM /					

To test the URL opening on browser

FAILED	DURATION - 0.097 s		Steps Total - 2 Pass - 0 Fail - 0 Skip - 2	
/ 9:14:32.006 PM // 9:14:32.103 PM /				
This is to test google.com				

#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser() org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)	FAILED	0.092 s

#	Step / Hook Details	Status	Duration
	<p>Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision: 'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version: FirefoxDriver</p> <pre> at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33) at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source) at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source) at java.lang.reflect.Method.invoke(Unknown Source) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.TestCase.run(TestCase.java:98) at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) </pre>		

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	When User enters the designated URL in the browser	SKIPPED	0.000 s
2	Then the google has to opened in the driver	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.000 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)		