

Ex.No:7	
Date:	

AIM:

ALGORITHM:

CODE:

```
import tkinter as tk
from datetime import datetime

monitoring = False

def start_monitoring():
    global monitoring
```

```
monitoring = True
```

```
status_label.config(text="Status: Monitoring")
```

```
input_area.focus_set()
```

```
def stop_monitoring():
```

```
    global monitoring
```

```
    monitoring = False
```

```
    status_label.config(text="Status: Stopped")
```

```
def key_pressed(event):
```

```
    if monitoring:
```

```
        key = event.keysym
```

```
        if event.keysym == "space":
```

```
            key = "space"
```

```
        time = datetime.now().strftime("%H:%M:%S")
```

```
        output_area.insert(
```

```
            tk.END,
```

```
            time + " Key Pressed: " + key + "\n"
```

```
        )
```

```
# Create window

window = tk.Tk()

window.title("Keyboard Event Monitoring")

window.geometry("600x450")


# Heading

title = tk.Label(

    window,

    text="Keyboard Event Monitoring",

    font=("Arial", 18, "bold")

)

title.pack(pady=10)


# Input label

input_label = tk.Label(

    window,

    text="Type something here:"

)

input_label.pack()


# Input area

input_area = tk.Text(window, height=5, width=60)

input_area.pack(pady=5)


# Start button
```

```
start_button = tk.Button(  
    window,  
    text="Start Monitoring",  
    command=start_monitoring  
)  
start_button.pack(pady=5)
```

Stop button

```
stop_button = tk.Button(  
    window,  
    text="Stop Monitoring",  
    command=stop_monitoring  
)  
stop_button.pack(pady=5)
```

Status

```
status_label = tk.Label(  
    window,  
    text="Status: Stopped"  
)  
status_label.pack(pady=5)
```

Output label

```
output_label = tk.Label(  
    window,  
    text="Keyboard Events"  
)
```

```
output_label.pack()
```

```
# Output area
```

```
output_area = tk.Text(
```

```
    window,
```

```
    height=10,
```

```
    width=60
```

```
)
```

```
output_area.pack(pady=5)
```

```
# Make output read-only
```

```
output_area.config(state=tk.NORMAL)
```


```
# Keyboard event
```

```
input_area.bind("<KeyPress>", key_pressed)
```

```
# Display window
```

```
window.mainloop()
```

Output:

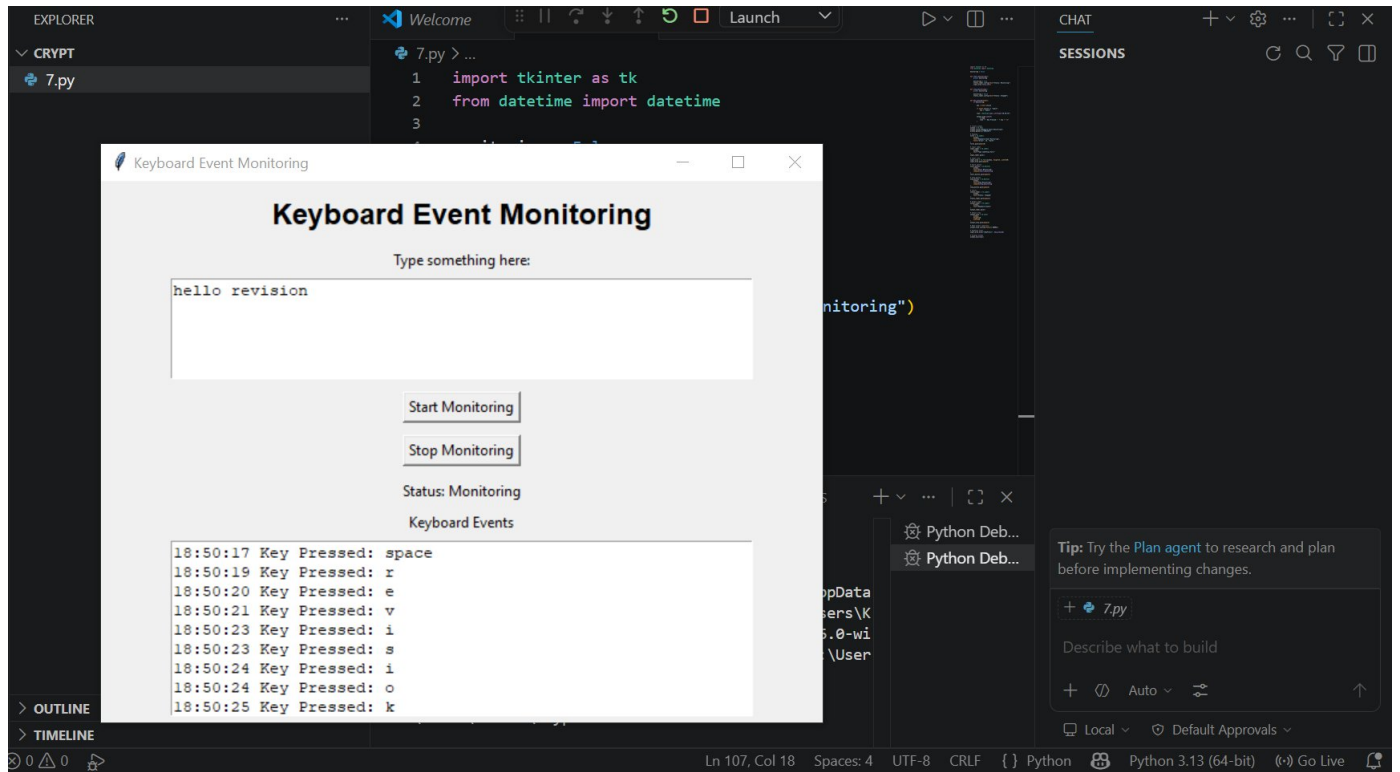

Result: