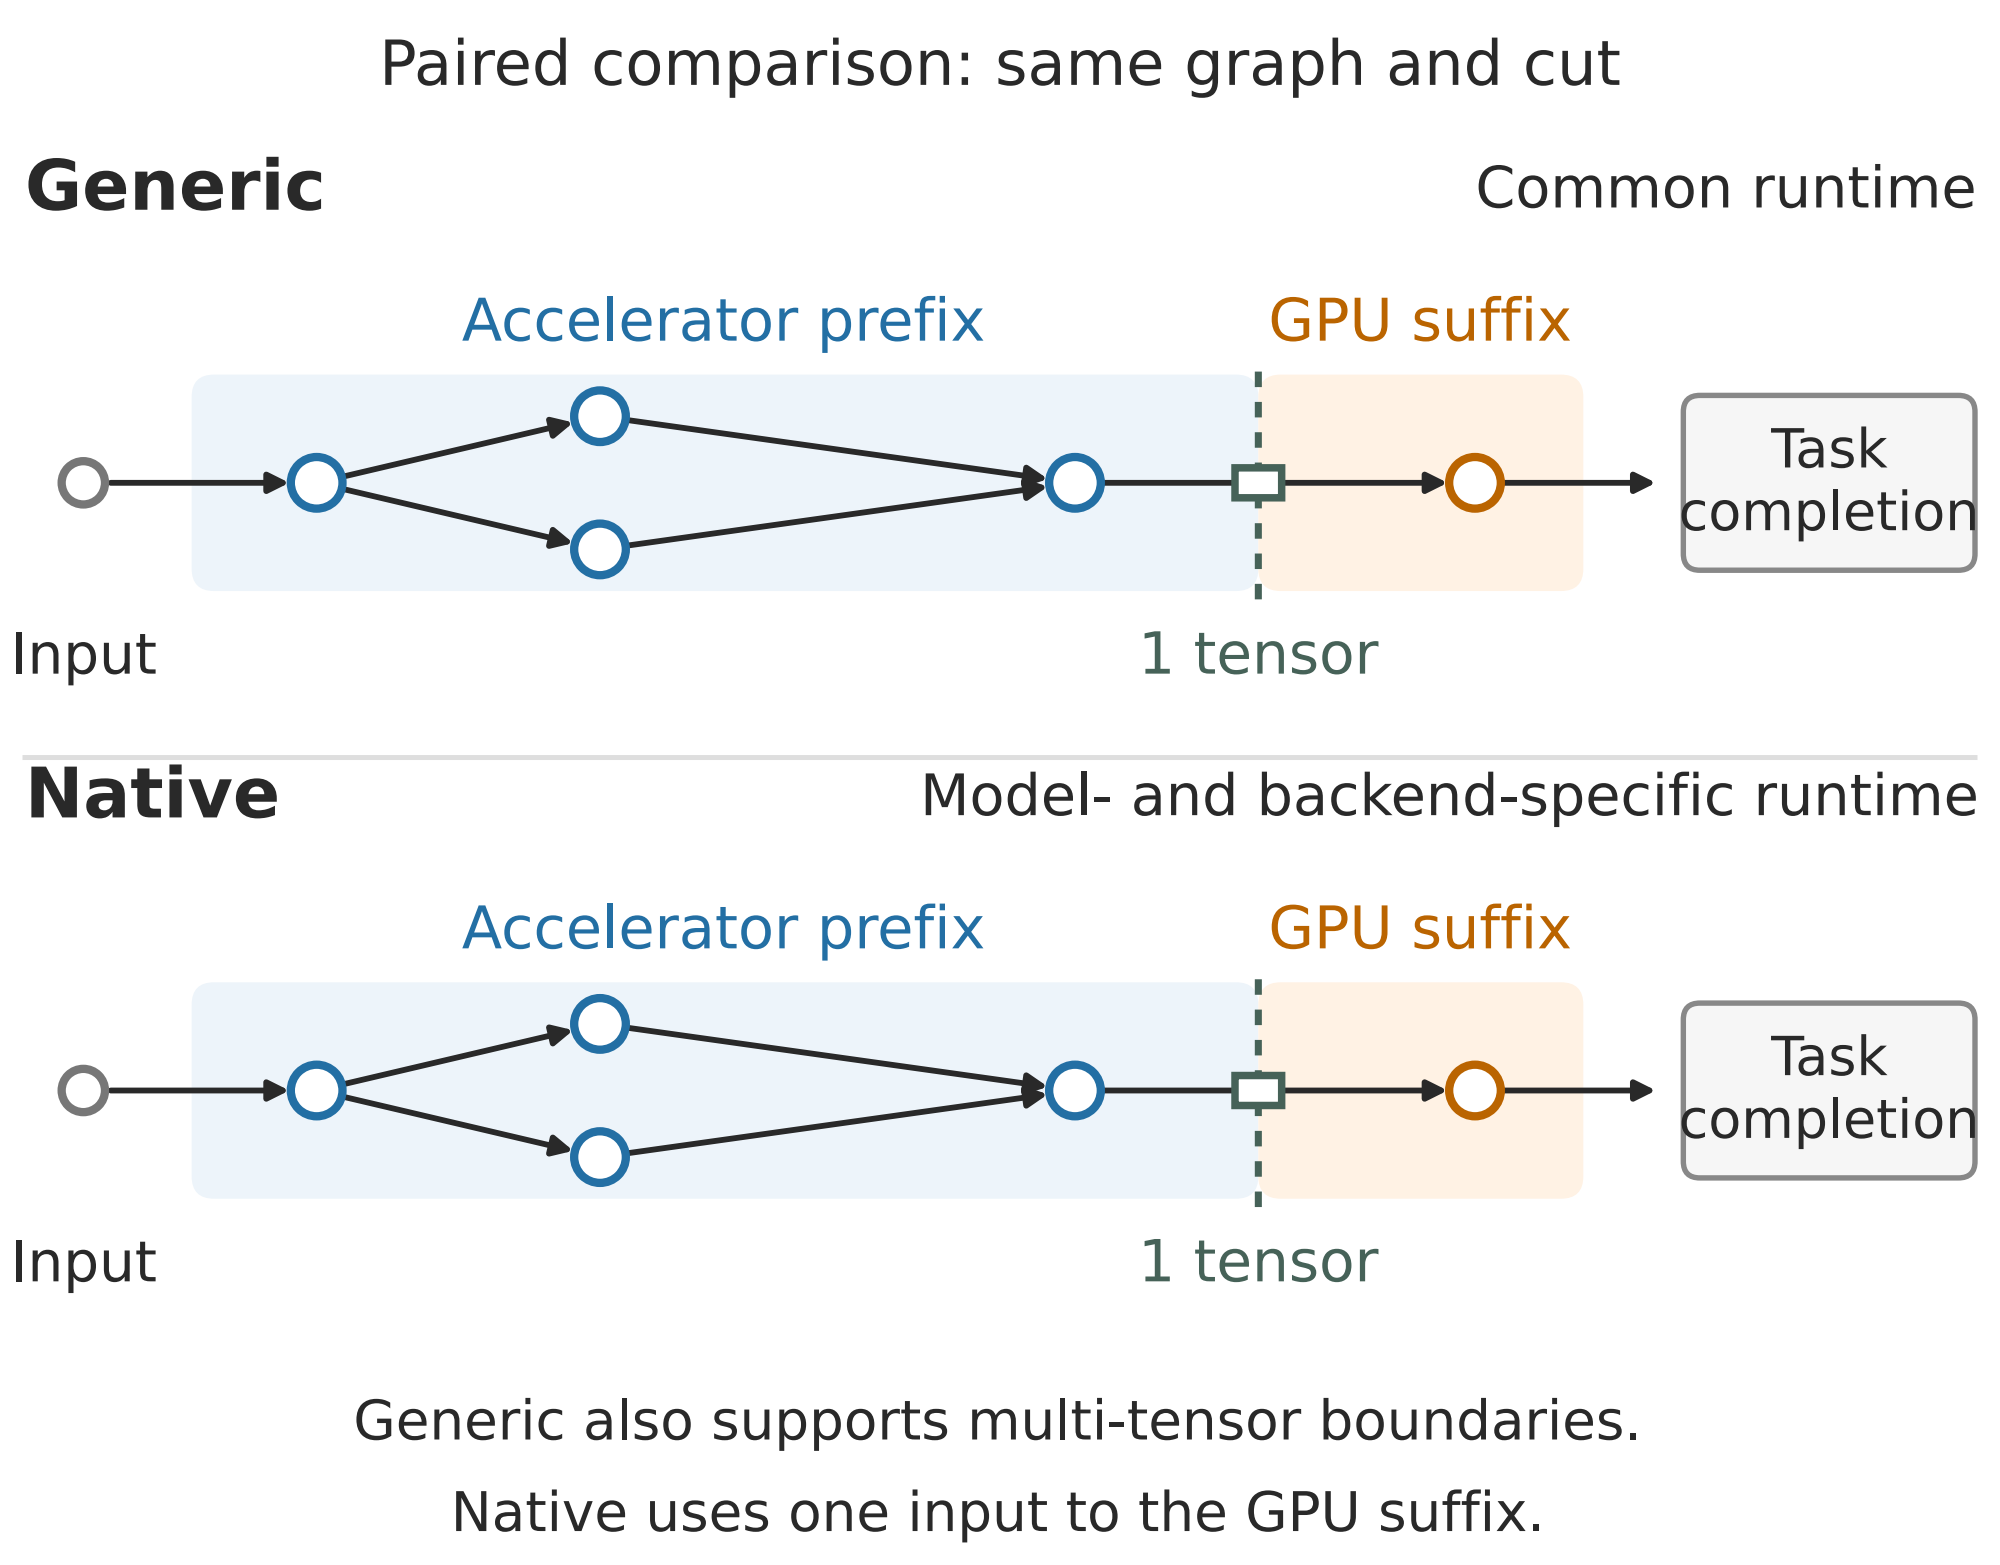
Paired comparison: same graph and cut
Generic
Common runtime
Accelerator prefix
GPU suffix
Task completion
Input
1 tensor
Native
Model- and backend-specific runtime
Accelerator prefix
GPU suffix
Task completion
Input
1 tensor
Generic also supports multi-tensor boundaries.
Native uses one input to the GPU suffix.