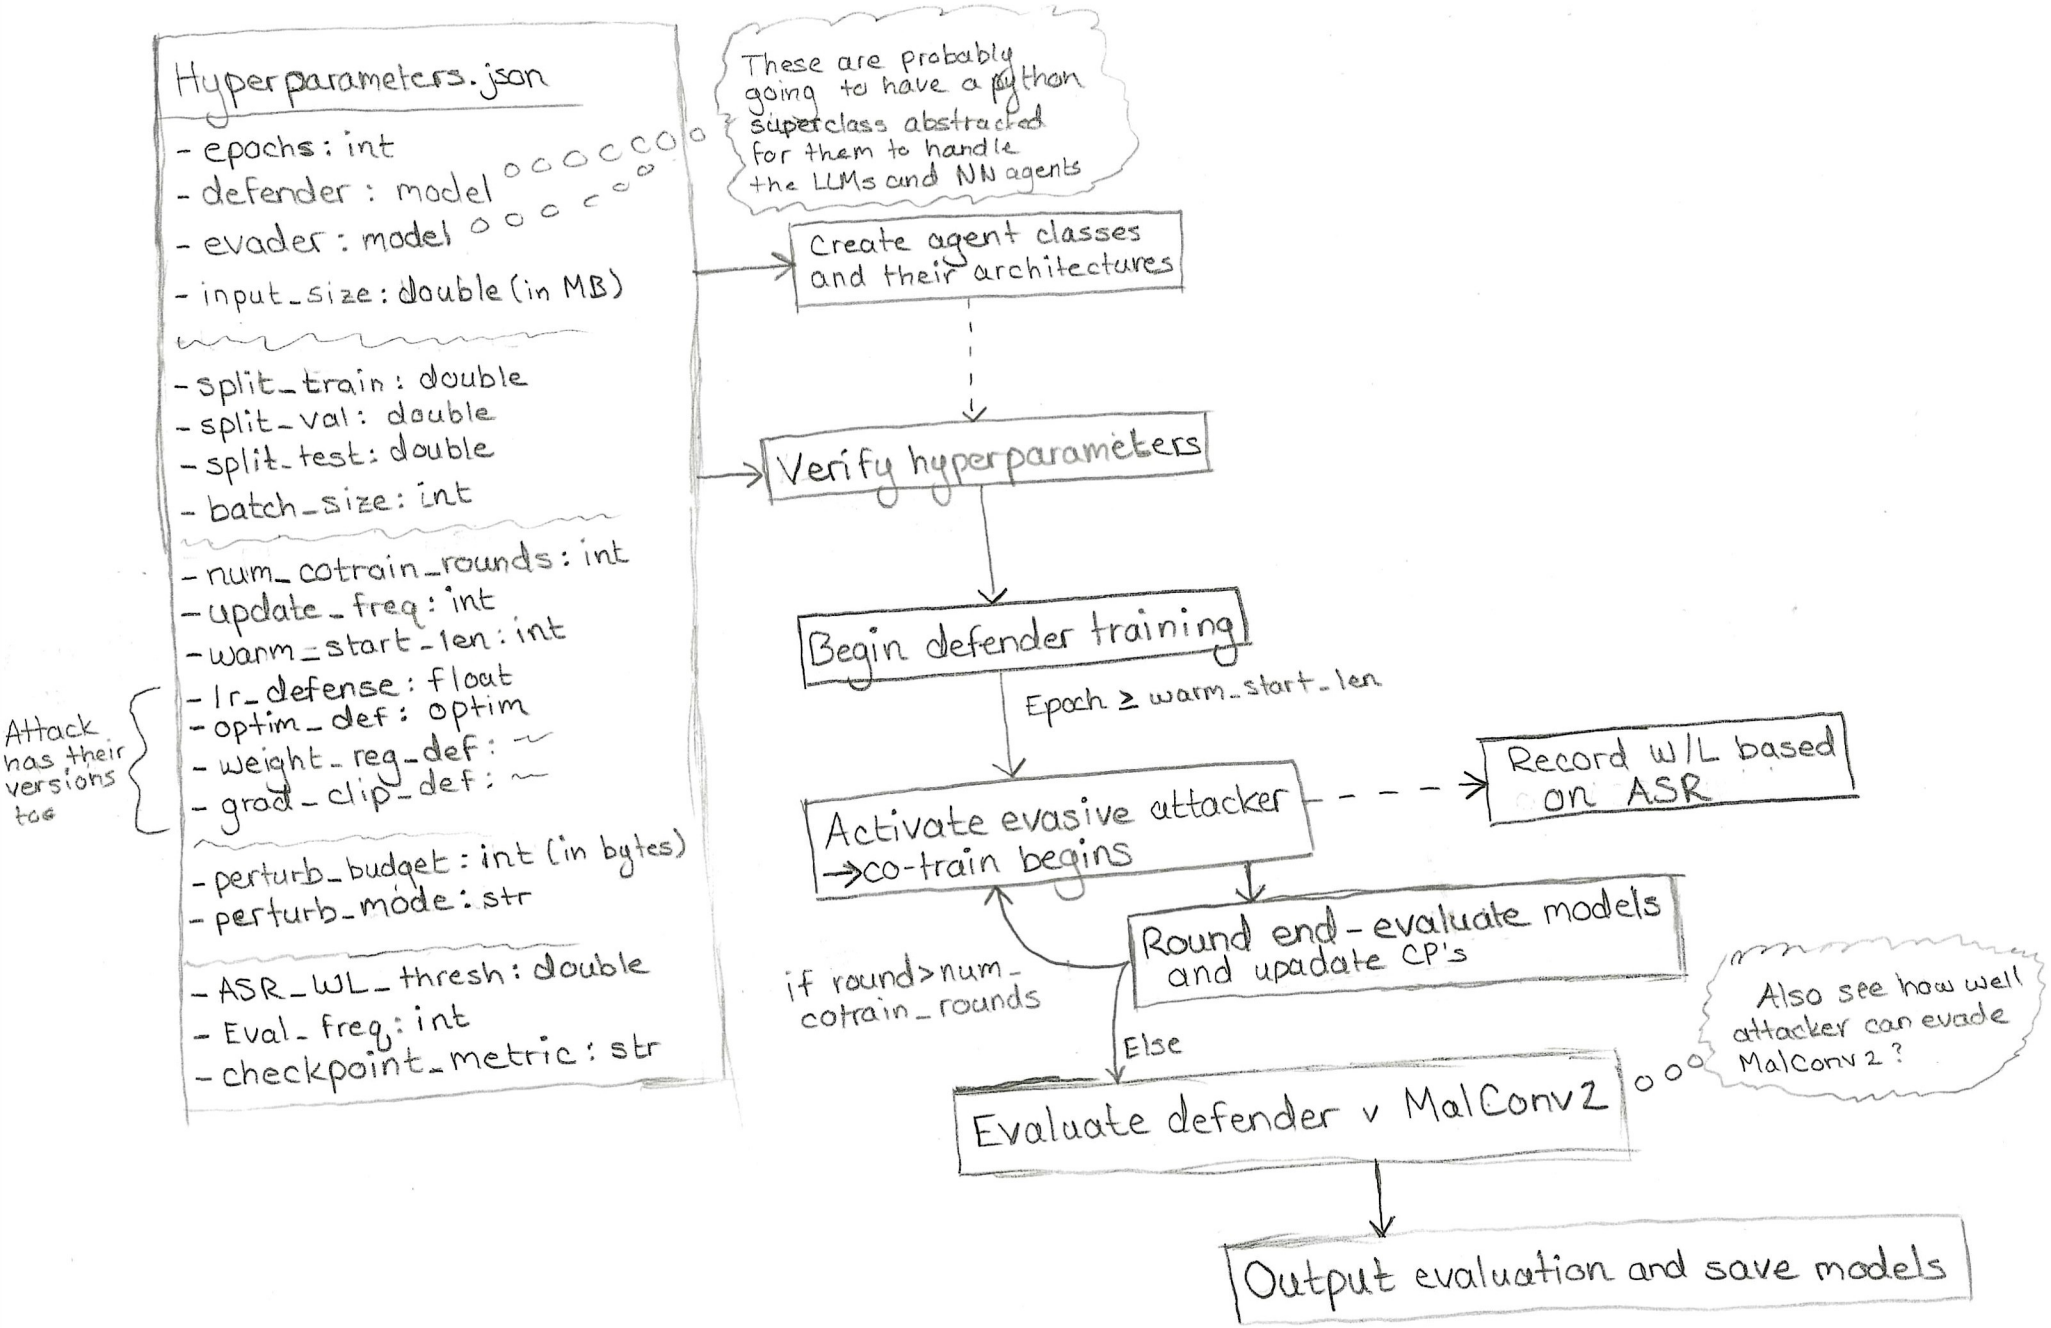
Hyperparameters.json
- epochs: int
- defender: model
- evader: model
- input_size: double (in MB)
- split_train: double
- split_val: double
- split_test: double
- batch_size: int
- num_cotrain_rounds: int
- update_freq: int
- warm_start_len: int
- lr_defense: float
- optim_def: optim
- weight_reg_def: ~
- grad_clip_def: ~
- perturb_budget: int (in bytes)
- perturb_mode: str
- ASR_WL_thresh: double
- Eval_freq: int
- checkpoint_metric: str
Attack has their versions too
These are probably going to have a python superclass abstracted for them to handle the LLMs and NN agents
Create agent classes and their architectures
Verify hyperparameters
Begin defender training
Epoch ≥ warm_start_len
Activate evasive attacker
→co-train begins
Record w/L based on ASR
Round end - evaluate models and upadate CP's
if round>num_cotrain_rounds
Else
Evaluate defender v MalConv2
Also see how well attacker can evade MalConv 2?
Output evaluation and save models