Surname: DITLHOTLHOLE Initials: K.J.D

Student ID: 202002023

2.iiii. Output: -rw-r—r—1 dit02023 dit02023 30 Feb 27 12:37 first.sh

2.v. Output: -rwx------ 1 dit02023 dit02023 30 Feb 27 12:37 first.sh

2.vi. Output: Hello World

3. Types of Variables = Environmental and Local variables

4. A simple variable declaration statement within a shell script

STUDENT= “Joy”

5.The command used to list all environmental variables

env

6. All environmental variables starting with a “P”

PWD

PATH

7. The output for **echo PATH** is

PATH

The output for **echo $PATH**

The difference is that the command starts all the directories in the path separated with a colon.

8. The command that will print the value of dog is

echo $DOG

9.

a. [ndlovuk@linuxnix common]$

\u@\h \w \$


That is username, connected server, the current directory and prompt character.

b. [root@linuxnix dev]*

\h,connected server and dev is the current directory.

This one doesn’t have a prompt character like the first one. It doesn‘t have a username like the first one

10.

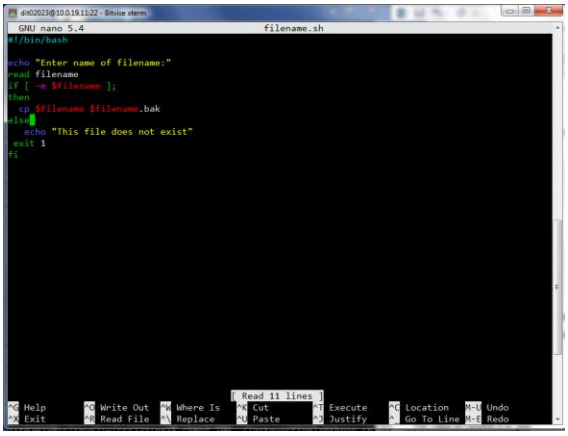

#!/bin/bash

echo “Enter name of filename:”

read filename

if [-e $filename];

then

cp $filename $filename.back

else

echo “This file does not exist”

exit 1

fi

11. The output for sparameters.sh John, mary, Jane was

3; ./sparameters.sh; John,; mary,; John, mary, Jane; John, mary, Jane

John, mary and Jane are somewhat printed 3 times.

12. The output is:

The value of variable x is: paper

The value of variable x is: pencil

The value of variable x is: pen

How it is displayed:

In the for loop, the statement “The value of variable x is:” is printed 3 times. “x” in this case is paper, pencil, pen thus the statement will be printed 3 times. I typed ./ and the file name and the output was displayed.