

Aims

Getting started with Perl programming.

Assessment

Submission: give cs2041 lab05 digits.pl echon.pl tail.pl
also submit shuffle.pl and shuffle_test.sh if you attempt these challenge exercises

Deadline: either during the lab, or Monday 29 August 11:59pm (midnight)

Assessment: Make sure that you are familiar with the lab assessment criteria (<lab/assessment.html>).

Background

We have covered only a small amount of Perl in lectures. In fact, to cover the whole language in detail would take a whole semester, so we're going to rely on you finding out about the language yourself in tutes, labs and assignments. A good place to start is the Perl documentation & tutorial links on the class home page For example you might find these useful:

- Perl language syntax (<http://search.cpan.org/dist/perl/pod/perlsyn.pod>)
- Perl functions (<http://search.cpan.org/dist/perl/pod/perlsub.pod>)
- Perl operators (<http://search.cpan.org/dist/perl/pod/perlop.pod>)

Storing lab work on gitlab.cse.unsw.edu.au

For this and future labs you are going to use a version control system named git to store copies of your lab work in a repository at gitlab.cse.unsw.edu.au.

Don't panic this is easy to do and will ensure you have a complete backup of all work on your lab and can return to its state at any stage.

It will also allow your tutor to check you are progressing on the lab as they can access your gitlab repository

Adding Your SSH Key to Gitlab

1. First print your CSE ssh key (if you have one:). This command should should do it.

```
$ cat ~/.ssh/id_rsa.pub  
ssh-rsa AAAAB3NzaC1yc2EAAAABIwAAAQEAYNSzIDylSPAAGLzUXdw359UhO+t1N6wW
```

2. If you couldn't print a ssh key with the above command, you need to generate an ssh key. You can do it like this (just hit return for each questions).

```
$ ssh-keygen  
Generating public/private rsa key pair.  
Enter file in which to save the key (/import/kamen/3/z5555555/.ssh/id_rsa):  
Created directory '/import/kamen/3/z5555555/.ssh'.  
Enter passphrase (empty for no passphrase):  
Enter same passphrase again:  
Your identification has been saved in /import/kamen/3/z5555555/.ssh/id_rsa.  
Your public key has been saved in /import/kamen/3/z5555555/.ssh/id_rsa.pub.  
The key fingerprint is:  
b8:02:31:8b:bf:f5:56:fa:b0:1c:36:89:ad:e1:cb:ad z5555555@williams  
The key's randomart image is:  
...  
.
```


3. Now add your ssh key to gitlab:

4. Go to <https://gitlab.cse.unsw.edu.au/profile/keys/new> (<https://gitlab.cse.unsw.edu.au/profile/keys/new>) Click on [Sign in](#)

5. Supply your UNSW login (e.g. z5555555) and zPass and click the [UNSW Sign in](#) button.

6. Cut-and-paste your ssh-key (the entire 200+ character line printed by `cat ~/.ssh/id_rsa.pub`) into the **"Key"** field.
Don't cut-and paste z5555555's ssh key above - cut-and-paste your ssh-key!

7. At this point, your screen should look something like this:

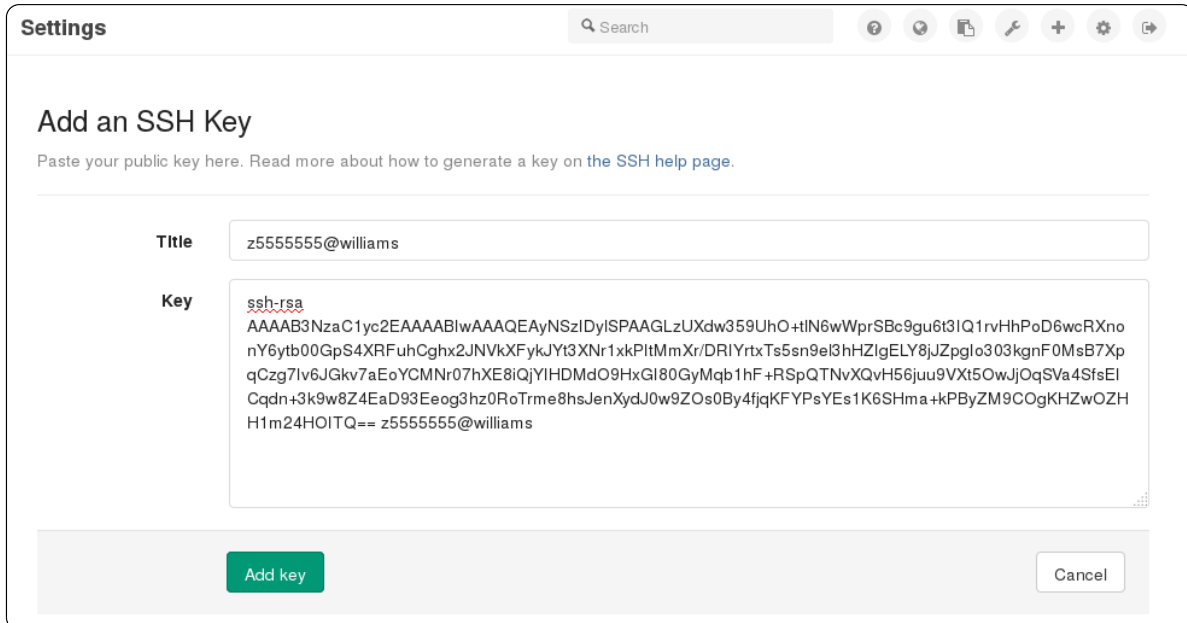

Settings Search

Add an SSH Key

Paste your public key here. Read more about how to generate a key on [the SSH help page](#).

Title z5555555@williams

Key `ssh-rsa
AAAAB3NzaC1yc2EAAAABIwAAAQEAyNSzlDylSPAAGLzUXdw359UhO+tIN6wWprSBc9gu6t3IQ1rvHhPoD6wcRXno
nY6ytb00GpS4XRFuhCghx2JNVkXFykYt3XNr1xkPltMmXr/DRIYrtxTs5sn9el3hHZlglELY8jJZpglo303kgnF0MsB7Xp
qCzg7lv6JGkv7aEoYCMNr07hXE8iQjYIHDMdO9HxGI80GyMqb1hF+RSpQTNvXQvH56juu9VXt5OwjOqSVa4SfsEI
Cqdn+3k9w8Z4EaD93Eeog3hz0RoTrme8hsJenXydJ0w9ZOs0By4fjqKFYPsYEs1K6SHma+kPByZM9COgKHZwOZH
H1m24HOITQ== z5555555@williams`

Add key Cancel

8. click the green **Add key** button

Creating a Git Repository in your CSE account

A repository for your COMP[29]041 labs has already been created for you on `gitlab.cse.unsw.edu.au`.

You'll also need a git repository for your labs in your CSE account.

The instructions below will create a new directory for your COMP[29]041 labs named **2041-labs**.

From now on put the files for each lab in a sub-directory of this lab.

You can if you wish move earlier labs into this directory as well but do this **after** following the instructions below.

Make sure you replace 555555 below by your student number!

```
$ cd
$ git clone gitlab@gitlab.cse.unsw.EDU.AU:z5555555/16s2-comp2041-labs 2041-labs
Cloning into '2041-labs'...
$ chmod 700 2041-labs
$ cd 2041-labs
$ ln -sf /home/cs2041/public_html/scripts/autotest-pre-commit-hook .git/hooks/pre-commit
$ ls -la
drwx-----  3 z5555555 z5555555  4096 Aug 27 14:44 .
drwxr-x--x 107 z5555555 z5555555 16384 Aug 27 14:51 ..
drwx-----  7 z5555555 z5555555  4096 Aug 27 14:44 .git
drwx-----  7 z5555555 z5555555  4096 Aug 27 14:44 lab05
drwx-----  7 z5555555 z5555555  4096 Aug 27 14:44 lab06
...
$ cd lab05
```

You now have a git repository in your CSE account for this and future week's lab work. The sub-directory `.git` is where git stores information.

Create the files for this week's lab in **2041-labs/lab05** and push them to `gitlab.cse.unsw.edu.au` when every you make some progress.

BTW the line

```
$ ln -s /home/cs2041/public_html/16s2/scripts/autotest-pre-commit-hook .git/hooks/pre-commit
```

results in git running autotests for every commit. This should be useful to you and is small example of customizing git for building a software system.

Exercise: Mapping Digits

Write a Perl script `digits.pl` that reads from standard input and writes to standard output mapping all digit characters whose values are less than 5 into the character '`<`' and all digit characters whose values are greater than 5 into the character '`>`'. The digit character '5' should be left unchanged.

[illegible]

As usual you can run some tests on your script like this:

```
$ ~cs2041/bin/autotest lab05 digits.pl
```

Also do your own testing!

Pushing to gitlab.cse.unsw.edu.au

When you make some progress with `digits.pl` do this to push it to `gitlab.cse.unsw.edu.au`.

```
$ git add digits.pl
$ git commit -a -m "first version"
[master 4cdfa5f] first version
1 file changed, 17 insertions(+)
create mode 100755 .pl
$ git push -u origin master
Counting objects: 3, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 239 bytes, done.
Total 2 (delta 1), reused 0 (delta 0)
To gitlab@calliope1.cse.unsw.EDU.AU:z5555555/16s2-comp2041-labs.git
36ccb2b..4cdfa5f  master -> master
```

Later on when you have made more progress with `digits.pl` do this to commit the new version & push it to gitlab.

```
$ git commit -a -m "digits.pl passes autotests"
...
$ git push
```

If you explore at <https://gitlab.cse.unsw.edu.au/z5555555/16s2-comp2041-labs> (replacing 5555555 with your student number) you'll find both versions of `digits.pl`

Follow the same steps for all the programs you write from now on for COMP[29]041.

Exercise: Repeated Echo

Write a Perl script `echon.pl` which given exactly two arguments, an integer n and a string, prints the string n times. For example:

```
$ ./echon.pl 5 hello
hello
hello
hello
hello
hello
```

```
$ ./echon.pl 0 nothing
```

```
$ ./echon.pl 1 goodbye
goodbye
```

Your script should print an error message if it is not given exactly 2 arguments. For example:

```
$ ./echon.pl
Usage: ./echon.pl <number of lines> <string>
```

```
$ ./echon.pl 1 2 3
Usage: ./echon.pl <number of lines> <string>
```

As usual use `autotest` to assist in testing your code and push `echon.pl` to `gitlab.cse.unsw.edu.au` every time you make some progress with it.

```
$ ~cs2041/bin/autotest lab05 echon.pl
...
$ git add echon.pl
$ git commit -a -m "first version of echon.pl"
...
$ git push
...
```

Exercise: Tail

Perl file manipulation

The standard approach in Perl for dealing with a collection of files whose names are supplied as command line arguments, is something like:

```
#!/usr/bin/perl -w
@files = ();
foreach $arg (@ARGV) {
    if ($arg eq "--version") {
        print "$0: version 0.1\n";
        exit(0);
    }
    # handle other options
    # ...
    else {
        push @files, $arg;
    }
}
foreach $f (@files) {
    open(F,"<$f") or die "$0: Can't open $f: $!\n";
    # process F
    #...
    close(F);
}
```

Write a Perl script to implement the Unix `tail` command. It should support the following features of `tail` :

- read from files supplied as command line arguments
- read from standard input if no file name arguments are supplied
- display the error message `tail.pl: can't open FileName` for any unreadable file
- display the last N lines of each file (default $N = 10$)
- can adjust the number of lines displayed via an optional first argument `-N`

- if there are more than one named files, separate each by `==> FileName <==`

To assist with testing your solution, there are three small t files: t1.txt (lab/perl/tail/t1.txt), t2.txt (lab/perl/tail/t2.txt), and t3.txt (lab/perl/tail/t3.txt). Copy these files to your current directory.

```
$ cp /home/cs2041/public_html/lab/perl/tail/t?.txt .
```

Using these data files, your program should behave as follows:

```
$ ./tail.pl <t1.txt
```

```
String found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before " or die "?)
```

```
Scalar found where operator expected at ./tail.pl line 16, near "" or die  
(Missing operator before $0?)
```

```
Backslash found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before \?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
```

```
String found where operator expected at ./tail.pl line 17, near "print "  
(Might be a runaway multi-line "" string starting on line 16)
```

```
(Missing semicolon on previous line?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 17
```

```
String found where operator expected at ./tail.pl line 17, at end of line  
(Missing semicolon on previous line?)
```

```
syntax error at ./tail.pl line 16, near "$file" or die ""
```

```
Can't find string terminator '"' anywhere before EOF at ./tail.pl line 17
```

```
$ ./tail.pl t1.txt
```

```
String found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before " or die "?)
```

```
Scalar found where operator expected at ./tail.pl line 16, near "" or die  
(Missing operator before $0?)
```

```
Backslash found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before \?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
```

```
String found where operator expected at ./tail.pl line 17, near "print "  
(Might be a runaway multi-line "" string starting on line 16)
```

```
(Missing semicolon on previous line?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 17
```

```
String found where operator expected at ./tail.pl line 17, at end of line  
(Missing semicolon on previous line?)
```

```
syntax error at ./tail.pl line 16, near "$file" or die ""
```

```
Can't find string terminator '"' anywhere before EOF at ./tail.pl line 17
```

```
$ ./tail.pl -5 t1.txt
```

```
String found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before " or die "?)
```

```
Scalar found where operator expected at ./tail.pl line 16, near "" or die  
(Missing operator before $0?)
```

```
Backslash found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before \?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
```

```
String found where operator expected at ./tail.pl line 17, near "print "  
(Might be a runaway multi-line "" string starting on line 16)
```

```
(Missing semicolon on previous line?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 17
```

```
String found where operator expected at ./tail.pl line 17, at end of line  
(Missing semicolon on previous line?)
```

```
syntax error at ./tail.pl line 16, near "$file" or die ""
```

```
Can't find string terminator '"' anywhere before EOF at ./tail.pl line 17
```

```
$ ./tail.pl -5 t2.txt
```

```
String found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before " or die "?)
```

```
Scalar found where operator expected at ./tail.pl line 16, near "" or die  
(Missing operator before $0?)
```

```
Backslash found where operator expected at ./tail.pl line 16, near "$file"  
(Missing operator before \?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
```

```
String found where operator expected at ./tail.pl line 17, near "print "  
(Might be a runaway multi-line "" string starting on line 16)
```

```
(Missing semicolon on previous line?)
```

```
Unquoted string "n" may clash with future reserved word at ./tail.pl line 17
```

```
String found where operator expected at ./tail.pl line 17, at end of line
    (Missing semicolon on previous line?)
syntax error at ./tail.pl line 16, near "$file" or die ""
Can't find string terminator '"' anywhere before EOF at ./tail.pl line 16
$ ./tail.pl -5 t1.txt t2.txt t3.txt
String found where operator expected at ./tail.pl line 16, near "$file"
    (Missing operator before " or die "?
Scalar found where operator expected at ./tail.pl line 16, near "" or die
    (Missing operator before $0?)
Backslash found where operator expected at ./tail.pl line 16, near "$file"
    (Missing operator before \?)
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
String found where operator expected at ./tail.pl line 17, near "print "
    (Might be a runaway multi-line "" string starting on line 16)
    (Missing semicolon on previous line?)
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
String found where operator expected at ./tail.pl line 17, at end of line
    (Missing semicolon on previous line?)
syntax error at ./tail.pl line 16, near "$file" or die ""
Can't find string terminator '"' anywhere before EOF at ./tail.pl line 16
$ ./tail.pl -2 tX.txt
String found where operator expected at ./tail.pl line 16, near "$file"
    (Missing operator before " or die "?
Scalar found where operator expected at ./tail.pl line 16, near "" or die
    (Missing operator before $0?)
Backslash found where operator expected at ./tail.pl line 16, near "$file"
    (Missing operator before \?)
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
String found where operator expected at ./tail.pl line 17, near "print "
    (Might be a runaway multi-line "" string starting on line 16)
    (Missing semicolon on previous line?)
Unquoted string "n" may clash with future reserved word at ./tail.pl line 16
String found where operator expected at ./tail.pl line 17, at end of line
    (Missing semicolon on previous line?)
syntax error at ./tail.pl line 16, near "$file" or die ""
Can't find string terminator '"' anywhere before EOF at ./tail.pl line 16
```

Hint: use the above template for Perl file processing to get started with your script. You *must* use the `-w` flag in your script, and you must write your code in such a way as to ensure that no warning messages are produced.

As usual use `autotest` to assist in testing your code and push `echon.pl` to `gitlab.cse.unsw.edu.au` every time you make some progress with it.

```
$ ~cs2041/bin/autotest lab05 tail.pl
...
$ git add tail.pl
$ git commit -a -m "initial tail.pl"
...
$ git push
...
```

Challenge Exercise: Shuffling Lines

Write a Perl script `shuffle.pl` which prints its input with the lines in random order. For example:

```
$ i=0;while test $i -lt 5; do echo $i; i=$((i + 1)); done|./shuffle.pl
0
3
2
4
1
```