


Método Post/Criar usuário:

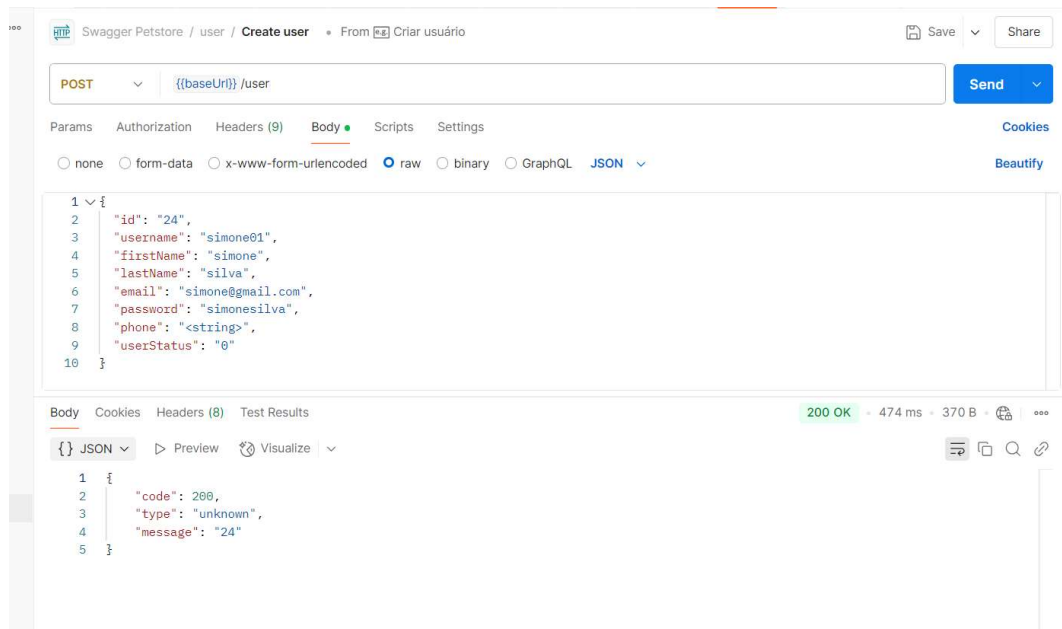

Código Body:

```
{
  "id": "24",
  "username": "simone01",
  "firstName": "simone",
  "lastName": "silva",
  "email": "simone@gmail.com",
  "password": "simonesilva",
  "phone": "<string>",
  "userStatus": "0"
}
```

Testes do Post Usuário:

```
//validar o status code

pm.test('validar o status code como 200', function () {
    pm.expect(pm.response).to.have.status(200);
});

// validar o campo code (dentro)

pm.test("validar campo code interno como 200", function () {
    var responseJSON = pm.response.json();
    pm.expect(200).eql(responseJSON.code);
});

// Validar o campo type como unknow

pm.test('validar o campo type como unknow', function () {
    var responseJSON = pm.response.json()
    pm.expect('unknown').eql(responseJSON.type)

});

//validar o campo messenger

pm.test('validar o campo message', function () {
    var responseJSON = pm.response.json();
    pm.expect('24').eql(responseJSON.message);
})
```

Resultado do teste

+

Swagger Petstore

...

pet

store

user

createWithList

username

login

logout

createWithArray

POST Create user

successful operation

Criar usuário

Swagger Petstore / user / Create user

From Criar usuário

Save

Share

POST

{{baseUri}}/user

Send

Params

Authorization

Headers (9)

Body

Scripts

Settings

Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body

Cookies

Headers (8)

Test Results (4/4)

200 OK

104 ms

370 B

Run Collection

Testing your API endpoints one by one? Run your entire collection and test end-to-end workflows effortlessly. [Learn more](#)

Filter Results

PASSED

validar o status code como 200

PASSED

validar campo code interno como 200

PASSED

validar o campo type como unknown

PASSED

validar o campo message

Método Get/Consultar usuário PELO USERNAME:

+

Swagger Petstore

...

pet

store

user

createWithList

username

GET Get user by user name

successful operation

Invalid username supplied

User not found

PUT Updated user

DEL Delete user

login

logout

createWithArray

POST Create user

successful operation

Criar usuário

Swagger Petstore / user / username

Get user by user name

Save

Share

GET

{{baseUri}}/user/simone01

Send

Params

Authorization

Headers (7)

Body

Scripts

Settings

Cookies

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

This request does not have a body

Body

Cookies

Headers (8)

Test Results

200 OK

473 ms

483 B

Save Response


JSON

Preview


Visualize

```
1 {
2   "id": 24,
3   "username": "simone01",
4   "firstName": "simone",
5   "lastName": "silva",
6   "email": "simone@gmail.com",
7   "password": "simonesilva",
8   "phone": "<string>",
9   "userStatus": 0
10 }
```

Método atualizar usuário, foi mudado o campo username para: *simone02*:

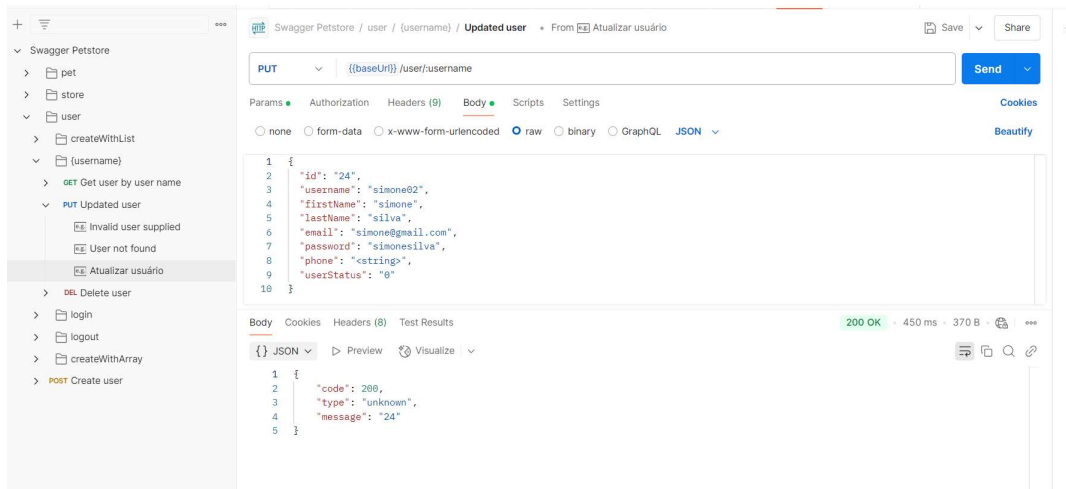

Mudei o id do usuário para 44.

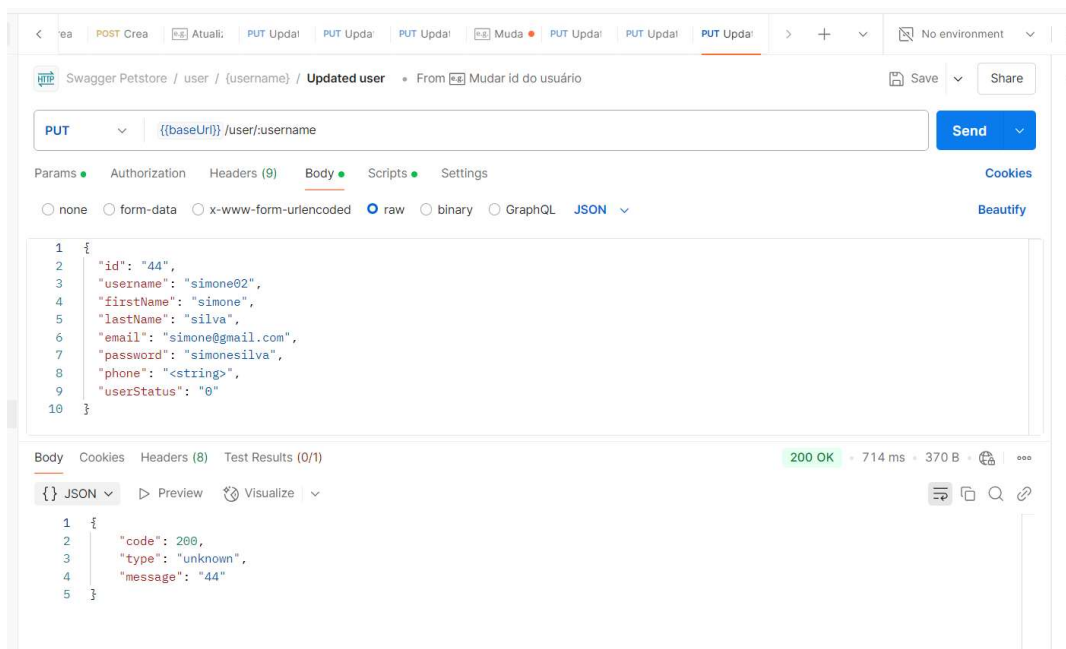

Escrevi os seguintes casos de testes para o método Put:

```
//validar o status code

pm.test('validar o status code como 200', function () {
    pm.expect(pm.response).to.have.status(200);
});

// validar o campo code (dentro)

pm.test("validar campo code como 200", function () {
    var responseJSON = pm.response.json();
    pm.expect(200).eq(responseJSON.code);
});

// Validar o campo type como unknow

pm.test('validar o campo type como unknow', function () {
    var responseJSON = pm.response.json()
    pm.expect('unknown').eq(responseJSON.type)

});

//validar o campo messenger

pm.test('validar o campo message', function () {
    var responseJSON = pm.response.json();
    pm.expect('44').eq(responseJSON.message);
})
```

Resultado:

PUT

{{baseUrl}}/user/username

Send

Params

Authorization

Headers (9)

Body

Scripts

Settings

Cookies

Beautify

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

JSON

1 {

2 " id": "44",

3 "username": "simone02",

4 "firstName": "simone",

5 "lastName": "silva",

6 "email": "simone@gmail.com",

7 "password": "simonesilva",

8 "phone": "<string>",

9 "userStatus": "0"

10 }

Body

Cookies

Headers (8)

Test Results (4/4)

200 OK • 446 ms • 370 B • 🌐 ⋮

📘 Testing your API endpoints one by one? Run your entire collection and test end-to-end workflows effortlessly. [Learn more](#) ➤

▶ Run Collection ✕

Filter Results ▾

🔄

PASSED

validar o status code como 200

PASSED

validar campo code como 200

PASSED

validar o campo type como unknow

PASSED

validar o campo message

Postbot

Ctrl Alt P

Método delete:

Swagger Petstore / user / {username} / Delete user

Save

Share

DELETE

{{baseUrl}}/user/simone02

Send

Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Query Params

	Key	Value	Description	⋮ Bulk Edit
	Key	Value	Description	

Body

Cookies

Headers (8)

Test Results

🔄

200 OK • 448 ms • 376 B • 🌐 📄 Save Response ⋮

{} JSON ▾ ▶ Preview 🔍 Visualize ▾

🔍 📄 🔍 🔗

1 {

2 "code": 200,

3 "type": "unknown",

4 "message": "simone02"

5 }

