

IMPE $\LaTeX$ System

User Manual

YANG Sikai

Version 1.0.2

English reference edition

Contents

1	Introduction	1
2	Installation	2
2.1	Distribution forms	2
2.2	Installed location	2
2.3	Font resources and local configuration	3
2.4	A quick installation check	4
3	Quick Start	4
4	Ready-to-use Templates	6
5	Document Classes and Public Entry Points	6
5.1	Wrapper classes	6
5.2	Using <code>impe.sty</code> directly	7
5.3	Titles and subtitles	7
6	The Template Model	8
6.1	Four setup keys	8
6.2	Single-purpose shortcuts	8

6.3	Compositional templates	9
7	Fonts, Script Routing, and Multilingual Typesetting	10
7.1	Font families as registered capabilities	10
7.2	Automatic, global, and local loading	10
7.3	Unicode-range routing	11
7.4	CJK handling	11
7.5	Shaping and line breaking	12
7.6	Vertical and externalized rendering	12
7.7	Where to find the complete font reference	13
8	Layouts and Features	13
8.1	Layout presets	13
8.2	Feature modules	13
8.3	Mathematics	14
8.4	Citations, indexes, tables, and figures	15
8.5	Headers and hyperlinks	15
9	Compatibility and Migration	15
10	Package Structure and Extension Points	16
10.1	The stable core	16
10.2	Catalogs	17
10.3	Modules	17
10.4	Extending IMPE	17
11	Further Documentation and Feedback	17
A	Quick Reference	18
A.1	Recommended font-loading model	19
A.2	Document classes and package entry points	19
A.3	Core setup commands	20
A.4	Template-set keys	21

A.5	Public layout identifiers	21
A.6	Public feature identifiers	22
A.7	Feature-specific commands and values	22
A.8	Public environments and table column types	24
A.9	Registered font-family identifiers	25
A.10	Advanced extension interfaces	28
B	Showcase	29

1 Introduction

The IMPE $\LaTeX$ System is a modular $X_{\LaTeX}$ framework for reusable layouts, font routing, multilingual typesetting, and optional document features.

IMPE addresses this by separating the system into reusable parts. From the user’s point of view, the most important distinction is between *layouts*, *fonts*, and *features*. A layout describes the principal visual organization of a document. Font families provide global or local font behavior, including script-aware routing where necessary. Features provide optional functionality such as mathematics, hyperlinks, citations, tables, or images. These parts can be selected independently or combined through one unified template interface.

The normal use of IMPE is intentionally short. A wrapper class can establish a sensible document layout and a default global font setup, after which a user loads the additional families or features required by the document. When more explicit control is wanted, the same components can be declared in a single `\UseTemplateSet` call.

$X_{\LaTeX}$ is the primary document engine for IMPE. This choice allows the system to rely on Unicode text, OpenType fonts, `fontspec`, and $X_{\LaTeX}$ ’s inter-character mechanisms while retaining the familiar $\LaTeX$ document model. Some specialized internal routes may invoke other engines where a particular script or renderer requires them, but ordinary IMPE documents are intended to be compiled with $X_{\LaTeX}$.

This manual is a user-oriented introduction. Detailed subsystem documentation is maintained in the repository under `docs/`. In particular, the font, layout, feature, and system documents describe registration fields and implementation details that would be unnecessarily repetitive here. This English manual is the reference edition: translated manuals should follow its structure and technical content.

A visual survey of the system is available in the project showcase at the current IMPE showcase PDF. The edition frozen with this manual is available from the version tag. That canonical repository PDF is also reproduced in Appendix B. It is intended to demonstrate the range of scripts, writing directions, layouts, and feature combinations that motivated the system.

2 Installation

2.1 Distribution forms

IMPE is prepared in three distribution forms, each intended for a different use case.

The *CTAN-oriented distribution* contains the portable runtime and public documentation. The local font library is managed separately. This is the `impe-framework.zip` archive, rooted at `impe-framework/`, and is intended for standard $\text{\TeX}$ distribution. It contains canonical `impe*` entries. The *core distribution* contains the same system logic for users who prefer to install IMPE directly from a release and manage fonts separately. The *full distribution* may add a prepared local font library, subject to the redistribution status of the individual fonts.

The distinction is deliberate. IMPE’s document runtime remains portable, while machines and users can supply their own large font libraries through the independent font-resource layer.

2.2 Installed location

A direct installation places the package in the user’s $\text{\TeX}$ MF tree under

```
tex/latex/impe/
```

so that the package and wrapper classes are available through the normal $\text{\TeX}$ search path. The canonical public entries are

```
impe.sty
impeart.cls
impebook.cls
impereport.cls
impebeamer.cls
```

with corresponding `_zh` wrapper classes for Chinese-oriented document defaults. Direct GitHub full and core releases also install the earlier `next*` compatibility entries; the CTAN `impe-framework` distribution contains the canonical entries. See Section 9.

When using a direct IMPE release, the supplied installer can be used to copy the runtime into the user TEXMF tree. A release archive may provide the usual Windows entry point

```
install.bat
```

The launcher delegates to `install.ps1`; advanced callers may invoke that script with their host’s normal script runner.

For $\text{T}_{\text{E}}\text{X}$ distribution installations, the $\text{T}_{\text{E}}\text{X}$ distribution handles package discovery through its usual mechanism.

2.3 Font resources and local configuration

Each registered face first uses its bundled file if present, then fontspec’s TeX Live or system lookup, and finally the configured error or fallback. Core installations use already resolvable fonts directly.

The source repository carries the runtime; the full font library is managed locally. In a local or full installation, catalogued font files are normally resolved below an `assets/fonts/` root. `\SetCatalogFontRoot` selects another location through local configuration.

The preferred persistent mechanism is `impe.local.tex`. A local setup may, for example, contain

```
\SetCatalogFontRoot{D:/Fonts/IMPE}
```

with the path adjusted to the local machine. The same command can also be used from a document when a one-off override is more appropriate. Core and CTAN installations use resolvable system or TeX fonts directly. Document features that request local font files require those resources to be supplied.

2.4 A quick installation check

After installation, the following file should compile with $\text{X}_{\text{Y}}\text{L}_{\text{A}}\text{T}_{\text{E}}\text{X}$ on a system with Libertinus available:

```
\documentclass{impeart}
```

```
\UseFont{libertinus}
```

```
\begin{document}
```

```
\LIB{IMPE is ready.}
```

```
\end{document}
```

If this succeeds, the canonical wrapper class, package entry, and automatic font-loading interface are visible to $\text{\TeX}$.

3 Quick Start

The simplest IMPE workflow is to choose a wrapper class, select any desired font family or feature, and write the document normally. IMPE provides a reusable setup layer around ordinary $\text{\TeX}$ document structure.

A small article can therefore look like this:

```
\documentclass[11pt]{impeart}
```

```
\UseFont{libertinus}
```

```
\UseFeatures{math,hyperlinks}
```

```
\title{A Sample Document}
```

```
\subtitle{Typeset with IMPE}
```

```
\author{Author Name}
```

```
\begin{document}
```

```
\maketitle
```

```
\section{Introduction}
```

```
\LIB{Hello, world.}
```

```
\end{document}
```

The class already supplies the normal English article layout and base font. The mode-free `\UseFont{libertinus}` call follows that family's registered automatic behavior, applying

its global stack and making its local `\LIB` command available, while `\UseFeatures` activates two optional feature modules. The rest is ordinary $\text{\LaTeX}$.

For a document whose setup is better expressed as a single declaration, the same idea can be written through `\UseTemplateSet`:

```
\documentclass{impeart}

\UseTemplateSet{
  fonts = {libertinus},
  features = {math,hyperlinks}
}
```

A template set may also choose a layout and additional font families. In practice, wrapper classes already supply a suitable default layout, so most documents state the settings that differ from those defaults.

IMPE can also be loaded as a package underneath a standard $\text{\LaTeX}$ class:

```
\documentclass{article}
\usepackage{impe}

\UseTemplateSet{
  layout = en_doc,
  fonts = {cmu,libertinus},
  features = {hyperlinks}
}
```

This form is useful when the underlying class must remain explicit or when every IMPE component should be selected manually. The wrapper classes and the raw package use the same underlying system.

4 Ready-to-use Templates

The repository includes a small collection of starter projects under `templates/`. These are intended for actual writing. Regression fixtures and internal demonstrations live under `tests/`.

The current starter templates are:

article_en/ English article starter using `impeart`.

article_zh/ Chinese article starter using `impeart_zh`.

book_en/ English book starter using `impebook`.

book_zh/ Chinese book starter using `impebook_zh`.

beamer_en/ English presentation starter using `impebeamer`.

beamer_zh/ Chinese presentation starter using `impebeamer_zh`.

Each template follows the installed-package style and contains realistic metadata, sectioning, and body structure, together with representative table, figure, or slide material where appropriate. A new project can therefore begin by copying the nearest template directory and editing the document contents using the supplied preamble as a starting point.

The templates deliberately use the canonical `impe*` entry points and show normal user-facing practice. Development fixtures live under `tests/`.

5 Document Classes and Public Entry Points

5.1 Wrapper classes

IMPE provides wrapper classes for the four principal document forms used by the system:

impeart English-oriented article wrapper. Its normal layout is `en_doc` and its default global family is `cmu`.

impebook English-oriented book wrapper. Its normal layout is `en_book` and its default global family is `cmu`.

impereport English-oriented report wrapper. It uses the `en_doc` layout and `cmu` by default.

impebeamer Presentation wrapper. It selects the `beamer` layout and `cmu` by default.

Chinese-oriented counterparts are provided as `impeart_zh`, `impebook_zh`, `impereport_zh`, and `impebeamer_zh`. These select the corresponding Chinese document settings and include `shanggu` in the default global font configuration alongside `cmu`. This default configuration supports multilingual content in either wrapper family.

Unknown class options are passed through to the underlying standard class. A normal option such as

```
\documentclass[12pt,twoside]{impeart}
```

therefore continues to control the underlying `article` class in the usual way.

5.2 Using `impe.sty` directly

The wrapper classes share one implementation and provide convenient defaults. A user may also keep a standard class and load

```
\usepackage{impe}
```

followed by an explicit layout, font, and feature configuration. This is the recommended route when the document class is supplied by a journal, publisher, or another package and must remain the document's class.

5.3 Titles and subtitles

IMPE supports `\subtitle{...}` alongside the standard `\title` and `\author` commands. Wrapper classes apply their own title-block defaults, while the ordinary $\LaTeX$ title mechanism remains recognizable. A typical preamble is simply

```
\title{Main Title}
\subtitle{A More Specific Description}
\author{Author Name}
```

followed by `\maketitle` in the document body.

6 The Template Model

6.1 Four setup keys

The principal unified command is `\UseTemplateSet`. Its public setup model is intentionally small:

```
\UseTemplateSet{
  layout = <preset>,
  fonts = {<families>},
  globalfonts = {<families>},
```

```

features = {<features>}
}

```

The four keys have different roles.

layout selects a public layout preset appropriate to the active document class.

fonts loads families through their registered automatic behavior. This is the normal choice: a family may define a local command, apply a document-wide font, or install range-specific routing.

globalfonts explicitly forces the listed families through their global mode or global routing path.

features loads optional functional modules.

mainfonts is accepted as an alias of **globalfonts**; both keys provide explicit global overrides; **fonts** provides the automatic interface.

The template interface provides one predictable place to express a complete configuration. Wrapper classes already apply their own layout and global-font defaults, so a document may specify an additional feature list alone.

6.2 Single-purpose shortcuts

For focused configuration, IMPE provides public shortcuts corresponding to the individual subsystems:

```
\UseLayout{en_doc}
```

```
\UseLayouts{...}
```

```
\UseFont{libertinus}
```

```
\UseFonts{arabic,tibetan}
```

```
\UseFont{libertinus}[global]
```

```
\UseLocalFonts{arabic,tibetan} % explicit local override
```

```
\UseGlobalFonts{libertinus} % explicit global override
```

```
\UseFeature{hyperlinks}
```

```
\UseFeatures{math,hyperlinks,tables}
```

The mode-free font forms are the recommended shortcuts for ordinary use. The local and global aliases remain useful when a document intentionally overrides a family’s registered behavior. The unified and single-purpose interfaces are two views of the same public model.

6.3 Compositional templates

An IMPE template combines reusable components. A layout can be reused with different font choices, the same feature set can be used in an article or book, and a script-specific font family can be added while preserving unrelated document functionality. This composition is the central design principle behind the public interface.

For example, the following declarations compose two different documents from the same template interface:

```
% English article
\UseTemplateSet{
  layout = en_doc,
  fonts = {libertinus},
  features = {math,hyperlinks}
}

% Chinese book with additional script support
\UseTemplateSet{
  layout = zh_book,
  fonts = {cmu,shanggu,sanskrit,tibetan},
  features = {citations,index,hyperlinks}
}
```

The second example states the families and features it needs; the internal font and layout subsystems remain responsible for the implementation details.

7 Fonts, Script Routing, and Multilingual Typesetting

Use `\Font{family-id}{content}` for generic local selection, for example `\Font{hindi}{...}`. It uses the same command path as the family-specific command, preserving series, shape, local routing override and script behavior. `\UseFont` retains its loading/activation meaning. Local declarations load on demand; load families requiring extra packages in the preamble.

7.1 Font families as registered capabilities

IMPE registers each font family with its shaping and routing behavior. Font families are registered in a central catalog with the information needed to use them correctly: available faces, paths or system font names, OpenType script and language settings, local command metadata, global routing behavior, and, where necessary, a specialized layout or rendering route.

This model allows a simple Latin family and a complex-script family to share the same public loading interface even when their internal requirements are very different. The common abstraction is the *registered family*; each writing system retains its appropriate implementation.

7.2 Automatic, global, and local loading

For ordinary use, omit the mode when loading a family. IMPE then follows the family's registered behavior, which may be local, global, or range-specific. The `fonts` template key applies the same automatic rule to a list.

A *global* family participates in document-wide font selection. For a normal Latin family this can mean replacing the main roman, sans-serif, and monospaced channels. For a script-specific family it can mean taking responsibility for selected Unicode ranges while Latin, Han, and other scripts retain their existing font routing.

A *local* family is loaded for explicit use. Local selection is useful when a particular passage requires a specific script font, a regional glyph form, or an editorially chosen typeface while preserving document-wide routing.

Families are loaded through, for example,

```
\UseFont{libertinus}
```

```
\UseFonts{sanskrit,tibetan,arabic}
```

```
\UseFont{libertinus}[global]    % deliberate global override
```

```
\UseLocalFonts{sanskrit}       % deliberate local override
```

or through the corresponding keys in `\UseTemplateSet`. The `\UseGlobalFont(s)` and `\UseLocalFont(s)` aliases are explicit overrides; the mode-free call remains the default recommendation. Public commands created for individual local families are defined by their catalog registrations; the complete list appears in the font reference.

When an explicit local font command is active, it takes precedence over the automatic global range router within that scope. Leaving the local scope restores the global routing state. This makes explicit authorial choice predictable even in a document with extensive automatic script selection.

7.3 Unicode-range routing

Some global families are intentionally range-limited. A Devanagari family, for example, can own its configured Unicode blocks while the Latin main font retains its existing role. Multiple registered families can therefore coexist in one document with distinct text ranges.

This routing is most useful for genuinely multilingual prose: the author writes Unicode text normally, while IMPE selects the active registered family when the text enters a configured script range. Range routing is an aid to font selection; shaping remains the responsibility of X₃TeX, fontspec, and the OpenType data associated with the selected family.

7.4 CJK handling

CJK fonts require a somewhat different route from ordinary Unicode-range switching. IMPE uses the xeCJK path for CJK global families, allowing the main, sans-serif, and monospaced CJK channels to be managed together as CJK fonts.

Shared Han ideographs use the same Unicode codepoints across Chinese, Japanese, and Korean regional glyph conventions. Automatic routing therefore gives language-specific scripts such as kana and Hangul their own claims while leaving shared Han characters on the document CJK family. When an explicitly Japanese or Korean Han form is required, a local family command can be used to make that choice directly.

This distinction is intentional. Automatic routing handles unambiguous script ranges; explicit local selection supplies regional forms for shared Han characters.

7.5 Shaping and line breaking

OpenType shaping for ordinary complex scripts is expressed through the registered script, language, and feature settings of a family. Indic, Arabic, and other shaping-sensitive scripts therefore remain ordinary Unicode text at the document level; IMPE supplies the font configuration needed for the text engine to shape them correctly.

Some scripts need line-breaking behavior beyond ordinary spaces. IMPE includes script-aware handling for Sanskrit in Devanagari, Tibetan, and Thai. The font and behavior layers

provide appropriate break opportunities while preserving clusters and script-specific punctuation rules.

Right-to-left behavior is likewise attached to families that require it. The public font model remains the same even though the underlying paragraph or inline behavior differs from a left-to-right Latin family.

7.6 Vertical and externalized rendering

A small number of writing systems need more than standard horizontal OpenType shaping. IMPE therefore includes a built-in vertical layout route used by registered vertical families, and it provides an externalized rendering path for cases where a fragment is more reliably produced as a small auxiliary $\text{\TeX}$ document and reinserted as PDF.

Externalized rendering is implemented through a portable `texlua` helper. The helper resolves the requested $\text{\TeX}$ engine from the system PATH, renders into an IMPE cache directory, and returns the resulting PDF to the main document. The mechanism is kept behind the font registration layer so that a normal document delegates temporary files and engine paths to the helper.

These specialized routes share the public font interface. They keep the model coherent for scripts requiring behavior beyond a simple `\newfontfamily` declaration.

7.7 Where to find the complete font reference

The detailed family catalog, registration syntax, style fallback rules, global routing model, vertical parameters, externalized backend, and script-specific notes are maintained in `docs/FONTS.md`. Users adding a new family or investigating font-routing behavior should treat that document as the technical reference.

8 Layouts and Features

8.1 Layout presets

Layouts describe document-level presentation. A public layout preset is a structured bundle of page geometry, text spacing, header behavior, book behavior, or slide behavior. The individual low-level components are internal; normal documents select the public preset as a whole.

The public presets in IMPE 1.x are:

en_doc English article/report layout.

zh_doc Chinese article/report layout.

en_book English book/report layout with book-oriented page and running-head behavior.

zh_book Chinese book/report counterpart.

beamer presentation layout for Beamer documents.

Presets declare which underlying document classes they support. IMPE checks that compatibility before applying the preset and reports mismatched document classes.

Wrapper classes select the corresponding layout automatically. Explicit selection is useful with raw standard classes or when a report should use a book-oriented preset:

```
\UseLayout{en_book}
```

The exact component values and geometry are documented in `docs/LAYOUTS.md`.

8.2 Feature modules

Features are flat, composable modules. Each feature has its own second preset layer. A feature id simply loads the corresponding optional functionality the first time it is requested; repeated requests are ignored.

The public feature set currently consists of:

math standard mathematics packages, theorem environments, and optional math-font selection.

hyperlinks hyperlinks, PDF bookmarks, stable destinations, and repository hyperlink defaults.

citations biblatex/biber citation support with selectable citation-style presets.

index index generation and IMPE term/index helpers.

tables table packages, reusable column types, and table environments.

image figure, image, and multi-panel helpers.

lists_envs reusable example-block formatting.

headers configurable running heads for article-, report-, and book-like documents.

A document loads any combination it requires:

```
\UseFeatures{math,hyperlinks,tables,image}
```

or

```
\UseTemplateSet{
  features = {citations,index,hyperlinks}
}
```

8.3 Mathematics

The `math` feature loads the standard AMS-oriented mathematics stack and defines theorem-like environments including `theorem`, `lemma`, `proposition`, `corollary`, `definition`, `example`, and `remark`. Computer Modern mathematics remains the default when a text family is loaded; an explicit `math` route selects another math alphabet.

A different math family can be selected before the feature is loaded. For example,

```
\UseMathFont{libertinus}
\UseFeature{math}
```

uses Libertinus Math through `unicode-math`. Other supported routes and the exact package stack are listed in `docs/FEATURES.md`.

8.4 Citations, indexes, tables, and figures

The feature modules provide useful defaults while retaining access to the underlying $\text{\LaTeX}$ ecosystem. The `citations` feature, for example, uses `biblatex` and `biber`; documents still use ordinary commands such as `\addbibresource`, `\textcite`, and `\printbibliography`. Citation presets such as APA, GB/T 7714, numeric, or author–year may be selected before the feature is loaded.

The `drawing` feature loads `TikZ/PGF`, `pgfplots` (compatibility 1.18), and `forest` for their ordinary diagram, plot and tree syntax.

The `index` feature loads `hyperlinks`, builds on `imakeidx` and adds the `\Term` helper for typesetting and indexing a term together. Its printed index page number links to the

recorded occurrence even after page-number resets. First-occurrence-per-key semantics are unchanged. For manual processing, run `texindy -L english -C utf8 -M <job>-impe <job>.idx` in the output directory, then rerun XeLaTeX twice. The `tables` and `image` features similarly provide convenient higher-level environments while leaving native `booktabs`, `graphicx`, and related commands available.

Throughout the feature system, IMPE reduces repetitive setup while preserving ordinary $\LaTeX$ commands.

8.5 Headers and hyperlinks

The `headers` feature supplies running heads through `fancyhdr`. By default it derives a fixed running title from the first line of `\title`; `\HeaderTitle{...}` can be used when a shorter form is preferable. Article-like documents use section information for the moving head, while report- and book-like documents use chapter information.

The `hyperlinks` feature loads `hyperref` and `bookmark` with Unicode-aware PDF settings, hidden link borders, linked table-of-contents structures, and stable destinations. Documents may still use ordinary `\label`, `\ref`, `\href`, and `\url` commands.

For the full list of feature-specific commands and environments, consult `docs/FEATURES.md`; this section introduces their main uses.

9 Compatibility and Migration

IMPE 1.x establishes the `impe*` names as the canonical public interface. New documents should therefore use `impe.sty`, `impeart`, `impebook`, `impereport`, `impebeamer`, and their Chinese variants.

Earlier development releases used the `next*` naming scheme. Those entry points remain supported compatibility wrappers in 1.x, with their existing status maintained. Existing documents that load the `nextart` class or `nextsystem` package continue to compile against the same underlying implementation. The compatibility layer preserves old documents; canonical `impe*` entries serve new work.

The direct installer also recognizes a managed installation from the 0.1.x series under `tex/latex/nextsystem/`. During migration it installs the canonical runtime under `tex/latex/impe/`, migrates recognized local override files when appropriate, removes files known to belong to the old managed runtime, and leaves unrelated user-created files or

subdirectories in place.

A legacy `nextsystem.local.tex` can therefore survive migration as a local override. New local configuration should use `impe.local.tex`.

Documents written with old wrapper names continue to compile through the compatibility runtime. Authors may update those names when convenient.

10 Package Structure and Extension Points

The repository separates public entry points, stable mechanisms, registrations, specialized implementations, and local resources:

<code>package/</code>	public package and class entry points
<code>core/</code>	stable subsystem mechanisms
<code>catalog/</code>	public ids and registration data
<code>modules/</code>	extendable or specialized implementations
<code>assets/</code>	local runtime resources such as fonts
<code>scripts/</code>	installation and release tooling
<code>manual/</code>	manual sources
<code>docs/</code>	detailed subsystem documentation

10.1 The stable core

The `core/` layer contains stable shared mechanisms for new font families, layout presets, and features. It implements the font registry and routing machinery, the layout registry and compatibility checks, the feature loader, and related shared behavior.

This distinction matters for maintenance. If adding one ordinary OpenType font requires editing the font-routing engine, or adding one feature requires changing the generic feature loader, the extension model has failed. The core is therefore intentionally separated from the growing catalog of concrete resources.

10.2 Catalogs

The `catalog/` layer assigns public ids and metadata. It contains the central registrations for fonts, layouts, and features. For many extensions, this is the correct place to begin.

An ordinary font family using standard `fontspec` shaping can usually be expressed entirely as a catalog registration. Likewise, a public layout preset is assembled from existing

internal components, and a feature id maps to its implementation module. Keeping those declarations centralized makes the public surface auditable in one place.

10.3 Modules

The `modules/` layer is reserved for functionality that genuinely needs its own implementation: feature modules, specialized script support, or reusable internal layout components. A new module should therefore represent a real behavioral extension; font names belong in catalog registrations.

This rule is particularly important for multilingual support. Most scripts should use ordinary OpenType shaping and catalog metadata. Specialized modules serve writing systems or rendering strategies requiring behavior beyond the generic core.

10.4 Extending IMPE

Developers extending the system should begin with the detailed registration interfaces in `docs/SYSTEM.md` and then consult the relevant subsystem document: `docs/FONTS.md`, `docs/LAYOUTS.md`, or `docs/FEATURES.md`.

The general rule is simple: prefer a registration over a new mechanism, and prefer a specialized module over a change to the stable core when the behavior is genuinely exceptional.

11 Further Documentation and Feedback

This manual is the normal starting point for using IMPE. The repository contains more detailed technical documentation for users who need a complete reference or who want to extend the system.

`docs/SYSTEM.md` architecture, public entry layers, template setup, release model, and extension boundaries.

`docs/FONTS.md` family registration, local and global modes, routing, fallback, shaping, writing behavior, vertical support, and externalized rendering.

`docs/LAYOUTS.md` public layout presets, compatibility targets, and the component model from which presets are built.

`docs/FEATURES.md` public feature ids and the commands, environments, package stacks, and compilation requirements supplied by each module.

CHANGELOG.md changes in published versions.

Showcase the full visual showcase is available from the project repository.

The project repository is available at

`github.com/KelvinYangBK67/IMPE-LaTeX-System`

Bug reports, feature requests, documentation corrections, portability reports, and other concrete feedback are welcome through GitHub Issues:

`github.com/KelvinYangBK67/IMPE-LaTeX-System/issues`

When reporting a typesetting problem, it is useful to include a minimal source file, the $\TeX$ engine and $\TeX$ Live version, the IMPE version, and the relevant font information. Reports concerning a local or privately supplied font should also distinguish between a font-coverage problem and an IMPE routing problem where possible.

The English manual is the authoritative manual text. Other language editions may adapt prose and terminology to their own technical conventions, but their commands, examples, and description of IMPE behavior should remain synchronized with this edition.

A Quick Reference

This appendix summarizes the documented public interface of IMPE 1.x. It serves as a lookup companion to the explanations in the main text and detailed subsystem documentation under docs/. Internal implementation commands, including those beginning with `\Next...`, are documented with their implementation.

A.1 Recommended font-loading model

For ordinary use, prefer `fonts = {...}` inside `\UseTemplateSet` or use `\UseFont{...}` directly. Omitting the mode makes IMPE follow the registered behavior of the family: it may define a local command, activate a document-wide font, or install script- or range-specific automatic routing as appropriate.

Use an explicit mode to override that automatic behavior deliberately:

```
\UseFont{sanskrit}           % recommended: registered automatic behavior
```

```

\UseFont{sanskrit}[local]    % explicitly local only
\UseFont{sanskrit}[global]  % explicitly global/range-global

\UseTemplateSet{
  fonts = {sanskrit,tibetan,arabic},
  features = {math,hyperlinks}
}

```

The convenience commands `\UseGlobalFont(s)` and `\UseLocalFont(s)` express the same explicit distinction. The `globalfonts` and `mainfonts` template keys are likewise explicit global overrides; `fonts` provides automatic selection.

A.2 Document classes and package entry points

Entry point	Purpose
<code>impeart</code>	English article wrapper; defaults to <code>en_doc</code> with CMU as the base global font.
<code>impeart_zh</code>	Chinese article wrapper; defaults to <code>zh_doc</code> with CMU and Shanggu.
<code>impereport</code>	English report wrapper; defaults to <code>en_doc</code> .
<code>impereport_zh</code>	Chinese report wrapper; defaults to <code>zh_doc</code> .
<code>impebook</code>	English book wrapper; defaults to <code>en_book</code> .
<code>impebook_zh</code>	Chinese book wrapper; defaults to <code>zh_book</code> .
<code>impebeamer</code>	English Beamer wrapper; defaults to the beamer layout.
<code>impebeamer_zh</code>	Chinese Beamer wrapper; defaults to the beamer layout with CMU and Shanggu.
<code>impe.sty</code>	Loads IMPE under an ordinary $\LaTeX$ class chosen by the document.

The legacy `next*` package and class names remain compatibility aliases in version 1.x, but new documents should use the canonical `impe*` entry points.

A.3 Core setup commands

Command	Purpose
<code>\UseTemplateSet{...}</code>	Configure layout, fonts, and features in one declaration.
<code>\UseFont{id}[mode]</code>	Load one registered font family; omit mode for the recommended automatic behavior, or use local/global explicitly.
<code>\UseFonts{ids}[mode]</code>	Load several registered font families with the same optional mode.
<code>\UseGlobalFont{id}</code>	Explicitly request the global mode of one family.
<code>\UseGlobalFonts{ids}</code>	Explicitly request the global mode of several families.
<code>\UseMainFont{id}</code>	Alias of <code>\UseGlobalFont</code> ; retained as a document-oriented name.
<code>\UseMainFonts{ids}</code>	Alias of <code>\UseGlobalFonts</code> .
<code>\UseLocalFont{id}</code>	Explicitly request the local mode of one family.
<code>\UseLocalFonts{ids}</code>	Explicitly request the local mode of several families.
<code>\UseLayout{id}</code>	Load one registered layout preset.
<code>\UseLayouts{ids}</code>	Load several registered layout presets.
<code>\UseFeature{id}</code>	Load one optional feature module.
<code>\UseFeatures{ids}</code>	Load several optional feature modules.
<code>\SetCatalogFontRoot{path}</code>	Override the root directory from which catalogued font files are resolved.
<code>\subtitle{text}</code>	Set the document subtitle used by the IMPE title block.
<code>\HeaderTitle{text}</code>	Override the fixed title used by the headers feature.
<code>\HeaderStyle{style}</code>	Choose the header style; documented values are running and title.

A.4 Template-set keys

Key	Meaning
layout	Select one public layout preset.
fonts	Load one or more registered families using their automatic registered behavior; this is the recommended key for normal font loading.
globalfonts	Explicitly force the listed families through their global mode or global routing path.
mainfonts	Alias of globalfonts.
features	Load one or more optional feature modules.

A.5 Public layout identifiers

ID	Purpose
en_doc	English article/report layout with A4 geometry and English text spacing.
zh_doc	Chinese article/report layout with A4 geometry and Chinese text spacing.
report	Report-only compatibility preset with the same page and text components as zh_doc.
en_book	English book/report layout with book geometry, running heads, and right-hand chapter openings.
zh_book	Chinese book/report layout with book geometry, Chinese text spacing, running heads, and right-hand chapter openings.
beamer	Presentation layout with the IMPE Beamer typography and navigation setup.

A.6 Public feature identifiers

ID	Purpose
math	Load the IMPE mathematics stack and theorem environments.

ID	Purpose
<code>hyperlinks</code>	Load hyperlinking, PDF bookmarks, linked headings, and bidirectional footnote links.
<code>citations</code>	Load biblatex/csquotes citation support and IMPE citation-style helpers.
<code>index</code>	Load index support and the <code>\Term</code> helper.
<code>tables</code>	Load the table stack, column types, and IMPE table environments.
<code>image</code>	Load image, caption, and panel-figure helpers.
<code>lists_envs</code>	Load the ExampleBlock display environment.
<code>headers</code>	Load configurable running heads for article-, report-, and book-like documents.
<code>bib, header</code>	Compatibility aliases for citations and headers.

A.7 Feature-specific commands and values

Command or setting	Purpose / documented values
<code>\UseMathFont{value}</code>	Choose the mathematics font route before loading math: <code>auto</code> , <code>libertinus</code> , <code>newcm</code> , <code>mlmodern</code> , or another font name passed to <code>\setmathfont</code> .
<code>\UseCitationStyle{value}</code>	Choose a citation preset before loading citations: <code>APA</code> , <code>GB</code> , <code>numeric</code> , or <code>author-year</code> .
<code>\SetCitationBiblatexOptions{...}</code>	Replace the effective biblatex option list before loading citations.
<code>\HeaderTitle{text}</code>	Set a short fixed title for running heads.
<code>\HeaderStyle{value}</code>	Select <code>running</code> or <code>title</code> .
<code>\IndexTitle</code>	Optional index-title override, defined before loading index.

Command or setting	Purpose / documented values
<code>\Term[options]{display}[description]</code>	Print a bold term and index its first occurrence; options include <code>sort</code> , <code>key</code> , and <code>parentheses</code> .
<code>\TablesSetup</code>	Apply or re-apply the IMPE table setup.
<code>\Panel</code>	Insert one panel inside <code>PanelFigure</code> or <code>PanelFigure*</code> .
<code>\TemplateFigurePaths</code>	Configure the default search paths used by the image feature.
<code>\OneImageDefaultWidth</code>	Set the default width for <code>OneImage</code> .
<code>\OneImageMaxHeight</code>	Set the maximum default image height for <code>OneImage</code> .
<code>\OneImageDefaultPlacement</code>	Set the default float placement for <code>OneImage</code> .
<code>\PanelDefaultCols</code>	Set the default number of columns used by panel figures.
<code>\PanelDefaultHeight</code>	Set the default panel height.
<code>\PanelDefaultMode</code>	Set the default panel layout mode.
<code>\PanelDefaultPlacement</code>	Set the default float placement for panel figures.

Standard commands provided directly by packages loaded by a feature—for example `\addbibresource`, `\printbibliography`, `\printindex`, or the `booktabs` rule commands—retain their normal package syntax as provided by $\text{\LaTeX}$.

A.8 Public environments and table column types

Name	Purpose
<code>theorem</code> , <code>lemma</code> , <code>proposition</code> , <code>corollary</code>	Numbered theorem-like environments provided by the <code>math</code> feature.

Name	Purpose
definition, example, remark	Additional theorem-style environments provided by the math feature.
TableInlineFit	Compact table environment intended to fit an inline table to the available width.
TableLong	Long-table environment for material that may span pages.
TableBook, TableBookX	Book-style table environments.
TableBookNotes	Book-style table environment with notes.
NiceBooktable, NiceBooktableX, NiceBooktableNotes	Alternative book-style table helpers provided by the tables feature.
L, C, R	Ragged-right, centered, and ragged-left tabularx columns.
P{w}, M{w}, B{w}	Fixed-width paragraph columns with ragged-right, centered, and ragged-left alignment.
OneImage	Single-image figure; appears inline under Beamer.
OneImageInline	Centered non-floating image.
PanelFigure	Captioned multi-panel figure with subcaptions outside Beamer.
PanelFigure*	Uncaptioned multi-panel figure.
ExampleBlock	Indented italic display block for examples, quotations, linguistic data, or teaching material.

A.9 Registered font-family identifiers

The table below lists the font-family IDs accepted by `\UseFont` in IMPE 1.x. The **Auto** column summarizes what a mode-less `\UseFont{id}` normally activates:

G document-global family;

L local family/command;

L+G local access plus full document-global activation;

L+R local access plus automatic script- or range-limited global routing.

The automatic route is the recommended interface. An explicit [local] or [global] request deliberately bypasses part of that automatic decision and should therefore be used only when required.

Family ID	Auto	Local mand	com- Typical role
cmu	G	—	Computer Modern Unicode base family.
noto	L+G	\NOT	General Noto Latin family.
times	L+G	\TIM	Times/Arial/Consolas system-family route.
gentium	L+G	\GEN	Gentium Plus.
charis	L+G	\CHA	Charis SIL.
libertinus	L+G	\LIB	Libertinus serif/sans/mono family.
mlmodern	L	\MLM	Latin Modern / MLModern local route.
anatolian	L	\CA	Carian / Anatolian script material.
coptic	L	\CO	Coptic.
bopomofo	L	\ZY	Bopomofo.
cuneiform	L	\CU	Cuneiform.
glagolitic	L	\GL	Glagolitic.
italic	L	\OI	Old Italic.
hungarian	L	\OH	Old Hungarian.
runic	L	\RU	Runic.
armenian	L	\HY	Armenian.
georgian	L	\KA	Georgian.

Family ID	Auto	Local mand	com- Typical role
hindi	L+R	\HI	Hindi Devanagari with registered range routing.
sanskrit	L+R	\SA	Sanskrit Devanagari with Sanskrit-aware routing.
devanagari	L	\DEV	Generic Devanagari shaping.
tamil	L	\TA	Tamil.
brahmi	L	\BR	Brahmi.
tibetan	L+R	\TI	Tibetan with tsheg-aware line-breaking behavior.
segoe	L	\SEG	Segoe Historic local route.
thai	L	\TH	Thai.
arabic	L	\AR	Arabic; serif/sans and alternate stylistic faces.
urdu	L	\UR	Urdu Nastaliq.
aramaic	L	\IA	Imperial Aramaic.
nabataean	L	\NB	Nabataean.
hebrew	L	\HE	Hebrew.
syriac	L	\SY	Syriac.
syriac_eastern	L+R	\SYE	Eastern Syriac with registered range routing.
kharosthi	L	\KH	Kharosthi.
khitan_small	L	\KHS	Khitan Small Script with its specialized composer.
pahlavi_parthian	L+R	\PAR	Inscriptional Parthian.
pahlavi_inscriptional	L+R	\PAH	Inscriptional Pahlavi.
pahlavi_psalter	L	\PSP	Psalter Pahlavi with specialized support.
avestan	L	\AV	Avestan.

Family ID	Auto	Local mand	com- Typical role
manichaeian	L	\MA	Manichaeian.
phoenician	L	\PH	Phoenician.
samaritan	L	\SM	Samaritan.
sogdian	L	\SG	Sogdian.
sogdian_old	L+R	\SG0	Old Sogdian with registered range routing.
chinese_simplified	L+R	\SC	Simplified Chinese CJK family.
chinese_traditional	L+R	\TC	Traditional Chinese CJK family.
japanese	L+R	\JP	Japanese; automatic routing preserves shared Han priority.
wenjin	L+R	\WJ	WenJin Mincho with CJK fallback chain.
shanggu	G	—	Traditional-Chinese-oriented global CJK family.
sim	G	—	Simplified-Chinese-oriented system CJK family.
korean	L+R	\KR	Korean/Hangul family.
tangut	L+R	\TG	Tangut with CJK-aware automatic routing.
mongolian	L	\MO	Mongolian with built-in vertical layout route.
mongolian_baiti	L	\MOb	Mongolian Baiti with vertical layout route.
manchu	L	\MC	Manchu with vertical layout route.
turkic	L	\OT	Old Turkic.

Family ID	Auto	Local mand	com-	Typical role
uyghur	L	\UY		Old Uyghur with vertical/rotated layout route.
vietnamese_quocngu	L	\VI		Vietnamese Quốc Ngữ.
vietnamese_hannom	L	\HN		Vietnamese Hán-Nôm / CJK text.

A.10 Advanced extension interfaces

These commands support extension of IMPE.

Command	Purpose
\FontRegisterFamily{...}	Register a new font family and its local/global meta-data.
\LayoutPresetRegister{...}	Register a structured layout preset from internal layout components.
\LayoutPresetDeclare{...}	Lower-level layout-preset declaration interface used when building the system.

For the full registration syntax and extension rules, see `docs/FONTS.md`, `docs/LAYOUTS.md`, and `docs/SYSTEM.md`.

B Showcase

The following pages reproduce the complete canonical IMPE showcase. The showcase is a visual companion to the reference manual, demonstrating multilingual font routing, complex shaping, right-to-left scripts, vertical writing, CJK regional forms, and combinations of document features.

The latest showcase can be obtained from the current main branch; the edition belonging to this manual is preserved by the v1.0.2 tag.

IMPE $\text{\LaTeX}$ System

Canonical Multilingual and Feature Showcase

Kelvin Yang

v1.0.2

Abstract

This document is the canonical visual specimen for the current IMPE $\text{\LaTeX}$ System public interface. It combines a local-family style audit, a deliberately small Unicode-range routing regression, dense multilingual paragraph composition with explicit local overrides, right-to-left text, vertical writing, generic complex shaping, CJK and Han family selection, and the principal document features provided by IMPE. It is intended both as a public showcase and as a release-time visual regression specimen.¹

Contents

1	Local Font Families and Styles	3
2	Multilingual Routing and Mixed-Script Composition	3
2.1	Mixed-Script Paragraph	3
2.2	Minimal Automatic Unicode-Range Regression	7
3	Right-to-Left Scripts	7
3.1	Arabic	7
3.2	Urdu	8
3.3	Hebrew	8
3.4	Syriac	8


¹The showcase is intentionally broader than the focused regression fixtures under `tests/`; those fixtures isolate individual failures.


4	Vertical Writing	9
4.1	Mongolian	9
4.2	Manchu	10
4.3	Old Uyghur	10
5	Complex Shaping and Stacked Sequences	10
5.1	Devanagari	10
5.2	Tibetan	11
5.3	Brahmi, Kharoshthi, and Thai	12
5.4	Khitan Small Script: current linear fallback	12
6	East Asian Writing and CJK Family Selection	12
6.1	Chinese	13
6.2	Korean and Historical Hangul	14
6.3	Japanese and Ryukyuan	16
6.4	Vietnamese	17
6.5	Tangut	18
6.6	WenJin Multi-Plane Coverage	19
6.7	Regional Forms of Shared Han Characters	19
7	Document Features	19
7.1	Mathematics	19
7.2	Tables	21
7.3	Lists and Example Blocks	21
7.4	Images	22
7.5	Citations and Bibliography	23
7.6	Index Terms	23
7.7	Hyperlinks, Footnotes, and Running Headers	23
	References	23
	Index	24

Family	Command	Regular	Bold	Italic	Bold italic	Sans	Sans bold	Sans italic	Sans bold italic
Latin and general-purpose families									
Noto	\NOT	Abg fi fl	Abg fi fl	<i>Abg fi fl</i>	<i>Abg fi fl</i>	Abg fi fl	Abg fi fl	<i>Abg fi fl</i>	<i>Abg fi fl</i>
Times	\TIM	Abg fi fl	Abg fi fl	<i>Abg fi fl</i>	<i>Abg fi fl</i>	Abg fi fl	Abg fi fl	<i>Abg fi fl</i>	<i>Abg fi fl</i>
Gentium Plus	\GEN	Ārya ṛ ṁ ḥ	Ārya ṛ ṁ ḥ	<i>Ārya ṛ ṁ ḥ</i>	<i>Ārya ṛ ṁ ḥ</i>	Ārya ṛ ṁ ḥ	Ārya ṛ ṁ ḥ	<i>Ārya ṛ ṁ ḥ</i>	<i>Ārya ṛ ṁ ḥ</i>
Charis SIL	\CHA	Ārya ṛ ṁ ḥ	Ārya ṛ ṁ ḥ	<i>Ārya ṛ ṁ ḥ</i>	<i>Ārya ṛ ṁ ḥ</i>	Ārya ṛ ṁ ḥ	Ārya ṛ ṁ ḥ	<i>Ārya ṛ ṁ ḥ</i>	<i>Ārya ṛ ṁ ḥ</i>
Libertinus	\LIB	Abg fi fl	Abg fi fl	<i>Abg fi fl</i>	<i>Abg fi fl</i>	Abg fi fl	Abg fi fl	<i>Abg fi fl</i>	<i>Abg fi fl</i>
European and ancient alphabetic scripts									
Carian	\CA	ΑΒΝ	ΑΒΝ	ΑΒΝ	ΑΒΝ	ΑΒΝ	ΑΒΝ	ΑΒΝ	ΑΒΝ
Coptic	\CO	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ	Ⲛⲟⲩⲧⲉ
Bopomofo	\ZY	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ	ㄗ ㄨ ˊ ㄣ
Cuneiform	\CU	𐎶𐎵𐎶	𐎶𐎵𐎶	𐎶𐎵𐎶	𐎶𐎵𐎶	𐎶𐎵𐎶	𐎶𐎵𐎶	𐎶𐎵𐎶	𐎶𐎵𐎶
Glagolitic	\GL	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ	ⱭⱰⱭⱭ
Old Italic	\OI	𐌲𐌱𐌸	𐌲𐌱𐌸	𐌲𐌱𐌸	𐌲𐌱𐌸	𐌲𐌱𐌸	𐌲𐌱𐌸	𐌲𐌱𐌸	𐌲𐌱𐌸
Old Hungarian	\OH	ꞤꞤꞤ	ꞤꞤꞤ	ꞤꞤꞤ	ꞤꞤꞤ	ꞤꞤꞤ	ꞤꞤꞤ	ꞤꞤꞤ	ꞤꞤꞤ
Runic	\RU	ᚱᚿᚱ	ᚱᚿᚱ	ᚱᚿᚱ	ᚱᚿᚱ	ᚱᚿᚱ	ᚱᚿᚱ	ᚱᚿᚱ	ᚱᚿᚱ
South and Central Asian scripts									
Armenian	\HY	Հայերեն	Հայերեն	Հայերեն	Հայերեն	Հայերեն	Հայերեն	Հայերեն	Հայերեն
Hindi	\HI	हिन्दी	हिन्दी	हिन्दी	हिन्दी	हिन्दी	हिन्दी	हिन्दी	हिन्दी
Sanskrit	\SA	संस्कृतम्	संस्कृतम्	संस्कृतम्	संस्कृतम्	संस्कृतम्	संस्कृतम्	संस्कृतम्	संस्कृतम्
Devanagari	\DEV	देवनागरी	देवनागरी	देवनागरी	देवनागरी	देवनागरी	देवनागरी	देवनागरी	देवनागरी
Tamil	\TA	தமிழ்	தமிழ்	தமிழ்	தமிழ்	தமிழ்	தமிழ்	தமிழ்	தமிழ்
Brahmi	\BR	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸	𑀧𑁆𑀭𑀸
Georgian	\KA	ქართული	ქართული	ქართული	ქართული	ქართული	ქართული	ქართული	ქართული

Family	Command	Regular	Bold	Italic	Bold italic	Sans	Sans bold	Sans italic	Sans bold italic
Tibetan	\TI	བསྐྱེད་པུ་	བསྐྱེད་པུ་	བསྐྱེད་པུ་	བསྐྱེད་པུ་	བསྐྱེད་པུ་	བསྐྱེད་པུ་	བསྐྱེད་པུ་	བསྐྱེད་པུ་
RTL and West Asian scripts									
Arabic	\AR	العربية	العربية	العربية	العربية	العربية	العربية	العربية	العربية
Urdu	\UR	اُردُو	اُردُو	اُردُو	اُردُو	اُردُو	اُردُو	اُردُو	اُردُو
Imperial Aramaic	\IA	ܐܪܡܝܐ	ܐܪܡܝܐ	ܐܪܡܝܐ	ܐܪܡܝܐ	ܐܪܡܝܐ	ܐܪܡܝܐ	ܐܪܡܝܐ	ܐܪܡܝܐ
Nabataean	\NB	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏
Hebrew	\HE	שְׁלוֹם	שְׁלוֹם	שְׁלוֹם	שְׁלוֹם	שְׁלוֹם	שְׁלוֹם	שְׁלוֹם	שְׁלוֹם
Syriac	\SY	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ
Eastern Syriac	\SYE	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ	ܡܠܝܬܐ
Kharoshthi	\KH	𑀘	𑀘	𑀘	𑀘	𑀘	𑀘	𑀘	𑀘
Iranian and other historical scripts									
Inscriptional Parthian	\PAR	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣
Inscriptional Pahlavi	\PAH	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣
Psalter Pahlavi	\PSP	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣
Avestan	\AV	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃	𐬀𐬁𐬂𐬃
Manichaean	\MA	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣	𐭠𐭡𐭣
Phoenician	\PH	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏
Samaritan	\SM	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏	𐤊𐤍𐤏
Sogdian	\SG	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃
Old Sogdian	\SGO	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃	𐰀𐰁𐰂𐰃
CJK and East Asian families									
Noto SC	\SC	汉字骨直	汉字骨直	汉字骨直	汉字骨直	汉字骨直	汉字骨直	汉字骨直	汉字骨直
Noto TC	\TC	漢字骨直	漢字骨直	漢字骨直	漢字骨直	漢字骨直	漢字骨直	漢字骨直	漢字骨直
Japanese	\JP	日本語漢字	日本語漢字	日本語漢字	日本語漢字	日本語漢字	日本語漢字	日本語漢字	日本語漢字

Family	Command	Regular	Bold	Italic	Bold italic	Sans	Sans bold	Sans italic	Sans bold italic
WenJin	\WJ	中國𐄂𐄂	中國𐄂𐄂	中國𐄂𐄂	中國𐄂𐄂	中國𐄂𐄂	中國𐄂𐄂	中國𐄂𐄂	中國𐄂𐄂
Korean	\KR	한국어漢字	한국어漢字	한국어漢字	한국어漢字	한국어漢字	한국어漢字	한국어漢字	한국어漢字
Tangut	\TG	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂
Mongolian-family and other Asian scripts									
Khitan Small Script (linear)	\KHS	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂	𐄂𐄂𐄂
Mongolian	\MO	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ
Mongolian Baiti	\MOb	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ	ᠮᠣᠩᠭᠣᠯᠠᠨ
Manchu	\MC	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ
Segoe Historic	\SEG	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ	ᠮᠠᠨᠴᠤ
Thai	\TH	ภาษาไทย	ภาษาไทย	ภาษาไทย	ภาษาไทย	ภาษาไทย	ภาษาไทย	ภาษาไทย	ภาษาไทย
Old Turkic	\OT	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏
Old Uyghur	\UY	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏	𐰇𐰆𐰐𐰏
Vietnamese									
Quốc Ngữ	\VI	Tiếng Việt	Tiếng Việt	Tiếng Việt	Tiếng Việt	Tiếng Việt	Tiếng Việt	Tiếng Việt	Tiếng Việt
Hán-Nôm	\HN	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂	𐄂𐄂𐄂𐄂

前後不同文種保持在同一個段落中。  縦書き

のモンゴル文字の直後にも日本語の完全な文章が続き、通常の横書き状態が回復したことを確認します。  두 번째 세로쓰기 구간 뒤에도 한국어의 완전한 문장이 이어지며 문단의 방향과 글꼴 상태가 정상적으로 복원되는지를 확인합니다. 最後這個中文完整句子仍然留在同一個段落裡，用來確認兩次豎排 local override、數次 RTL 切換與複雜 shaping 之後，普通橫排行文與局部字體狀態全部恢復正常。

2.2 Minimal Automatic Unicode-Range Regression

Unicode-range routing (automatic font ownership) is exercised here on a small representative set. The showcase tests routing correctness with a compact interchar transition graph. The specimen itself uses raw Unicode.

Հայերեն այս ամբողջական նախադասությունը գրված է առանց տեղական տառատեսակի հրամանի: ეს სრული ქართული წინადადება ავტომატური Unicode დიაპაზონის მარშრუტიზაციას ამოწმებს. Огoд пилoгoс аqыпaи NoYcaрз oYoд аqыпaи NҺHTEN. ூஐ Pற஥ற஥஥ ஁஁றயஃ ஔஔஔஔ, ஥ ஔஔஔஔ ஁஁றயஃ 4ஔ ஁ஔஔஔ. தமிழில் எழுதப்பட்ட இந்த முழு வாக்கியம் தனி local font command இன்றி Unicode range owner மூலம் அமைக்கப்படுகிறது.

3 Right-to-Left Scripts

Right-to-left text (directional behavior) requires more than choosing a glyph source. This section therefore uses explicit local families throughout. Each specimen is long enough to form a genuine paragraph, allowing line breaking, inter-word spacing, punctuation, digits, bidirectional interaction, and OpenType shaping to be inspected through explicit local Arabic, Hebrew, and Syriac families.

3.1 Arabic

الْعَرَبِيَّةُ لُغَةٌ ذَاتُ تَارِيخٍ طَوِيلٍ، وَهِيَ تُكْتَبُ مِنَ الْيَمِينِ إِلَى الْبَسَارِ، وَتَتَّصِلُ حُرُوفُهَا بِأَشْكَالٍ مُخْتَلِفَةٍ بِحَسَبِ مَوْضِعِهَا فِي الْكَلِمَةِ. يَحْتَوِي هَذَا النَّصُّ عَلَى جُمْلٍ طَوِيلَةٍ وَعَلَامَاتٍ تَرْقِيمٍ مُتَنَوِّعَةٍ، وَتَتَغَيَّرُ أَطْوَالُ الْكَلِمَاتِ وَالْجُمْلِ حَتَّى يَظْهَرَ سُلُوكُ الْفَقْرَةِ عِنْدَ نِهَآيَةِ السَّطْرِ. وَعِنْدَمَا يَطُولُ السَّطْرُ يَجِبُ أَنْ يَنْتَقِلَ النَّصُّ إِلَى السَّطْرِ التَّالِي بِصُورَةٍ طَبِيعِيَّةٍ مِنْ غَيْرِ أَنْ تَنْقَطِعَ أَشْكَالُ الْحُرُوفِ أَوْ تَضْطَرِبَ الْمَسَافَاتُ بَيْنَ الْكَلِمَاتِ. وَيُسْتَعْمَلُ هَذَا الْمَقْطَعُ لِلتَّأَكُّدِ مِنْ أَنَّ الْفَقْرَةَ الْعَرَبِيَّةَ الْكَامِلَةَ تَبْقَى مُسْتَقَرَّةً دَاخِلَ وَثِيقَةٍ مُتَعَدِّدَةِ اللُّغَاتِ.

3.2 Urdu

3.3 Hebrew

3.4 Syriac

Western / general Syriac:

עלה ללמד. מן הדברים הללו נראה שיש להם חשיבות רבה. וכן נראה שיש להם חשיבות רבה. וכן נראה שיש להם חשיבות רבה.

Eastern Syriac stylistic family:

[illegible]

Vertical writing (horizontal-layout-compatible vertical embedding) provides local vertical runs inside a horizontal document model. The text is divided at word boundaries, and each word is typeset vertically while the resulting word-sized units continue to participate in ordinary horizontal paragraph layout. Spaces therefore become natural break opportunities between vertical words.

This design keeps genuinely vertical glyph orientation while allowing the text to wrap within normal horizontal pages, with relatively compact line spacing. The specimens below are deliberately long enough to test this compatibility strategy under realistic paragraph conditions: word segmentation, inter-word spacing, line breaking, line spacing, punctuation, ordering, and recovery of the surrounding horizontal layout.

4.1 Mongolian

[illegible][illegible]

4.2 Manchu

Horizontal

ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ

Vertical

ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ

4.3 Old Uyghur

The Old Uyghur sample is deliberately extended so that several successive vertical columns must be produced. It is used as a layout stress string rather than as a continuous philological quotation.

Horizontal

ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ

Vertical

ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ
 ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ ᡤᡠᡵᡠ

5 Complex Shaping and Stacked Sequences

OpenType shaping (generic complex shaping) is tested here through explicit local families. This deliberately separates shaping from Unicode-range ownership: if a local specimen is wrong, the failure belongs to the selected family or shaping path through the selected local family and shaping path. Khitan Small Script is recorded through its current linear fallback form.

5.1 Devanagari

The Sanskrit local family exercises conjuncts, virama behavior, pre-base and post-base vowel signs, and longer clusters through explicit local selection.

A longer local specimen:

धर्मक्षेत्रे कुरुक्षेत्रे समवेता युयुत्सवः । संस्कृतवाक्यानि देवनागर्या लिखितानि सन्ति ।

Table 2: Devanagari shaping specimens

Sequence	Specimen
kṣa	क्ष
jña	ज्ञ
śra	श्र
stra	स्त्र
ddhya	द्ध्य
dharma	धर्म
dharmakṣetre	धर्मक्षेत्रे
saṃskṛtam	संस्कृतम्
om	ॐ

5.2 Tibetan

Tibetan provides a visible example of generic vertical stacking inside one local shaping run.

Table 3: Tibetan stack specimens

Type	Specimen
stack	བསྐྱབས་
stack	བརྒྱད་
stack	བཟླ་
stack	རྒྱལ་
stack	དབྱངས་

A longer local paragraph exercises Tibetan shaping and line breaking under ordinary document width:

བོད་ཡིག་ནི་བོད་ཀྱི་སྐད་ཡིག་འབྲི་བའི་ཡི་གེའི་མ་ལག་ཅིག་ཡིན་ཞིང་། ཆོག་དང་ཆོག་གི་བར་ལ་ཆོག་གིས་
མཚམས་འབྲེད་པ་དང་། ཡི་གེ་མང་པོ་ཞིག་མགོ་ཅན་དང་འདོགས་ཅན་དུ་སྒྱར་ནས་ཆོག་བར་གཅིག་གི་ནང་དུ་སྤངས་ཏེ་
འབྲི་དགོས། དཔེར་ན་བསྐྱབས་པ་དང་། བརྒྱད་པ། བཟླ་པ། རྒྱལ་ཁབ། དབྱངས་ཅན་ལྟ་བུའི་ཆོག་ནང་དུ་ཡི་གེ་མང་པོ་
སྒྱར་ཡོད་པས། ཡིག་གཟུགས་ཀྱི་སྤངས་སྤངས་དང་ཆོག་བར་གྱི་བར་ཐག་གཉིས་ཀ་ཡང་དག་པར་སྟོན་དགོས། ཆོག་ཕྱིང་
རིང་པོ་ཞིག་ཤོག་ངོས་ཀྱི་ཞིང་ཚད་ལས་བཀལ་བའི་སྐབས་སུ། ཆོག་གི་རྗེས་སུ་རང་བཞིན་གྱིས་ཕྱིང་བ་གསར་པར་འགོ་
ཐུབ་པ་དང་། སྔ་ཕྱིའི་ཡི་གེའི་སྤངས་སྤངས་དང་ཆོག་གི་གོ་རིམ་མི་འབྲུག་པ་གལ་ཆེ། དེའི་ཕྱིར་ཆོག་ཕྱིང་རིང་པོ་འདིས་
བོད་ཡིག་གི་གཟུགས་སྒྱུར་དང་། ཆོག་བར། ཕྱིང་བར། ཤད་དང་ཉིས་ཤད་ཀྱི་གནས་སྤངས། དེ་བཞིན་དུ་ཕྱིང་བ་བརྗེ་བའི་
སྐབས་ཀྱི་སྤྱིའི་སྒྲིག་སྤངས་བཅས་ལ་ཚོད་ལྟ་བུའི་ཐུབ།

The specimens in this section use normal-width continuous text. They exercise paragraph composition, line breaking, punctuation, regional glyph forms, Hangul composition, historical jamo, supplementary-plane ideographs, and mixed-script runs. A compact table at the end isolates shared Han codepoints for direct visual comparison.

6.1 Chinese

Mainland Simplified Chinese — Noto SC This paragraph uses the explicit Simplified Chinese family throughout.

现代中文排版并不只是把一个个汉字依次放进页面。一个真正的正文环境还需要同时处理标点、数字、书名号、引号、括号以及连续句子之间的换行关系，并且在较长的段落中保持稳定的字面和行距。对于共享的汉字码位，不同地区使用的字体还可能给出不同的字形，因此同一个“骨、直、令、具、角”在不同字体家族中会表现出细微而稳定的区域差异。这里使用一整段连续的简体中文来检查大陆简体字形、标点悬挂附近的布局、正常段落换行以及本地字体选择在长文本中是否能够始终保持有效，而不是只验证几个孤立字符能不能显示。

Mainland Traditional Chinese — Noto SC Traditional characters can also be deliberately typeset through the Mainland Chinese family. This separates character repertoire from regional glyph selection: the explicit family choice supplies the regional form for traditional codepoints.

現代中文排版並不只是把一個個漢字依次放進頁面。一個真正的正文環境還需要同時處理標點、數字、書名號、引號、括號以及連續句子之間的換行關係，並且在較長的段落中保持穩定的字面和行距。對於共享的漢字碼位，不同地區使用的字體還可能給出不同的字形，因此同一個「骨、直、令、具、角」在不同字體家族中會表現出細微而穩定的區域差異。這裡特意使用傳統漢字而仍然選擇大陸字體家族，以檢查字符繁簡與地域字形選擇能否保持彼此獨立，並觀察長段落中共享漢字、繁體字和全角標點的連續排版。

Taiwan Traditional Chinese — Noto TC The Taiwan family is tested with continuous Taiwan Traditional Chinese rather than with a short regional-glyph sample.

正體中文的正文排版除了字符本身之外，也牽涉字型、標點、行距與段落節奏。當文件同時包含不同語言或不同地區的漢字時，程式不能僅依 Unicode 碼位猜測應採用哪一套地區字形，而應由明確的語言或字型選擇來決定。這個段落使用臺灣正體字型，並刻意包含「骨、直、令、具、角、門、國、學、龍」等適合觀察地區字形差異的共享

漢字，同時加入引號、頓號、逗號與句號，藉此確認較長的正體中文內容在正常欄寬中能自然換行，而且從段首到段末始終維持同一個本地 CJK family。

Document Traditional Chinese – Shanggu The following paragraph is deliberately left completely unwrapped. It therefore remains under the document CJK family, Shanggu, and provides the control against which the explicit Chinese, Japanese, and Korean families can be compared.

漢字進入現代數位排版之後，同一個編碼往往可以由許多不同的字體呈現，而字形的歷史層次、地域習慣和設計風格並不會因此消失。傳統中文尤其適合用來觀察這種情形：有些字在不同地區的正文中結構略異，有些字的筆形和部件位置不同，而另一些差別只有在一整段文字的灰度與節奏中才會顯現。這個段落不使用任何語言專用命令，使所有漢字直接落入文件的 Shanggu CJK family；因此它不只是檢查單字是否存在，也檢查文件級 CJK 選擇在較長的連續文本、標點和自動換行之間能否穩定維持。

6.2 Korean and Historical Hangul

Modern Korean – Hangul The first Korean specimen deliberately avoids Hanja. It tests ordinary modern Hangul composition, punctuation, word spacing, and paragraph wrapping.

한글로 쓰인 긴 문장은 여러 음절 블록이 끊임없이 이어지면서도 낱말 사이의 간격과 문장 부호의 위치가 자연스럽게 유지되어야 한다. 짧은 보기에서는 글꼴이 몇 글자를 제대로 보여 주지만 확인할 수 있지만, 실제 문단에서는 줄 끝에서 낱말이 어떻게 배치되는지, 괄호와 따옴표가 앞뒤 글자와 어떻게 어울리는지, 여러 줄을 지나도 같은 글꼴 선택이 계속 유지되는지를 함께 살펴볼 수 있다. 이 문단은 완성형 한글이 이어지는 일반적인 한국어 본문을 충분히 길게 배치하여 문장 전체의 모양과 줄 간격을 확인하고, 뒤에 나오는 한자 혼용문과 옛한글 자료를 비교하기 위한 현대 한글 기준 표본으로 사용한다.

Modern Korean – mixed Hanja and Hangul The next paragraph keeps Hangul and Hanja inside a single explicit Korean family. Shared Han characters retain Korean regional forms throughout the surrounding Hangul text.

韓國語의 現代 文體는 오늘날 대체로 한글만으로 적지만, 歷史、言語、哲學、法律과 같은 분야에서는 漢字를 함께 적은 문헌을 어렵지 않게 만날 수 있다. 이런 漢字混用文을 조판할 때에는 한글 音節과 句讀點 사이에 들어가는 漢字가 갑자기 다른 地域 字形으로 바뀌지 않아야 하며, 韓國、朝鮮、漢字、文化、文字와 같은 어휘도 앞뒤의 한글 문맥과 한 family 안에서 자연스럽게 이어져야 한다. 이 문단은 國語의 읽기 흐름을 유지하면서 여러 漢字語와 고유어를 섞어, 실제 문헌에서 볼 수 있는 긴 혼용문이 줄바꿈을 거처도 안정

적으로 조판되는지를 시험한다.

Jeju language – corpus specimen Jeju is useful here because practical orthographies make active use of the arae-a and decomposed Hangul sequences that are rare in ordinary modern Korean. The following is a composite regression specimen assembled from short attested Jeju-language passages for a paragraph-level regression.

제주말 (濟州말) 은 제주섬서 곁아지는 말이다. 제주말모음은 시간 지나명 여러 가지 변화가 이섯다. 제주섬은 한라산광 주깃디 오름덜록 일뤼진 섬이라. 옛적 화산활동으록 굴부리가 꿔썩 곤데곤데 으라 오름이 하영 샅다. 낭 (木) 은 나무질로 뉘 줄기를 가지고 잇인 여러해살이 식물이다. 제주말 위키백과 또시는 제주어 위키백과는 제주말로 운영험신 위키백과 언어판이라.

Middle Korean and Old Hangul – historical corpus specimen The historical specimen deliberately retains decomposed jamo and tone marks. Short genuine historical fragments retain their source spellings and are placed consecutively to form a paragraph-level shaping regression.

나·랏·말·ㅅ·미·中·듀 。國·꺠·에 달·아문·중·와로서르·스·뭇·디아·니·홀·썩 ·아기·빅·여·셔·과
굴·이·가·슴·알·파·주·글··똥·헝·거·든 두·들·겐 開·關·홀·젯·므리 疏·通·헝고 남·곤 古·今·엿 남·기·섯
것·도·다 머·리·알·푸·고·고·히·막·고 머·리·와·눈·괘·환·티·아·니·커·든 ·긔·운·이·우·호·로·올·아
머·리·알·포·미·뽻·리·는·똥·거·든 녀·고·큰 天·造·수·이·에 다·슬·며 어·즈·러·우·민·들 엿·디·덜·덜·흔 數
| 리·오

The corpus paragraph above tests realistic historical material. The following synthetic boundary sequence has a different purpose: it explicitly crosses Hangul Jamo Extended-A, ordinary Jamo, and Extended-B while remaining inside one shaping run.

·맏

Modern decomposed control:

각

6.3 Japanese and Ryukyuan

Modern Japanese Modern Japanese combines kana, regional Han forms, punctuation, and frequent script changes inside the same sentence. The entire paragraph remains under the explicit Japanese family.

現代日本語の文章では、漢字、ひらがな、カタカナが一つの段落の中で何度も切り替わり、句読点や括弧、かぎ括弧も連続して現れる。短い文字列だけではフォントが表示できることしか分らないが、長い本文にすると、漢字と仮名の大きさの釣り合い、約物の位置、行末での折り返し、そして次の行へ移った後の字形の連続性まで確認できる。この段落では「日本語」「漢字」「文字」「学校」「文化」「骨」「直」「令」「具」「角」などを通常の文脈に入れ、日本語用の地域字形を保ったまま複数行の文章が安定して組版されるかを試している。

Historical kana orthography The opening sentence below is historical text; the continuation is a showcase-written regression passage that deliberately retains historical kana spellings such as ゐる, やう, and 言ふ. This keeps the specimen long enough for paragraph testing while identifying the continuation as showcase-written text.

真夏の宿屋は空虚であつた。窓の外には白い雲がゆつくり流れ、庭の木立では蟬が絶えず鳴いてゐる。旅人は古い椅子に腰をおろし、まだ來ない馬車の音を待ちながら、時計の針ばかりを眺めてゐた。誰も何も言はないので、午後の光だけが廊下を少しづつ移つて行くやうに見えた。かうして長い時間が過ぎても、玄關の戸は一度も開かず、遠くの道から聞えて來る物音だけが、時々静かな宿の空氣を動かしてゐるのであつた。

Japanese Kanbun The first sentence is taken from Rai San'yō's *Nihon Gaishi*; the remainder is a showcase-written Kanbun-style regression continuation. The purpose here is typographic: Japanese Han glyphs must remain selected even throughout the all-Han run.

外史氏曰、吾讀舊志、見鳥羽帝時數下制符。蓋日本文章之傳、漢籍之學與國史之記相因而久矣。昔之學者讀經史、作序記、論人物、述治亂、多用漢文而各成其體。今取其字列於一段、所以驗日本字形之連續、句讀之位置、長行之折返、以及共享漢字在無假名介入時亦不離其本地字體也。文字雖同出一碼、而骨直令具角門國學龍諸字之形、隨地域字體而微異、故尤宜以連續文章觀之。

Okinawan — corpus specimen Okinawan is represented by a composite specimen from the Wikimedia Okinawan test project. Its mixed use of kana and Han characters makes it a

useful additional Japanese-family regression. The orthography reflects this composite corpus specimen.

沖縄口えー琉球諸語ぬてい壺ちやいびーん。うちなーぐちぬ首里那覇方言おー琉球国ぬじょーま言葉やびたん。琉球王國や、昔ジジ中心んかい存在さる王国やたん。王や首里天加那志とう言ん。首里城や、沖縄県ぬ城やん。琉球王朝ぬ王城っし、沖縄県ぬいっちゃん大さるぐしくやん。漢字えー、大昔唐ぬ国んかいそーじー現りーる文字ぬていーちやん。やまとう、高麗、るーちゅー、ベトナムおー、大昔唐ぬ国から漢字伝わていちゃん。

Ainu Ainu written in the modern katakana orthography makes extensive use of Katakana Phonetic Extensions for syllable-final consonants. The following specimen therefore exercises ordinary katakana together with characters such as ク, シ, ム, ラ, and the combining form プ inside continuous text.

イタッブリカ ソモネコロカ シサムモシリ モシリソカワ チヌムケニシパ
チヌムケ カッケマッ ウタペラリワ オカウシケタ クニネネワ アイヌイタッ
アニ クイタクルウェ ネワネヤクン ラモッシワノ クヤイライケプ ネルウェ
タパンナ。エエパキタ カニアナクネ アイヌモシリ シシリムカ ニプタニコタ
ン コアパマカ クネルウェネ ウッチケクニプ ラカサッペ。

6.4 Vietnamese

The same constitutional passage is used throughout this subsection so that the specimens differ primarily in writing system or font selection rather than in linguistic content. Quốc Ngũ is first typeset with the document Latin family, Libertinus, and then with the dedicated Vietnamese family. The corresponding Hán-Nôm text uses the VinaWiki repertoire.

Quốc Ngũ – document Latin family The first specimen is deliberately unwrapped and therefore remains in the document Latin family, Libertinus. It tests Vietnamese diacritics through that document-wide font choice.

Trải qua mấy nghìn năm lịch sử, Nhân dân Việt Nam lao động cần cù, sáng tạo, đấu tranh anh dũng để dựng nước và giữ nước, đã hun đúc nên truyền thống yêu nước, đoàn kết, nhân nghĩa, kiên cường, bất khuất và xây dựng nên nền văn hiến Việt Nam. Từ năm 1930, dưới sự lãnh đạo của Đảng Cộng sản Việt Nam do Chủ tịch Hồ Chí Minh sáng lập và rèn luyện, Nhân dân ta tiến hành cuộc đấu tranh lâu dài, đầy gian khổ, hy sinh vì độc lập, tự do của dân tộc, vì hạnh phúc của Nhân dân. Cách mạng tháng Tám thành công, ngày 2 tháng 9 năm 1945, Chủ

駸駸，峩峩縱弱，猗猗綏猗，綏綏猗猗，猗猗猗猗，猗猗猗猗，猗猗猗猗，猗猗猗猗。

6.6 WenJin Multi-Plane Coverage

WenJin is different from the language-specific families above. It is exposed as one public local family whose internal fallback configuration spans multiple CJK planes. The paragraph below is therefore intentionally a coverage stress test: ordinary Han text is interleaved with supplementary-plane characters while the public command remains unchanged.

中國文字的編碼範圍遠遠超過基本多文種平面，因此只測試一二三天地玄黃這類常用字並不足以確認大型漢字字體的覆蓋是否正常。這一段先由普通漢字開始，隨後插入第二平面的亅、吉、土、堅、丕，再回到典籍文字與古今學術，之後繼續進入第三平面的丌、丰、𠂇、冂、𠂆。當不同平面的字符在同一個長段落中交錯出現時，使用者仍然只看見一個 \WJ family；Plane 0、Plane 2 和 Plane 3 的具體 fallback 應由內部配置完成，而不應要求正文作者為不同 Unicode plane 手動切換命令。

The following table complements the paragraph test with deterministic block coverage samples. For each CJK Unified Ideographs block, the first twenty encoded ideographs are shown. This makes gaps in coverage or an incorrect Plane 0, Plane 2, or Plane 3 fallback immediately visible and keeps the regression sample stable across releases.

6.7 Regional Forms of Shared Han Characters

The preceding specimens test normal paragraphs. Here shared codepoints deliberately isolated. Every cell below contains the same Unicode character; the visible difference should therefore come from the selected regional family selected for the common codepoint.

7 Document Features

feature system (composable document modules) is demonstrated throughout this PDF, but this section gives each major public feature an explicit specimen as well. The showcase therefore tests individual modules and their coexistence in a realistic document.

7.1 Mathematics

Mathematical font selection is deliberately left at IMPE’s default setting. The following single display combines several common mathematical alphabets, operators, delimiters, accents,

matrices, integrals, sums, limits, radicals, and nested scripts as a compact stress specimen.

$$\begin{aligned}
\mathcal{Z}_{\beta,\mu} &:= \mathrm{Tr}_{\mathcal{H}} \exp \left[-\beta \left(\widehat{\mathbf{H}} - \mu \widehat{\mathbf{N}} \right) \right] \\
&= \sum_{n=0}^{\infty} \frac{1}{n!} \int_{\mathbb{R}^{3n}} \prod_{j=1}^n \frac{d^3 \mathbf{p}_j}{(2\pi\hbar)^3} \exp \left[-\sum_{j=1}^n \sqrt{m_j^2 c^4 + c^2 \|\mathbf{p}_j\|^2} \right] \\
&\quad \times \det \left(\begin{array}{ccc} \frac{\partial^2 \mathcal{L}}{\partial q^i \partial q^j} & \nabla_{\mu} F^{\mu\nu} & \langle \psi | \widehat{\mathbf{H}} | \phi \rangle \\ \sum_{k=1}^{\infty} \frac{(-1)^{k+1}}{k^2} & \sqrt[3]{1 + \sqrt{1 + \lambda^2}} & \frac{\mathbb{E}[X^4] - 3\mathbb{E}[X^2]^2}{\mathrm{Var}(X)^2} \\ \oint_{|z|=1} \frac{\log(1+z)}{z^{r+1}} dz & \prod_{p \in \mathbb{P}} (1 - p^{-s})^{-1} & \lim_{\varepsilon \rightarrow 0^+} \frac{f(x+\varepsilon) - f(x-\varepsilon)}{2\varepsilon} \end{array} \right) \\
&\quad + \underbrace{\widetilde{\mathbf{A}}_{\mu}^{\dagger \nu} \overline{\mathbf{B}}_{\nu}^{\rho} \widehat{\mathbf{C}}_{\rho}^{\mu}}_{\text{accented tensor contraction}} + \frac{\Gamma(\frac{1}{2} + i\alpha) \zeta(2s)}{\sqrt{2\pi\sigma^2}} \\
&\quad + \begin{cases} e^{-1/x^2} \sin(\pi/x), & x \neq 0, \\ 0, & x = 0, \end{cases} \\
&\quad \xrightarrow[\alpha \rightarrow 0]{\beta \rightarrow \infty} \left(\bigoplus_{j=1}^r \mathbb{C}^{n_j} \right) \otimes \bigwedge^k V \\
&\quad \implies \mathbb{P}(|X - \mathbb{E}[X]| \geq t) \leq \frac{\mathrm{Var}(X)}{t^2}, \quad t > 0, \\
&\quad \alpha, \beta, \gamma, \delta, \varepsilon, \theta, \vartheta, \lambda, \mu, \nu, \xi, \pi, \varpi, \rho, \varrho, \sigma, \phi, \varphi, \chi, \psi, \omega \in \mathbb{R}.
\end{aligned}$$

7.2 Tables

Table 7 uses the IMPE book-table environment rather than a raw tabular wrapper.

7.3 Lists and Example Blocks

A normal list remains ordinary $\LaTeX$:

1. automatic font ownership;
2. script-specific behavior where required;
3. reusable document features;
4. stable public interfaces.

Table 7: Feature integration summary

Feature	Public route	Exercised here
Mathematics	<code>math</code>	yes
Tables	<code>tables</code>	yes
Images	<code>image</code>	yes
Citations	<code>citations</code>	yes
Index	<code>index</code>	yes
Hyperlinks	<code>hyperlinks</code>	yes
Running headers	<code>headers</code>	yes
List environments	<code>lists_envs</code>	yes

The IMPE `ExampleBlock` environment provides a distinct indented specimen:

A canonical showcase should be readable as a document, useful as a visual regression specimen, and representative of the public interface that new documents are expected to use.

7.4 Images

The image feature is exercised with the standard $\text{\TeX}$ distribution’s example image when it is available. This keeps the canonical source self-contained using a generated illustration in the build.

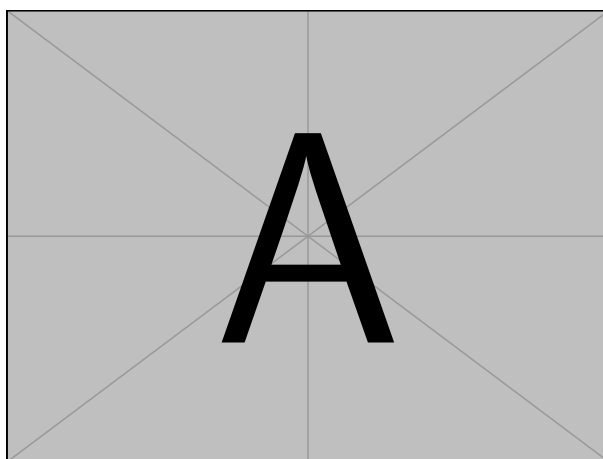


Figure 1: Image-feature specimen using the standard $\text{\TeX}$ example image.

Figure 1 also exercises cross-reference hyperlinks.

7.5 Citations and Bibliography

Citation support is loaded through the feature system and configured before feature activation. A normal textual citation can therefore be written as Knuth (1984), while a parenthetical citation appears as (Knuth, 1984).

The bibliography is printed near the end of the document.

7.6 Index Terms

Several concepts in earlier sections were inserted with the public `\Term` interface. For example, **canonical showcase** (release-time specimen) itself is now indexed. The generated index at the end of the PDF therefore also exercises indexed terms, optional descriptions, and hyperlinks back to their first occurrence.

7.7 Hyperlinks, Footnotes, and Running Headers

The table of contents is clickable, numbered headings carry stable targets, and section headings can link back toward their table-of-contents entries. The running header above this page is produced by the `headers` feature.

Footnote markers are also bidirectional.²

For an external-link specimen, the project repository can be represented with a normal hyperlink: IMPE $\LaTeX$ System on GitHub.

References

Knuth, D. E. (1984). *The texbook*. Addison-Wesley.

²Clicking the footnote marker jumps to this note; the note marker can link back to the original position.

Index

C

- canonical showcase (release-time specimen), 23
- CJK family selection (continuous text, shared Han ownership, and explicit regional overrides), 12

F

- feature system (composable document modules), 19

M

- Multilingual composition (combined routing and local overrides), 3

O

- OpenType shaping (generic complex shaping), 10

R

- Right-to-left text (directional behavior), 7

U

- Unicode-range routing (automatic font ownership), 7

V

- Vertical writing (horizontal-layout-compatible vertical embedding), 9