
01 – Account

Carrier Fleet Profile — Fleet Overview, Yard Terminals, Assets, Drivers

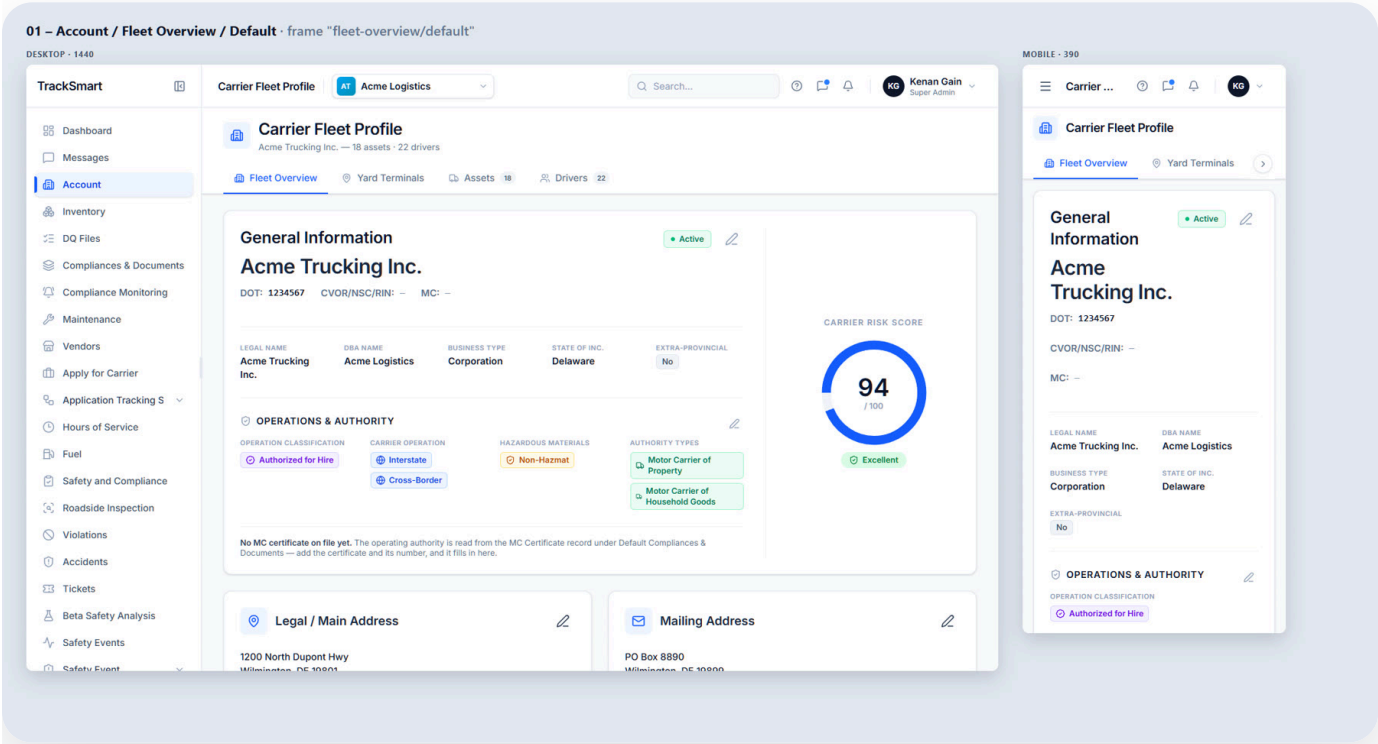

APP	SECTION	DATE	VERSION
TrackSmart fleet compliance prototype	**Menu option #1** Account · /account/profile	**23 October 2026**	**1.0** test accounts, demo data

Contents

1 Page overview
Every tab, field, button, modal, state and role difference

2 Screenshots
132 captures — desktop 1440 px and mobile 390 px, with captions

3 Design specification
Layout, typography, components, icons, interactions, accessibility

4 Colour palette
28 colour tokens, light and proposed dark, WCAG contrast

5 Data model
MongoDB collections, fields, relationships, indexes, sample data

6 Agent instructions (summary)
Purpose, stack, rules to preserve, security, acceptance checklist

7 Links
Figma, video, files in this folder

Nothing in this document is masked: every name, address, email and phone number is fictional demo data from the prototype's test accounts.

1 Page overview

App: TrackSmart (fleet compliance prototype) · **Section:** sidebar menu #1 "Account" · **Documented:** 2026-10-22 · **Source of truth:** the running app (test accounts only) cross-checked against `src/pages/profile/CarrierProfilePage.tsx` and the pages it embeds.

> Everything below exists in the app today. Anything not seen on screen is marked **ASSUMPTION:** (inferred from code) or **TO CONFIRM:** (needs a product decision or a check I could not make).

---

0. Entry point and frame

Item	Value
Sidebar item	**Account** (icon: building)
Route	`/account/profile`
Top-bar title	"Carrier Fleet Profile"
Page header	Icon + title **Carrier Fleet Profile**, subtitle `"<Carrier name> — <n> assets · <n> drivers"`, then the 4 section tabs. The header condenses (shrinks) as the body scrolls down and returns on scroll up.
Carrier scope	The page always shows **one carrier** – the one picked in the top-bar **Switch carrier** dropdown (Super Admin / Admin) or the user's own carrier. Every tab, count and list is scoped to that carrier.
Back button	When the page was opened from another record (a share link, a monitoring alert), a "← Back to …" button appears at the right of the header. Otherwise no header action.
Section tabs	`Fleet Overview` · `Yard Terminals` · `Assets <count>` · `Drivers <count>` (tab strip scrolls with arrows when narrow)

Page-level states

State	What the user sees
No carrier	"No carrier profile yet" empty page: "You don't have any carrier accounts (under *Service Profile*) assigned to you yet." + note "Access per role is set in Users & Roles ▸ Roles." + button **Go to Dashboard**.
Loading	None. Data is local (localStorage-backed stores); tabs render immediately. ASSUMPTION: a real backend would need a skeleton here.
View-only (light access)	A blue strip under the top bar: "**View only** · a *Safety Manager* can look at Account here but not change it." (see §6 Roles).
Success	Green toast bottom-right after every save/import/delete (exact messages listed per tab).
Error	Inline red field messages inside wizards (Assets); `window.confirm()` dialogs before every row delete; no global error page.

---

1. Tree (what exists inside Account)

```
Account  (/account/profile)
├── Fleet Overview
│   ├── Carrier identity card         [Edit → "Edit Corporate Identity" modal]
│   ├── Operations & Authority card   [Edit → "Operations & Authority" modal]
│   ├── Legal / Main Address card     [Edit → modal]
│   ├── Mailing Address card          [Edit → modal]
│   ├── Fleet & Driver Overview card  [Edit → modal]  (Carrier risk score, Power units, Drivers, Non-CMV)
│   ├── Cargo Carried card            [Edit → "Cargo types" editor]
│   ├── Corporate Office Locations    [Add Location / Edit Location / Remove Location → "Add/Edit Office
Location" modal]
│   └── Directors & Officers          [Add Director / View More → "Director Details" modal → Edit → "Edit
Director" modal]
├── Yard Terminals   (embedded Locations page; also reachable standalone at /account/locations)
│   ├── Add New Location              → "Add New Location" modal
│   ├── Filters: search · Status · Security
│   ├── Locations table (grouped)     row click → "Location" view modal; ⋮ Open / Edit / Share to chat /
Delete
│   └── Pagination
├── Assets   (embedded Asset Directory)
│   ├── KPI tiles (6)  · sub-tabs All / Trucks (CMV) / Trailers (Non-CMV)
│   ├── Search · Columns · Export · Add Asset
│   ├── Assets table: inline Status dropdown · ⋮ Open / Edit / Share to chat / Delete · pagination
│   ├── Add / Edit Asset  → full-screen wizard, 9 sections
│   └── Asset detail page → header tiles + 11 tabs (Overview, Monitoring, Compliances, Activity,
Maintenance, Inventory, Expenses, Inspections, Violations, Accidents, Notifications)
└── Drivers
    ├── KPI tiles (5) · Search · Status filter · Columns · Export · Import · Add Driver
    ├── Drivers table: inline Status dropdown · ⋮ Open / Edit / Share to chat / Open DQ file / Delete ·
pagination
    ├── Import drivers  → "Import Drivers" modal (CSV / XLSX)
    ├── Add / Edit Driver → full-page application form, 15 sections + driver-type picker
    └── Driver profile page → header (status dropdown, Share to chat, Print, Edit Profile) + 13 tabs
```

---

2. Tab: Fleet Overview

Purpose. The carrier's legal identity and operating authority as filed (USDOT / CVOR / NSC), its addresses, fleet size, cargo, corporate offices and directors. Read mostly; every card has one pencil that opens a modal for that card only.

2.1 Carrier identity card (top-left of the big card)

Displayed: carrier name, **DOT:** number, **CVOR/NSC/RIN:** number(s), MC number (from the MC Certificate record), status chip, and fields **Legal name · DBA name · Business type · State of inc. · Extra-provincial**. Hover titles explain each number (e.g. "US Federal Motor Carrier Safety Administration USDOT Number").

Icon button (pencil, no label) → **Edit Corporate Identity** modal:

Field	Type	Required	Options / placeholder / rules
DOT Number	text + **LOOKUP** button	no	placeholder `1234567` ; helper "Click Lookup to pull SAFER record" (TO CONFIRM: lookup is a demo stub)
Safety Registration	select	no	`CVOR` , `NSC`

Field	Type	Required	Options / placeholder / rules
CVOR / NSC Number	text	no	placeholder changes with the select: `CVOR-00123` / `AB-12345`
RIN	text	no	placeholder `RIN-0099`; helper "Registered Importer / Registration Identification Number."
Legal Name	text	**yes**	placeholder `Acme Trucking Inc.`
DBA Name	text	no	placeholder `Acme Logistics`
Business Type	select	**yes**	Corporation · LLC · Sole Proprietor · Partnership
State of Inc.	select	**yes**	Delaware · California · Texas · Florida · New York (TO CONFIRM: full state list)
Extra-Provincial	select	no	Yes · No; helper "Operates commercial vehicles across provincial or federal borders."
Status	select	**yes**	Active · Inactive · Suspended · Pending

Buttons: **Cancel** · **Save**. Success toast "Changes saved successfully". ASSUMPTION: required fields are marked but the generic modal does not block Save on empty values (TO CONFIRM).

2.2 Operations & Authority card

Displayed: **Operation classification · Carrier operation · Hazardous materials · Authority types** as chips.

Icon button (pencil) → **Operations & Authority** modal:

Field	Type	Options
Operation Classification	checkbox list	Authorized for Hire · Private Carrier · Exempt For Hire
Carrier Operation	check cards	Interstate · Intrastate · Cross-Border
Hazardous Materials	check cards	Hazmat · Non-Hazmat
FMCSA Operating Authority Types	checkbox list	Motor Carrier of Property · Motor Carrier of Household Goods · Broker of Property

Buttons: Cancel · Save → toast "Changes saved successfully".

2.3 Legal / Main Address card → Edit Section

Field	Type	Required	Options / placeholder
Country	select	no	United States · Canada
Street Address	text	no	`1200 North Dupont Highway`
Apartment, suite, etc.	text	no	`(Optional)`
City	text	no	`Wilmington`
State	select	no	DE · NY · CA · TX (TO CONFIRM: full list)
ZIP Code	text	no	`19801`

2.4 Mailing Address card → Edit Section

Field	Type	Required	Placeholder / options
Street Address or PO Box	text	**yes**	`PO Box 8890`
City	text	**yes**	`Wilmington`

Field	Type	Required	Placeholder / options
State	select	**yes**	DE · NY · CA · TX
ZIP Code	text	**yes**	`19899`
Country	select	**yes**	United States · Canada

2.5 Fleet & Driver Overview card → Edit Section

Displayed tiles: **Carrier risk score** (computed, read-only) · **Power units** · **Drivers** · **Non-CMV**.

Field	Type	Required	Note
Power Units	number	**yes**	info icon
Drivers	number	**yes**	info icon
Non-CMV Vehicles	number	no	helper "Vehicles under 10,001 lbs."

2.6 Cargo Carried card → pencil → Cargo types editor

- Note on the card: "Updated from MCS-150".
- Modal: search box (placeholder "Search cargo type...") + checklist of cargo types (the MCS-150 cargo classifications, e.g. General Freight, Household Goods, Metal, Motor Vehicles, Logs, ...). Each label maps to a canonical cargo family internally.
- Buttons: Cancel · Save → toast "Cargo Types updated successfully".

2.7 Corporate Office Locations card

Table columns: **Label** · **Address** · **Contact** · **Phone** · **Actions**. Row actions: **Edit Location** (pencil) · **Remove Location** (bin; removes immediately, no confirm — TO CONFIRM whether a confirm is wanted). Header button **+ Add Location**.

Add Office Location / Edit Office Location modal:

Field	Type	Required	Placeholder
Location Label	text	**yes**	`e.g. Phoenix Branch`
Full Address	text	**yes**	`123 Main St, Phoenix, AZ 85001`
Contact Person	text	**yes**	`Manager Name`
Phone Number	tel	**yes**	`+1 (555) 000-0000`
Operating hours – Mon - Fri	text	no	`08:00 - 18:00`
Operating hours – Saturday	text	no	`10:00 - 14:00`
Operating hours – Sunday	text	no	`Closed`

Toasts: "Office Location added successfully" / "Office Location updated successfully".

2.8 Directors & Officers card

Table columns: **Name** · **Title** · **Ownership %** · **Actions**. Row action **View More** → **Director Details** modal (read-only): avatar/name/title, *Contact information* (Email Address, Phone Number, Office Location), *Role & compliance* (Date of Appointment, Date of Resignation, Primary Responsibility) + **Edit** button. Header button **+ Add Director**.

Edit Director / Add Director modal:

Field	Type	Required	Note
Full Name	text	**yes**	
Role Title	text	no	
Email Address	email	**yes**	
Phone Number	tel	**yes**	
Stock Class	text	no	
Ownership %	number	**yes**	
Date of Appointment	date	no	
Date of Resignation	date	no	
Primary Responsibility	textarea (4 rows)	no	placeholder "Describe this director's primary areas of responsibility and oversight..."

Toasts: "Director added successfully" / "Director updated successfully". TO CONFIRM: there is no delete for a director.

---

3. Tab: Yard Terminals

Purpose. The carrier's yards / terminals with their physical-security profile and a security score. This is the Locations page embedded (same page is reachable standalone at `/account/locations`, with a breadcrumb; the tab hides the breadcrumb).

Header action: + Add New Location.

Filters

Control	Type	Options
Search	text	placeholder "Search by name, address, or ID..." (matches name and ID)
Status	select	All · Active · Maintenance
Security	select	All · High (90+) · Medium (70-89) · Low (<70) — TO CONFIRM: the filter code currently matches on feature names (Fenced/Gated/CCTV/Guarded), so the score-band options have no effect.

Table (rows grouped with a band per group, e.g. "3 LOCATIONS")

Columns: Location Name / ID · Address · Fenced · Gated · CCTV · Guard · Restricted (icon columns, ✓/–) · Score (0-100 with tone: ≥90 Excellent, ≥75 Good, ≥60 Fair, else Low) · Status chip (Active / Maintenance / Deactivated) · Actions ⋮.

Row click → **Location** view modal (name, ID, address, time zone, score circle with label, the 5 security features as on/off list). ⋮ menu: **Open yard terminal · Edit yard terminal · Share to chat · Delete yard terminal** (red, last; asks `Delete yard terminal <name>? This cannot be undone.`). Delete → toast "Location removed successfully". Footer: rows-per-page select (5 · 10 · 20 · 50) and page buttons.

Add New Location / Edit Location modal

Field	Type	Required	Options / placeholder
Location Name	text	**yes** (ASSUMPTION)	`e.g. West Coast Distribution`

Field	Type	Required	Options / placeholder
Location ID	text	no	default `LOC-`, placeholder `LOC-####`
Address – Street	text	no	`Street Address`
Address – City / State / Zip	text ×3	no	`City` / `State` / `Zip`
Timezone	select, grouped	no	groups North America · South America · Europe · Africa · Middle East · Asia · Oceania · UTC
Initial Status	select	no	Active · Deactivated
Security features	5 toggles	no	Fenced Perimeter · Gated Entry · CCTV Surveillance · Security Guard · Restricted Areas (each with a one-line description)

Buttons: Cancel · Save. Empty state: "No locations match these filters." Pagination: prev / page numbers / next.

---

4. Tab: Assets

Purpose. The carrier's fleet register: every truck, trailer and non-CMV vehicle, its plate, ownership, compliance gaps, and the door into the asset's full record.

4.1 List

- **KPI tiles** (click = filter, click again = clear): Total Assets · Active · Maintenance · Out of Service · Draft · Deactivated.
- **Sub-tabs:** All Assets · Trucks (CMV) · Trailers (Non-CMV) (with counts).
- **Toolbar:** Search ("Search by Unit #, VIN, make, model, plate, year...") · **Columns** picker · **Export** (TO CONFIRM: no-op in the prototype) · **+ Add Asset** (primary).
- **Columns:** Unit # · Type (asset type · vehicle type) · Status (inline dropdown) · Plate (number + jurisdiction) · Plate expiry (date + EXPIRED/Expiring chip) · Make / Model / Year (+ VIN, colour) · Ownership (Owned / Leased / Financed / Rented) · Compliance ("n missing" chip) · Date added · Actions.
- **Inline Status dropdown** options: Active · Maintenance · Out of Service · Draft · Deactivated → saves immediately, toast confirms the change.
- ⋮ **row menu:** Open asset · Edit asset · Share to chat · Delete asset (red; `Delete asset <unit>? This cannot be undone.`).
- Row click opens the asset detail page. Pagination at the bottom. Empty state: "No assets found".
- **Share to chat** dialog (same everywhere): Send via In-app chat / External chat / Email, recipient, subject, message with the unit's facts, attached documents.

4.2 Add Asset / Edit Asset (full-screen wizard)

Header: "← Back to assets", title "Register Asset" / "Edit ", buttons **Discard** and **REGISTER ASSET** (or **Save changes**). Left rail lists the 9 sections with a completion count; clicking scrolls to the section.

#	Section	Fields (label — type — required — rules/options)
1	Asset class	Asset Type — select — yes — Truck · Trailer · Non-CMV Vehicle (sets the CMV / Non-CMV category). Vehicle Type — select — no — Truck: Power Unit · Straight Truck · Tanker · Other; Trailer: Dry Van · Flatbed · Reefer · Other; Non-CMV: Pickup · Van · SUV · Other. "Vehicle type — other" — text — shown when Other.
2	Vehicle info	Unit Number* — text — placeholder `TR-100`. VIN (17 characters)* — text — exactly 17 chars, mono. **LOOKUP** button beside the VIN (TO CONFIRM: decode stub). Manufacturer/Make* — `Freightliner`. Model* — `Cascadia`. Year — number — 1900 ... current year + 2. Color — `e.g. White`. Gross Weight (Loaded) — number + unit lbs/kg. Unloaded Weight — number + unit lbs/kg.

#	Section	Fields (label — type — required — rules/options)
3	Registration & plate	Plate Number — `ABC-1234`. Plate Type — select — IRP · Local (hint: IRP for interjurisdictional running). Plate Country — USA · Canada. Plate State/Province — list follows the country. Issue Date — date. Expiry Date — date. **Monitoring block:** Monitor based on — radio Expiry Date / Issue Date; Recurrence — select; Reminders (days before) — checkboxes 90 · 60 · 30 · 7; Channels — checkboxes Email · In-app · SMS.
4	Yard / terminal	Location Name — select — Unassigned + the carrier's yards.
5	Driver assignment	**Assign Driver (n/2)** button adds a row (max 2): Driver Name* — select from roster; Assignment Date* — date; Date Monitoring / End Date — date.
6	Annual safety	The last annual safety inspection: Performed on — date; Odometer — `e.g. 412,500`; Operating hours — `e.g. 6,110`; Vendor — Shop name; Performed by — vendor / driver / mechanic; Driver — select; Mechanic name — `Dale Foster`; Labour / Parts — decimal; Currency — USD/CAD; Notes on this service; Remarks for next time.
7	Ownership & financial	Ownership Structure — select — Owned · Leased · Financed · Rented. Current Market Value — number + currency USD/CAD. **Bill of sale record:** Record Name (`Bill of Sale`), Purchase Price, Seller (`Dealer or seller as named on the bill`), Street Address, City, Zip / Postal Code, Bill of Sale — file upload. Depending on structure: Leasing Company (`e.g. Ryder`) · Lien Holder Business (`e.g. Fleet Finance LLC`) · Rental Agency Name (`e.g. Enterprise`) · Monthly Payment.
8	Insurance & status	Liability Policy Number — `Policy number on the slip`. Slip Expiry — date. Proof of Automobile Insurance Card (pink slip) — upload. Operational Status — select (same 5 statuses). Date Added to Fleet* — date. Date Added to Insurance* — date (required when Active). Odometer* — number + unit mi/km. When status is Deactivated: Date Removed from Fleet* and Date Removed from Insurance. When Out of Service: notice "Asset is marked Out of Service. No additional fleet dates required."
9	Notes	Notes (max 2000 chars) — textarea.

Validation: inline red messages ("Required", "Must be 17 characters"); the save button submits only when the schema passes. Saving returns to the list with the new/updated row (toast). Saving a bill of sale also files a Bill of Sale document on the asset's Compliances tab.

4.3 Asset detail page

Opened from a row or from : Open. Header band: "← Back to Assets" breadcrumb strip, vehicle icon with status dot, title "", chips (status, vehicle type), meta (drivers assigned, location, Added date), buttons **Share to chat** and **Edit Vehicle** (opens the wizard). Tiles: Odometer · Risk score · Health · Plate expiry. Metadata block: Unit #, VIN, Plate #, Plate state, Plate expiry, weights, GVWR class, Ownership, Market value, Date added. The header condenses on scroll.

Tab	Purpose
Overview	Summary cards, recent activity, open items.
Monitoring	Every monitored date on this unit (plate, insurance, inspections…) with priority, due, status, who is notified; actions per row.
Compliances	The unit's compliance records and documents (upload, versions, status).
Activity	What was done about this unit's monitored items (the action log).
Maintenance	Service intervals, work orders and service history for the unit.
Inventory	Items issued to the unit (transponder, cards, keys).
Expenses	Costs recorded against the unit.
Inspections	Roadside/DOT inspections involving the unit.
Violations	Violations recorded against the unit.

Tab	Purpose
Accidents	Accident records involving the unit.
Notifications	Alerts raised for the unit (count badge).

---

5. Tab: Drivers

Purpose. The carrier's driver roster: who is on it, their status, licence, compliance gaps, and the way into each driver's full file.

5.1 List

- **KPI tiles** (click to filter): Total · Active · Inactive · On Leave · Terminated.
- **Toolbar:** Search ("Search name, ID, email, phone, license...", with clear ×) · Status filter select (All statuses · Active · Inactive · On Leave · Terminated; shows a removable "Status: ..." chip) · **Columns** picker (Driver · Hired · Added to fleet · Status · Compliance · DQ File · License · Contact) · **Export** (TO CONFIRM: no-op) · **Import** · **+ Add Driver** (primary).
- **Columns:** Driver (avatar initials, name) · Hired (date) · Added to fleet (date; hover "When the driver was added to the fleet") · Status (inline dropdown) · Compliance ("n missing" chip) · DQ File (completion % + "n missing") · License (number · exp date) · Contact (phone, email) · Actions. Hired, Added to fleet, Status and License are sortable.
- **Inline Status dropdown** options: Active · On Leave (break) · Inactive · Terminated → saves immediately, toast " is now ".
- ⋮ **row menu:** Open driver · Edit driver · Share to chat · Open DQ file (goes to DQ Files) · Delete driver (red; `Delete driver <name>? This cannot be undone.`).
- Row click opens the driver profile. Pagination. Empty state: "No drivers found".

5.2 Import drivers modal

Upload a `.csv`, `.xlsx` or `.xls`. The modal lists the accepted columns (header match is case/space-insensitive): First Name*, Last Name*, Driver Type, Email, Phone, Date of Birth (YYYY-MM-DD), Gender, SSN / SIN, Citizenship (USA/Canada), Street Address, Unit / Apt, City, State / Province, Zip / Postal, Country, License Number, License State, License Class, License Expiry, Date Hired, Status (Active / Inactive / On Leave / Terminated). Shows a preview of parsed rows; **Import** → toast "n drivers imported successfully". TO CONFIRM: template download.

5.3 Add Driver / Edit Driver (full-page application form)

Same form as the hiring application, rendered as one scrolling page. Header: **Cancel** · **Fill sample data** (demo helper) · **Save Driver**. Top: driver-type picker **US Only Driver (United States) · Canada Only Driver (Canada) · Canada (Cross Border) (Canada / US)** – it switches labels (SSN vs SIN), regions and the Hours-of-Service window (8 days US, 14 days Canada/Cross-border). Left rail lists the 15 sections with a filled-field count.

#	Section	Fields
1	Applicant Information	First Name, Middle Name, Last Name, Email, Phone Number, Date of Birth (mm/dd/yyyy picker), SSN / SIN, Gender, Position Type (select), "Will this driver operate in or cross into the United States?" Yes/No
2	Address Details	Street Address (line 1), Street Address (line 2), Country (US/Canada), City, State / Province, Zip / Postal Code, "Residence 3+ years?" Yes/No → No opens a previous-address block (repeatable)
3	Emergency Contact	Contact name, Relationship (`e.g. Spouse, Parent, Friend`), Phone, Email

#	Section	Fields
4	License Details (repeatable, "Add Another License")	License front / back uploads (PNG, JPG, PDF ≤10MB), License Number, Country, Licensing Authority, License Class (searchable: Class 1 / A, Class 2 / B, Class 3 / C, Class 4 / D, Class 5 / G, Class M), Current driver license? Y/N, Commercial (CDL)? Y/N, Expiration Date, Endorsements (None · Other · Tanker · Doubles / Triples · X Endorsement · HazMat), Restrictions on license? Y/N → Restrictions comment box
5	License Disqualification	6 Yes/No questions: ever denied / suspended / revoked; convicted of driving during suspension; alcohol / controlled-substance offense; illegal substance possession / sale; reckless / careless driving conviction; failed / refused a DOT drug or alcohol test (each Yes opens a detail box)
6	Travel Documents	Citizenship country, Work authorization in (and in the United States for cross-border), Passport Number, Passport expiry, Visa held? + Visa Number, TWIC Card held?, FAST Card held? (each with upload)
7	Driving Experience (repeatable)	Equipment Class, Freight Types, Regions Driven, Dates (from / to), Approximate Miles, Owner-operator? Y/N
8	Employment Details (repeatable)	Company Name, Dates, Position Held, Location, Reason for leaving, Current employer? Y/N, Operated CMV? Y/N
9	Employment Gaps	"Any gaps?" Yes → repeatable Dates + Comments
10	Education Details	Yes → repeatable School name, Dates, Location, Studied, Graduation
11	Accident Details	Yes → repeatable Date of Accident, Type, State / Prov, Commercial vehicle? , At fault?, Ticketed?, Details
12	Traffic Violation Details	Yes → repeatable Violation Date, Charge / Description, State / Prov, Commercial Vehicle?, Penalty, Fine Amount
13	Military Service	"Were you ever in the military?" Yes/No (+ branch / dates when Yes)
14	Hours of Service	Last 8 (US) or 14 (Canada / Cross-border) days from the date of hire: a day-by-day table (two rows of 7 when 14), hours per day, total, Notes
15	Signature & Declarations	Declaration text, Applicant Name, Date Signed, Signature pad, Certification checkbox

Saving: **Save Driver** creates/updates the roster record, files the travel documents to the driver's compliance records (toast "n travel documents filed to compliance — ..."), toast "Driver added successfully" / "Driver updated successfully". ASSUMPTION: no field is hard-required to save in page mode (TO CONFIRM which should block Save).

5.4 Driver profile page

Header band: breadcrumb strip, avatar, name + chips (driver type, licence), meta line with an **inline Status dropdown** (same 4 statuses), buttons **Share to chat** · **Print** · **Edit Profile** (opens the application form pre-filled). Tiles: Status · Tenure · CDL / Licence · Terminal. Header condenses on scroll.

Tab	Purpose
Overview	Summary, compliance health, recent items.
Profile	The application data in read mode (personal, address, licences, experience, employment...).
Monitoring	The driver's monitored dates (licence, medical, training...) – list only.
Activity	Actions taken on the driver's monitored items.
Records	Compliance records / documents filed for the driver.
Consent Forms	Signed consents from hiring/onboarding.

Tab	Purpose
Training	Assigned and completed training.
Hours of Service	HOS violations and logs.
Inspections	Roadside inspections where this driver was inspected.
Violations	Violations on the driver's record.
Accidents	Accidents linked to the driver.
Tickets	Tickets / citations issued to the driver.
Inventory	Items issued to the driver (hand-overs).

---

6. Roles and visibility

Access is set in **Users & Roles** ▸ **Roles**; the default table for the Account menu:

Role	Access	What differs
Super Admin	Full	Sees every carrier; the top-bar **Switch carrier** picks which one.
Admin (service profile)	Full	Only carriers under their service profile.
Fleet Admin	Full	Only the carrier(s) they are assigned to.
Safety Manager	**Light (view only)**	Blue "View only" strip under the top bar. **TO CONFIRM:** the edit/add/delete buttons are still rendered and clickable in light mode (observed in the test run) – decide whether light should disable them.
User	**Light (view only)**	Same as Safety Manager.
Driver	Hidden	Menu not shown; the route falls back to the driver's own pages.

A user whose role has no carrier assigned sees the "No carrier profile yet" page.

---

7. Shared behaviours

- **Toasts** (bottom-right, green, auto-dismiss): "Changes saved successfully", "Cargo Types updated successfully", "Office Location added/updated successfully", "Director added/updated successfully", "Location removed successfully", " is now ", "Driver added/updated successfully", "n drivers imported successfully", "n travel documents filed to compliance — ...", asset status change confirmation.
- **Delete confirmation:** every ⋮ Delete uses the browser `confirm()` with the text `Delete <noun> <name>? This cannot be undone.` (assets, drivers, yard locations). Office locations under Fleet Overview delete without confirmation.
- **Share to chat** opens the same dialog on asset rows, driver rows, yard locations, the asset page and the driver page.
- **Disabled states:** pagination arrows at the ends; wizard primary buttons disabled until the schema passes; Add Driver's driver-type picker disabled while editing an existing driver.
- **Keyboard:** tab strips are buttons; yard-location rows are focusable (`Enter` opens).

---

8. Not in the UI (left out on purpose)

- `CarrierProfilePage.tsx` still contains code for **Compliance (Key Numbers)** and **Documents (Carrier Documents)** tabs, but they are not in the tab list and cannot be reached. Their live replacements are the **Compliances & Documents** and **DQ Files** menus. TO CONFIRM: delete the dead code.
- `/account/locations` renders the same Locations page standalone (with breadcrumb); no menu links to it.

---

9. TO CONFIRM (open questions)

1. Should **light (view-only)** roles have the edit/add/delete controls disabled, not just the banner?
2. Yard Terminals **Security** filter: options are score bands, code matches feature names – which is intended?
3. **Export** buttons on Assets and Drivers – intended behaviour (CSV of the visible rows?).
4. DOT **LOOKUP** and VIN **LOOKUP** – real SAFER / VIN decode, or demo?
5. **State of Inc.** and address **State** selects show 4–5 states – full list wanted?
6. Removing a corporate office location has no confirmation – wanted?
7. Which Add Driver fields must block **Save Driver**?
8. Drivers **Import**: provide a downloadable template?
9. No **delete** for a director – intended?
10. Dead Compliance / Documents tab code in CarrierProfilePage – remove?

2 Screenshots


132 captures of every tab and state, named `[tab]-[state]-[device].png`. Full-page captures are shown at full height; the source PNGs are in `screenshots/`.

Fleet Overview

Desktop · 1440 px




`fleet-overview-condensed-header-desktop.png` — Fleet Overview scrolled down: the page header condenses to one row.

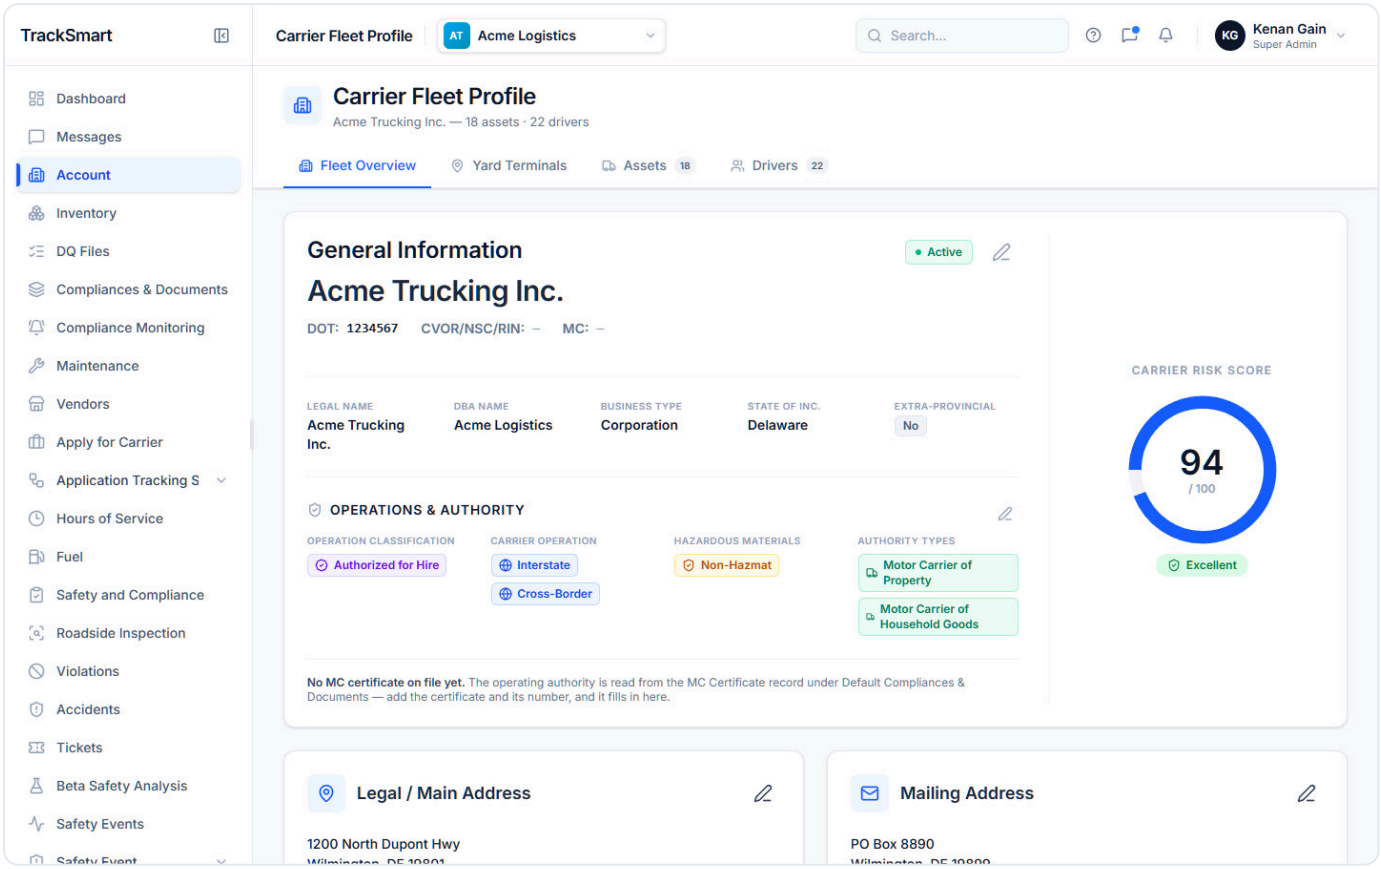

`fleet-overview-default-desktop.png` — Fleet Overview tab: carrier identity, operations & authority, addresses, fleet counts, cargo, office locations, directors.




`fleet-overview-modal-add-director-desktop.png` — Fleet Overview › "Add Director" (empty Edit Director modal).



`fleet-overview-modal-add-office-location-desktop.png` — Fleet Overview › Corporate Office Locations › "Add Office Location" modal (label, address, contact, phone, hours).



`fleet-overview-modal-director-details-desktop.png` — Fleet Overview › Directors & Officers › "Director Details" view modal.



`fleet-overview-modal-edit-cargo-carried-desktop.png` — Fleet Overview › "Edit Cargo Carried" modal.


fleet-overview-modal-edit-corporate-identity-desktop.png — Fleet Overview › "Edit Corporate Identity" modal.

fleet-overview-modal-edit-director-desktop.png — Fleet Overview › "Edit Director" modal (name, role, contact, ownership %, dates, responsibility).

fleet-overview-modal-edit-legal-main-address-desktop.png — Fleet Overview › "Edit Legal / Main Address" modal.


fleet-overview-modal-edit-mailing-address-desktop.png — Fleet Overview › "Edit Mailing Address" modal.

fleet-overview-modal-operations-authority-desktop.png — Fleet Overview › "Operations & Authority" modal.

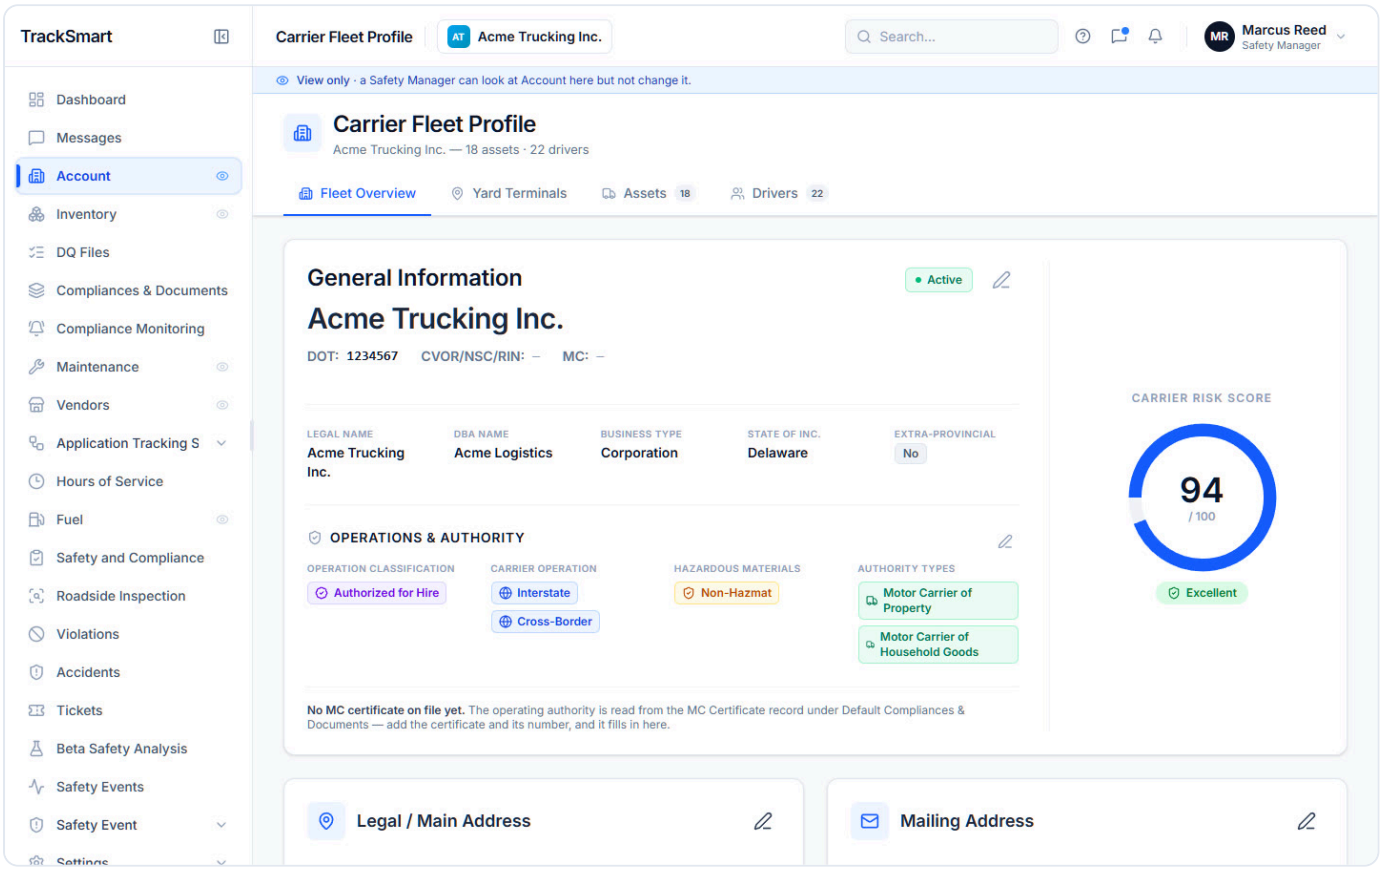


fleet-overview-view-only-desktop.png — Account as a view-only role (Safety Manager test account): the blue "View only" strip under the top bar; every control is still rendered (TO CONFIRM).

Mobile · 390 px

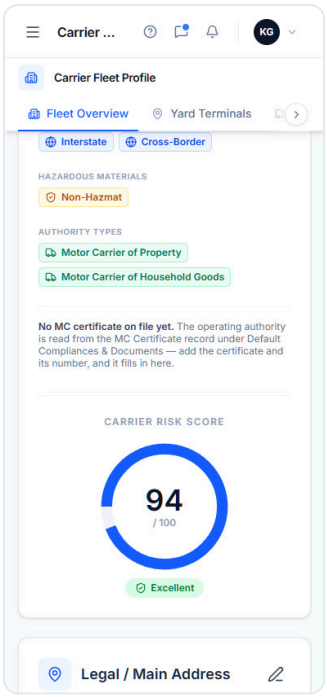

fleet-overview-condensed-header-mobile.png
Fleet Overview scrolled down: the page header condenses to one row.

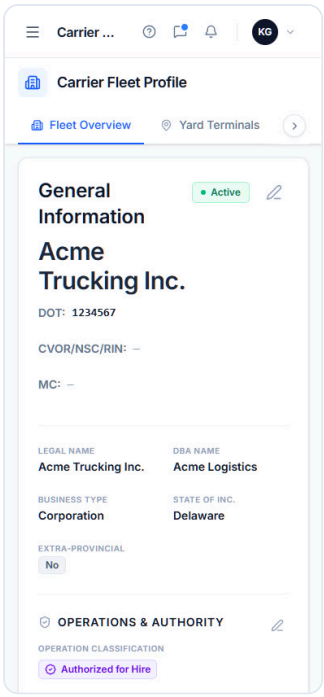

fleet-overview-default-mobile.png
Fleet Overview tab: carrier identity, operations & authority, addresses, fleet counts, cargo, office locations, directors.



fleet-overview-modal-add-director-mobile.png
Fleet Overview › "Add Director" (empty Edit Director modal).



fleet-overview-modal-add-office-location-mobile.png
Fleet Overview › Corporate Office Locations › "Add Office Location" modal (label, address, contact, phone, hours).



fleet-overview-modal-director-details-mobile.png
Fleet Overview › Directors & Officers › "Director Details" view modal.



fleet-overview-modal-edit-cargo-carried-mobile.png
Fleet Overview › "Edit Cargo Carried" modal.



fleet-overview-modal-edit-corporate-identity-mobile.png
Fleet Overview › "Edit Corporate Identity" modal.




fleet-overview-modal-edit-director-mobile.png
Fleet Overview › "Edit Director" modal (name, role, contact, ownership %, dates, responsibility).

`fleet-overview-modal-edit-legal-main-address-mobile.png`
Fleet Overview › "Edit Legal / Main Address" modal.

`fleet-overview-modal-edit-mailing-address-mobile.png`
Fleet Overview › "Edit Mailing Address" modal.


`fleet-overview-modal-operations-authority-mobile.png`
Fleet Overview › "Operations & Authority" modal.

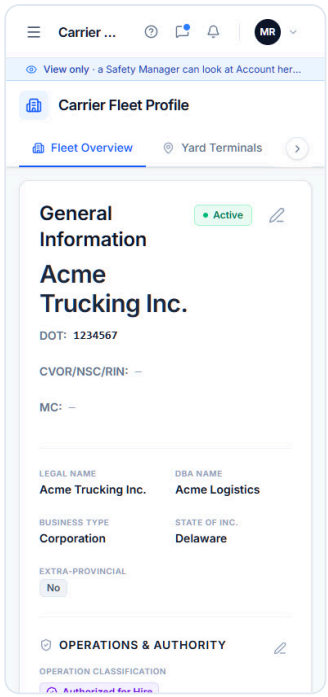


`fleet-overview-view-only-mobile.png`
Account as a view-only role (Safety Manager test account): the blue "View only" strip under the top bar; every control is still rendered (TO CONFIRM).

Yard Terminals

Desktop · 1440 px

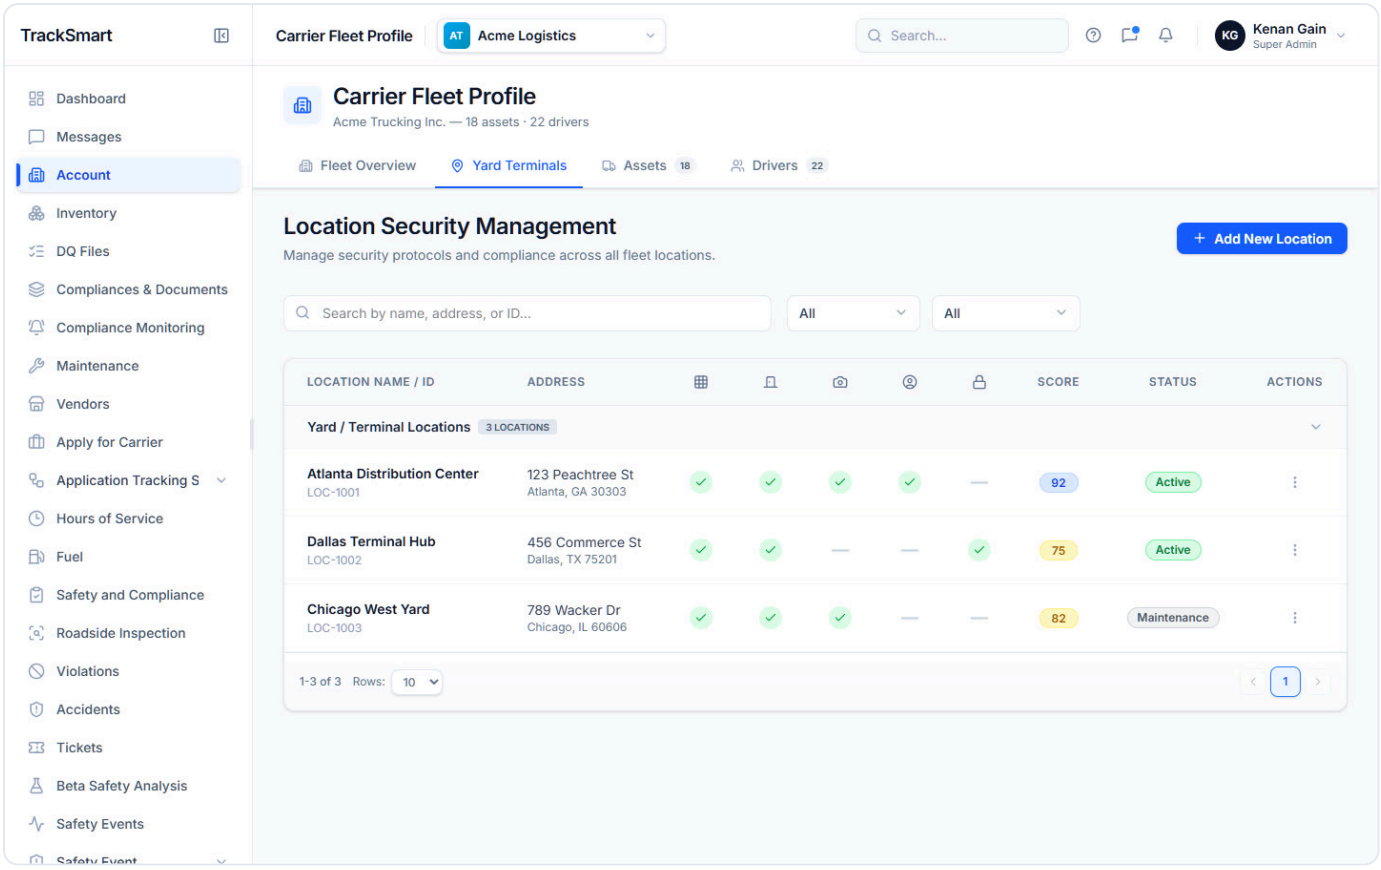


`yard-terminals-default-desktop.png` — Yard Terminals tab: filters, grouped locations table with security features and score, pagination.

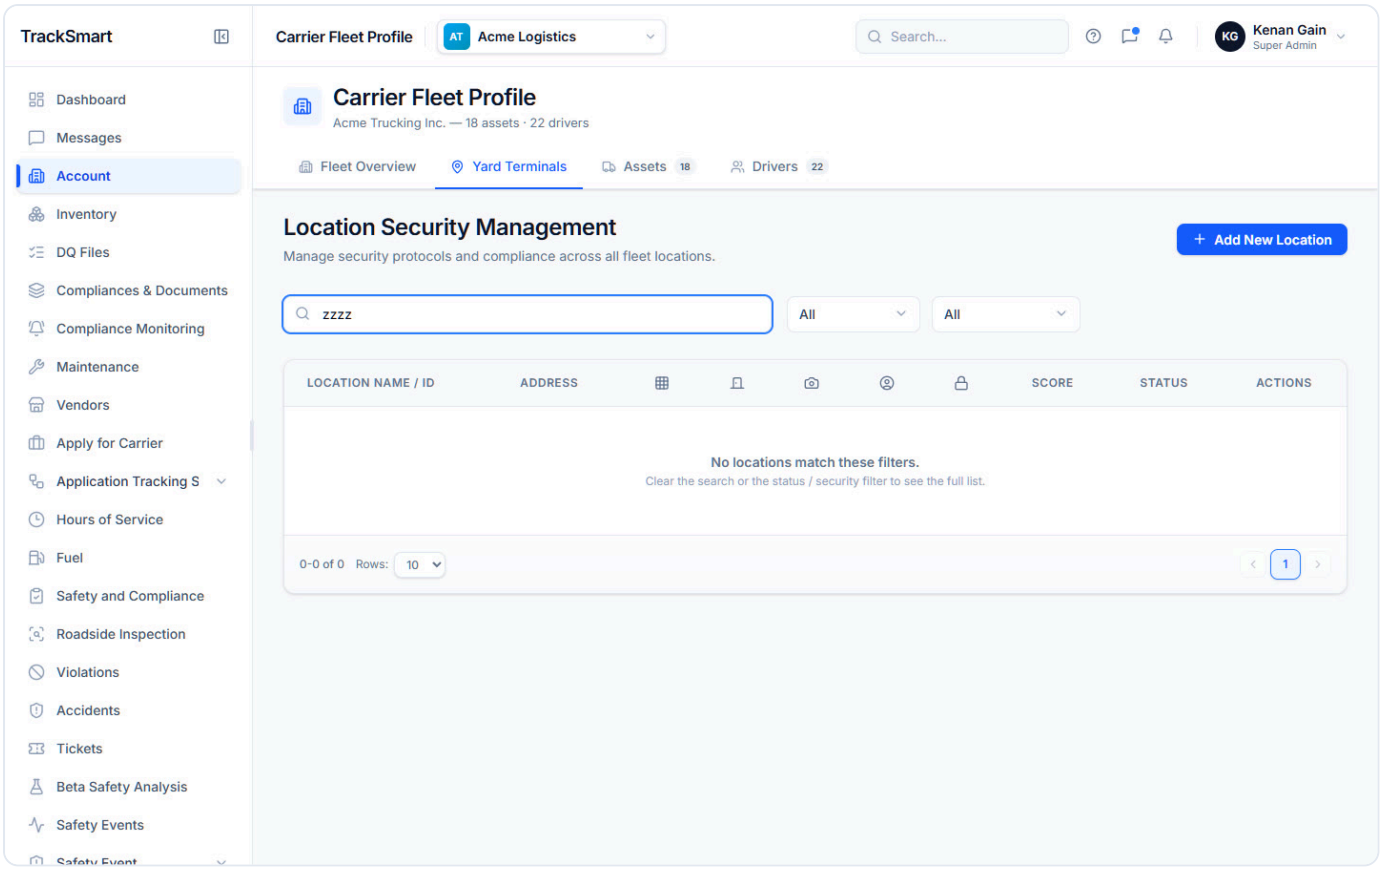

yard-terminals-empty-no-match-desktop.png — Yard Terminals › no location matches the filters.


yard-terminals-modal-add-new-location-desktop.png — Yard Terminals › "Add New Location" modal: name, ID, address, time zone, initial status, five security toggles.

yard-terminals-modal-location-view-desktop.png — Yard Terminals › location view modal: score circle, address, security features.

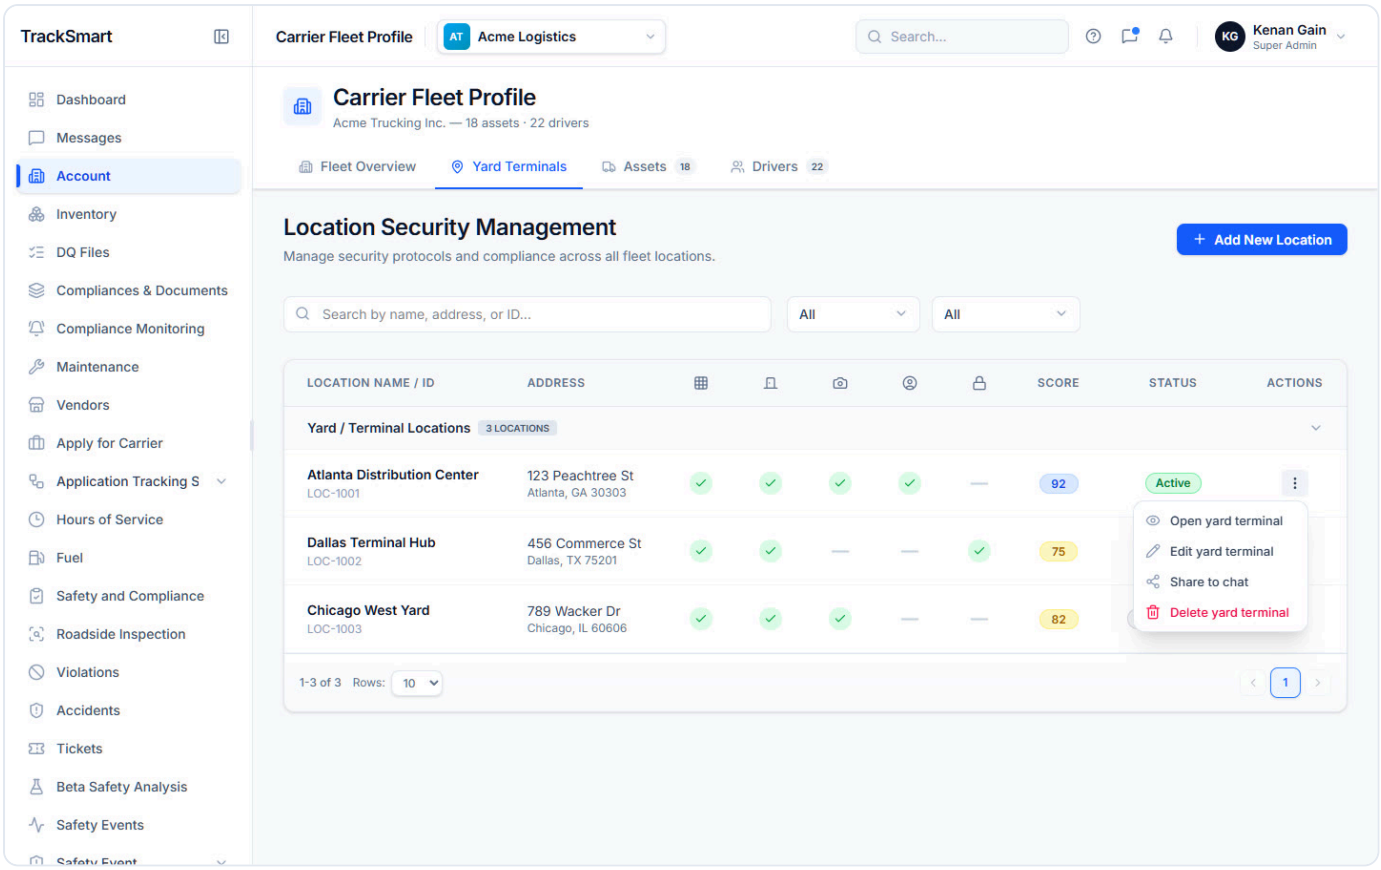


`yard-terminals-row-menu-open-desktop.png` — Yard Terminals › row ⋮ menu: Open, Edit, Share to chat, Delete.

Mobile · 390 px

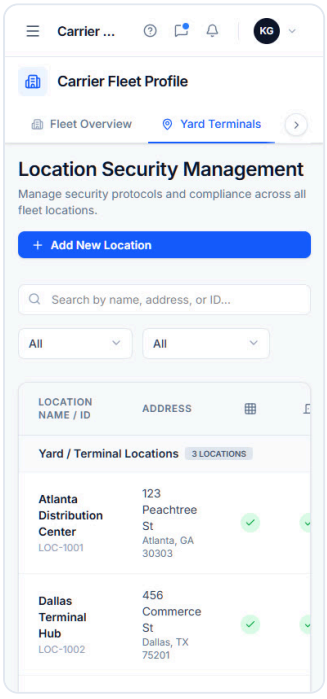


`yard-terminals-default-mobile.png`
Yard Terminals tab: filters, grouped locations table with security features and score, pagination.

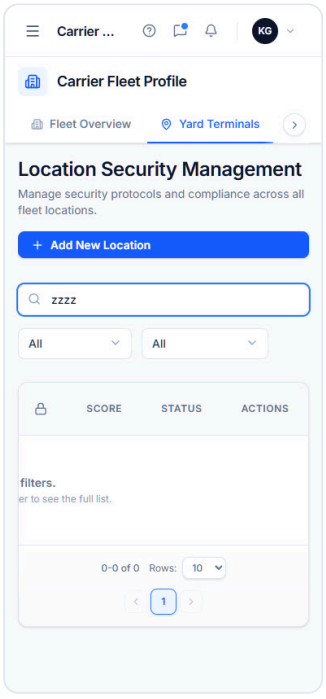

`yard-terminals-empty-no-match-mobile.png`
Yard Terminals › no location matches the filters.

`yard-terminals-modal-add-new-location-mobile.png`
Yard Terminals › "Add New Location" modal: name, ID, address, time zone, initial status, five security toggles.


`yard-terminals-modal-location-view-mobile.png`
Yard Terminals › location view modal: score circle, address, security features.

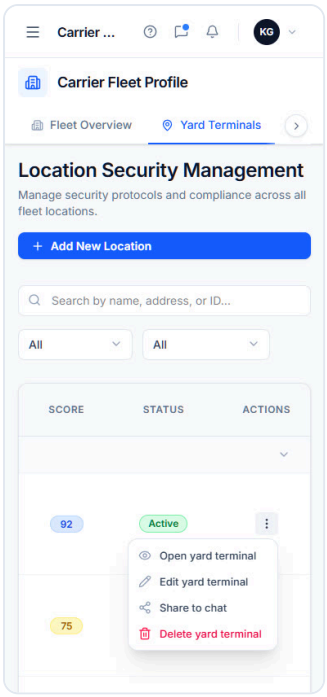


`yard-terminals-row-menu-open-mobile.png`
Yard Terminals › row ⋮ menu: Open, Edit, Share to chat, Delete.

Assets


Desktop · 1440 px

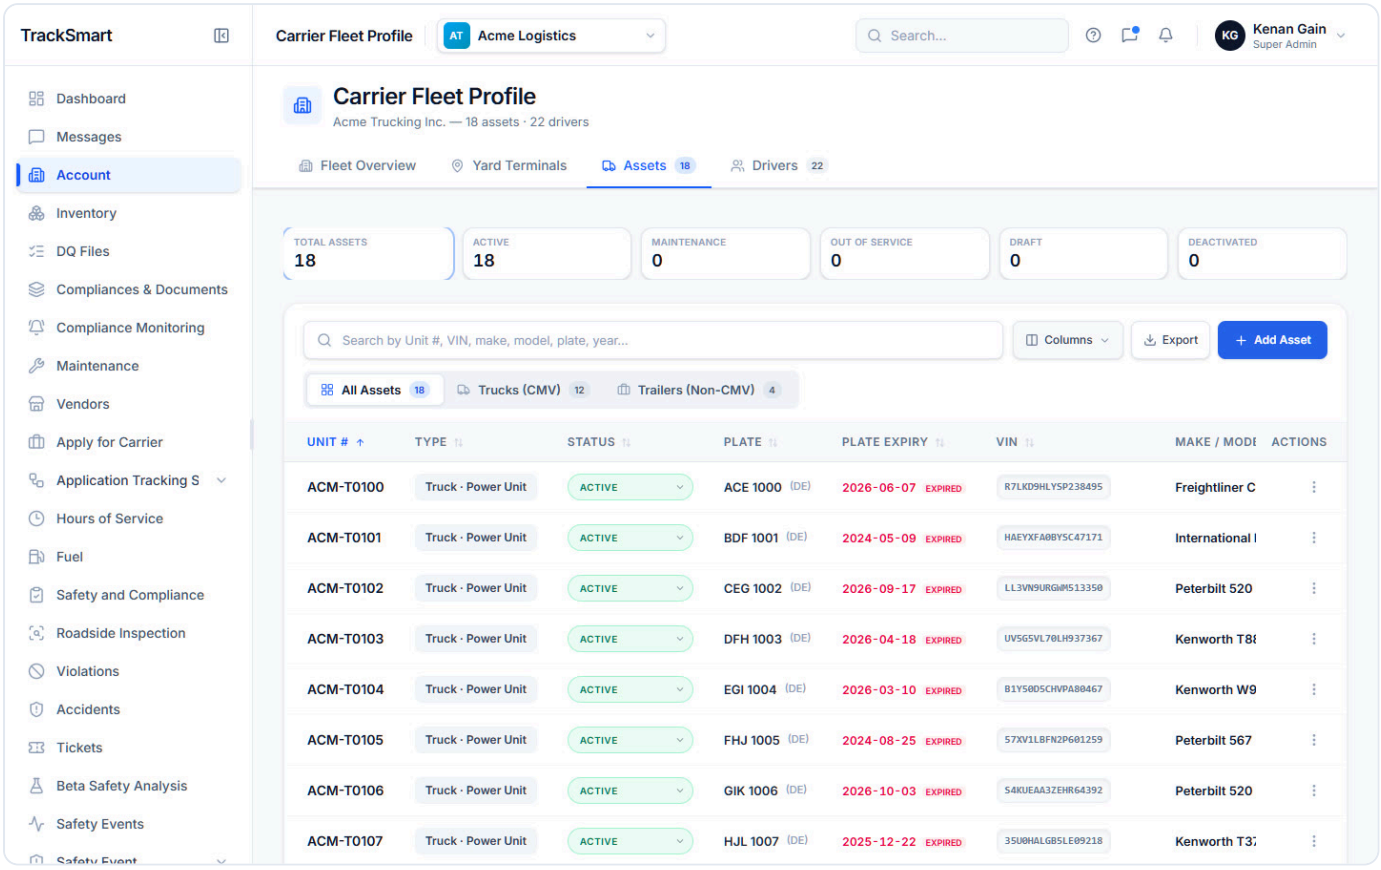


`assets-columns-picker-open-desktop.png` — Assets › Columns picker open.

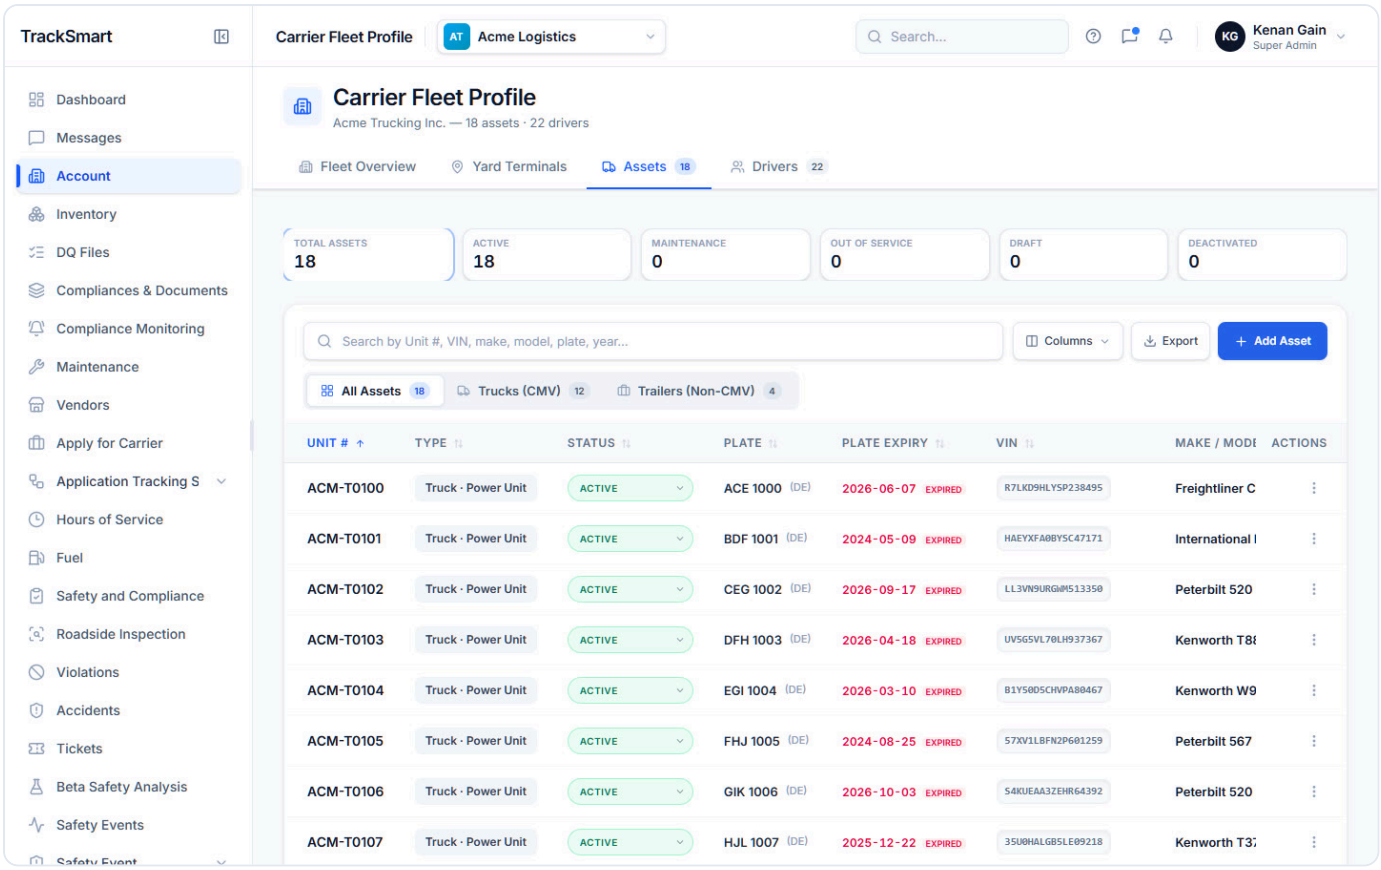


assets-default-desktop.png — Assets tab: KPI tiles, sub-tabs, toolbar, assets table with inline status and row menus.

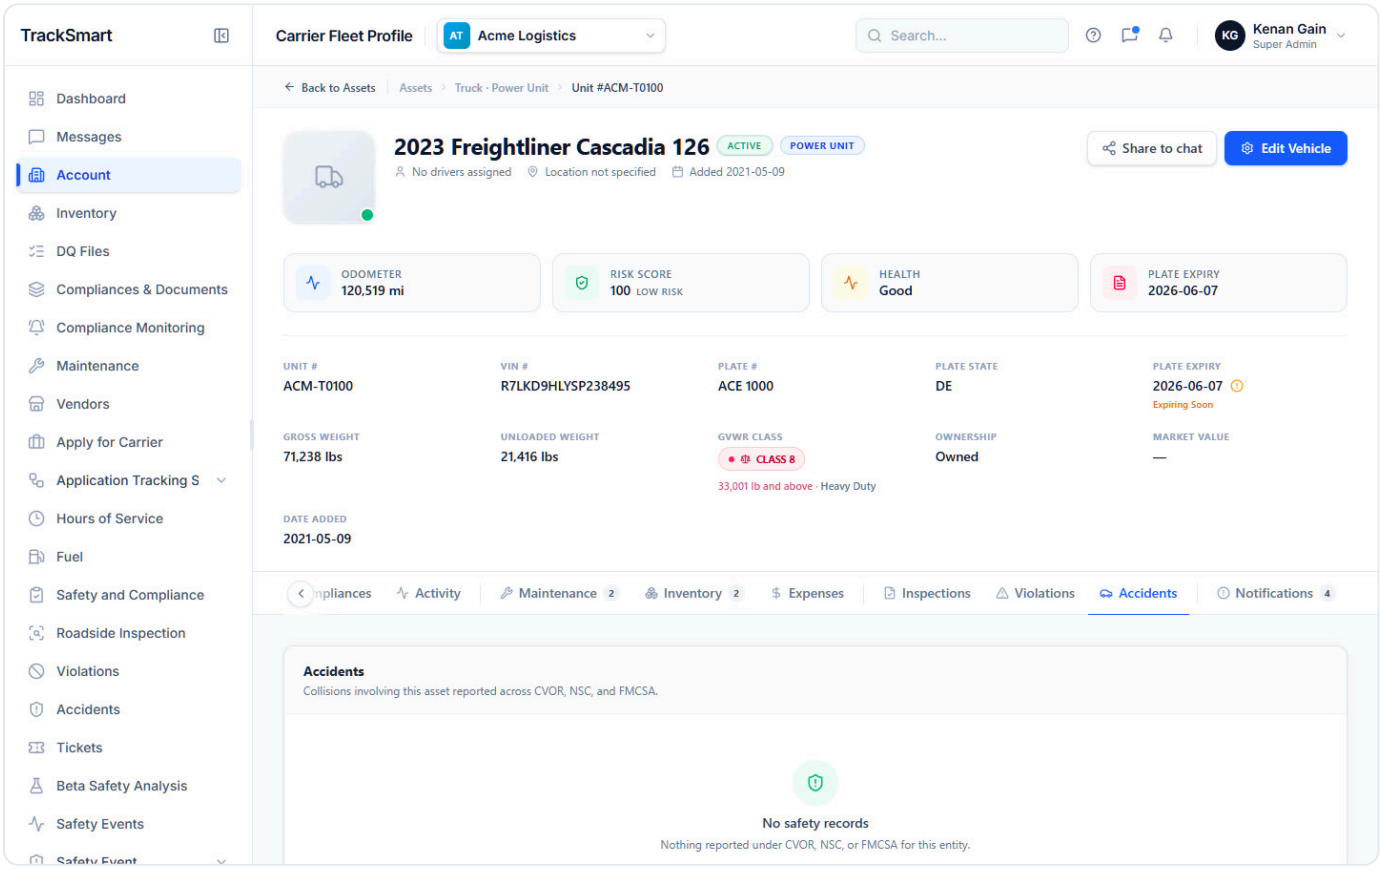


assets-detail-accidents-desktop.png — Asset detail › Accidents tab.

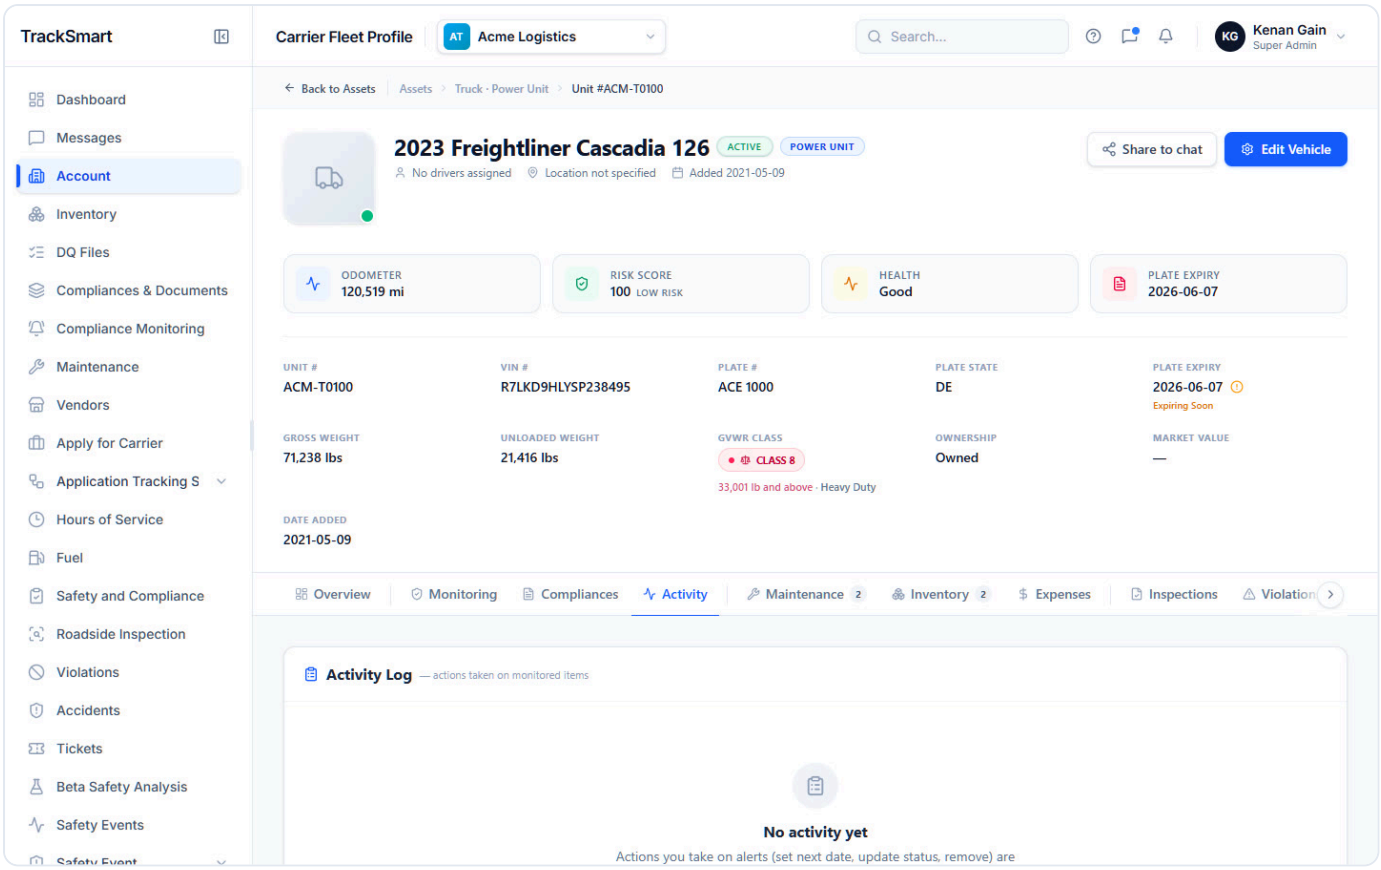


assets-detail-activity-desktop.png — Asset detail › Activity tab (actions on monitored items).

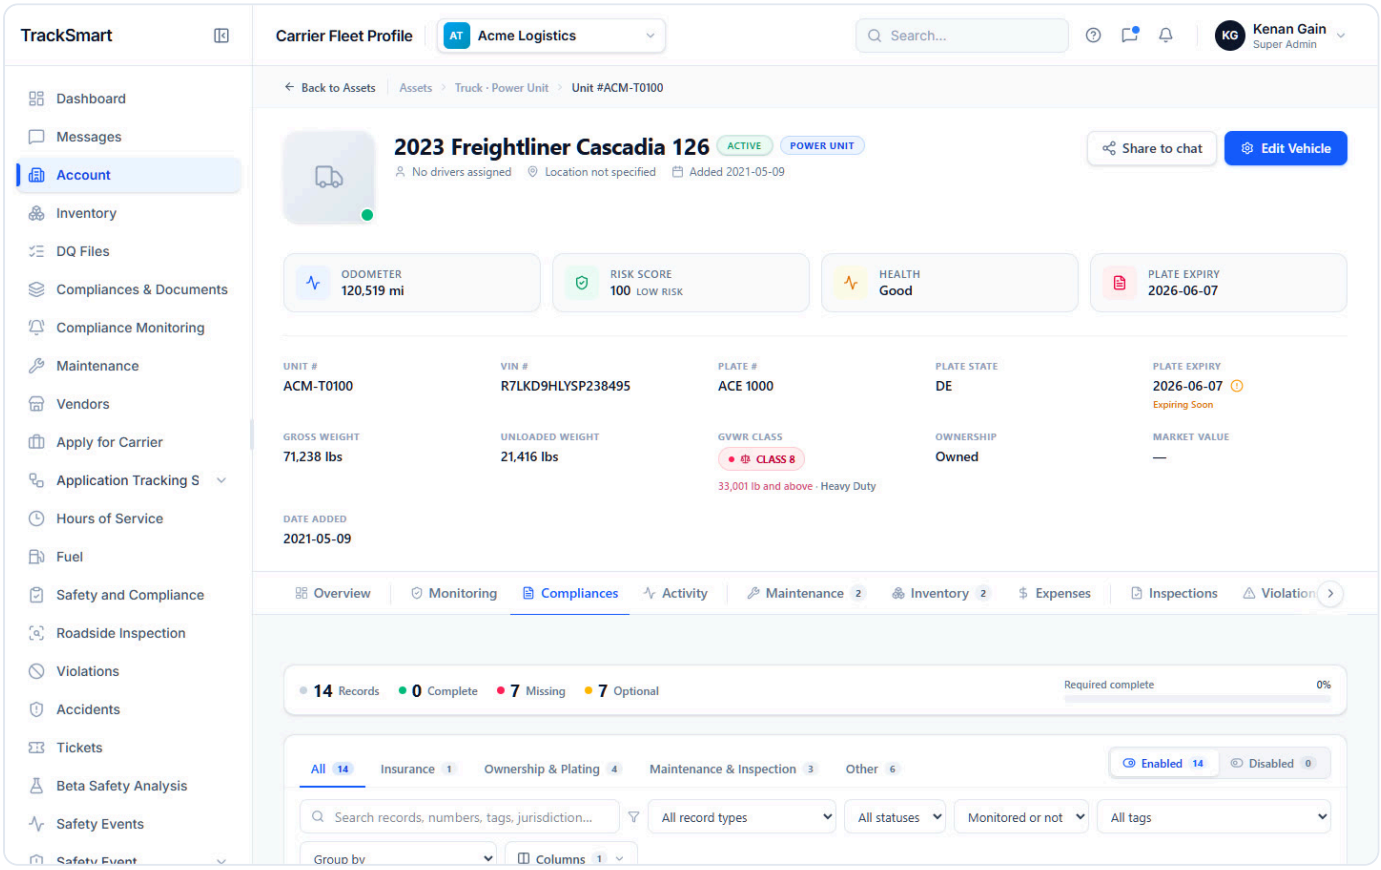


assets-detail-compliances-desktop.png — Asset detail › Compliances tab (records and documents).

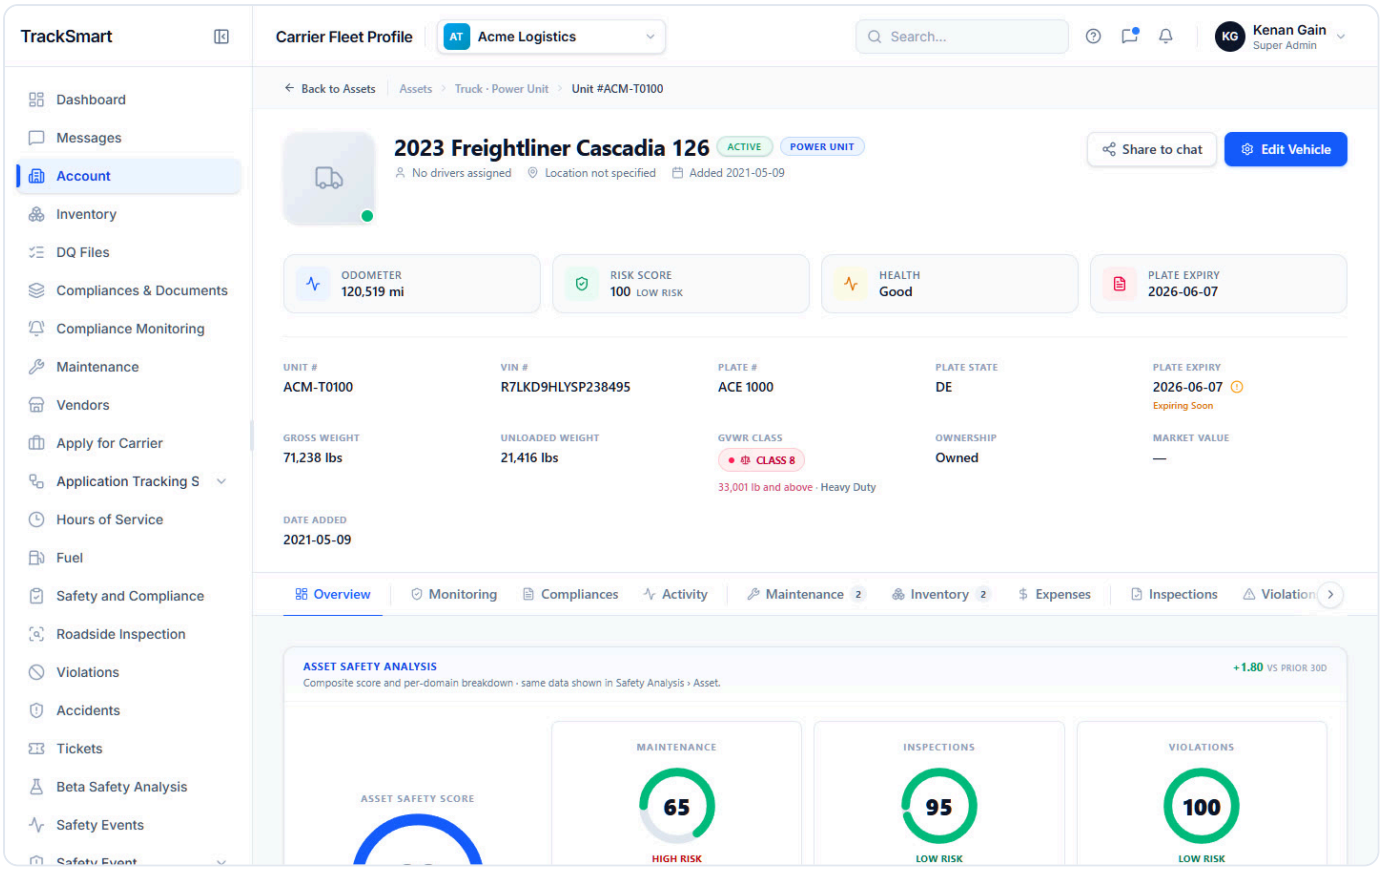


assets-detail-condensed-header-desktop.png — Asset detail scrolled: header condensed.

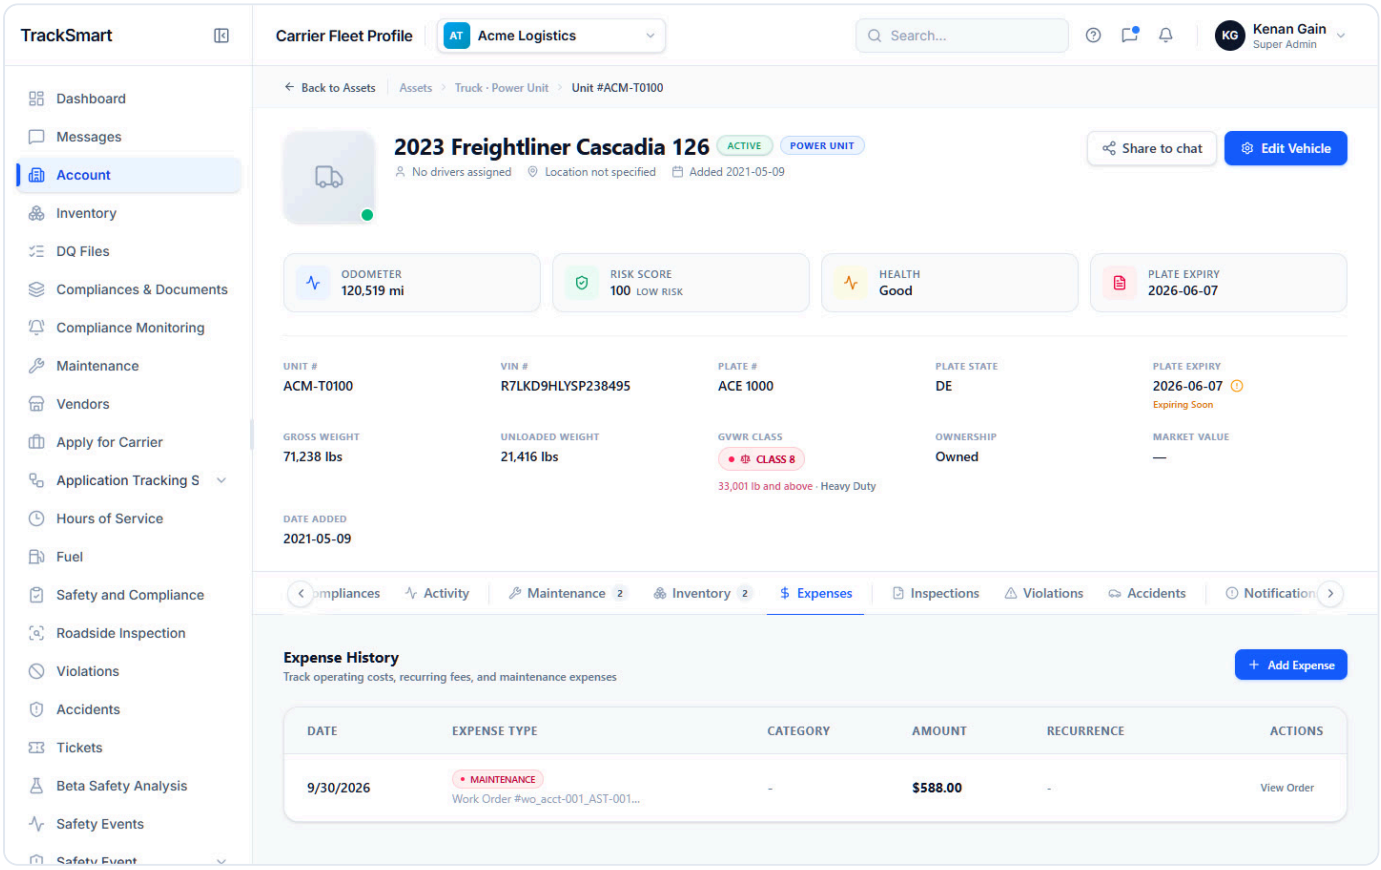


assets-detail-expenses-desktop.png — Asset detail › Expenses tab.

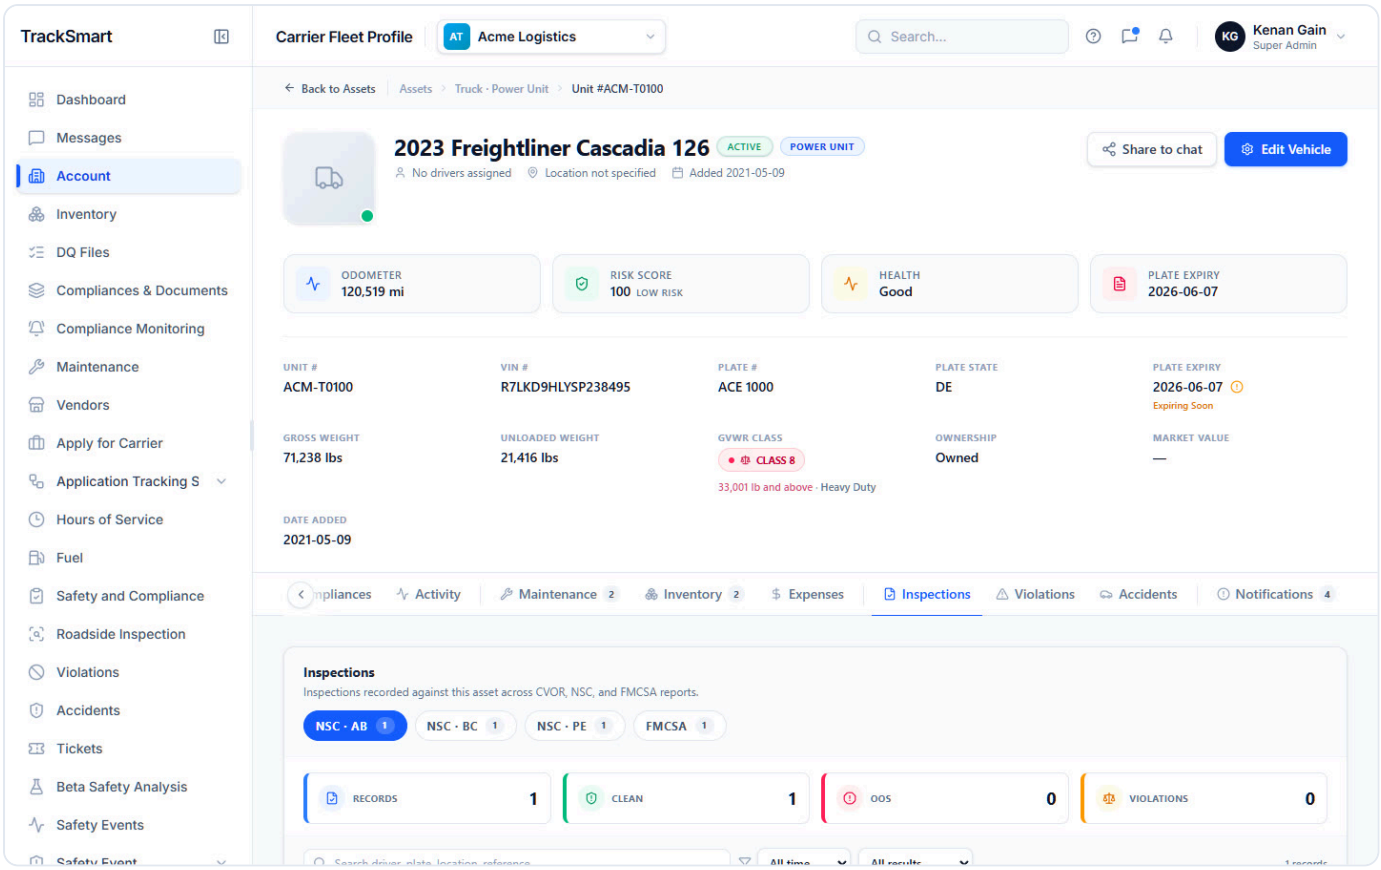


`assets-detail-inspections-desktop.png` — Asset detail › Inspections tab.

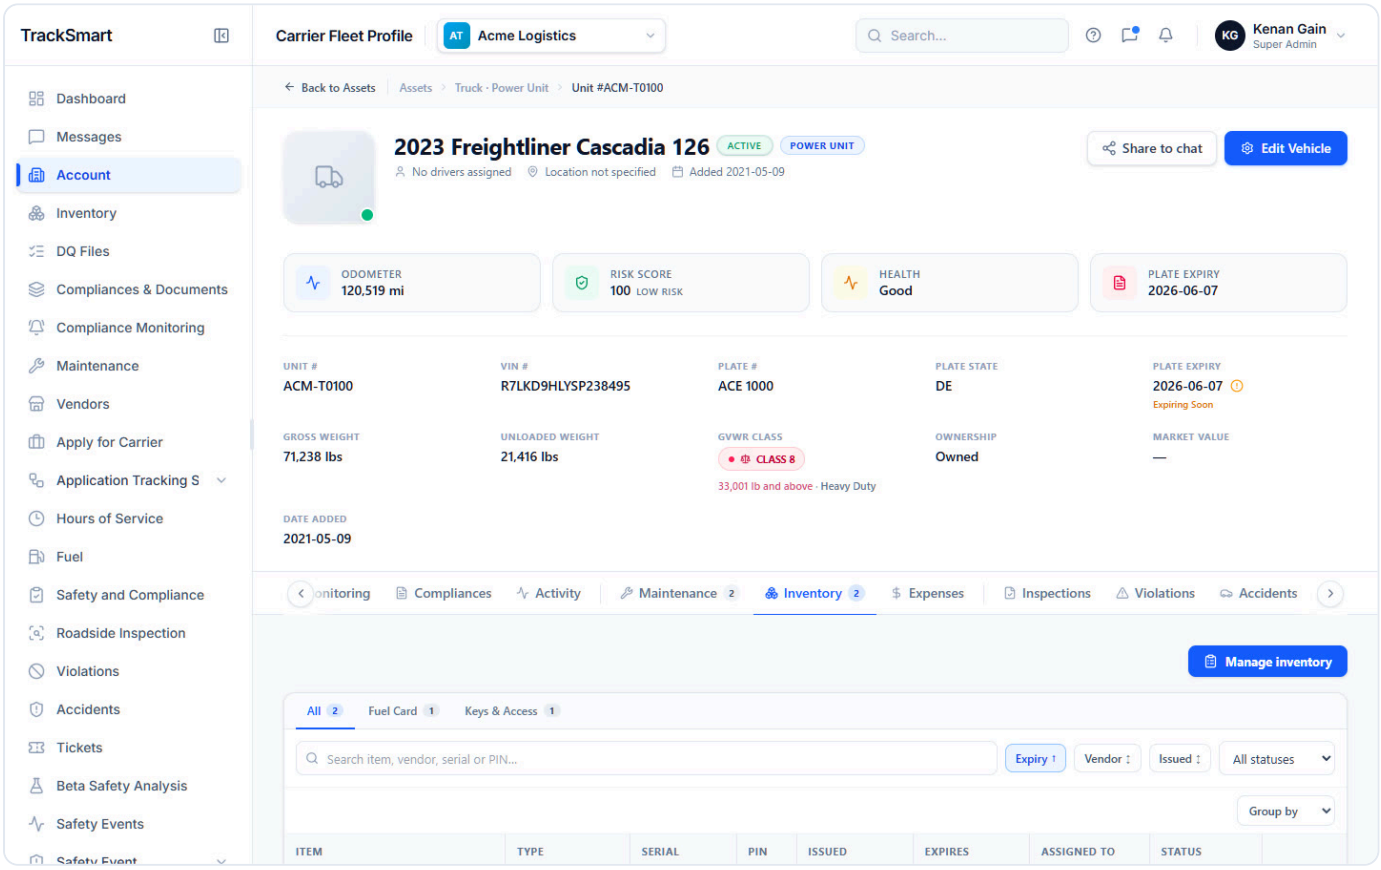


`assets-detail-inventory-desktop.png` — Asset detail › Inventory tab.

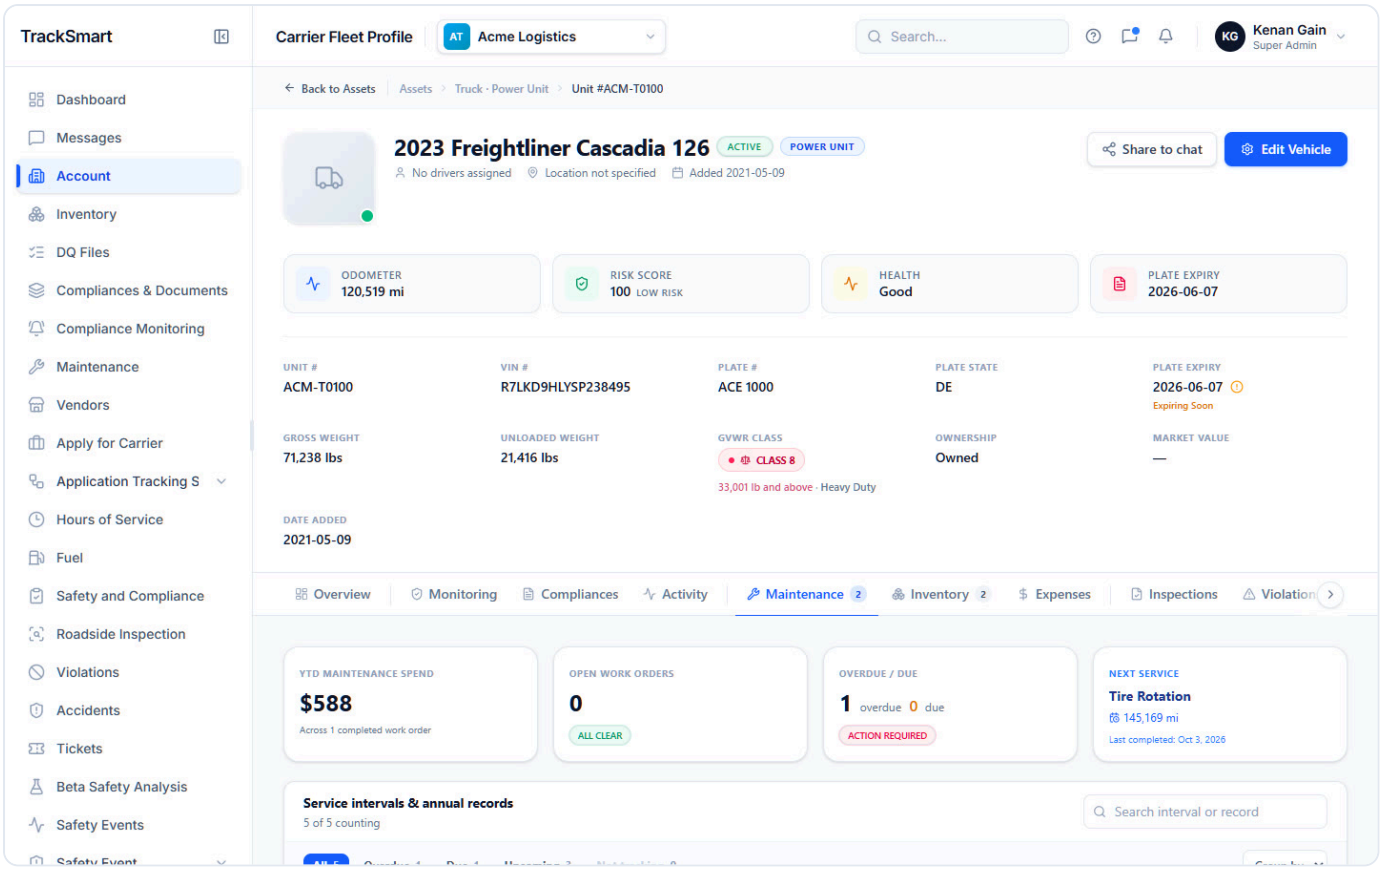


`assets-detail-maintenance-desktop.png` — Asset detail › Maintenance tab.

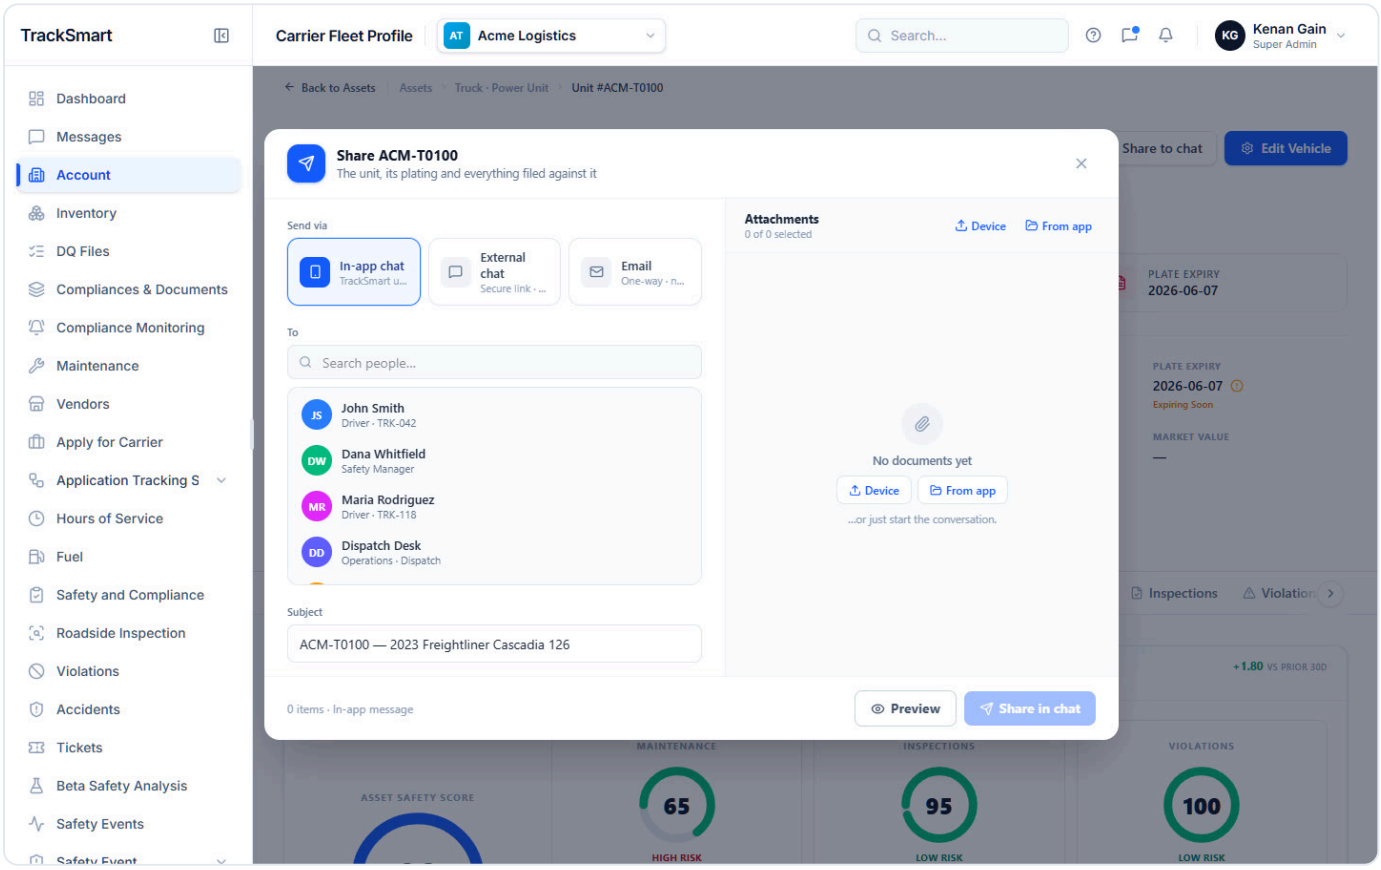


`assets-detail-modal-share-to-chat-desktop.png` — Asset detail › "Share to chat" dialog.

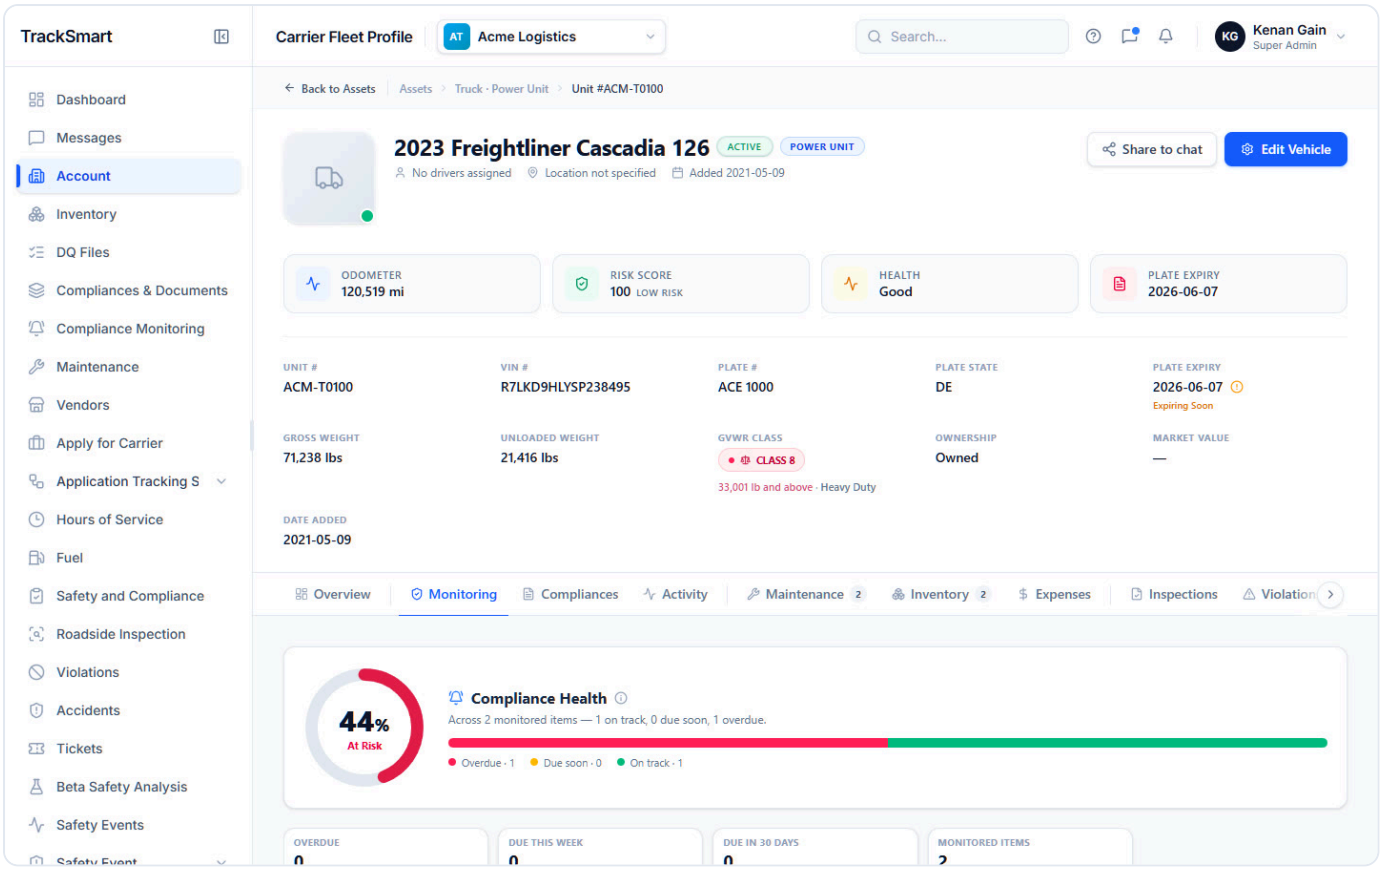


assets-detail-monitoring-desktop.png — Asset detail › Monitoring tab (the unit's monitored dates).

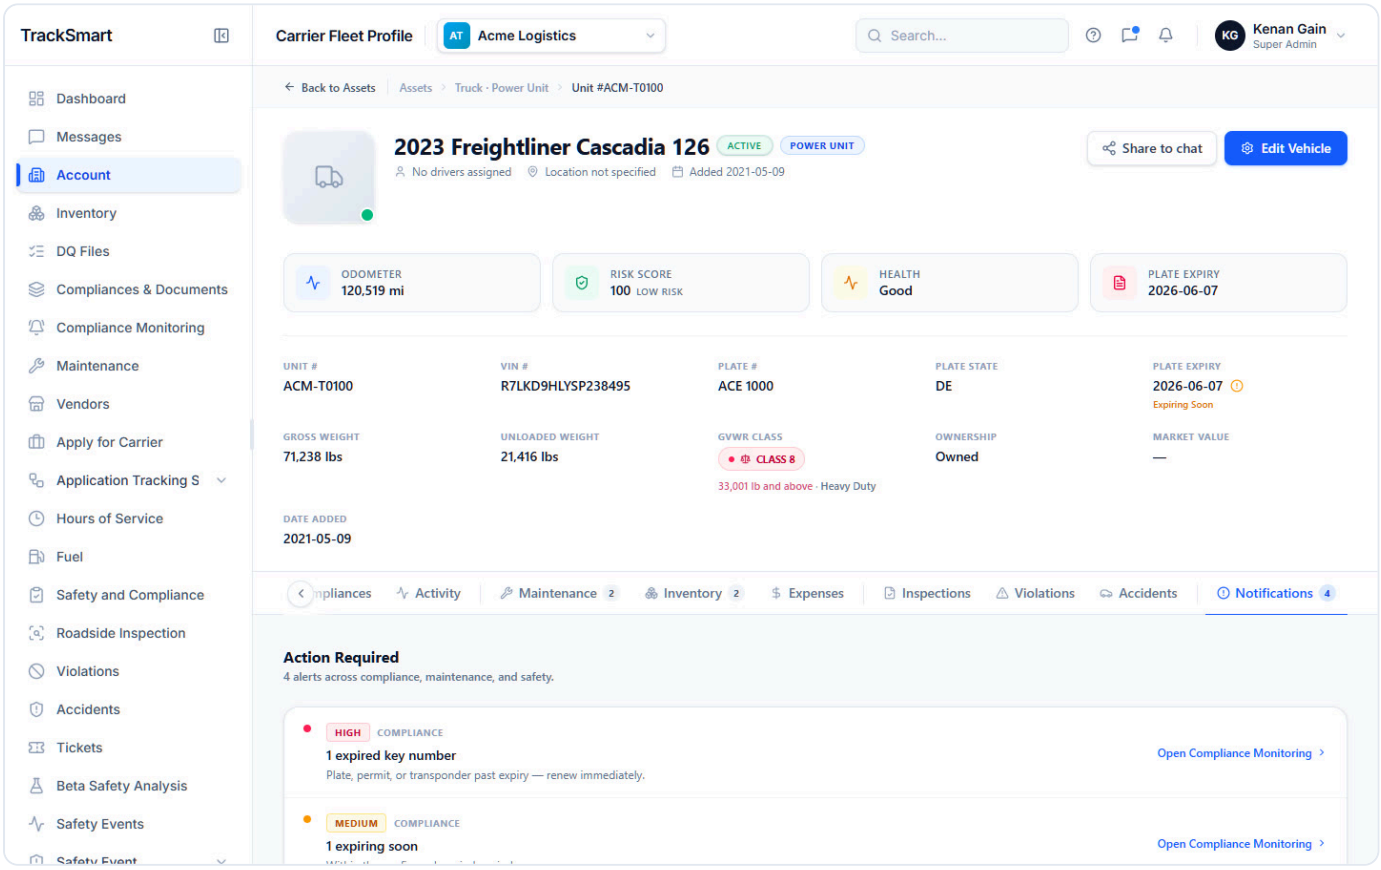


assets-detail-notifications-desktop.png — Asset detail › Notifications tab.

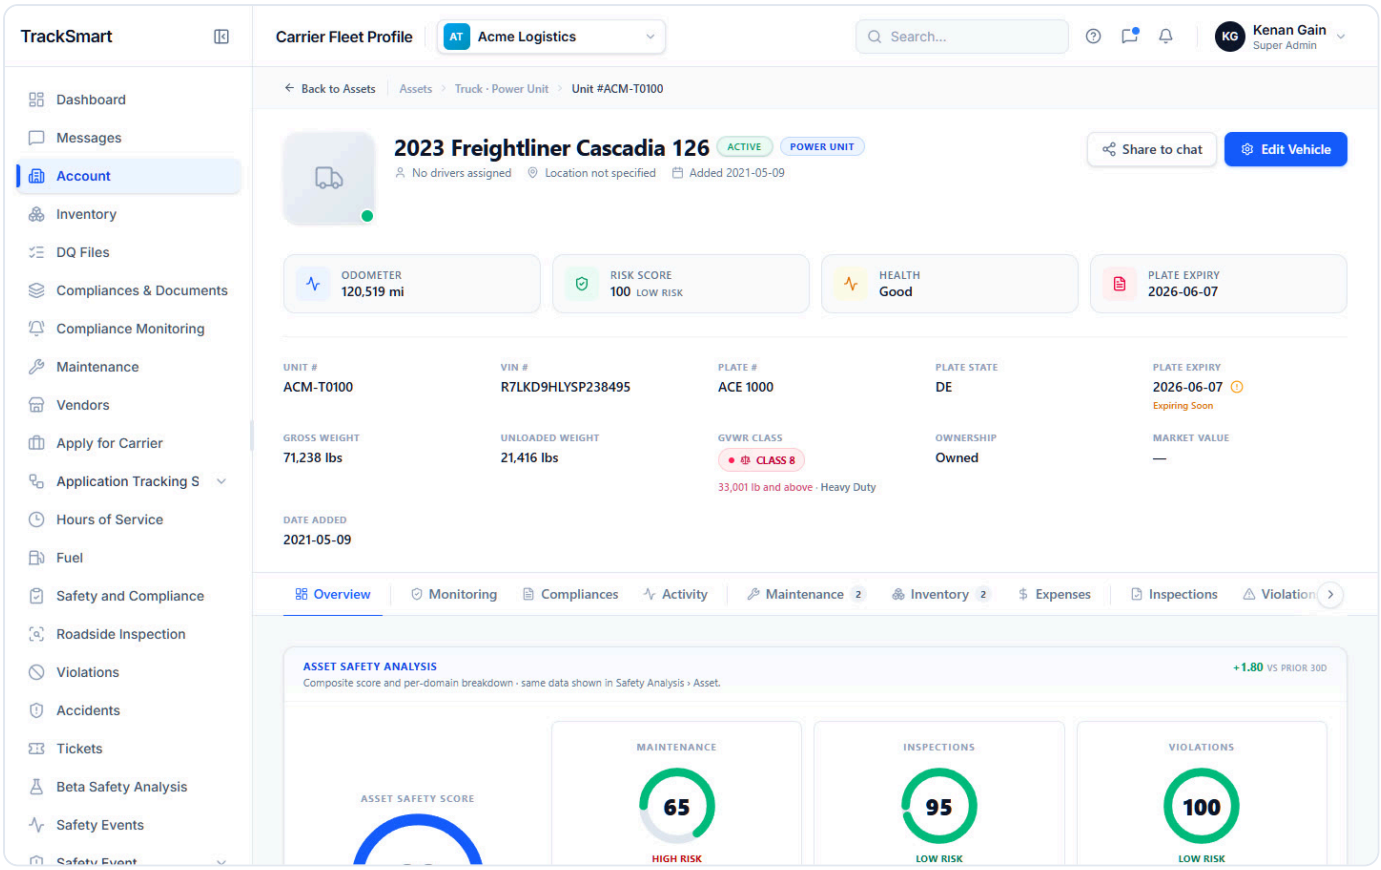


assets-detail-overview-desktop.png — Asset detail page: header tiles, metadata, Overview tab.

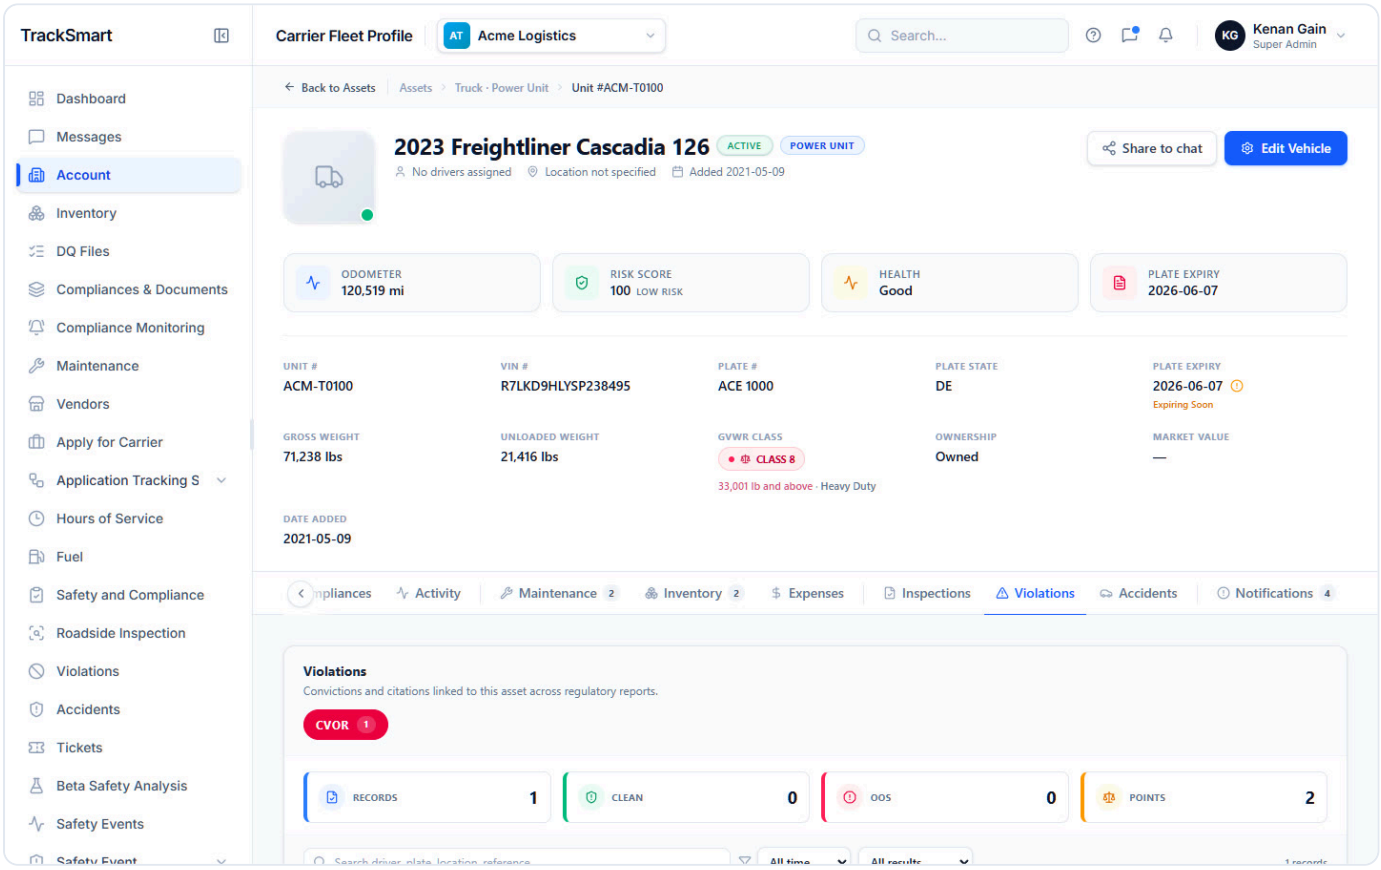


assets-detail-violations-desktop.png — Asset detail › Violations tab.

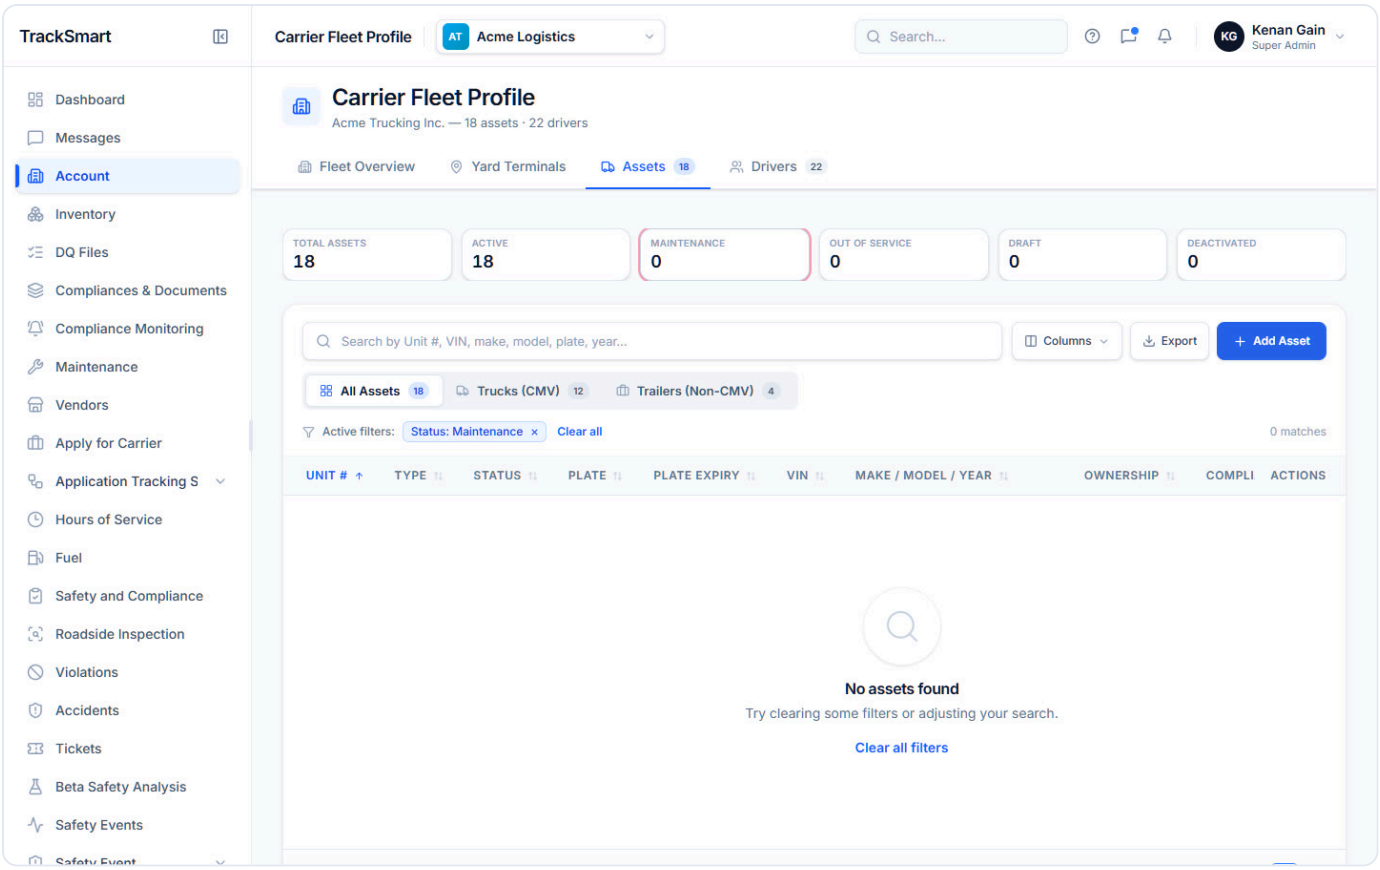


assets-empty-kpi-filter-desktop.png — Assets › KPI tile "Maintenance" selected with no matching assets ("No assets found").

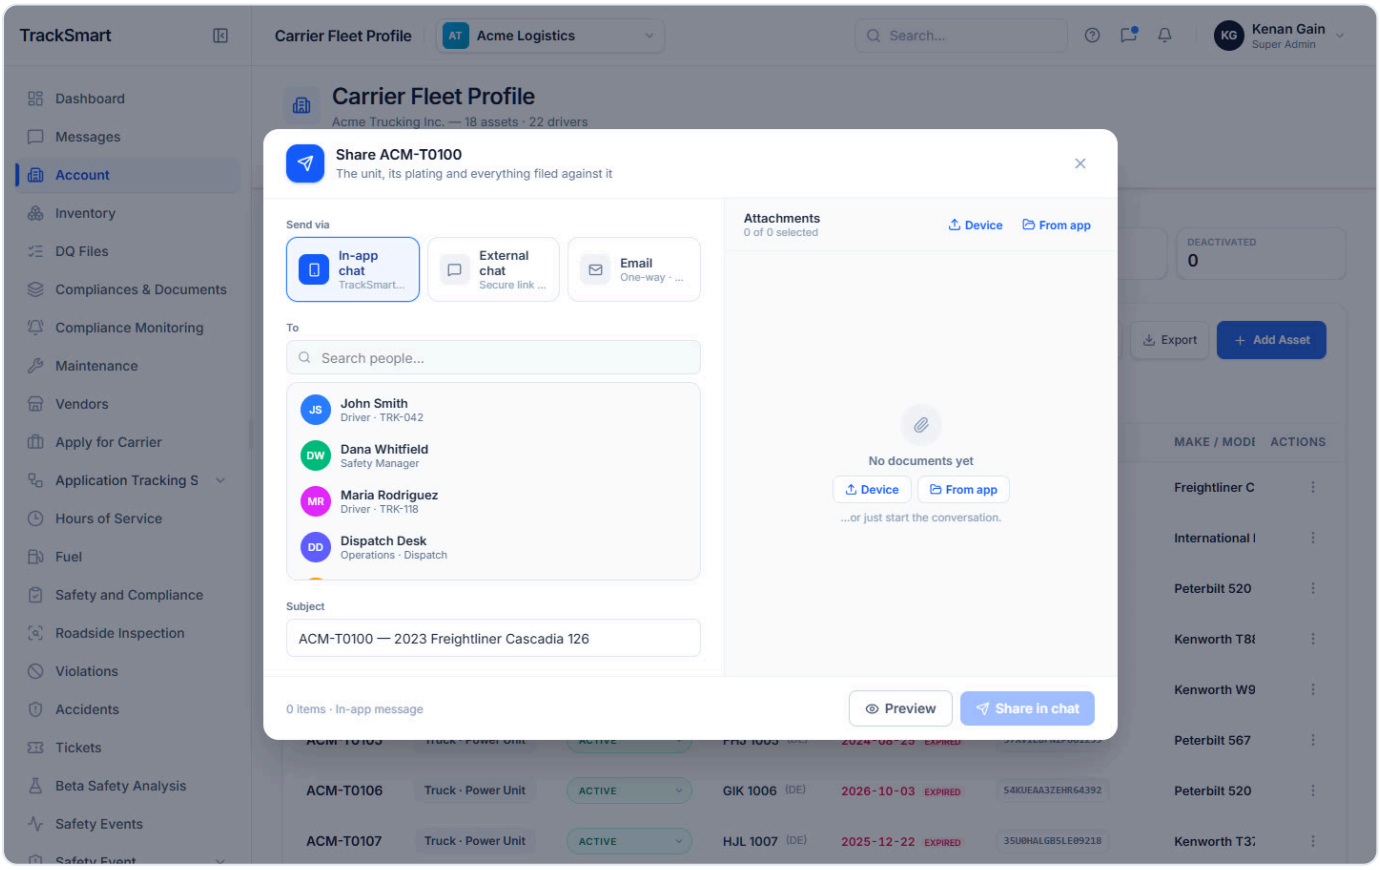


assets-modal-share-to-chat-desktop.png — Assets › "Share to chat" dialog for one unit.

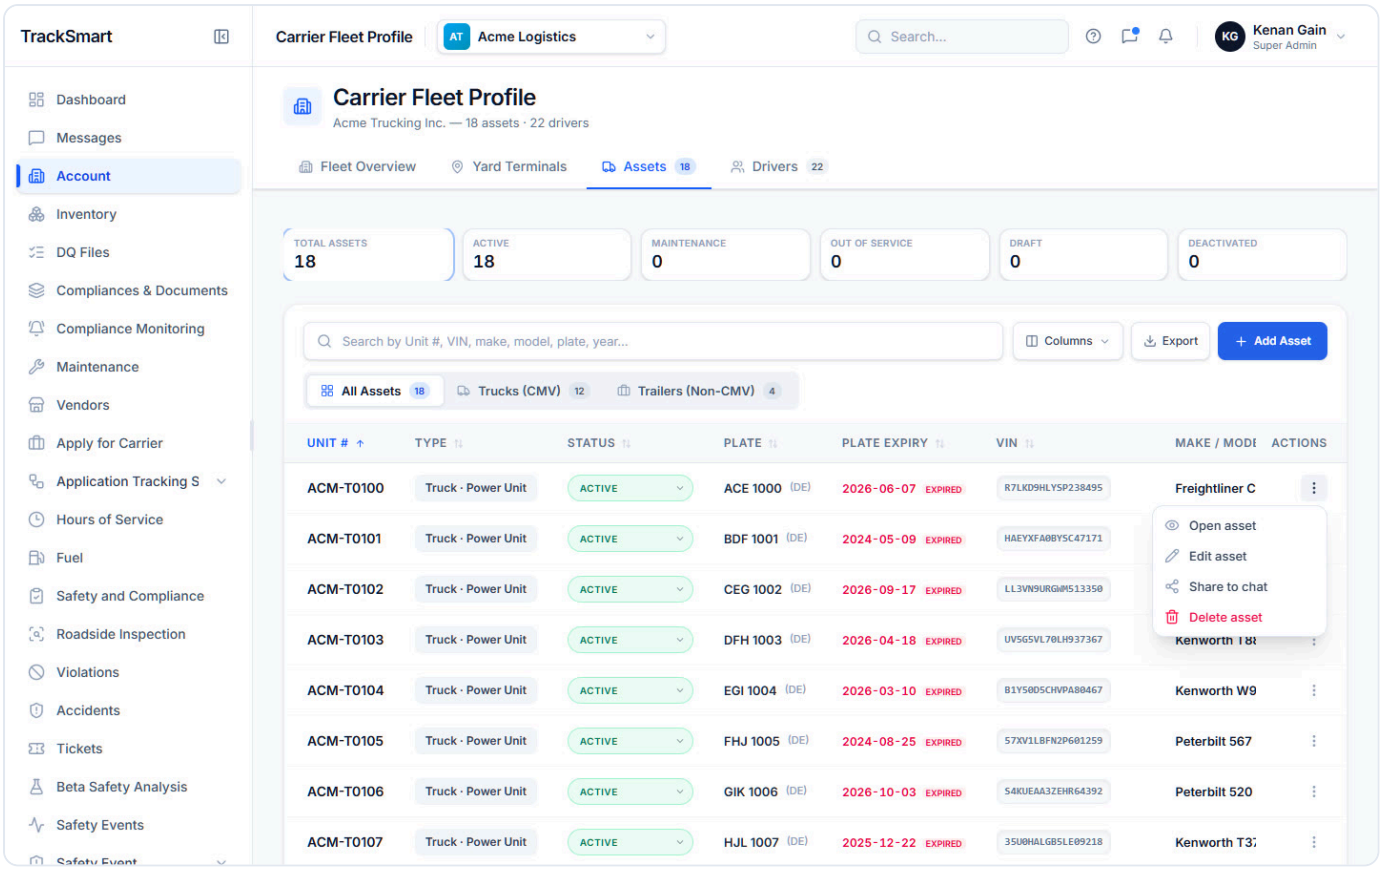


assets-row-menu-open-desktop.png — Assets › row ⋮ menu: Open asset, Edit asset, Share to chat, Delete asset.

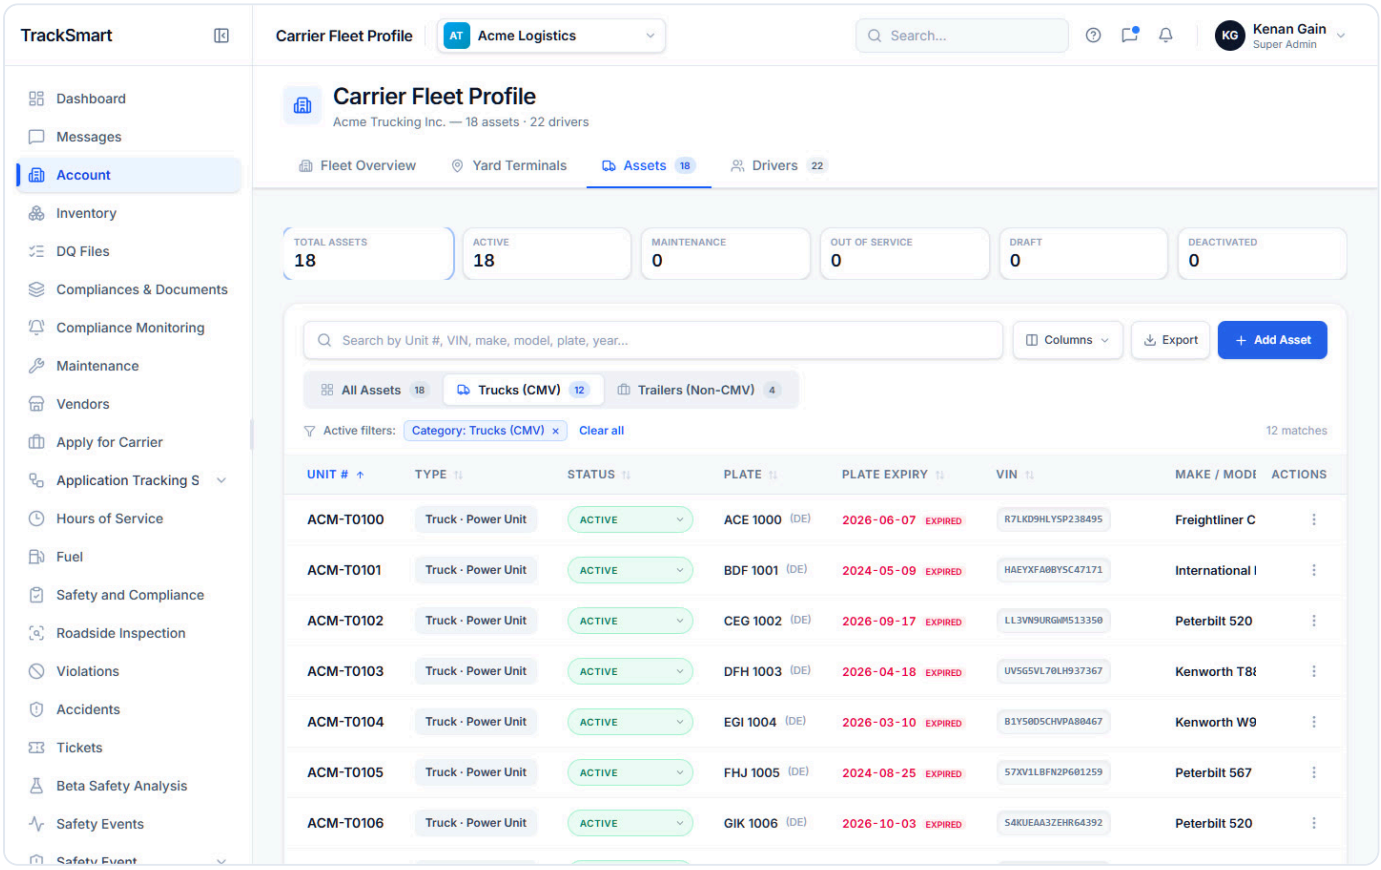


assets-subtab-trucks-desktop.png — Assets › "Trucks (CMV)" sub-tab.

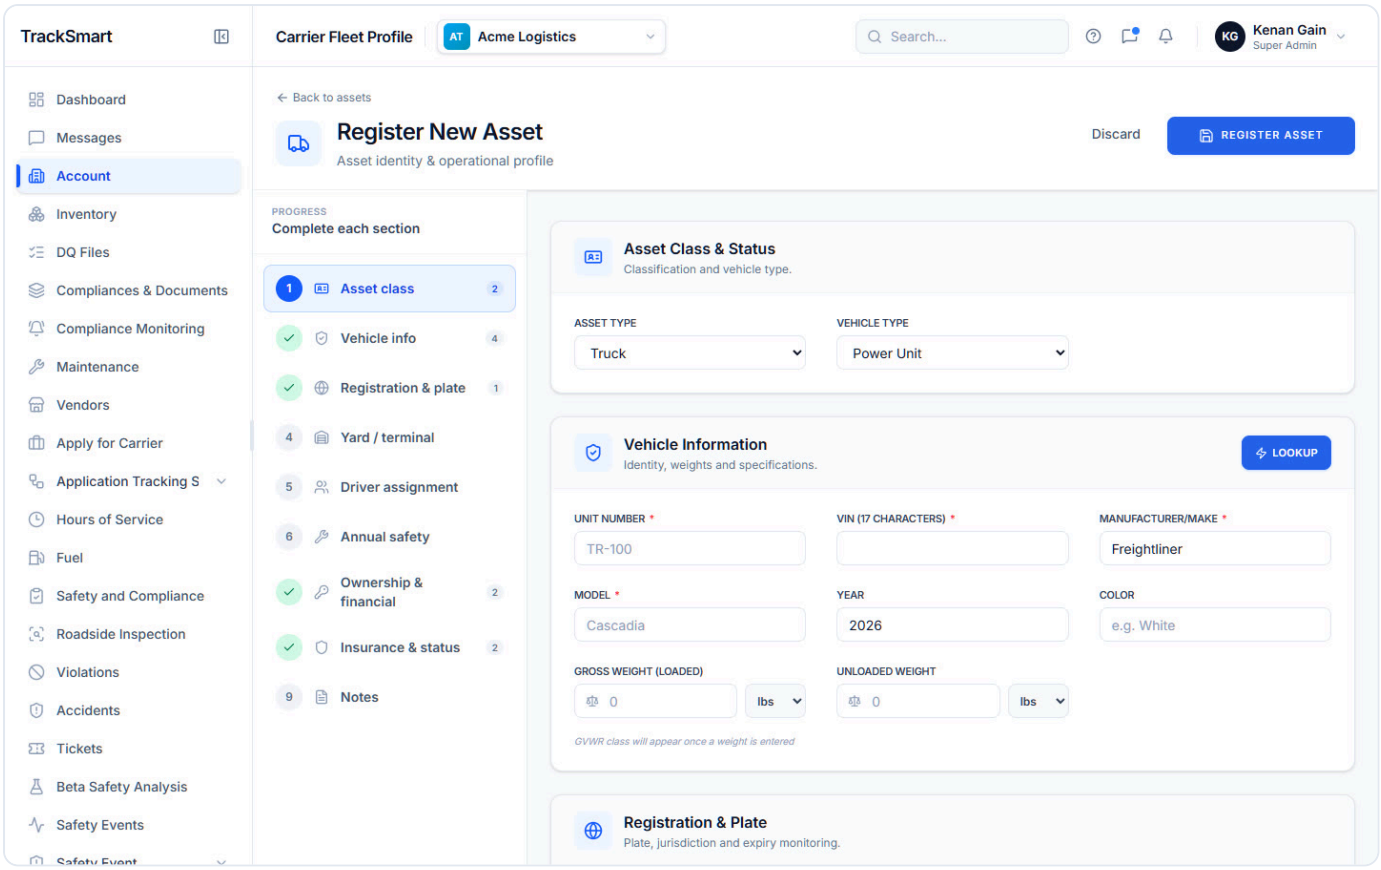


assets-wizard-add-asset-top-desktop.png — Add Asset wizard: section rail, Asset class and Vehicle info.

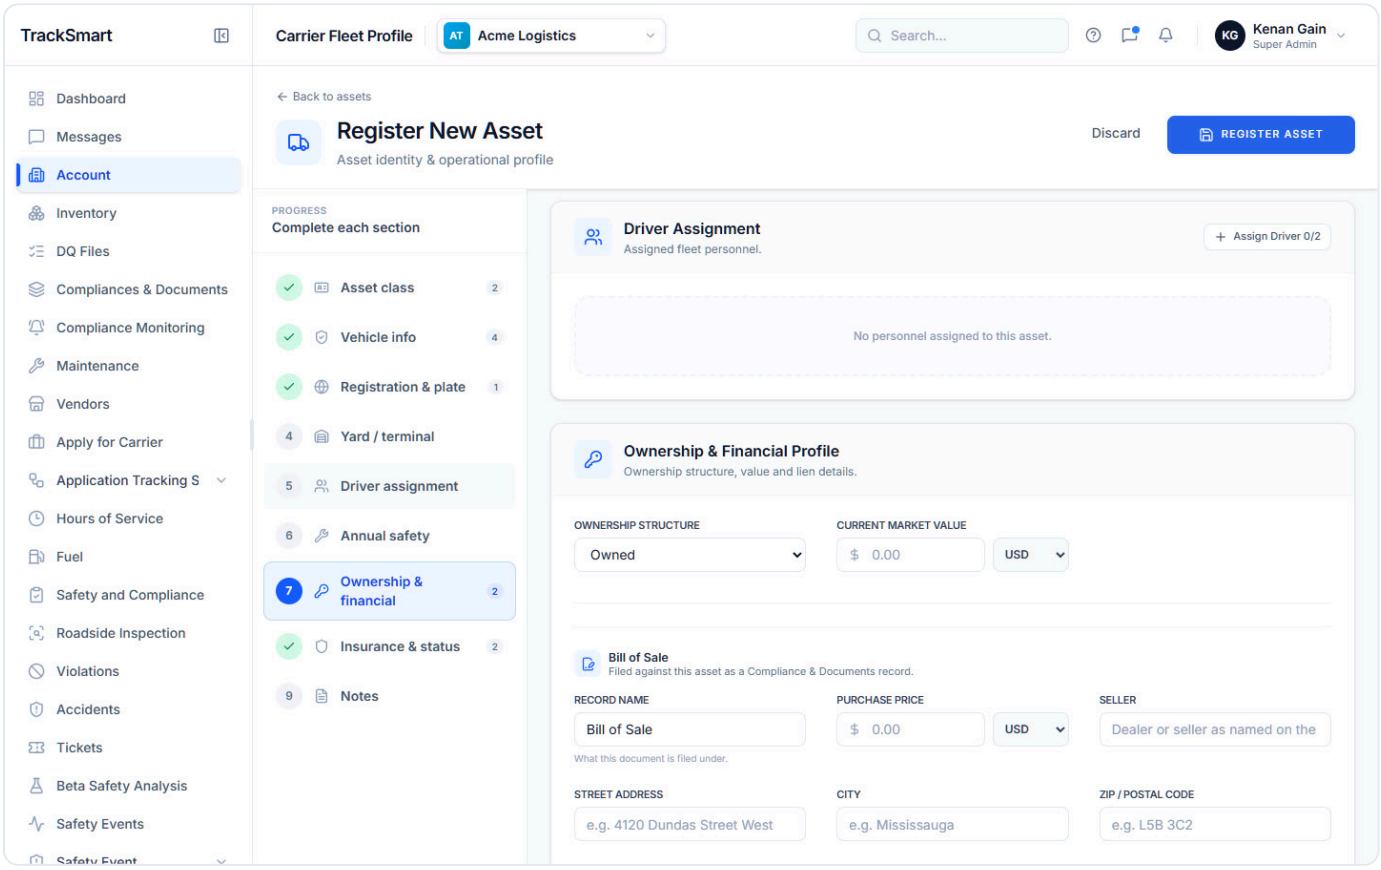


assets-wizard-driver-assignment-desktop.png — Add Asset wizard › Yard / terminal and Driver assignment.

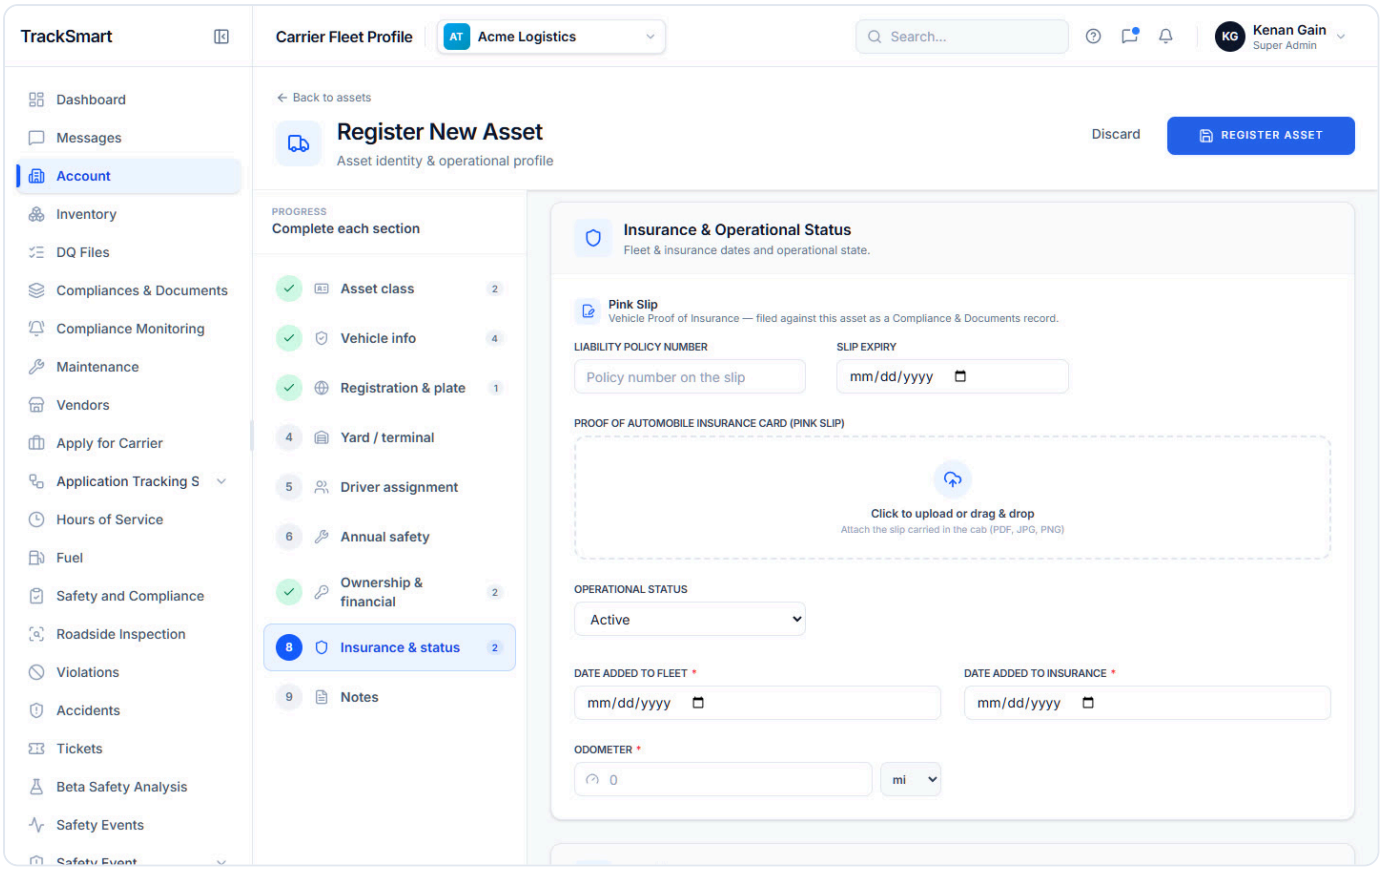


`assets-wizard-insurance-status-desktop.png` — Add Asset wizard › Insurance & status, Notes.

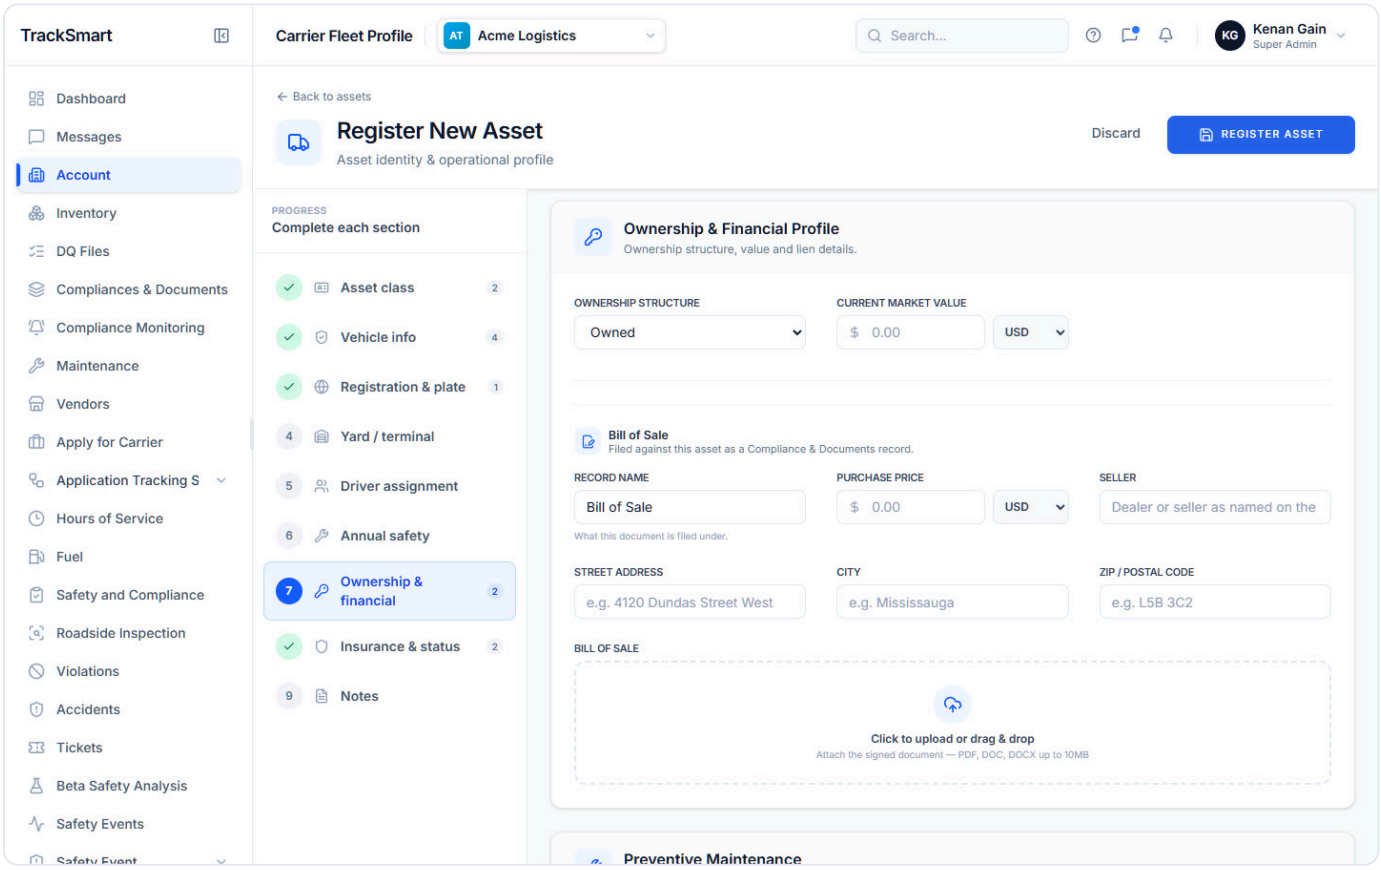

`assets-wizard-ownership-financial-desktop.png` — Add Asset wizard › Ownership & financial with the bill of sale record.

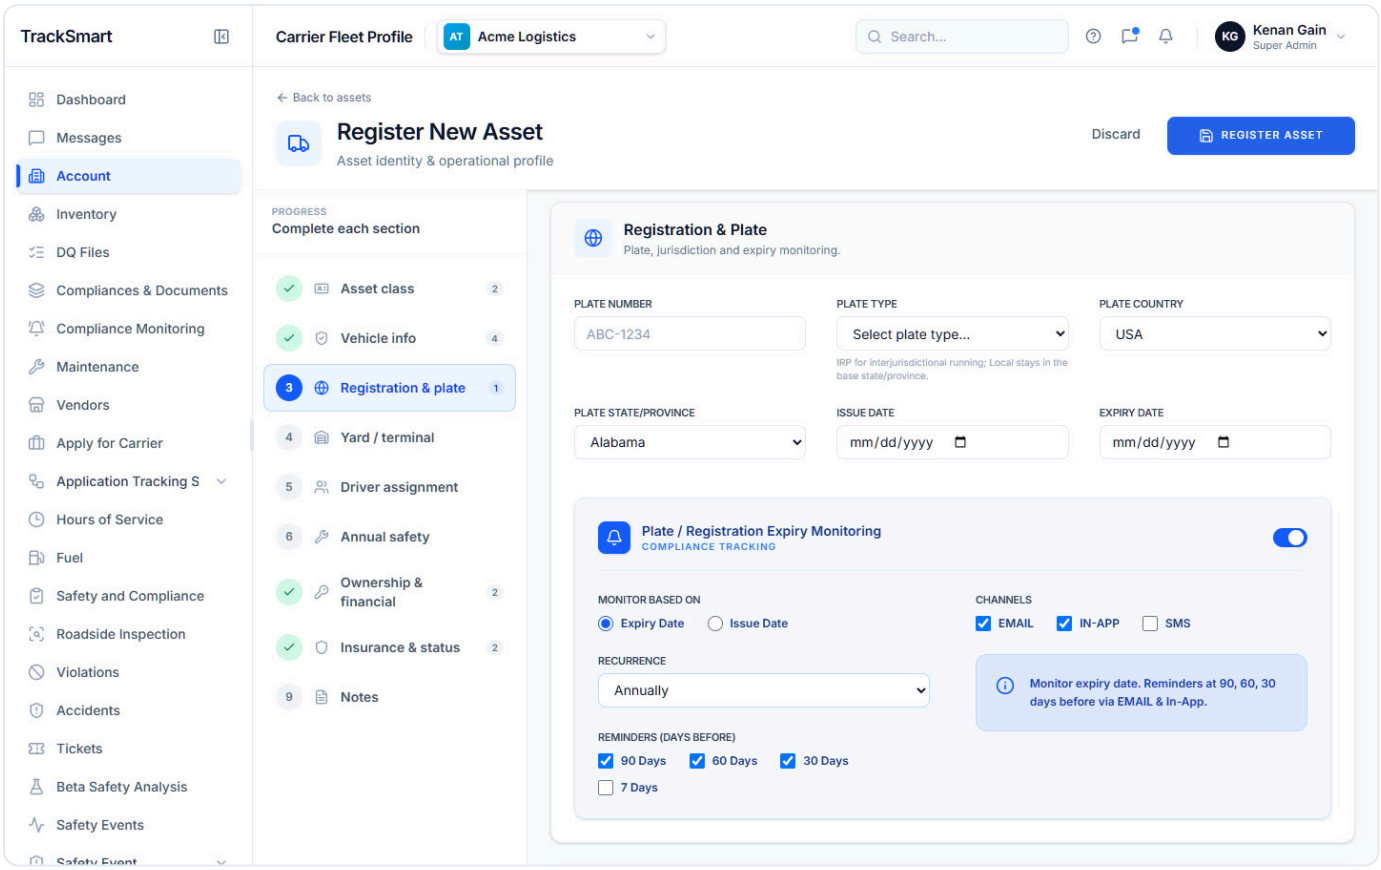


assets-wizard-registration-plate-desktop.png — Add Asset wizard › Registration & plate with the monitoring block.

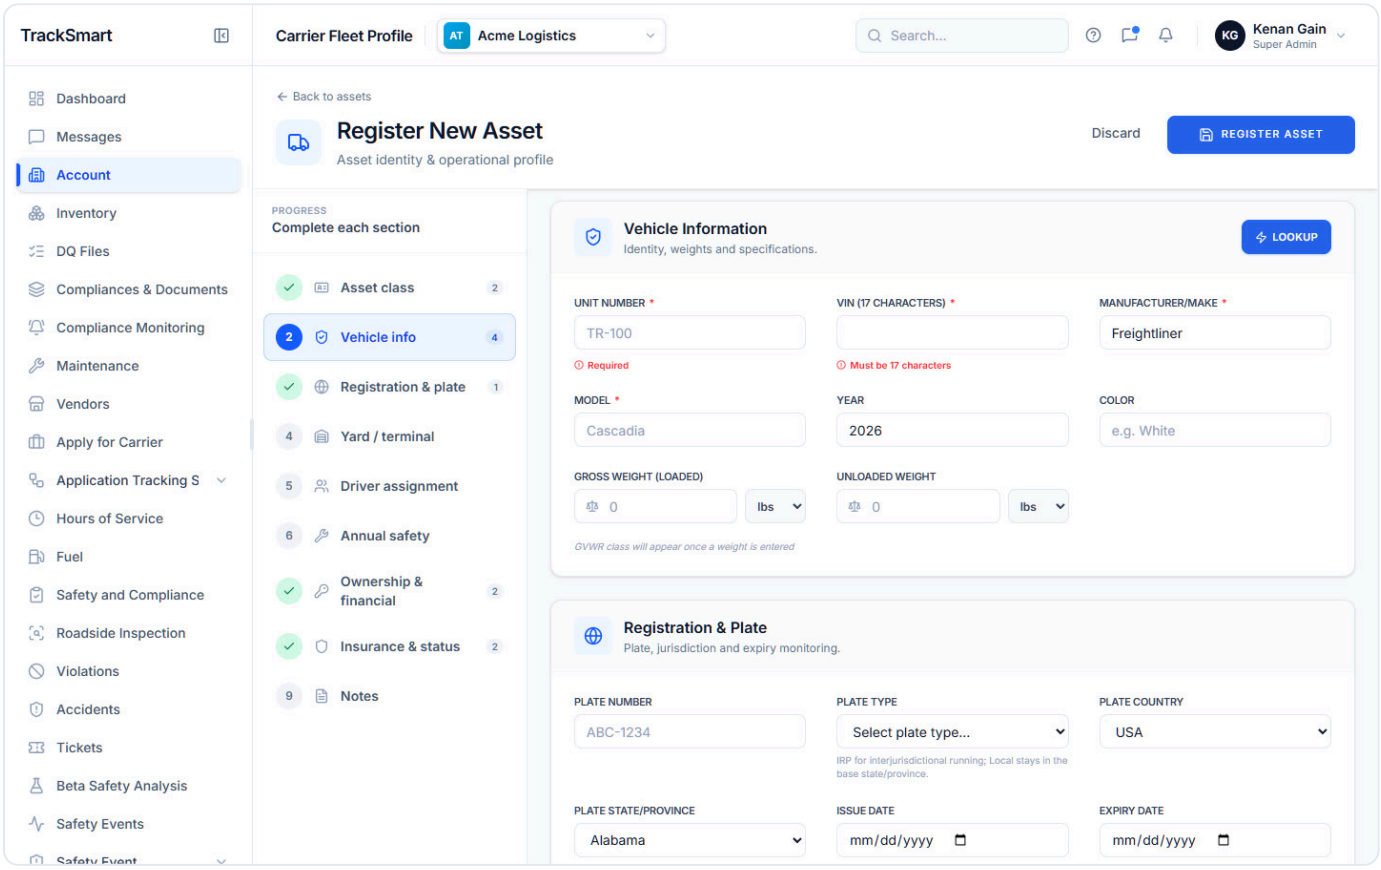


assets-wizard-validation-errors-desktop.png — Add Asset wizard › Register pressed with required fields empty: inline validation errors.


Mobile · 390 px

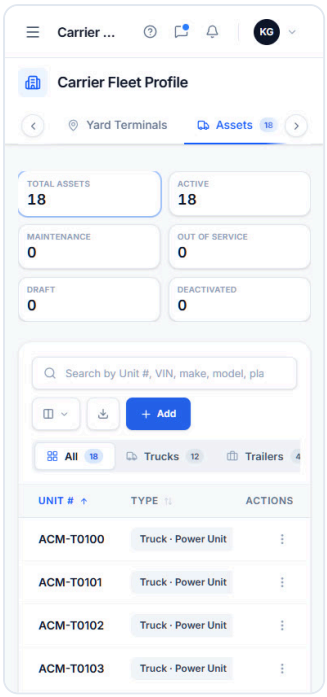


assets-default-mobile.png
Assets tab: KPI tiles, sub-tabs, toolbar, assets table with inline status and row menus.

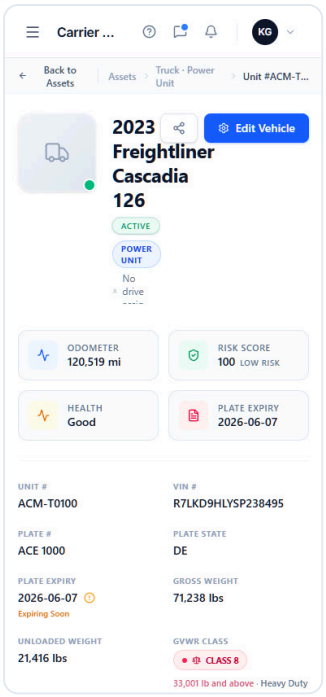


assets-detail-accidents-mobile.png
Asset detail › Accidents tab.

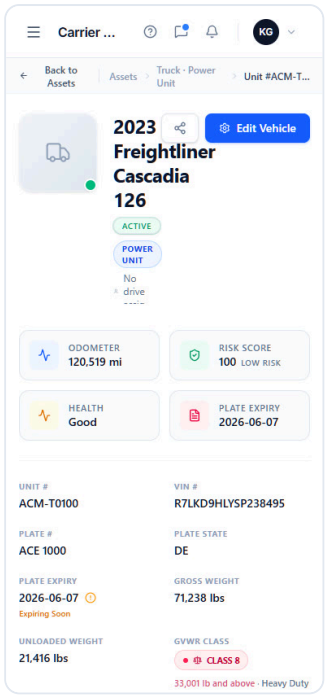


assets-detail-activity-mobile.png
Asset detail › Activity tab (actions on monitored items).

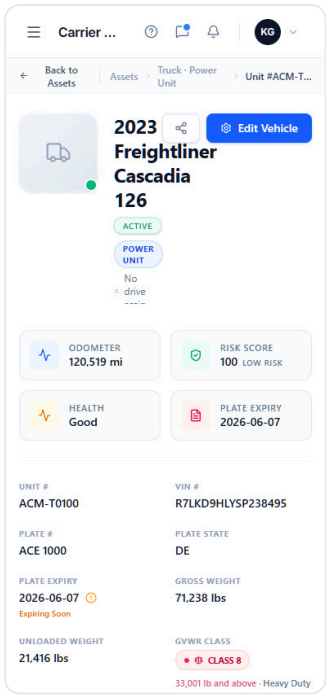


assets-detail-compliances-mobile.png
Asset detail › Compliances tab (records and documents).

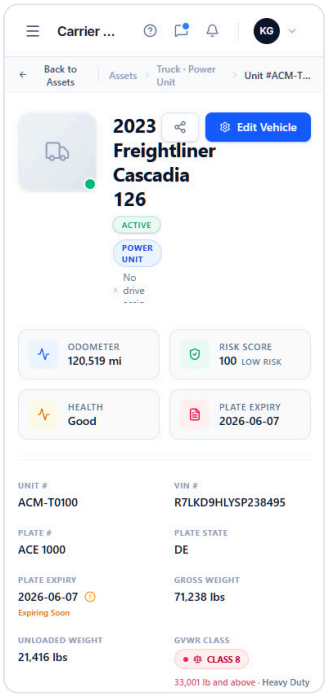


assets-detail-condensed-header-mobile.png
Asset detail scrolled: header condensed.

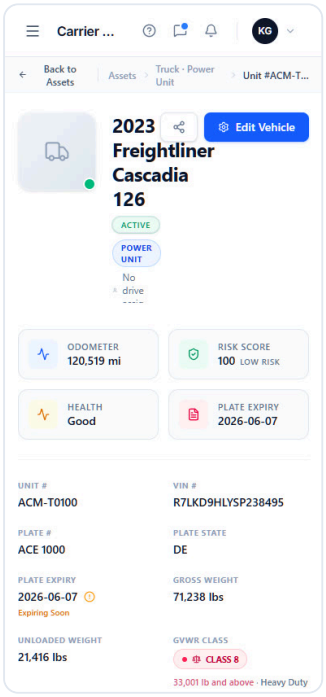


assets-detail-expenses-mobile.png
Asset detail › Expenses tab.

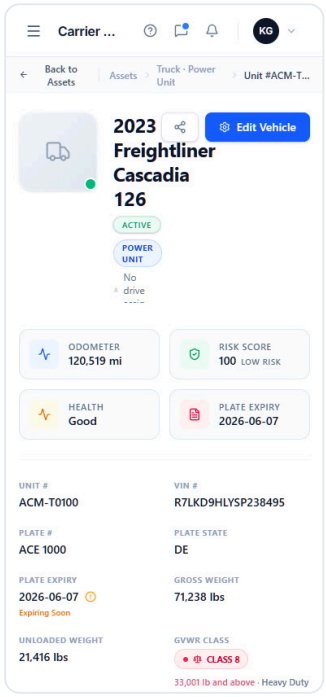


assets-detail-inspections-mobile.png
Asset detail › Inspections tab.

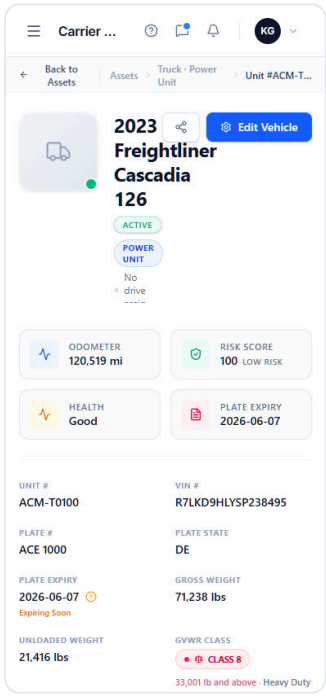


assets-detail-inventory-mobile.png
Asset detail › Inventory tab.

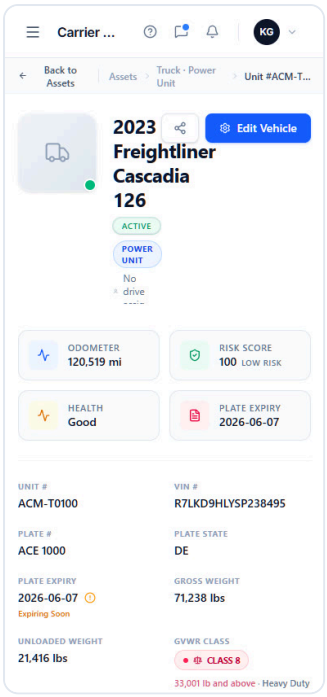


assets-detail-maintenance-mobile.png
Asset detail › Maintenance tab.

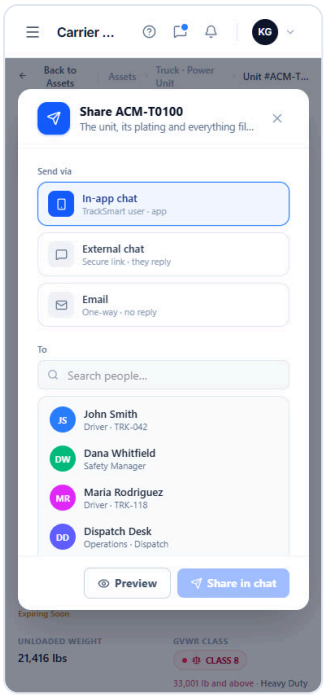


assets-detail-modal-share-to-chat-mobile.png
Asset detail › "Share to chat" dialog.

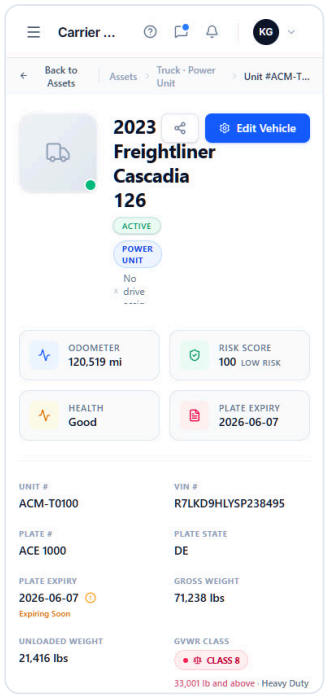


assets-detail-monitoring-mobile.png
Asset detail › Monitoring tab (the unit's monitored dates).

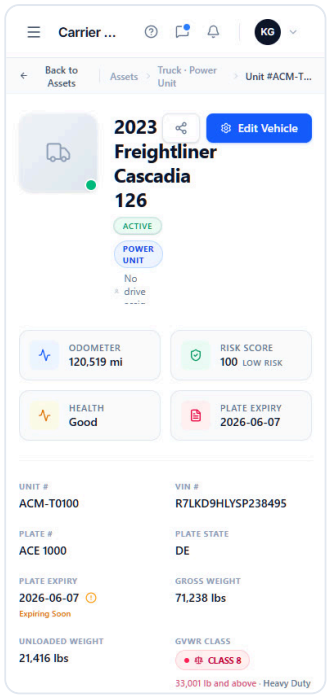


assets-detail-notifications-mobile.png
Asset detail › Notifications tab.

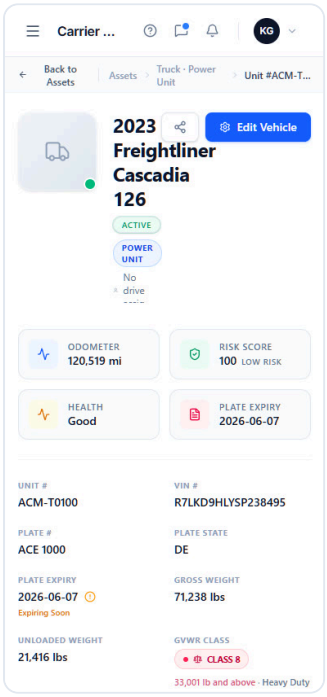


assets-detail-overview-mobile.png
Asset detail page: header tiles, metadata, Overview tab.

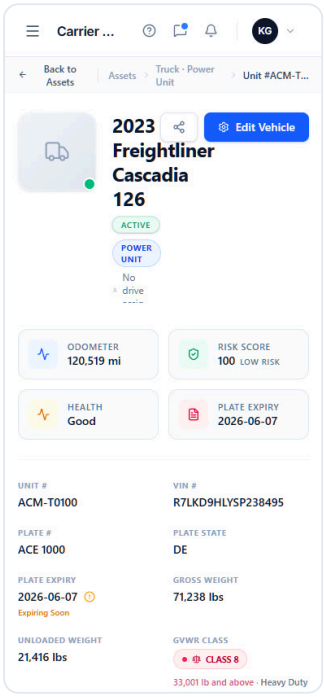


assets-detail-violations-mobile.png
Asset detail › Violations tab.

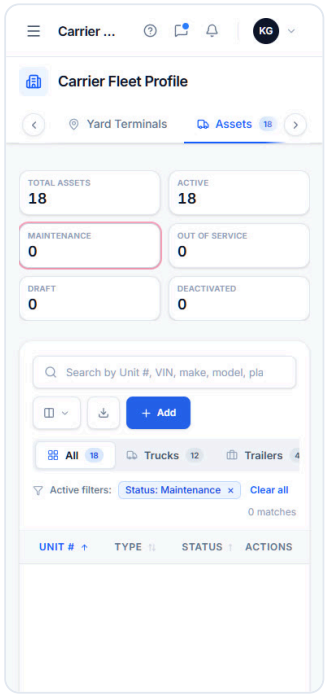


assets-empty-kpi-filter-mobile.png
Assets › KPI tile "Maintenance" selected with no matching assets ("No assets found").

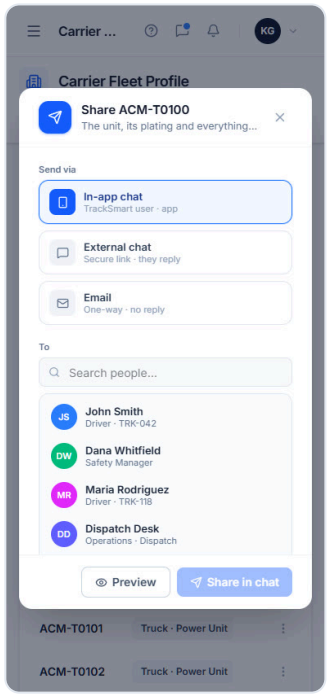


assets-modal-share-to-chat-mobile.png
Assets › "Share to chat" dialog for one unit.

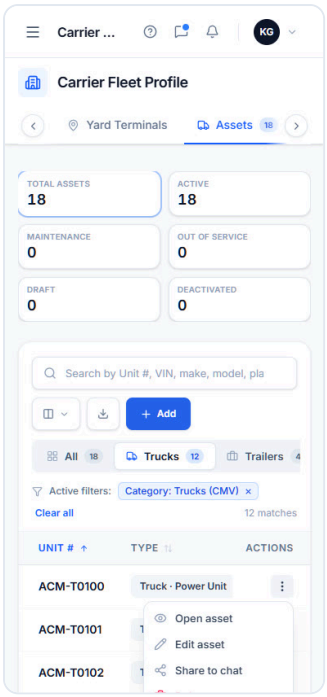


assets-row-menu-open-mobile.png
Assets › row ⋮ menu: Open asset, Edit asset, Share to chat, Delete asset.

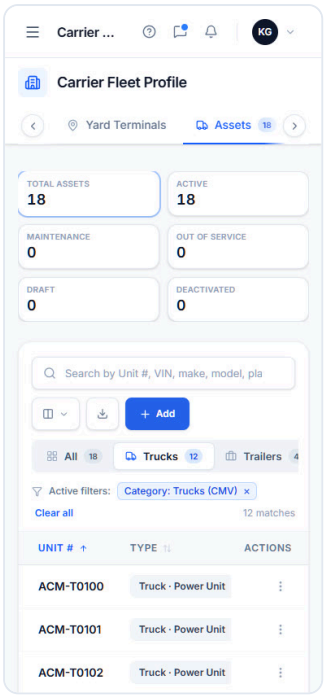


assets-subtab-trucks-mobile.png
Assets › "Trucks (CMV)" sub-tab.

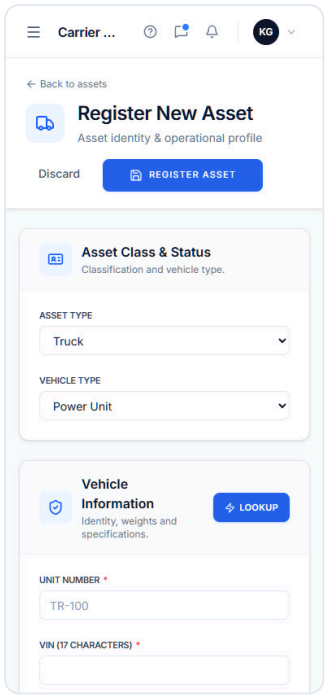


assets-wizard-add-asset-top-mobile.png
Add Asset wizard: section rail, Asset class and Vehicle info.

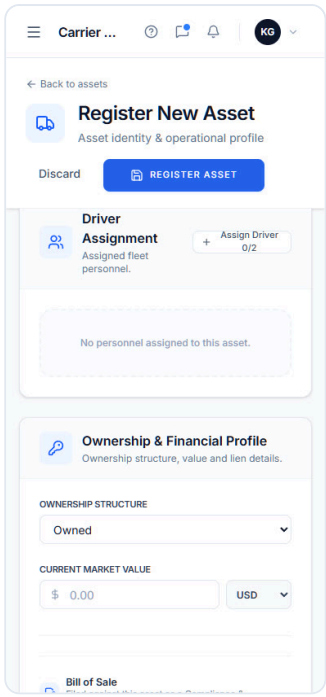


assets-wizard-driver-assignment-mobile.png
Add Asset wizard › Yard / terminal and Driver assignment.

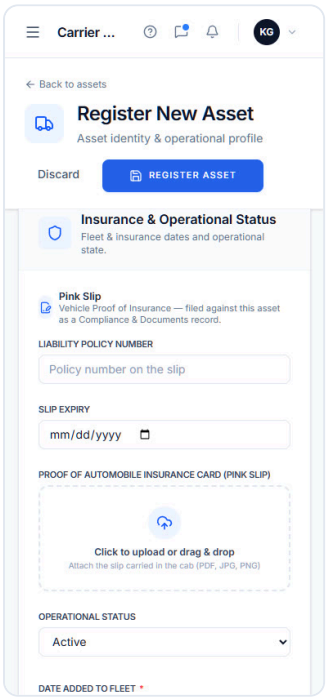


assets-wizard-insurance-status-mobile.png
Add Asset wizard › Insurance & status, Notes.

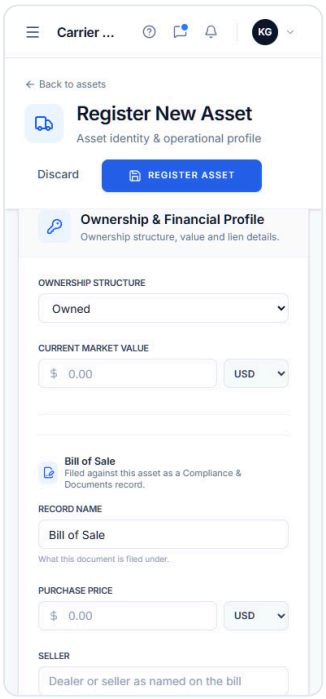

assets-wizard-ownership-financial-mobile.png
Add Asset wizard › Ownership & financial with the bill of sale record.

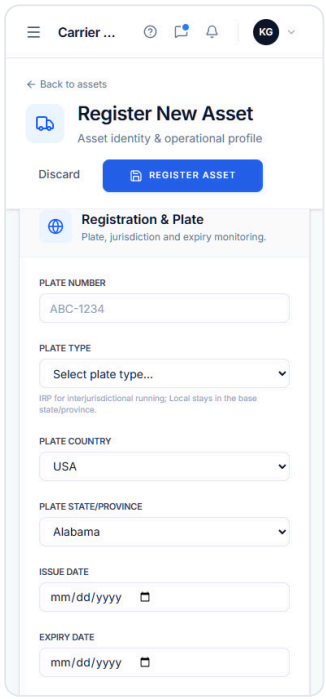


assets-wizard-registration-plate-mobile.png
Add Asset wizard › Registration & plate with the monitoring block.

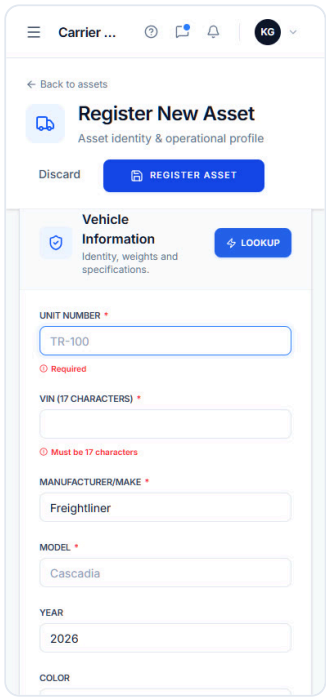


assets-wizard-validation-errors-mobile.png
Add Asset wizard › Register pressed with required fields empty: inline validation errors.

Drivers


Desktop · 1440 px

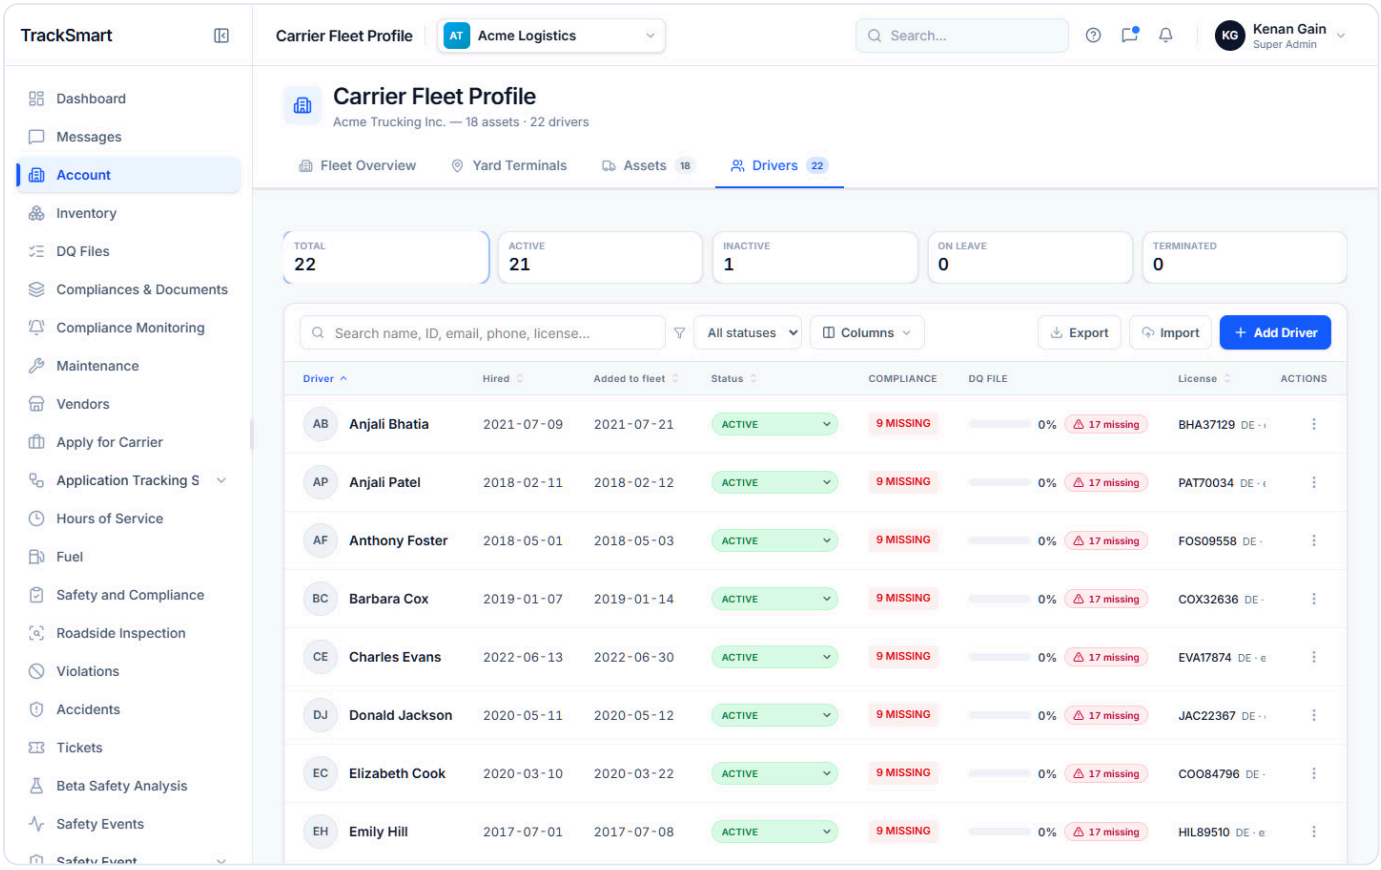


`drivers-default-desktop.png` — Drivers tab: KPI tiles, toolbar, drivers table with inline status and row menus.

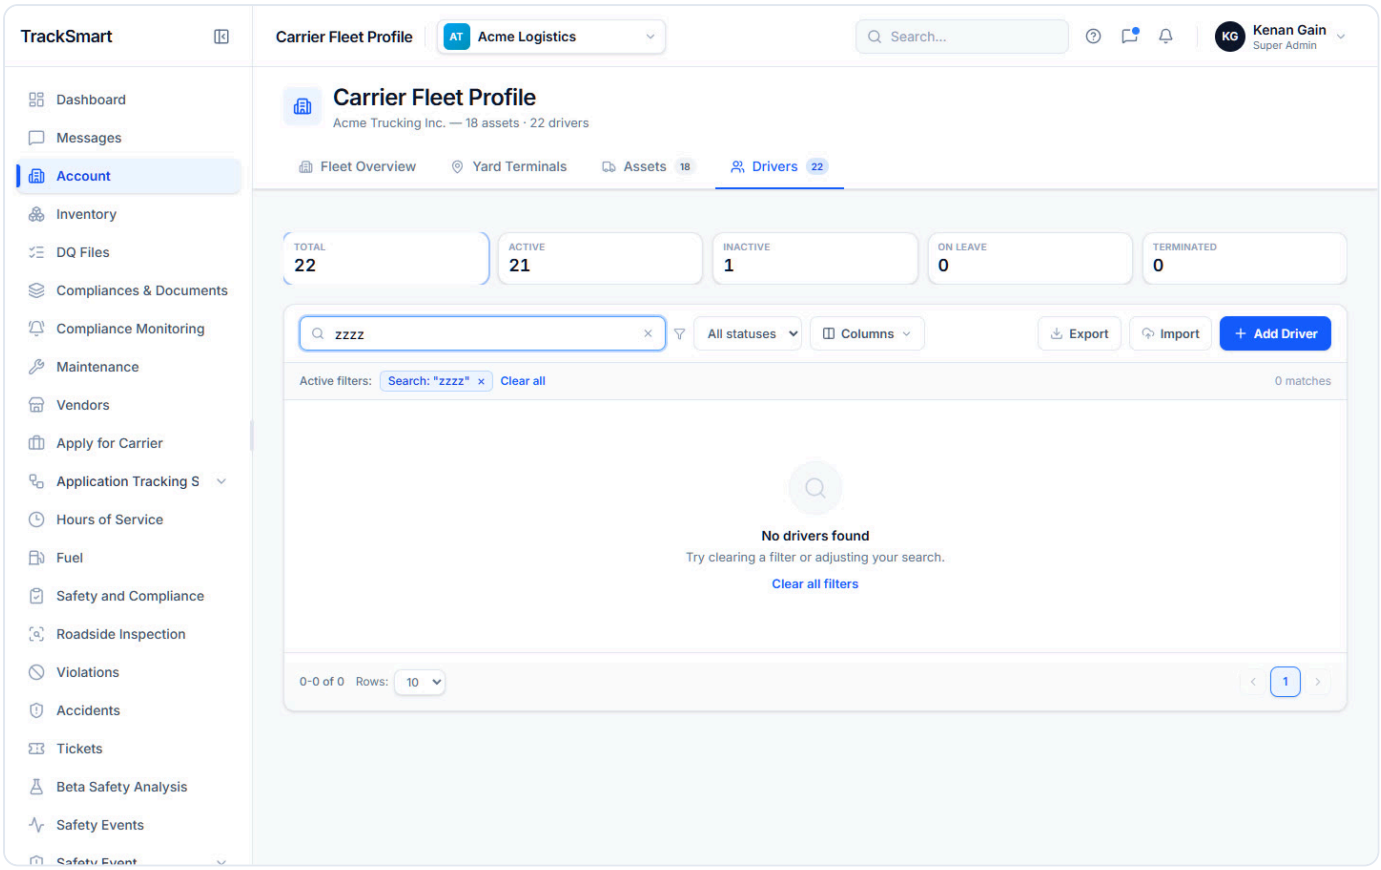


drivers-empty-no-match-desktop.png — Drivers › search with no match ("No drivers found").

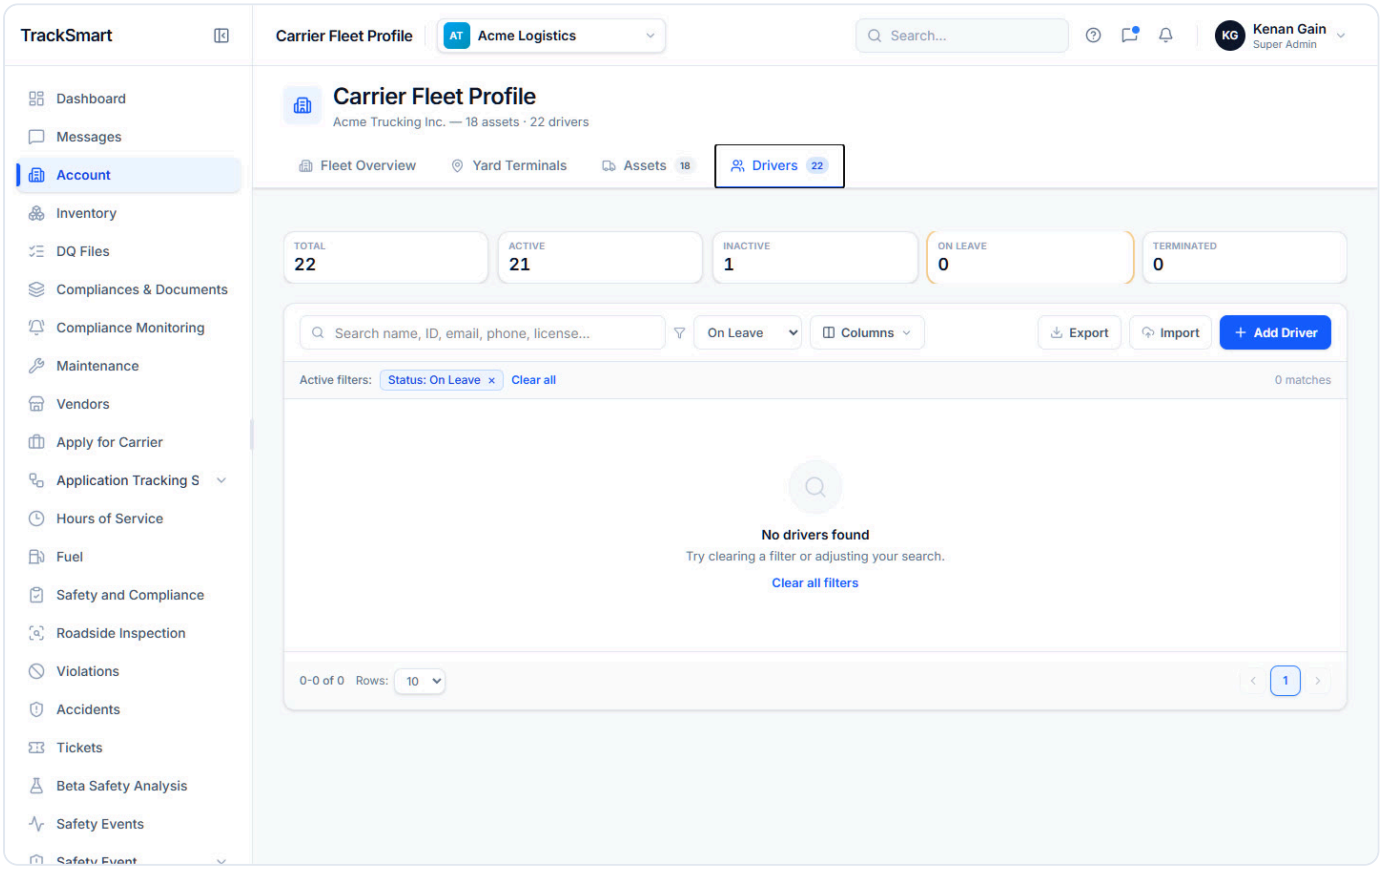


drivers-filter-status-on-leave-desktop.png — Drivers › Status filter "On Leave" applied (filter chip; empty when nobody is on leave).

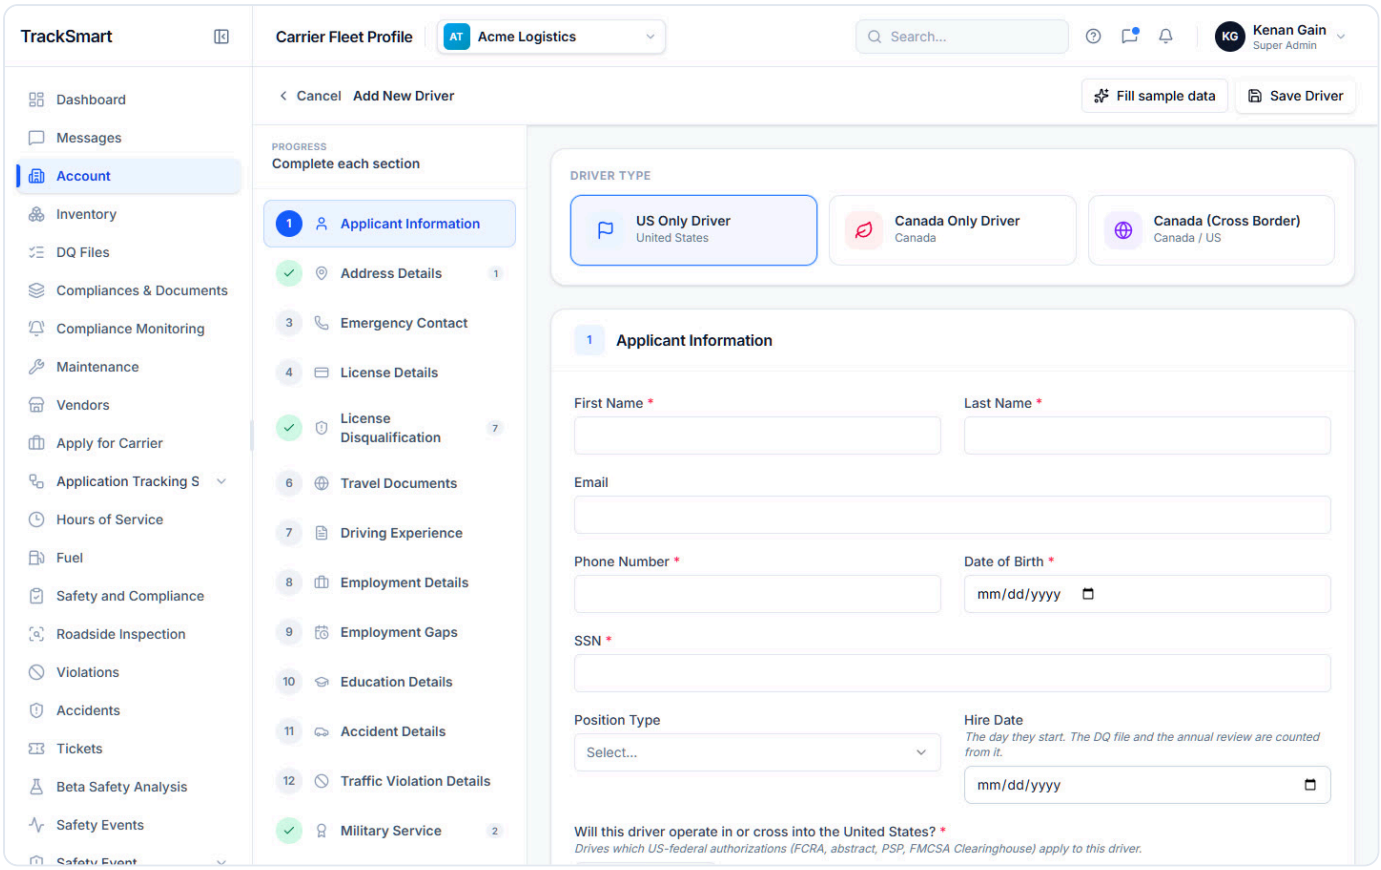


drivers-form-add-driver-top-desktop.png — Add Driver form: driver-type picker, section rail, Applicant Information.

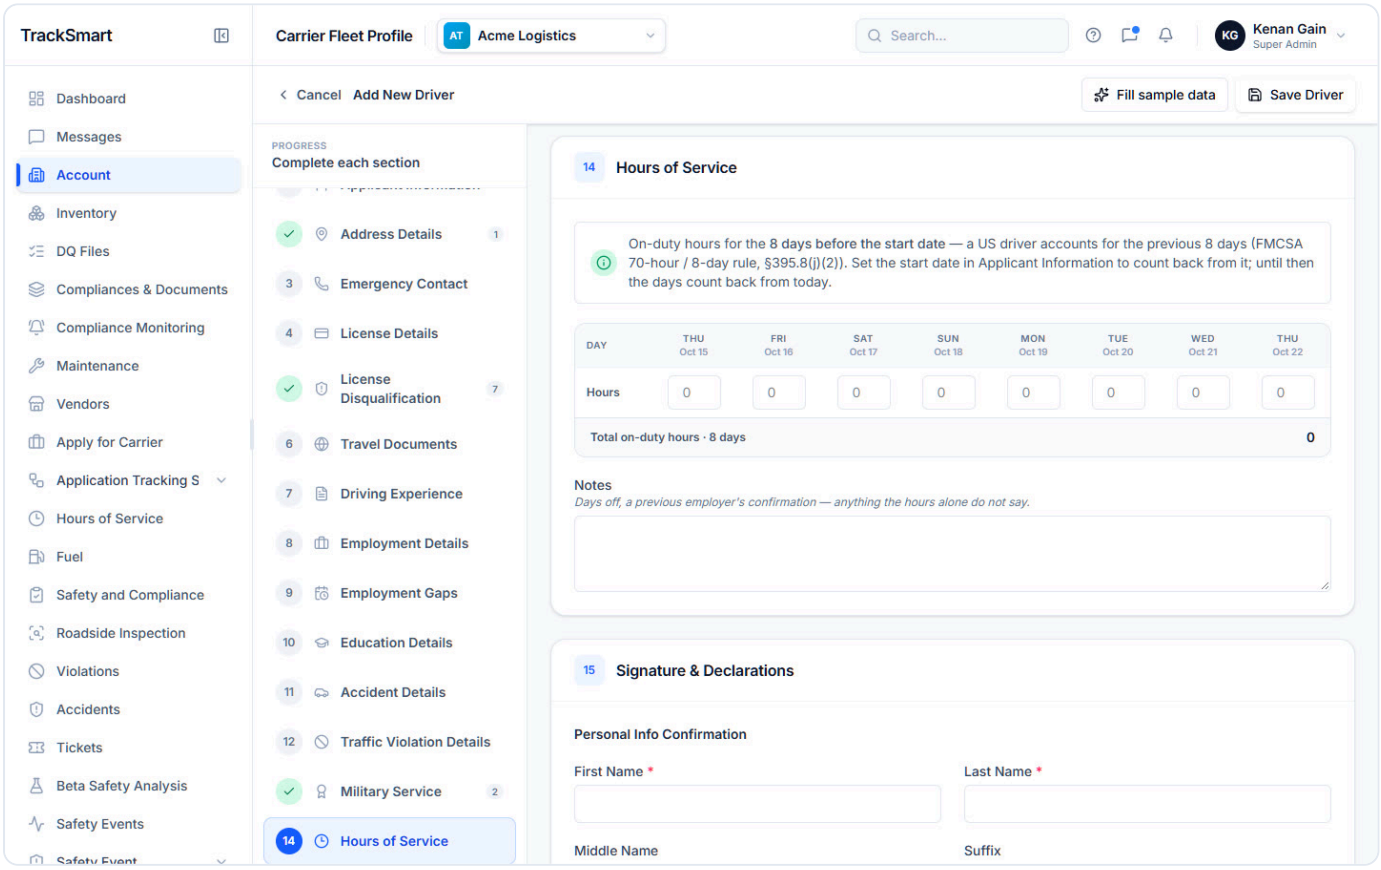


drivers-form-hours-of-service-desktop.png — Add Driver › Hours of Service day table.

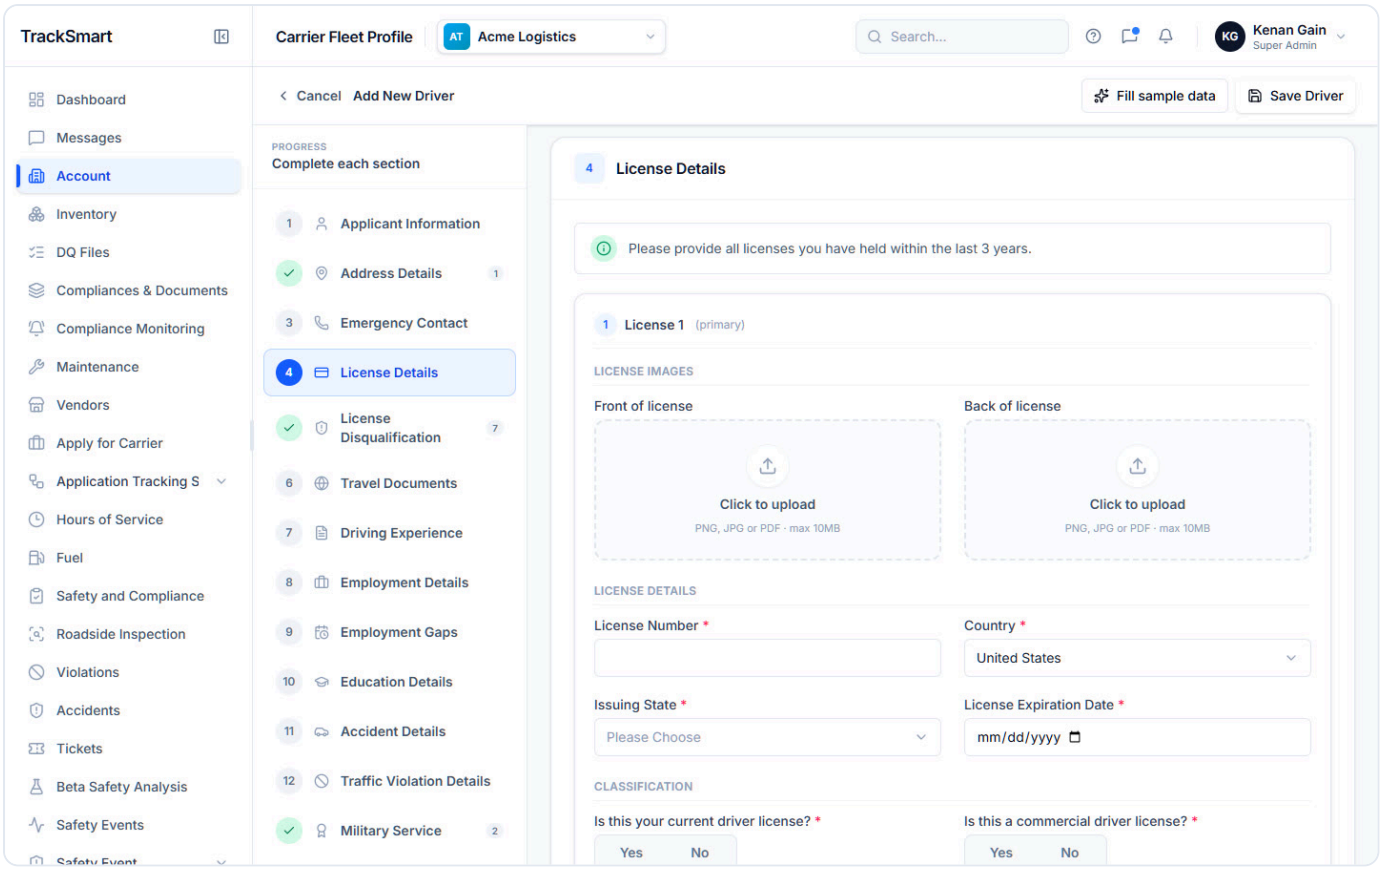


drivers-form-license-details-desktop.png — Add Driver › License Details (uploads, class search, endorsements, restrictions).

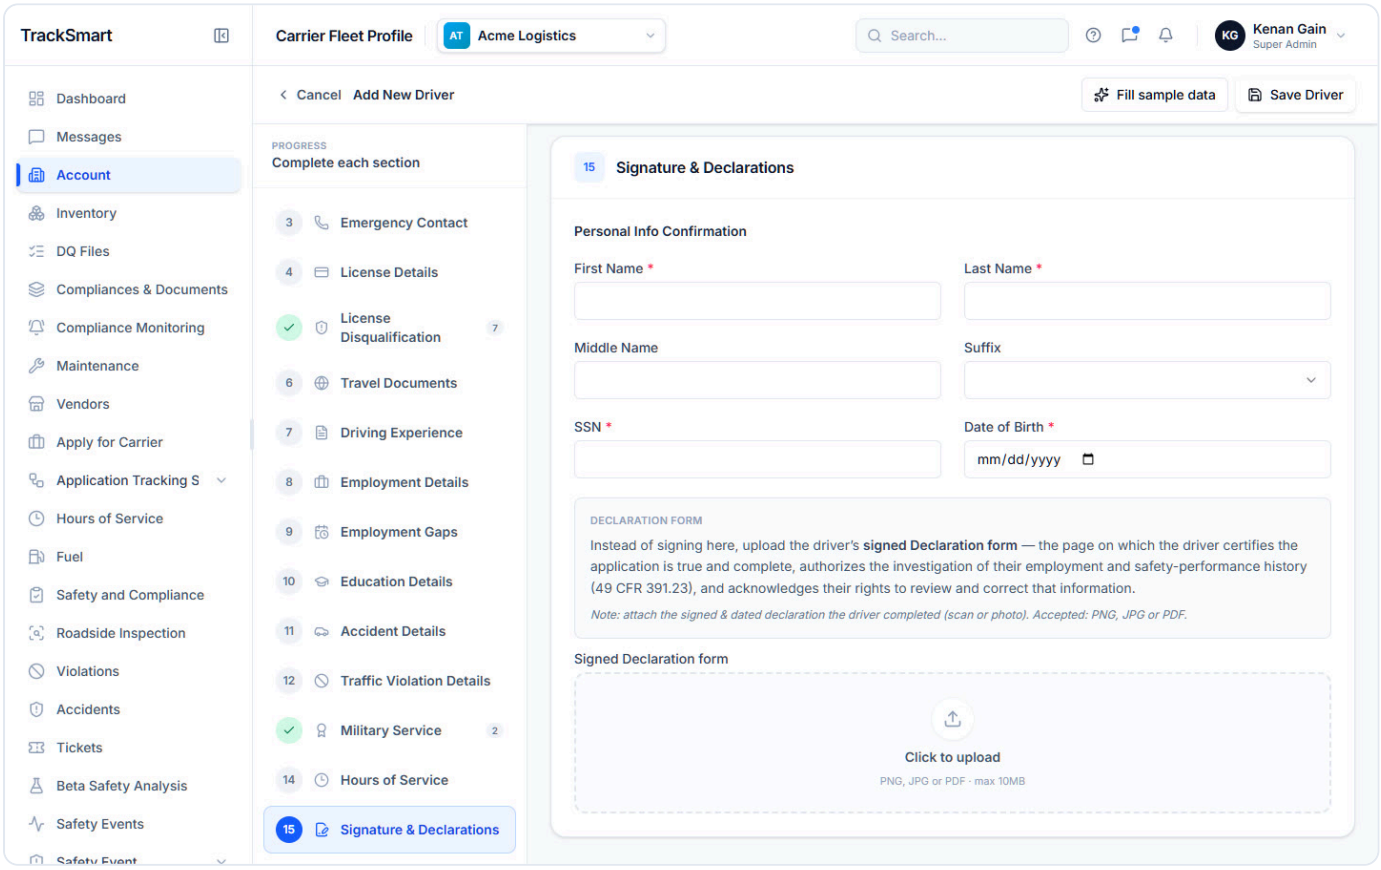


drivers-form-signature-desktop.png — Add Driver › Signature & Declarations.

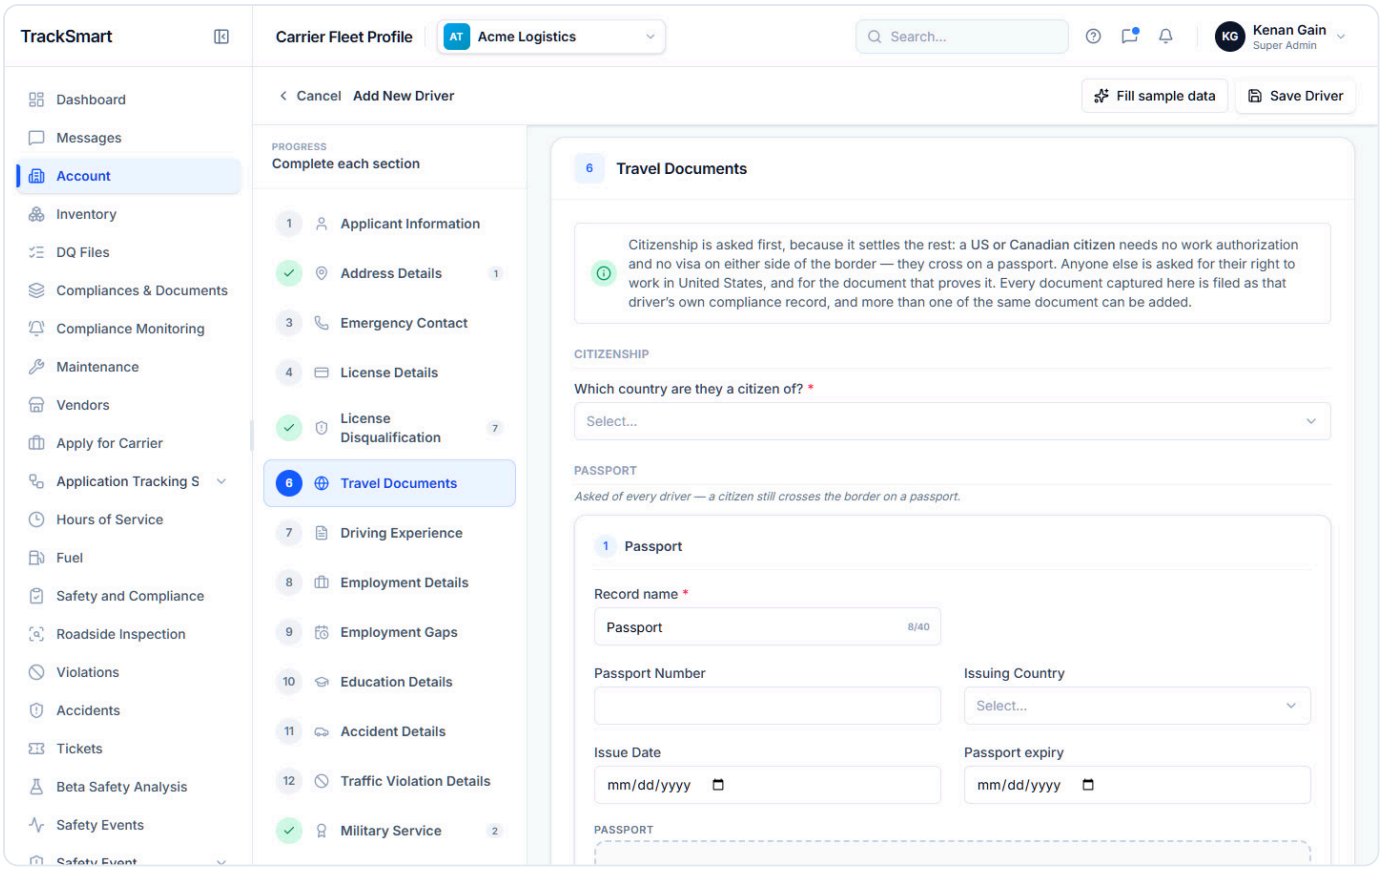


drivers-form-travel-documents-desktop.png — Add Driver › Travel Documents.

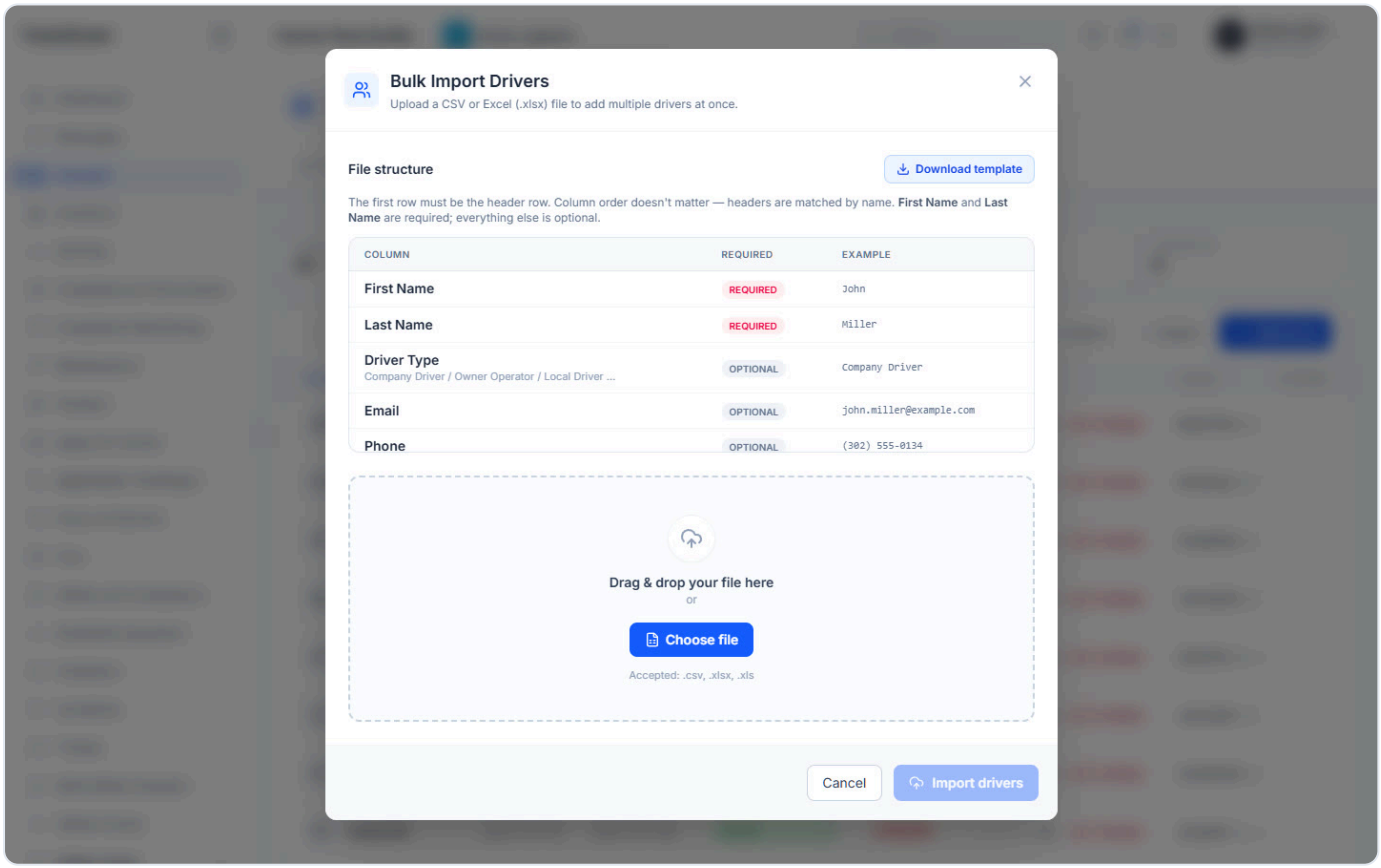


drivers-modal-import-drivers-desktop.png — Drivers › "Import" modal: CSV/XLSX upload and accepted columns.

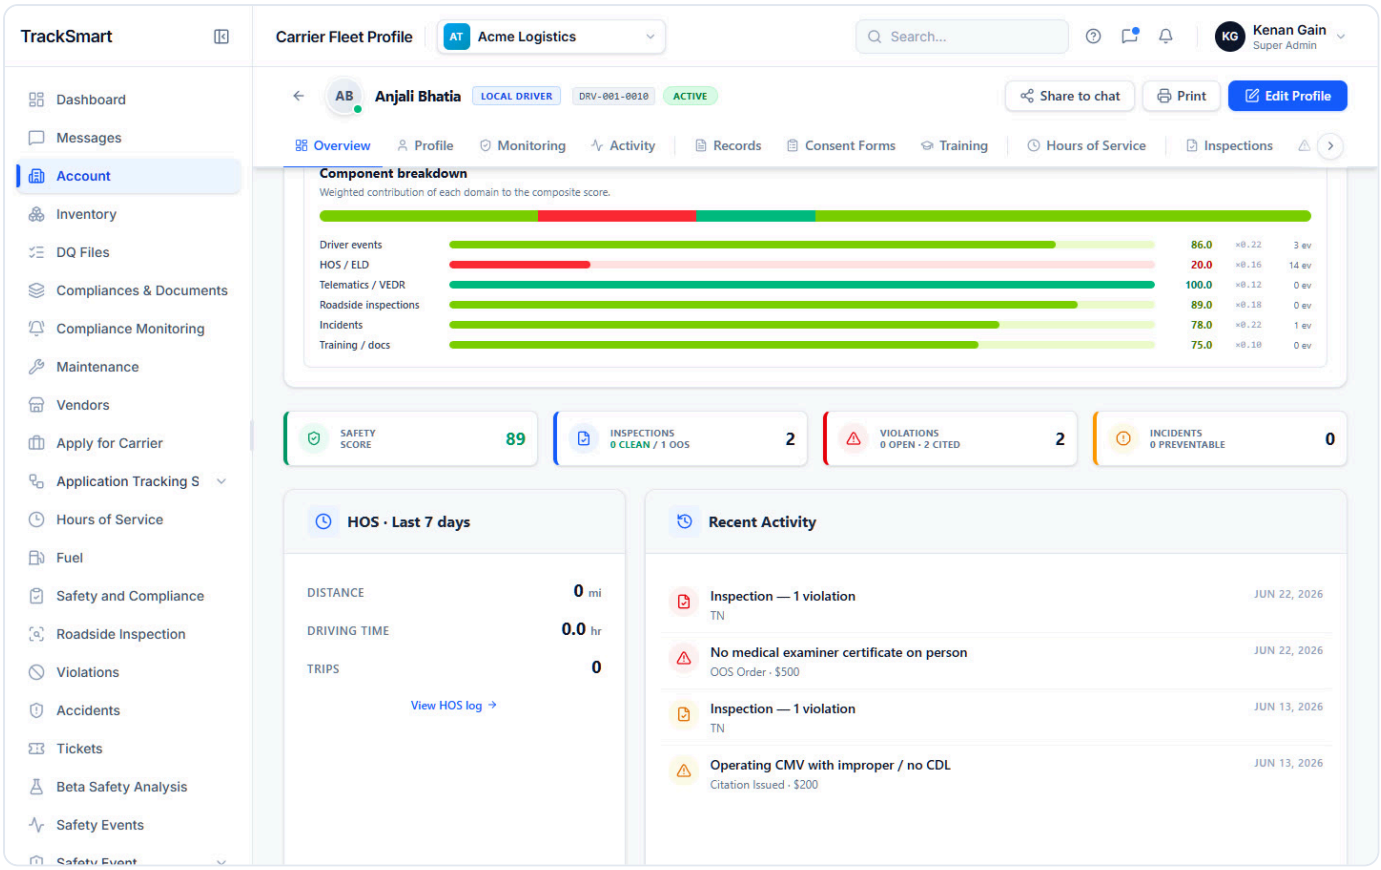


drivers-profile-condensed-header-desktop.png — Driver profile scrolled: header condensed.

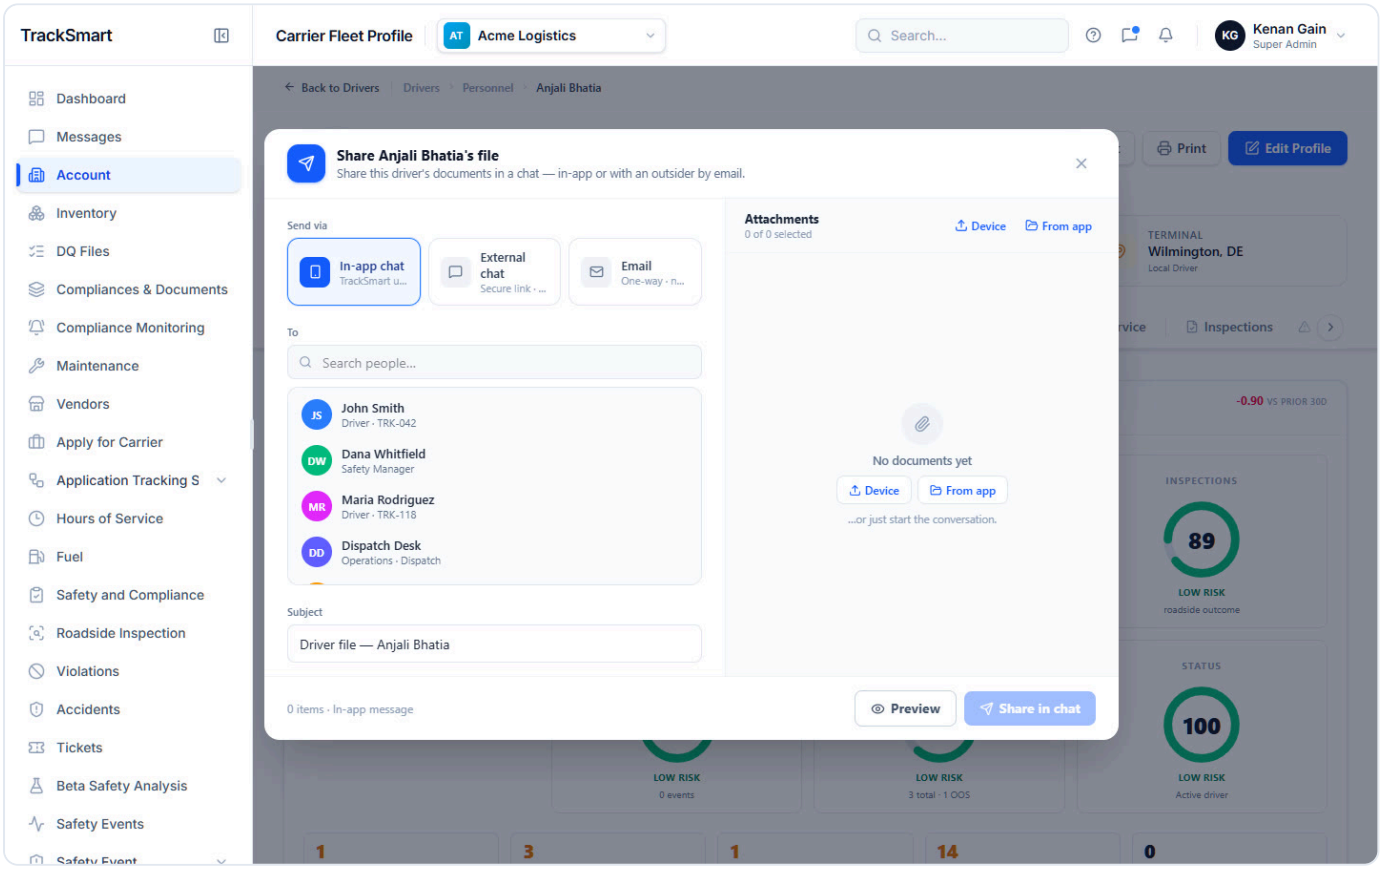


drivers-profile-modal-share-to-chat-desktop.png — Driver profile › "Share to chat" dialog.

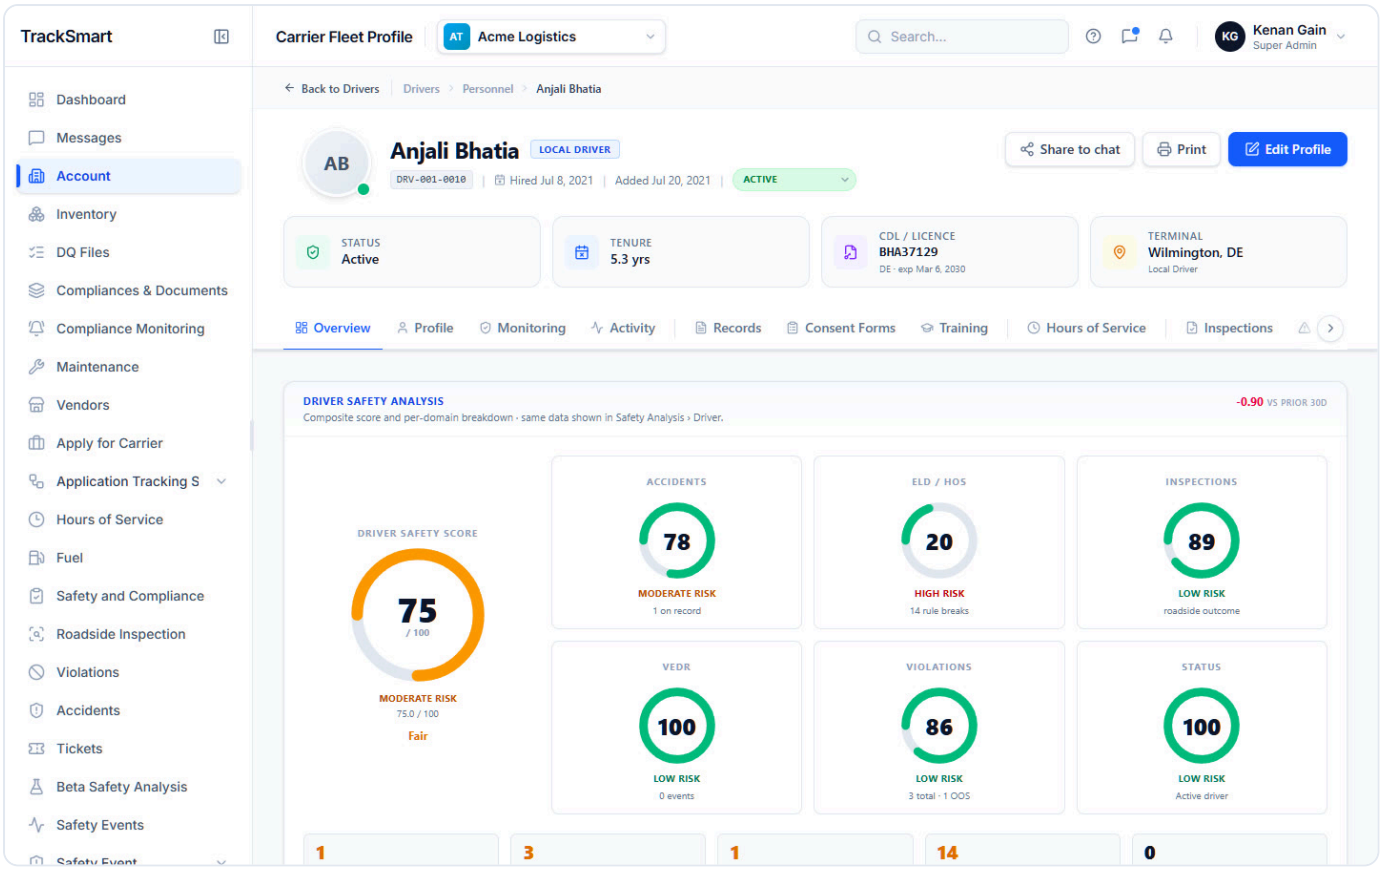


drivers-profile-overview-desktop.png — Driver profile page: header (status dropdown, Share to chat, Print, Edit Profile), tiles, Overview tab.

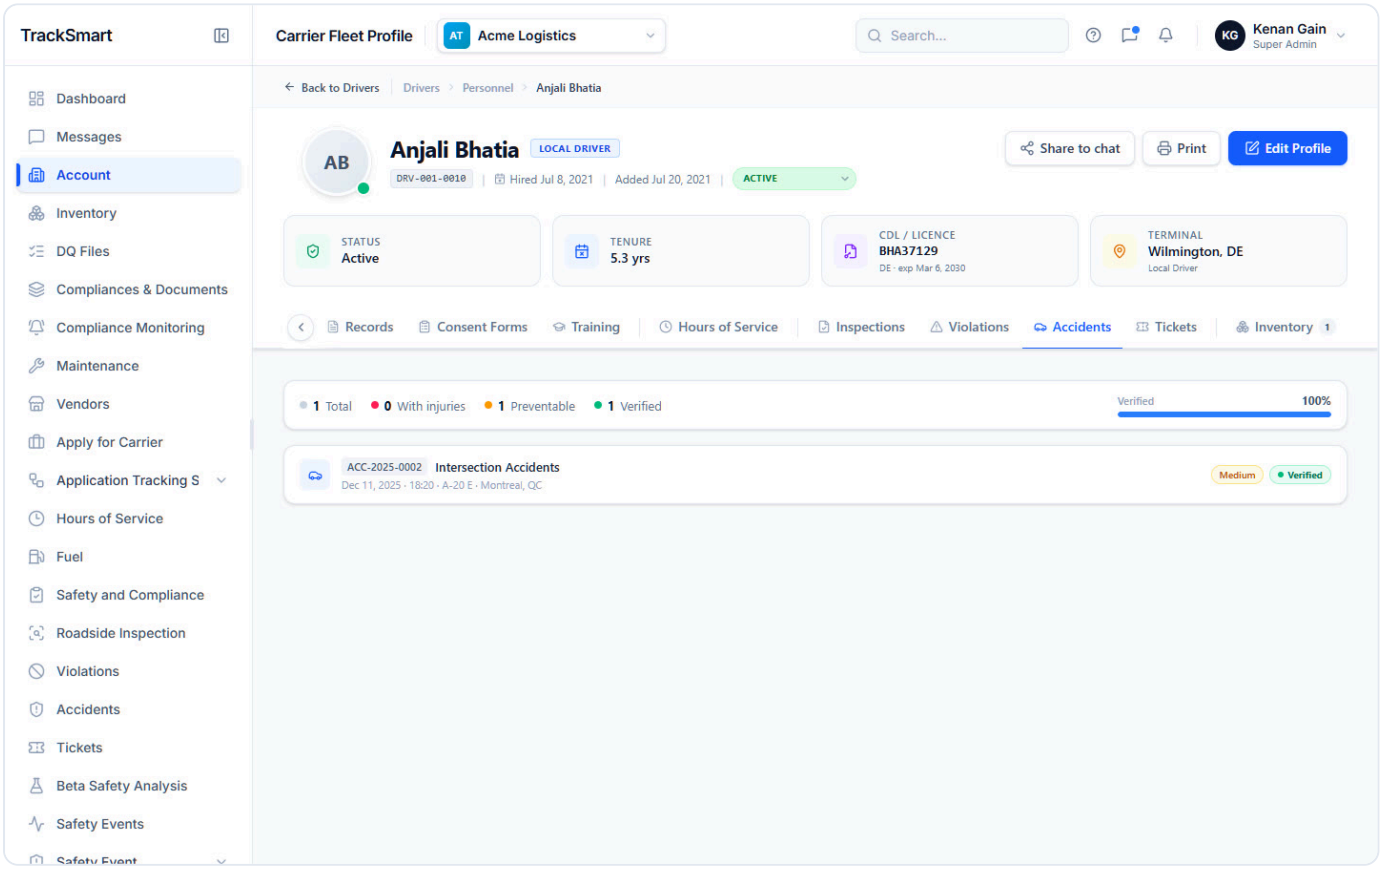


drivers-profile-tab-accidents-desktop.png — Driver profile › accidents tab.

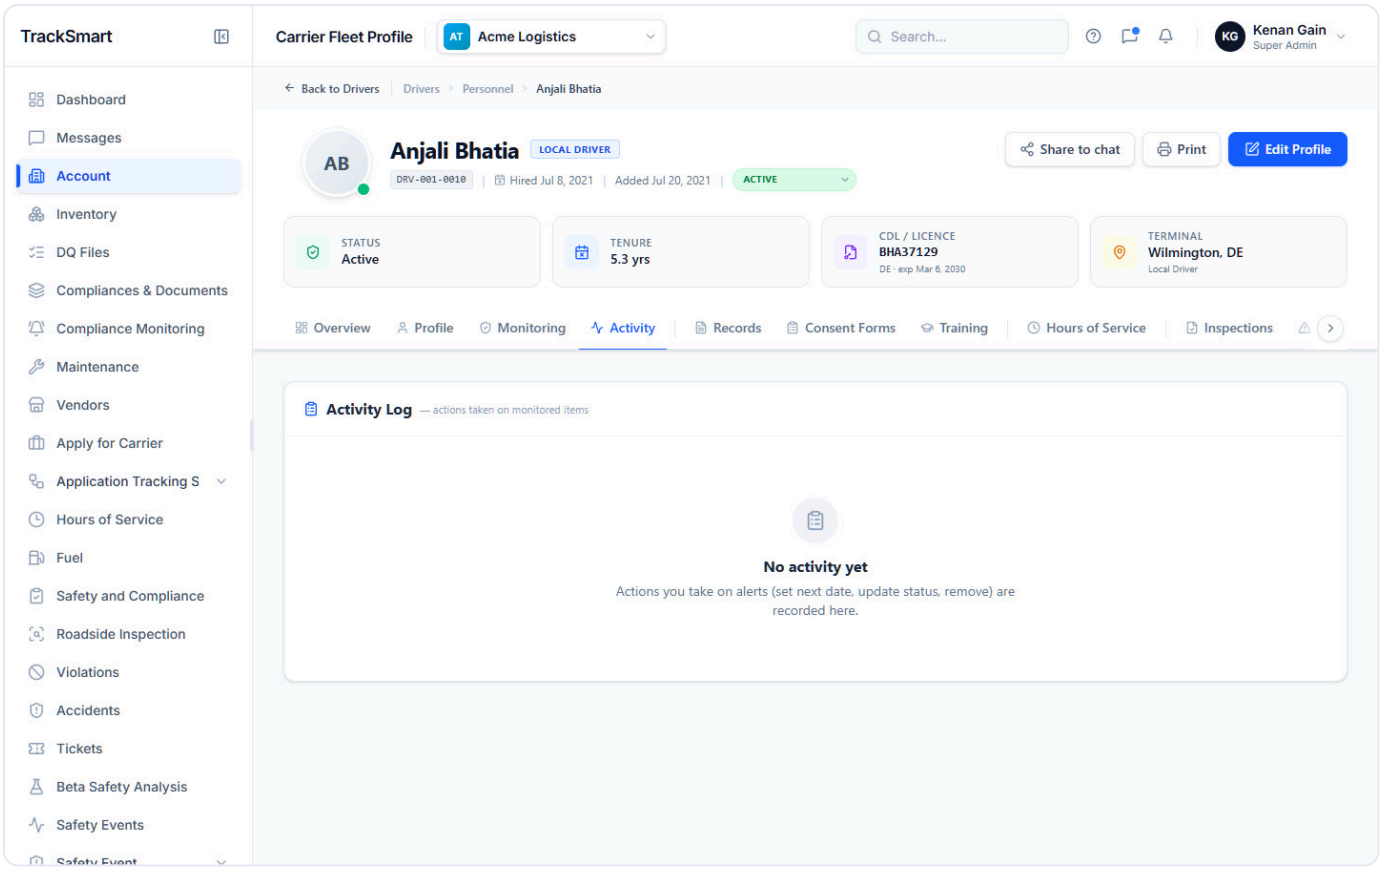


drivers-profile-tab-activity-desktop.png — Driver profile › activity tab.

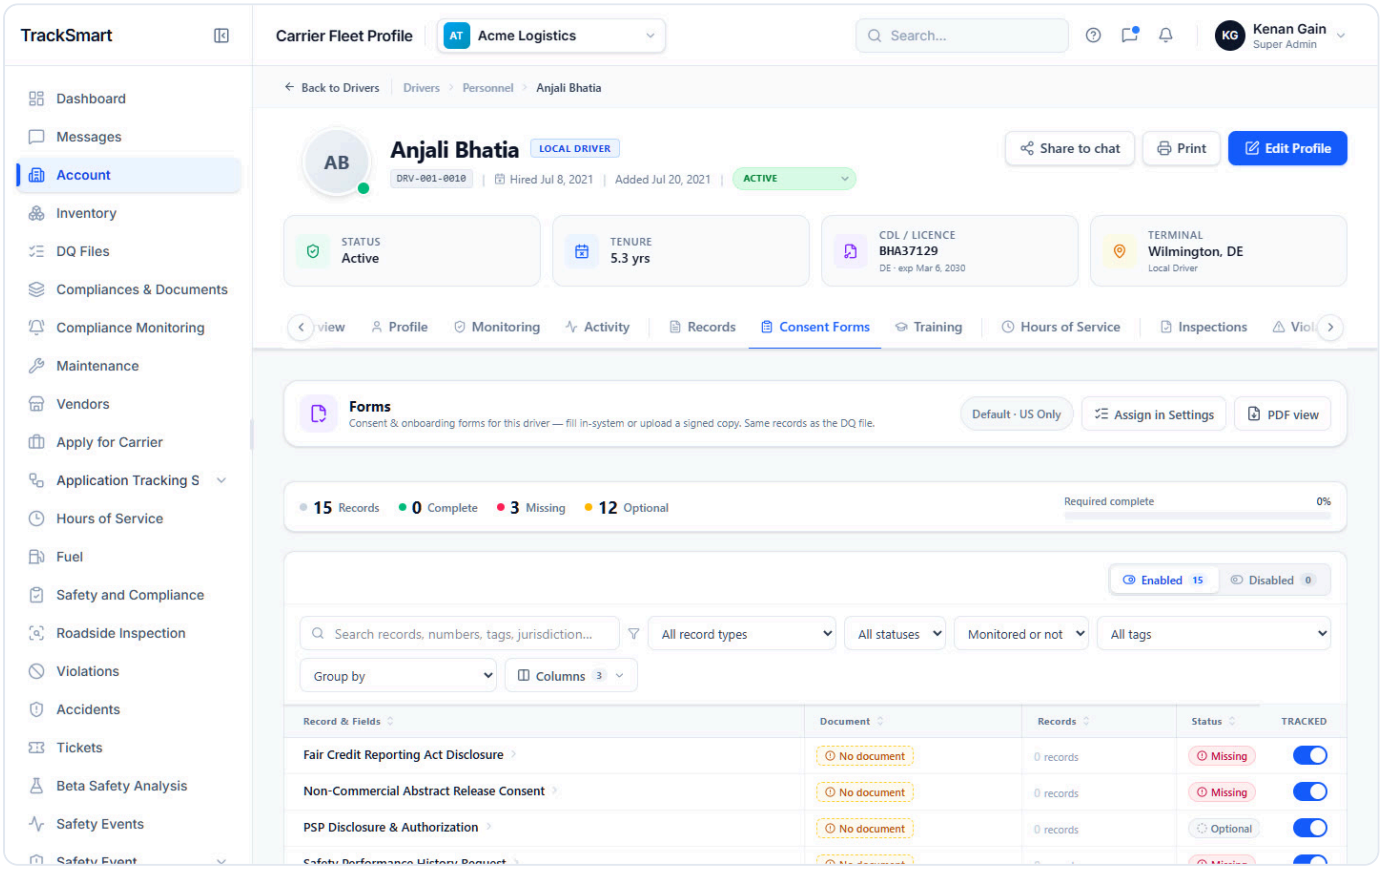


drivers-profile-tab-consent-forms-desktop.png — Driver profile › consent forms tab.

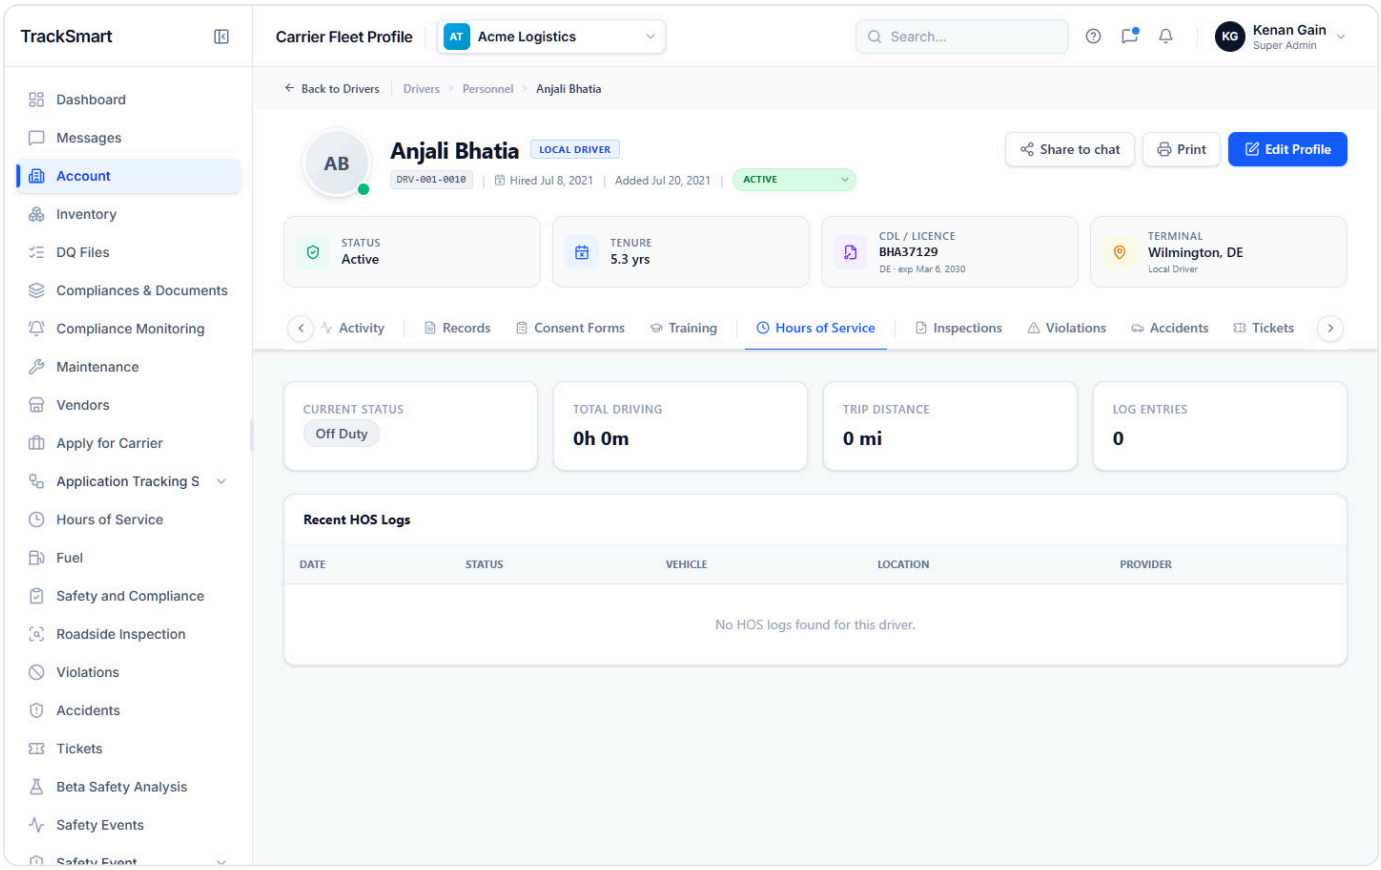


drivers-profile-tab-hours-of-service-desktop.png — Driver profile › hours of service tab.

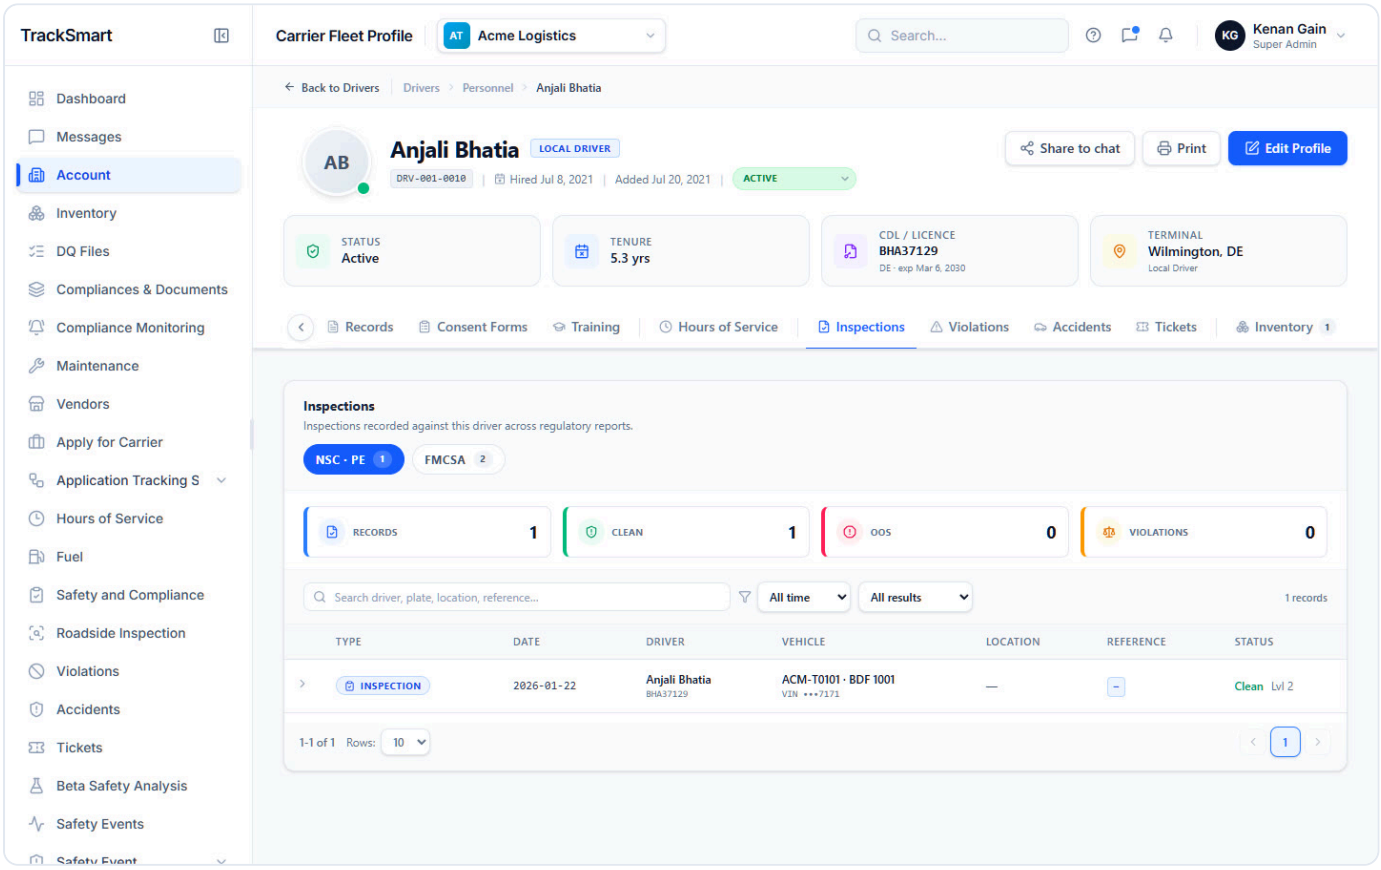


drivers-profile-tab-inspections-desktop.png — Driver profile › inspections tab.

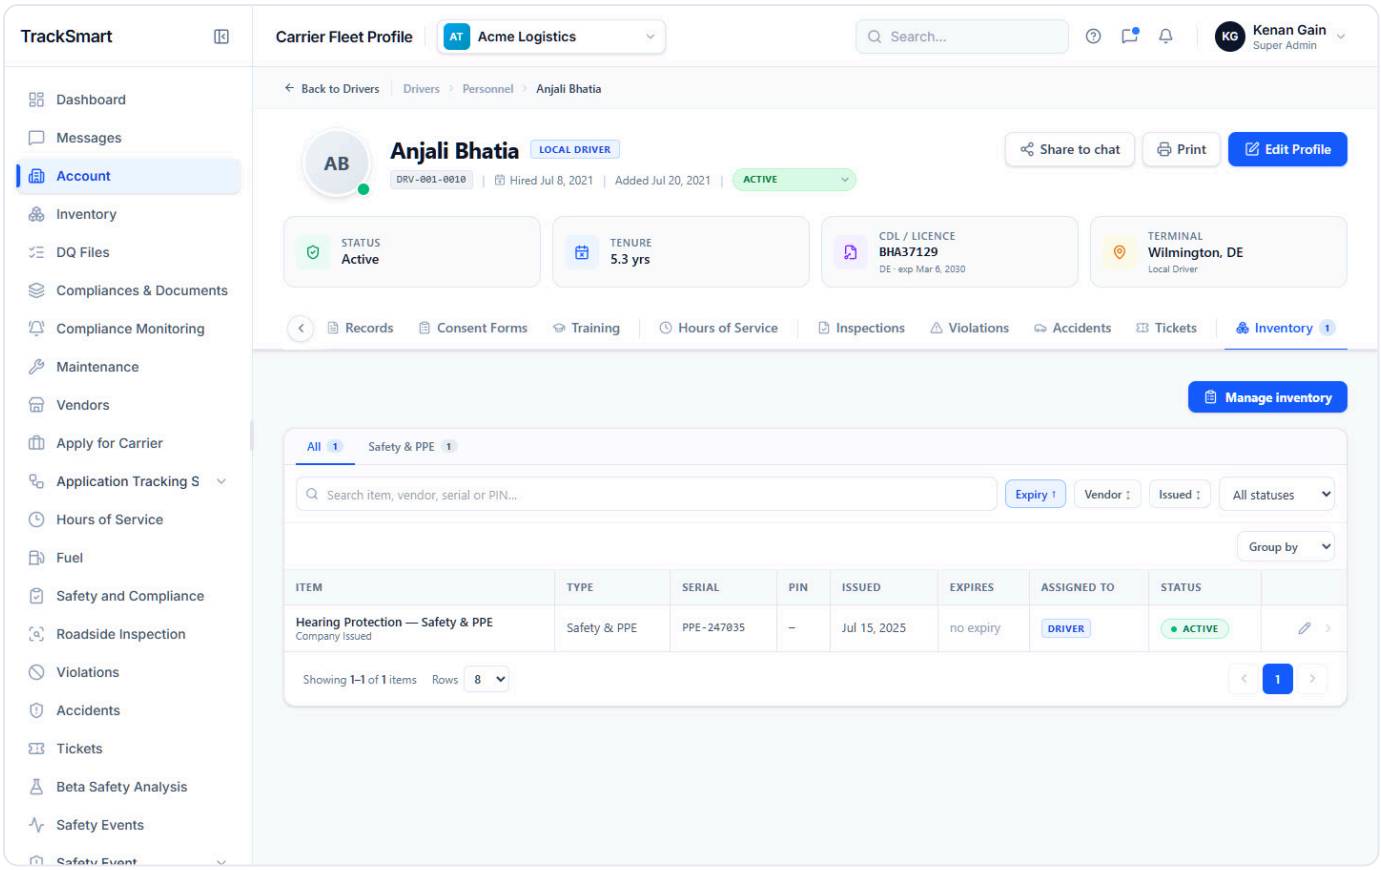


`drivers-profile-tab-inventory-desktop.png` — Driver profile › inventory tab.

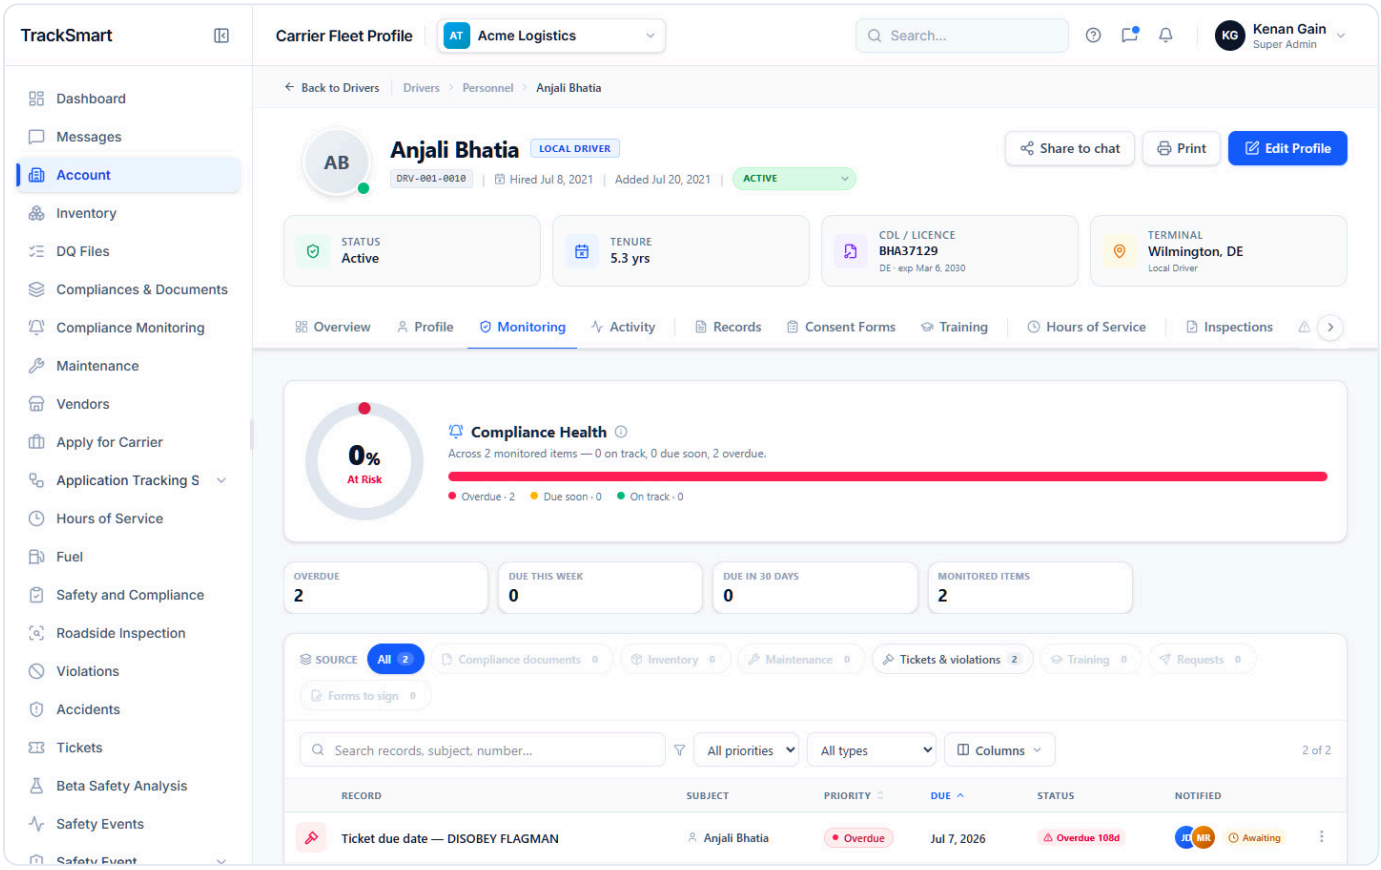


`drivers-profile-tab-monitoring-desktop.png` — Driver profile › monitoring tab.

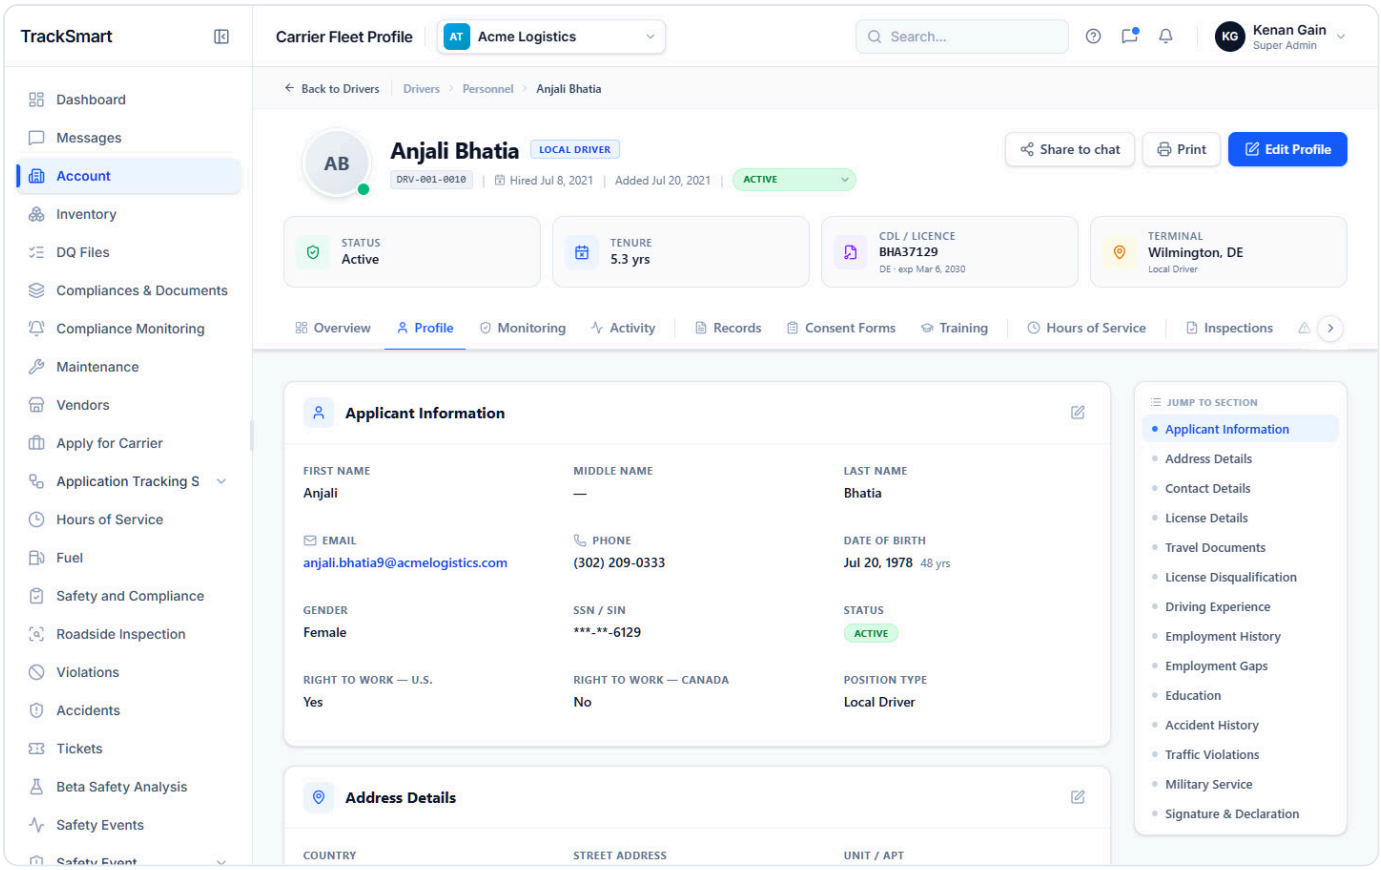


drivers-profile-tab-profile-desktop.png — Driver profile › profile tab.

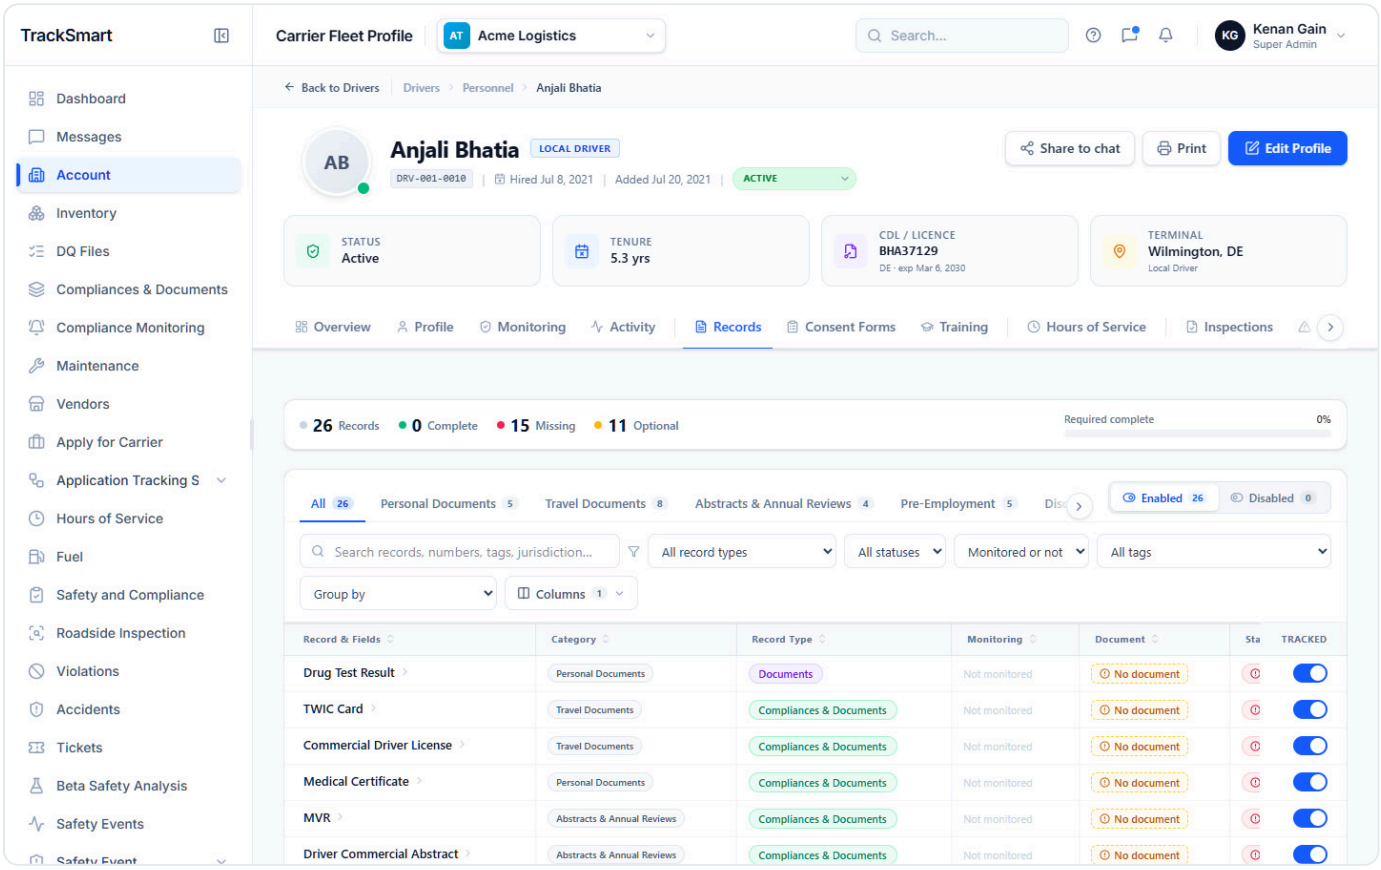


drivers-profile-tab-records-desktop.png — Driver profile › records tab.

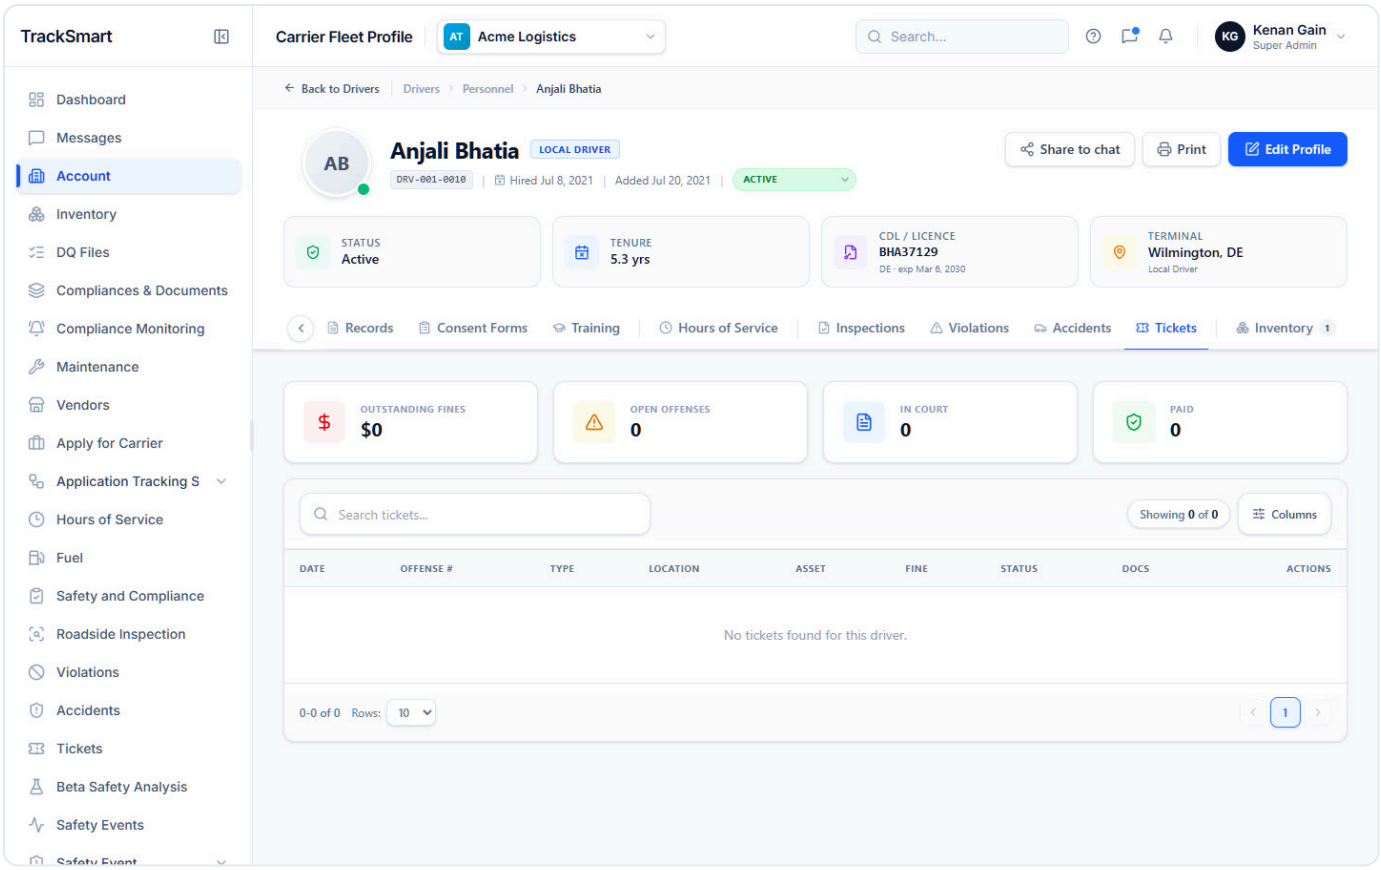


drivers-profile-tab-tickets-desktop.png — Driver profile › tickets tab.

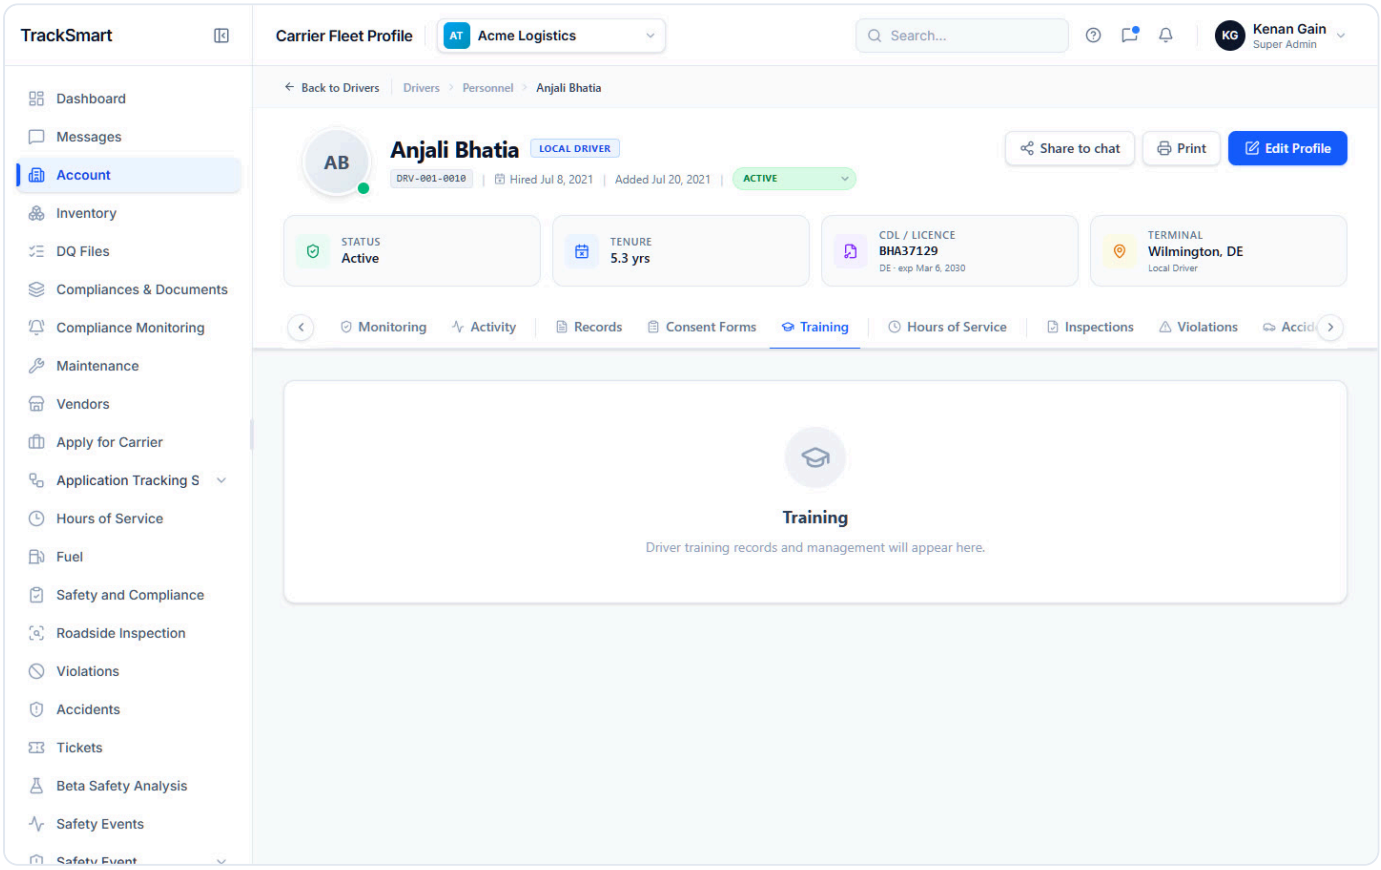

drivers-profile-tab-training-desktop.png — Driver profile › training tab.

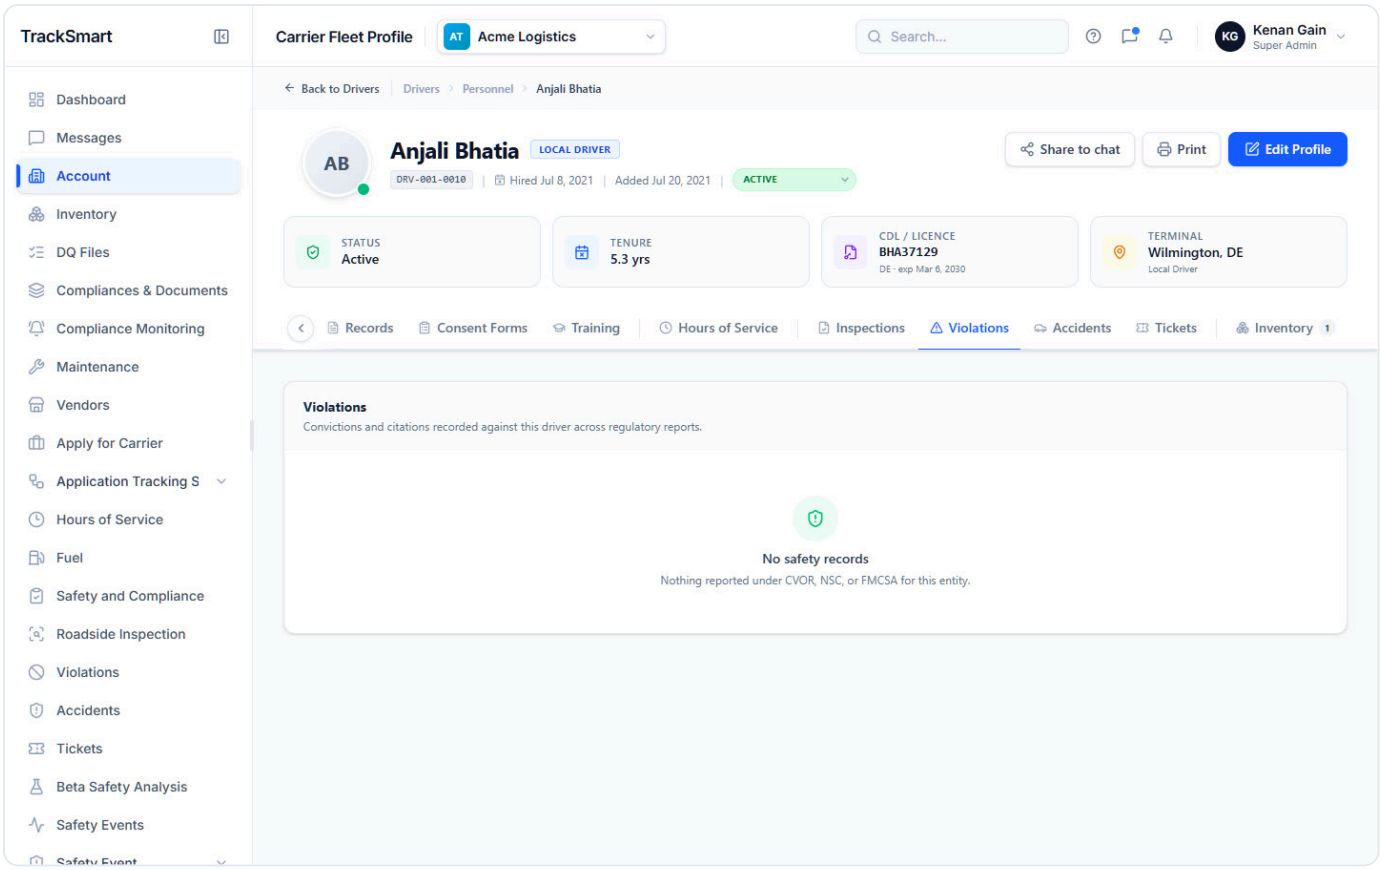


drivers-profile-tab-violations-desktop.png — Driver profile › violations tab.

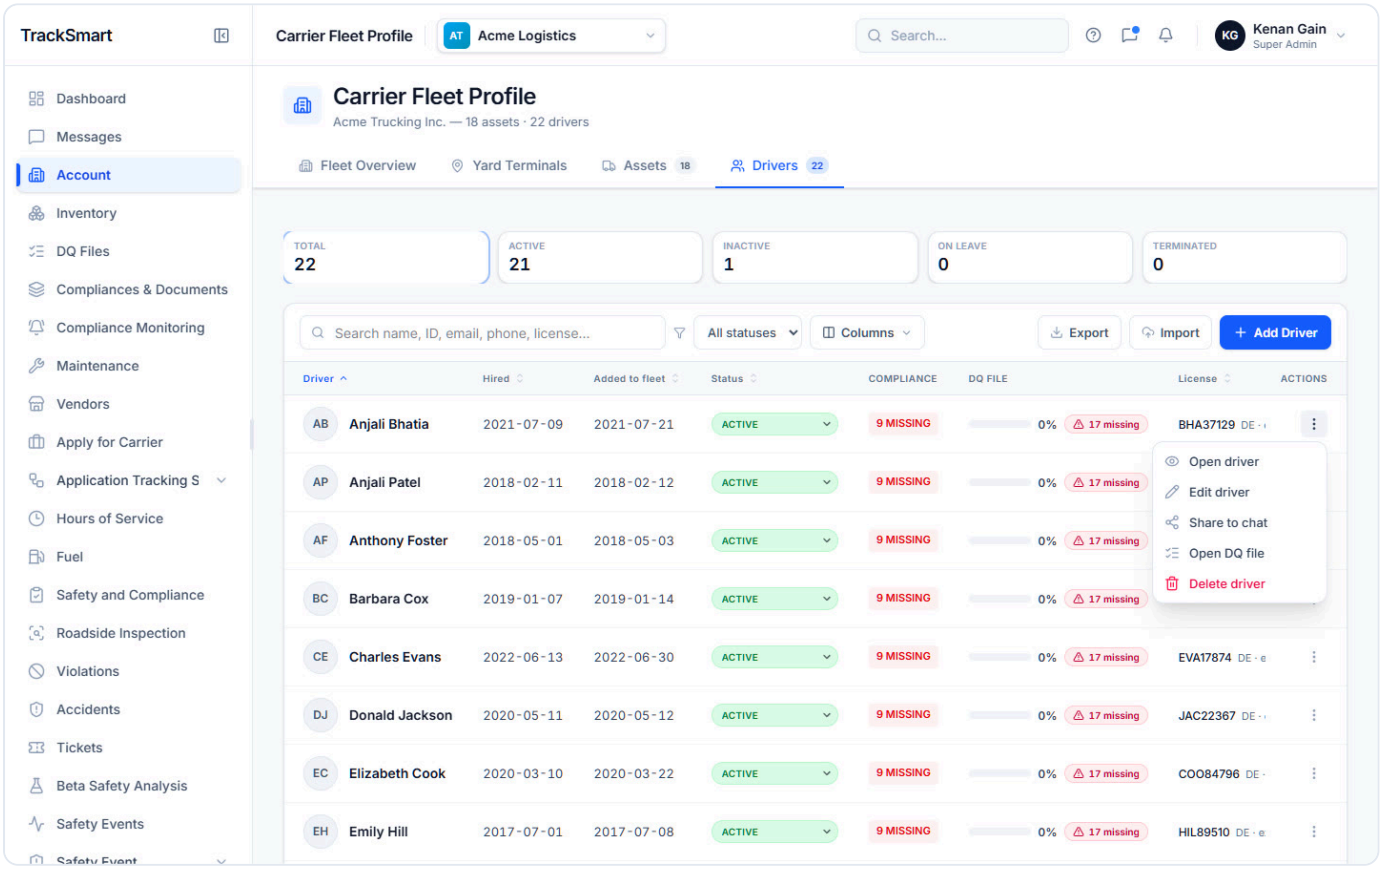


drivers-row-menu-open-desktop.png — Drivers › row ⋮ menu: Open driver, Edit driver, Share to chat, Open DQ file, Delete driver.


Mobile · 390 px

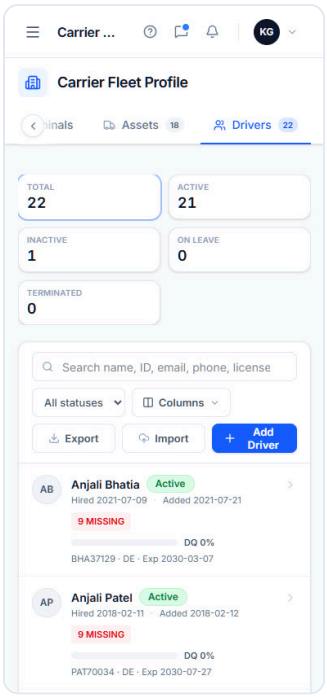


drivers-default-mobile.png
Drivers tab: KPI tiles, toolbar, drivers table with inline status and row menus.

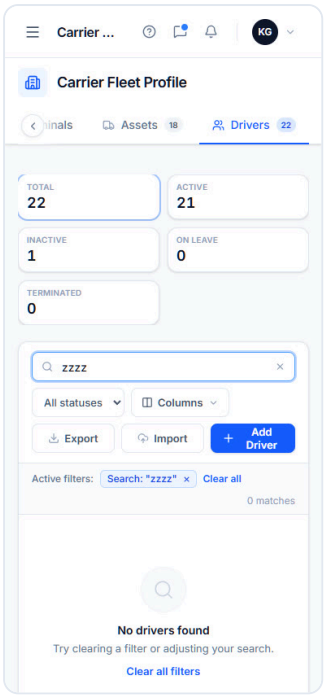


drivers-empty-no-match-mobile.png
Drivers › search with no match ("No drivers found").

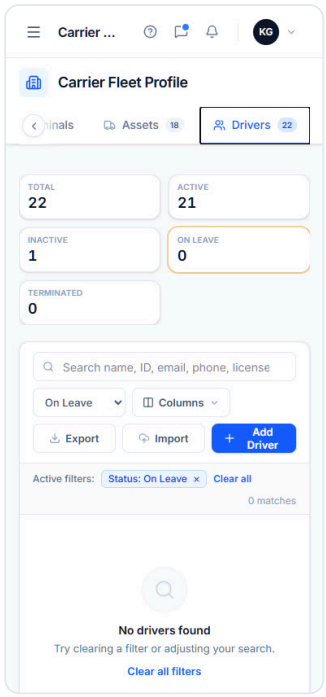


drivers-filter-status-on-leave-mobile.png
Drivers › Status filter "On Leave" applied (filter chip; empty when nobody is on leave).

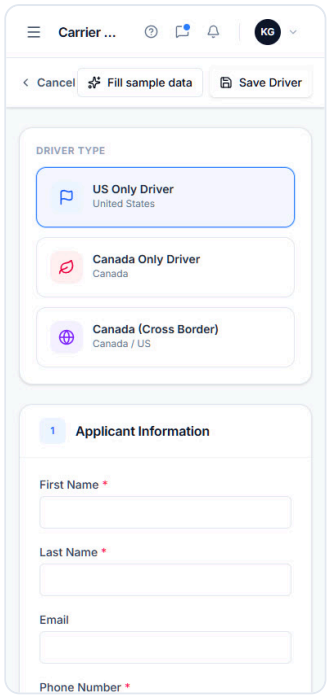


drivers-form-add-driver-top-mobile.png
Add Driver form: driver-type picker, section rail, Applicant Information.

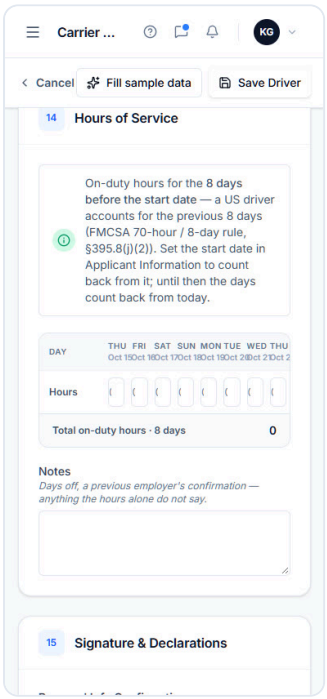


drivers-form-hours-of-service-mobile.png
Add Driver › Hours of Service day table.

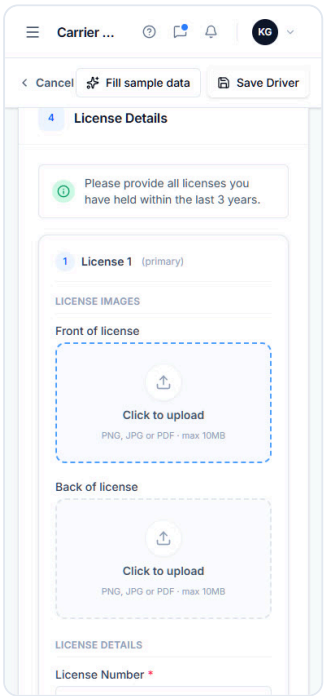


drivers-form-license-details-mobile.png
Add Driver › License Details (uploads, class search, endorsements, restrictions).

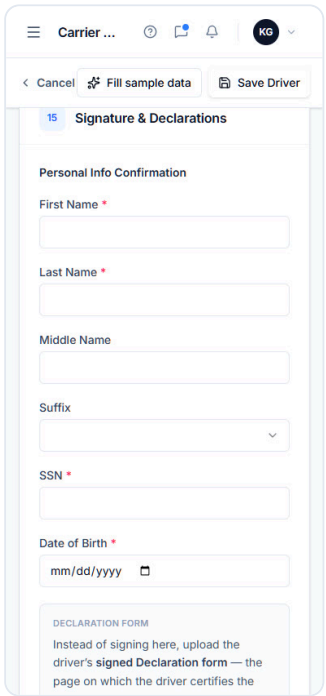


drivers-form-signature-mobile.png
Add Driver › Signature & Declarations.

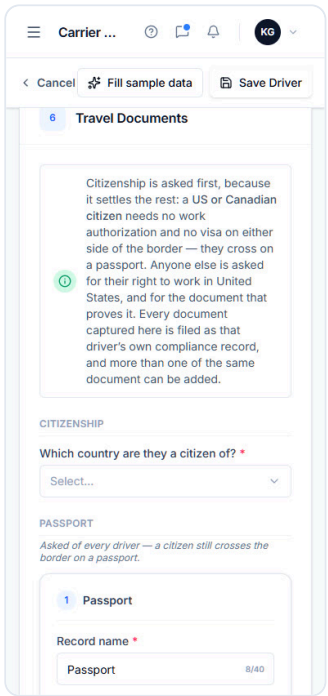


drivers-form-travel-documents-mobile.png
Add Driver › Travel Documents.

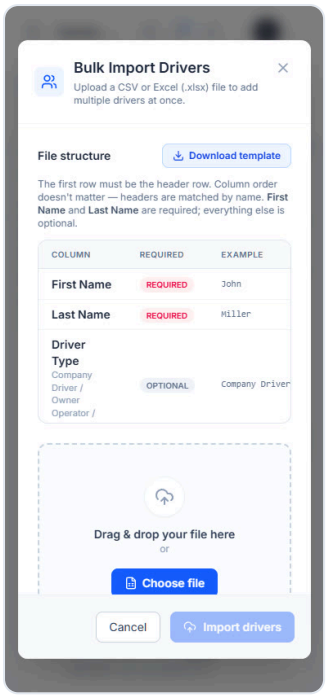


drivers-modal-import-drivers-mobile.png
Drivers › "Import" modal: CSV/XLSX upload and accepted columns.

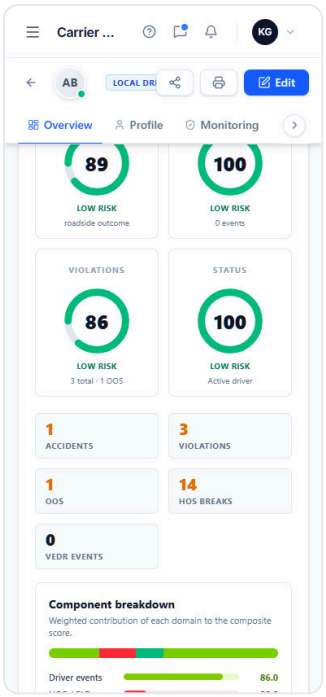


drivers-profile-condensed-header-mobile.png
Driver profile scrolled: header condensed.

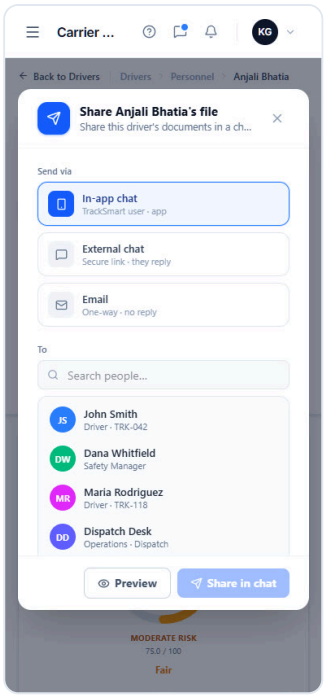


drivers-profile-modal-share-to-chat-mobile.png
Driver profile › "Share to chat" dialog.

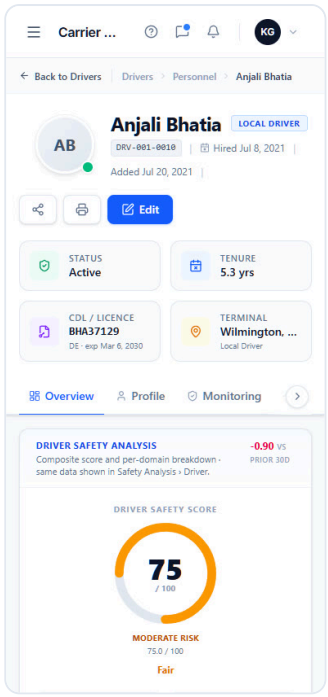


drivers-profile-overview-mobile.png
Driver profile page: header (status dropdown, Share to chat, Print, Edit Profile), tiles, Overview tab.

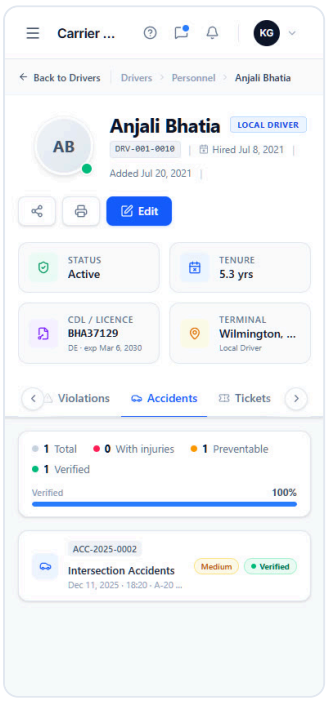


drivers-profile-tab-accidents-mobile.png
Driver profile › accidents tab.

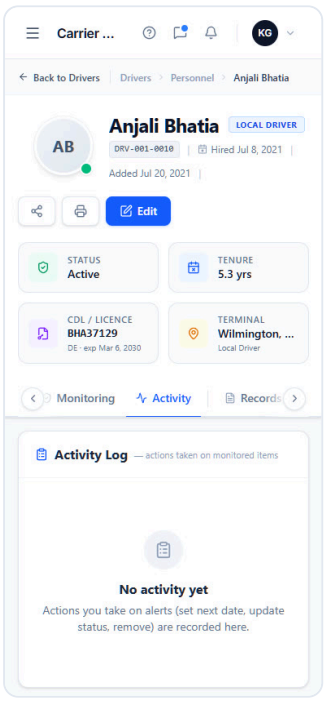


drivers-profile-tab-activity-mobile.png
Driver profile › activity tab.

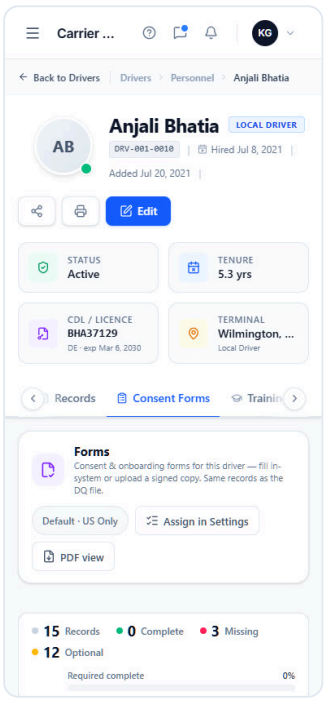


drivers-profile-tab-consent-forms-mobile.png
Driver profile › consent forms tab.

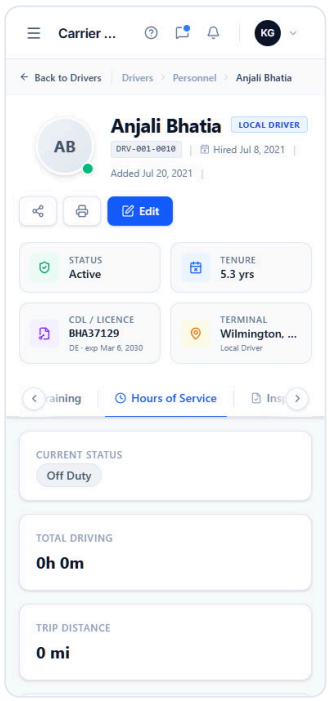


drivers-profile-tab-hours-of-service-mobile.png
Driver profile › hours of service tab.

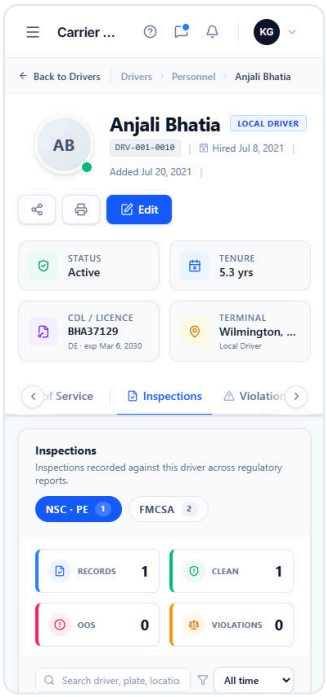


drivers-profile-tab-inspections-mobile.png
Driver profile › inspections tab.

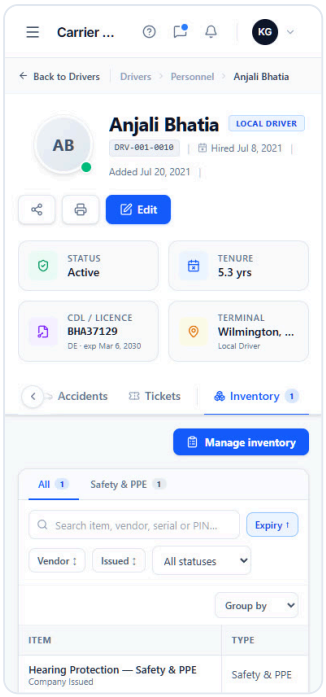


drivers-profile-tab-inventory-mobile.png
Driver profile › inventory tab.

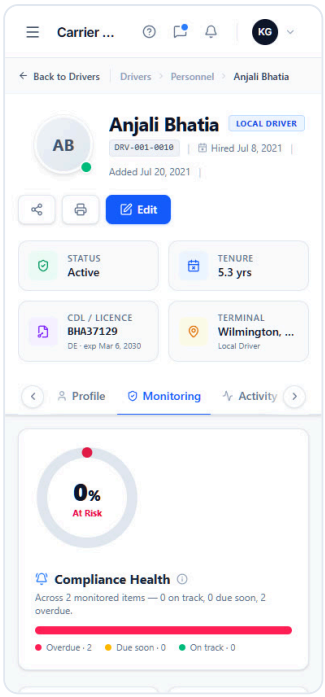


drivers-profile-tab-monitoring-mobile.png
Driver profile › monitoring tab.

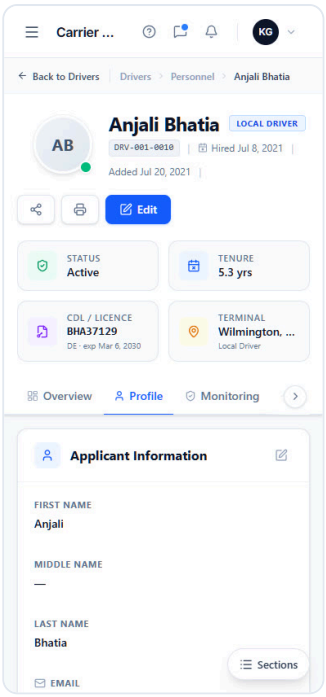


drivers-profile-tab-profile-mobile.png
Driver profile › profile tab.

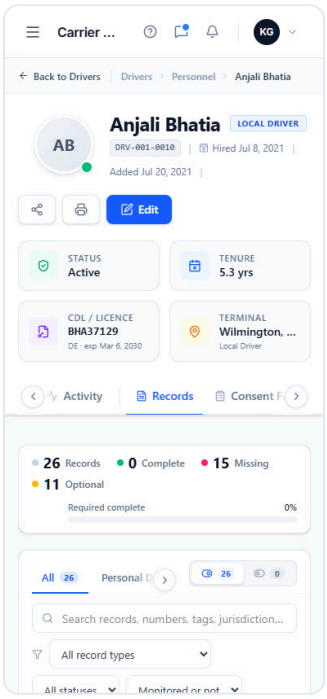


drivers-profile-tab-records-mobile.png
Driver profile › records tab.

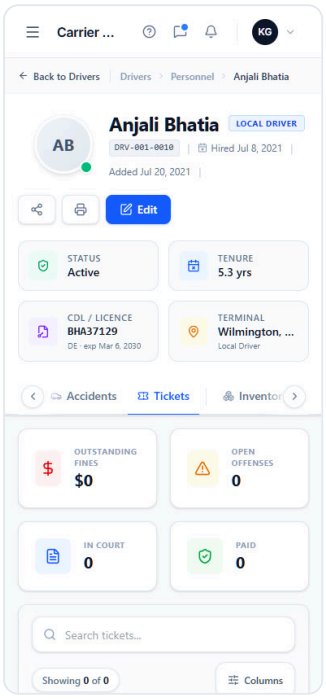

drivers-profile-tab-tickets-mobile.png
Driver profile › tickets tab.

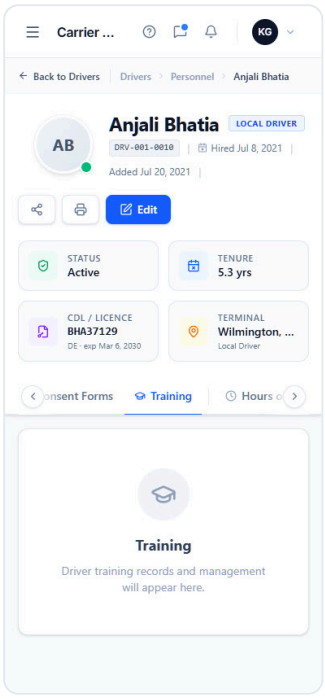

drivers-profile-tab-training-mobile.png
Driver profile › training tab.

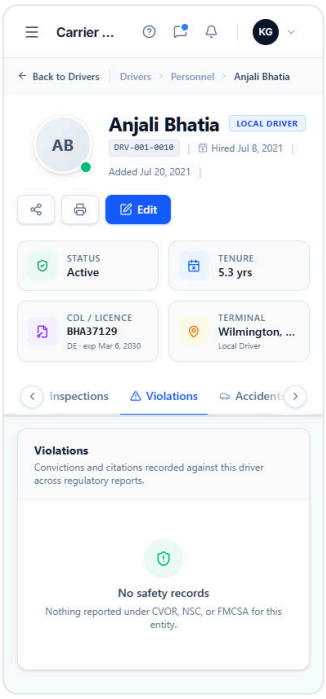

drivers-profile-tab-violations-mobile.png
Driver profile › violations tab.

States not captured

- **Delete confirmations** — the app uses the browser's native `confirm()` dialog for Delete asset / driver / yard terminal; native dialogs cannot be screenshotted. Text: `Delete <noun> <name>? This cannot be undone.`
- **Inline status dropdown opened** — native `<select>` menus render outside the page and cannot be captured; the closed pill is in the default shots.

- **Columns picker and the Drivers row ⋮ menu on mobile** — the Columns button is not rendered below the `sm` breakpoint, and the mobile driver cards open the driver directly (no row menu). The Assets row menu exists on mobile and is captured.
- **"All Assets" sub-tab reset on mobile** — the sub-tab strip scrolls; the Trucks shot is captured, the strip itself is in the default shot.
- **Loading state** — none exists (local data renders immediately).
- **No-carrier state** — TO CONFIRM: no demo login without a carrier is available; capture once one is added.
- **Toasts** — transient (auto-dismiss); their texts are listed in docs/page-overview.md §7.

3 Design specification


How the Account section is built visually: layout, type, components, icons, motion and accessibility, as it stands in the app on 2026-10-23. Everything here is read from the running UI and the stylesheet / component source (`src/index.css`, `src/components/ui/*`, `src/pages/profile/*`, `src/pages/assets/*`, `src/pages/account/*`). Screenshot links point into `../screenshots/`.

Stack for the visuals: **Tailwind CSS v4** utilities (no custom `@theme`; the default v4 palette), **Inter** from Google Fonts, **lucide-react** icons, the `cn()` helper (`clsx` + `tailwind-merge`).

---

1. Layout

1.1 Page frame

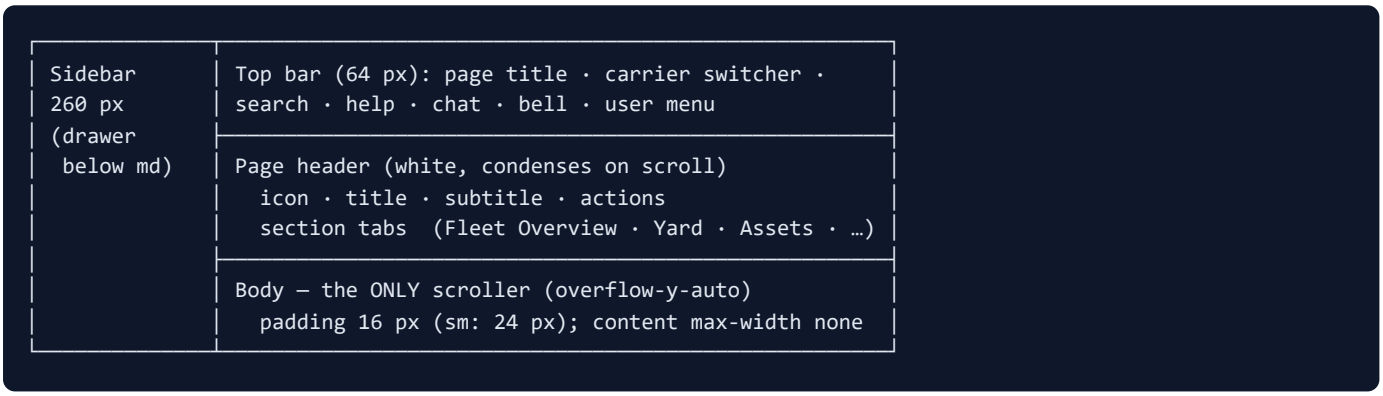

- The body scrolls inside its own container; the sidebar, top bar and page header stay put. Scrolling down past 140 px folds the header (see §5); scrolling up unfolds it. Screenshots: fleet-overview-default vs fleet-overview-condensed-header.
- Full-page sub-screens (Add/Edit Asset wizard, Add/Edit Driver form, asset detail, driver profile) replace the header and body with their own shell: a back strip, their own header band and their own scroller. Screenshots: assets-wizard-add-asset-top, assets-detail-overview, drivers-profile-overview.

1.2 Grids used inside Account

Where	Grid	Notes
Fleet Overview cards	1 column, `lg:` 2 columns (`grid-cols-1 lg:grid-cols-2 gap-6`); Office Locations and Directors span both (`lg:col-span-2`)	fleet-overview-default-mobile shows the single column
Modal field grids	2 columns (`grid-cols-2 gap-4`), full-width textareas	modal-edit-director
KPI tile rows (Assets, Drivers)	**Container query**, not viewport: `grid-cols-2`, `@xl:grid-cols-3`, `@3xl:grid-cols-5/6`; each tile is itself a `@container` and grows its number from `text-lg` to `text-2xl` at 240 px	assets-default
Asset detail metadata	`grid-cols-2 … lg:grid-cols-5` with 16 px gaps	assets-detail-overview
Wizard (Add Asset)	left rail 288 px (`w-72`, hidden below `md`) + scrolling column; section cards `max-w-4xl` centred	assets-wizard-registration-plate
Add Driver form	same shell as the wizard; sections are `h2`-headed cards, 2-column field grids	drivers-form-license-details

Where	Grid	Notes
Driver profile Profile tab	content `flex-1` + sticky "Jump to section" rail 260 px on the right (`lg:` only)	drivers-profile-tab-profile

1.3 Spacing scale

Tailwind's default 4 px scale. The values that actually occur in Account:

Token	px	Typical use
`0.5`	2	chip padding-y, hairline gaps
`1` / `1.5`	4 / 6	icon–label gaps, tight stacks
`2` / `2.5`	8 / 10	row-action gaps, KPI tile gap (`gap-2.5`)
`3` / `3.5`	12 / 14	table cell padding-y, button padding-x
`4`	16	table cell padding-x, body padding on phones, field grid gap
`5` / `6`	20 / 24	card padding (`p-6`), body padding ≥ sm, card grid gap
`8`	32	header padding-x on wide screens (`sm:px-8`)

Component heights are fixed, not derived: inputs/buttons **36 px** (`h-9` , the standard), **40 px** for primary CTAs and shadcn inputs (`h-10`), **32 px** when the header is condensed (`h-8`), **24 px** status pills (`h-6`), **28 px** row kebab buttons.

1.4 Breakpoints

Tailwind defaults: `sm` 640, `md` 768, `lg` 1024, `xl` 1280, `2xl` 1536 px. What changes:

Width	Account behaviour
< 640 (`sm`)	Sidebar becomes a drawer behind the ☰ button; button labels drop to icons or short words ("Add", "Edit"); the breadcrumb strip hides its trail; header title `text-lg` . The Columns picker is not rendered.
< 768 (`md`)	Wizard rail hidden (sections are reached by scrolling); Assets table replaced by cards.
< 1024 (`lg`)	Fleet Overview single column; Drivers table replaced by cards (no row ⋮ menu — the card opens the driver); driver Profile jump-rail hidden.
≥ 1024	Full tables, pinned Actions column (`sticky right-0`), two-column cards.

Mobile captures: `../screenshots/mobile/` .

---

2. Typography

Family: Inter (Google Fonts, weights 400 / 500 / 600 loaded), fallback `sans-serif` . Numbers use `tabular-nums` wherever they sit in columns (dates, counts, fines). `font-mono` (system monospace) is used for identifiers only: VIN, plate, licence number, record IDs.

> **TO CONFIRM:** the UI sets `font-bold` (700) on most labels and headings, but only weights 400–600 are loaded, so browsers synthesise the bold. Either load Inter 700 or map `font-bold` to 600.

Base: body 14 px / 400 / `line-height: normal`; stylesheet hierarchy `h1` 20 px 600 (−0.02 em), `h2` 16 px 500, `h3/h4` 14 px 500, `label` 13 px 400 — the components then override with utilities, so the effective scale is the one below.

Role	Size / weight / tracking	Where
Page title	24 px bold, `tracking-tight` (`text-2xl`; 20 px `lg` and below, 16 px when condensed)	"Carrier Fleet Profile", asset and driver names
Card / modal title	18 px bold (`text-lg`) · modal `h3` 20 px bold (`text-xl`)	"Legal / Main Address", "Edit Director"
Section title in wizards	16 px bold (`text-base`) + 12 px slate-500 subtitle	"Registration & Plate"
Body / table cell	13–14 px (`text-[13px]`, `text-sm`), 400–500	rows, descriptions
Primary cell value	14 px semibold slate-900	unit numbers, names
Secondary line	11–12 px slate-500	"DE · exp 2030-03-07", dates under names
Field label	11 px bold uppercase `tracking-wider` slate-500 (`text-[11px]`)	all form and fact labels
Micro label	10 px bold uppercase `tracking-wide/wider` slate-400	KPI tile labels, pill text, counts
Chip / pill	10–11 px bold uppercase	status pills, "Required" badge
Button	14 px semibold (`text-sm font-semibold`); 13 px in toolbars	
Line heights	`leading-tight` for stacked label/value pairs, `leading-snug` for 13 px copy, `leading-relaxed` for help text	

> **Note for the rebuild:** 10 px text is used on 300+ elements (tile labels, pills). It passes contrast but sits below the 12 px floor most accessibility guidance recommends; see §6.

---

3. Components

All components below are the shared ones under `src/components/ui/` unless noted. Variants are listed with the Tailwind classes that define them so they can be reproduced exactly.

3.1 Buttons

Variant	Classes (key parts)	Example
Primary	`h-9 px-3.5 rounded-lg bg-blue-600 text-white text-sm font-semibold shadow-sm hover:bg-blue-700` (some CTAs `h-10`)	Add Driver, Add Asset, Edit Vehicle, Save Changes
Secondary / outline	`h-9 px-3 rounded-lg border border-slate-200 bg-white text-slate-600 text-[13px] font-semibold hover:bg-slate-50`	Export, Import, Cancel, Print
Share to chat (`ShareButton`)	outline variant with `text-slate-700 shadow-sm hover:border-slate-300 active:scale-[0.98]`, icon + label (label hidden below `sm`)	asset detail, driver profile
Ghost / text	`text-xs text-slate-500 hover:text-blue-600`	"← Back to assets"
Danger	`bg-rose-600 hover:bg-rose-700 text-white` (confirm dialogs) and `text-rose-500` menu items	Delete / Remove

Variant	Classes (key parts)	Example
Icon button	`p-2 rounded-full text-slate-400 hover:text-blue-600 hover:bg-slate-50` (Fleet Overview pencils); `p-1.5 rounded-md` kebab	Edit Section, ⋮
shadcn `Button` (`button.tsx`)	`rounded-md text-sm font-medium`, sizes default `h-10 px-4`, `sm` `h-9 px-3`, `lg` `h-11 px-8`, `icon` `h-10 w-10`; variants default/outline/ghost/destructive/secondary/link; `focus-visible:ring-2 ring-ring ring-offset-2`; `disabled:opacity-50`	Add Driver form header (Cancel / Fill sample data / Save Driver), asset wizard
Disabled primary	`bg-blue-300 cursor-not-allowed` (wizard save until valid) or `bg-slate-300` (Add Vendor)	

States: hover darkens by one Tailwind step; active scales to 0.98 on the newer buttons; focus uses the browser ring unless the shadcn button is used (then a 2 px blue ring with 2 px offset).

3.2 Inputs and selects

Control	Classes	Notes
Text / number / date input (page forms)	`h-9 w-full px-3 rounded-lg border border-slate-300 bg-white text-sm focus:outline-none focus:ring-2 focus:ring-blue-500/30 focus:border-blue-400`	Roadside/asset style; placeholders `text-slate-300/400`
shadcn `Input`	`h-10 rounded-md border-slate-200 focus-visible:ring-2 ring-slate-950 ring-offset-2`	Add Asset wizard fields
Modal inputs (Fleet Overview, Locations)	`px-3 py-2 rounded-lg border border-slate-300 text-sm focus:ring-2 focus:ring-blue-500`	
Select	same box as inputs, native `<select>`; filter selects `h-9 rounded-lg border-slate-200 text-[13px] font-medium`	
Search box	`h-9 pl-9 rounded-lg border-slate-200 bg-slate-50 focus:bg-white` with a 14 px search icon at left; some have a clear × (`aria-label="Clear search"`)	
Date picker	native `<input type="date">` (`mm/dd/yyyy`) everywhere	
Textarea	`rounded-lg border-slate-200 px-3 py-2.5 text-sm focus:border-blue-500 focus:ring-2 focus:ring-blue-500/20`, 3–5 rows	Notes, Primary Responsibility
Yes / No	two-button segmented control `rounded-lg border bg-slate-50 p-0.5`; selected = `bg-blue-600 text-white` (or `bg-rose-600` for danger questions)	Add Driver, wizard
Toggle	20 × 36 px pill `bg-slate-200 → bg-blue-600` with a white knob translating 16 px (`transition-transform`)	monitoring on/off, security features
Checkbox	native, `rounded text-blue-600 focus:ring-blue-500 border-slate-300`	reminders, channels, columns
Radio	native	Monitor based on
Status pill select (`AssetStatusSelect`, `DriverStatusSelect`)	native `<select>` styled as a pill: `h-6 rounded-full border pl-2.5 pr-6 text-[10px] font-bold uppercase appearance-none` + chevron; tone per status (emerald Active, amber Maintenance/On Leave, rose Out of Service, sky Draft, slate Deactivated/Inactive, red Terminated)	tables and headers
Upload zone (`UploadZone`)	`card` variant: dashed `border-slate-300 rounded-xl` panel, blue circle icon, "Click to upload or drag & drop" + hint; `inline` variant: slim strip	bill of sale, pink slip, licence images
Search-select (licence class)	input with a `datalist`-style dropdown of matches	Add Driver › License class

Validation: inline red (`text-red-500`) messages under the field, required asterisk `text-red-500` or a "Required" pill (`bg-blue-50 text-blue-600 text-[9px] uppercase`) next to the label. assets-wizard-validation-errors.

3.3 Cards

Card	Classes	Example
Section card (Fleet Overview `Card`)	`bg-white rounded-xl shadow-sm border border-slate-200 overflow-hidden`; header `p-6 pb-2` with a 40 px `bg-blue-50 text-blue-600 rounded-lg` icon tile, `text-lg font-bold` title and an optional Edit Section pencil; body `p-6 pt-4`	fleet-overview-default
Wizard section (`WizardSection`)	`rounded-xl border border-slate-200 bg-white shadow-sm`; header `bg-slate-50/60 px-6 py-4` with icon tile, `text-base font-bold` + `text-xs` subtitle; body `p-6`; `allowOverflow` variant drops `overflow-hidden` for dropdowns	wizard, Add Driver
KPI tile (`KpiStatCard`)	`rounded-xl border border-slate-200 bg-white px-4 py-3 shadow-sm`, label 10/11 px uppercase slate-400, value `text-lg → text-2xl` bold, accent icon square (`bg-<accent>-50 text-<accent>-600`) shown from 240 px; selected tile gets a `ring-1` in the accent colour (`aria-pressed`)	Assets / Drivers tiles
Legacy KPI card (`KPICard` on Assets, old style)	left colour bar `w-1` + label/value/subtitle	superseded in most places by `KpiStatCard`
Stat tile on detail pages	`rounded-xl border bg-white px-4 py-3` with a 36 px icon square at left	Odometer / Risk / Health / Plate expiry; Status / Tenure / CDL / Terminal
Fact block	one bordered block with internal rules (`divide-y`, per-cell `border-r`), cells `px-4 py-3` with 10 px label + 14 px value	asset metadata, driver Profile tab
Info banner	`rounded-xl border px-4 py-3` tinted: blue (view-only, info), amber (warning / missing), rose (out of service), emerald (clean)	view-only strip, OOS notice

3.4 Tabs

Kind	Look	Where
Section tabs (`ListPageHeader` → `SubTabs`)	underline tabs: `px-4 py-3 text-sm font-medium border-b-2`, active `border-blue-600 text-blue-600`, inactive `text-slate-500 hover:text-slate-800 border-transparent`; 15 px icon; count badge `rounded-full px-1.5 text-[10px] font-bold` (blue when active); whole strip rides a `TabScroller` with fade + chevron paging arrows when it overflows	Fleet Overview · Yard Terminals · Assets · Drivers
Sub-tabs with counts	same component, smaller	All Assets / Trucks / Trailers
Detail-page tabs (`ProfileTabs`)	same underline style, grouped with hairline separators between groups (`identity · compliance · operations · safety`)	asset detail (11), driver profile (13)
Segmented	`rounded-lg bg-slate-100 p-0.5` with a white active segment	Records
Wizard rail (`WizardStepNav`)	vertical list: numbered circle (`h-6 w-6 rounded-full`), icon, label, count badge; active row `bg-blue-50 text-blue-700`; completed circle turns into a ✓	Add Asset, Add Driver

Keyboard: every tab is a real `<button>`; the active one carries `aria-current`. Arrow-key navigation between tabs is **not** implemented (TO CONFIRM whether wanted).

3.5 Tables and lists

- Table: `table-fixed` with `min-w-[…]` so columns never collapse; header `bg-slate-50 text-[11px] font-bold uppercase tracking-wider text-slate-500`, sortable headers (`SortTh`) show ↕ / ↑ / ↓ chevrons; cells `px-4 py-3`, one line each with `truncate` + `title` tooltips; rows `hover:bg-slate-50`, `cursor-pointer` where the row opens a

record; the **Actions** column is `sticky right-0` with a left hairline and its own background so it never scrolls away. drivers-default
- Column picker (`ColumnPicker`): outline button "Columns" opening a `rounded-lg shadow-lg` popover of checkboxes. assets-columns-picker-open
- Group band (`TableGroupBand`): a full-width `bg-slate-50` row with the group label and count. yard-terminals-default
- Pager (`TablePager` / `PaginationBar`): "1–15 of 41 · Rows [select]" at left, ‹ 1 2 3 › buttons at right (`h-8 rounded-lg border`), disabled arrows `opacity-40`.
- Mobile cards: `divide-y` list; each card is a full-width `<button>` with avatar/initials, name, chips, 2-column facts. drivers-default-mobile
- Empty states: centred icon in a `bg-slate-100` circle, bold title, one-line hint, optional clear-filters button. assets-empty-kpi-filter, yard-terminals-empty-no-match

3.6 Menus

- Row ⋮ menu (`KebabMenu` via `RowActions`): trigger `MoreVertical` 16 px in a `p-1.5 rounded-md` button (`title="Actions for <name>"`); menu rendered in a portal, `fixed`, 200 px wide, `rounded-xl border shadow-xl py-1`; items `px-3 py-2 text-[13px] font-medium hover:bg-slate-50` with a 16 px slate-400 icon; the Delete item is last and `text-rose-600` with a rose icon; a full-screen transparent backdrop closes it on click. Order is always Open · Edit · Share to chat · (extras) · Delete. assets-row-menu-open
- Header ⋮ (`HeaderMenu`) on detail pages uses the same menu.

3.7 Modals and dialogs

Dialog	Shell	Footer
Generic edit modal (Fleet Overview cards)	`fixed inset-0 bg-black/50 z-50` backdrop, centred panel `max-w-2xl rounded-2xl bg-white shadow-xl`, header with title + × button, scrolling body `px-6 py-5`, 2-column field grid	Cancel (outline) · Save Changes (primary) — sticky; only the middle scrolls
Director Details (view)	same shell, read-only sections "Contact information" / "Role & compliance" with icons	Edit (primary)
Add New Location / Add Office Location	same shell, `max-w-xl`; the yard editor has a 5-row toggle list for security features	Cancel · Save
Location view	same shell with a score ring and feature list	Close
Import Drivers	same shell; drop zone + columns table + preview	Cancel · Import
Share to chat (`ShareToChat`)	same shell, `max-w-xl`; compose/preview views; "Send via" picker (3 cards), recipient, subject, message, attachments	Cancel · Send
Delete confirmation	**native** `window.confirm()` — unstyled	OK / Cancel

Screenshots: modal-edit-corporate-identity, modal-add-new-location, modal-import-drivers, modal-share-to-chat. On phones every modal is full-width with 16 px gutters and its footer stays in view: modal-add-new-location-mobile.

3.8 Toasts

`role="status"` box, `fixed bottom-6 right-6 z-[60]`, `rounded-xl bg-slate-900 text-white text-sm font-medium px-4 py-3 shadow-xl`, check icon at left; auto-dismisses after **3 s**; one at a time. Texts are listed in page-overview.md §7.

3.9 Chips, pills and badges

- Status pill (read-only): `rounded-full border px-2.5 py-0.5 text-[10px] font-bold uppercase tracking-wider` with a 6 px dot; tones as in §3.2.

- Count badge: `rounded-full bg-slate-100 text-slate-600 px-1.5 text-[10px] font-bold tabular-nums` (blue variant when active).
- Compliance chip: `bg-red-50 text-red-700` "9 missing"; progress bar `h-1.5 rounded-full bg-slate-100` with a `bg-blue-600` fill (DQ File column).
- Type chips (cargo, authority): `rounded-lg bg-slate-900 text-white px-4 py-2` (cargo) or tinted outline chips `border-emerald-200 bg-emerald-50` (authority types).
- Filter chip (`DriverFilterChip`): `rounded-full border border-blue-200 bg-blue-50 text-blue-700 text-[12px] font-semibold` with an × to clear.
- Avatar: initials in a `h-9 w-9 rounded-full border bg-slate-100 text-xs font-bold`; 72 px on detail headers with a status dot `h-4 w-4 border-2 border-white` at the corner.

---

4. Icons

Library: lucide-react 0.562 (stroke icons, 1.5–2 px stroke). Sizes: 20 px in header icon tiles, 16 px in buttons and menus, 15 px in tabs, 14 px in toolbars, 12–13 px inside labels, 10–11 px inside chips. Colour follows the text (`text-slate-400` idle, `text-blue-600` active/brand, `text-rose-500` danger).

Icons used in the Account section and its shared chrome (122):

`Activity, AlertCircle, AlertOctagon, AlertTriangle, ArrowDown, ArrowLeft, ArrowRight, ArrowUp, ArrowUpDown, BadgeCheck, Bell, BellRing, Boxes, Briefcase, Building2, Calendar, CalendarClock, CalendarDays, CalendarPlus, CalendarX, Camera, Car, Check, CheckCircle2, CheckSquare, ChevronDown, ChevronLeft, ChevronRight, ChevronUp, ChevronsUpDown, CircleAlert, CircleDashed, ClipboardCheck, ClipboardList, Clock, Columns, Copy, DollarSign, DoorClosed, Download, Edit, Edit2, Edit3, ExternalLink, Eye, FileCheck, FileDown, FileKey, FileSignature, FileSpreadsheet, FileText, FileUp, FileWarning, Filter, FolderOpen, Gauge, Globe, GraduationCap, Grid, Hash, HelpCircle, History, IdCard, Image, Info, KeyRound, Layers, LayoutDashboard, LayoutGrid, Link2, ListChecks, Lock, LogOut, Mail, Map, MapPin, Menu, MessageSquare, MoreVertical, Package, PanelLeftClose, PanelLeftOpen, Paperclip, Pencil, Phone, Plus, Printer, RefreshCw, RotateCcw, Save, Scale, Search, Send, Settings, Share2, Shield, ShieldCheck, Sliders, SlidersHorizontal, Smartphone, Sparkles, StickyNote, Tag, Ticket, Trash, Trash2, Truck, Upload, UploadCloud, User, UserCheck, UserCircle, UserMinus, UserPlus, UserX, Users, Video, Warehouse, Wrench, X, XCircle, Zap`

Meaning conventions worth keeping: `Building2` = Account/carrier, `MapPin` = yard/location, `Truck` = asset (`Container` for trailers elsewhere), `Users` / `User` = drivers, `Pencil` / `Edit3` = edit, `Trash2` = delete, `Share2` = share to chat, `MoreVertical` = row menu, `ShieldCheck` = compliance/monitoring, `BellRing` = alerts, `Eye` = open/view-only, `Check` = done/active.

---

5. Interactions and micro-animations

Interaction	Behaviour	Implementation
Condensing header	After 140 px of scroll and 40 px of travel in one direction, the page header folds: padding 20→8 px, icon 40→32 px, title 24→16 px, subtitle/KPI chips collapse (`max-h-0 opacity-0`); unfolds on scroll-up, with a guard so layout shifts cannot flip it back	`useCondensingHeader`; transition on `[height,max-height,width,max-width,padding,margin,gap,opacity,font-size,border-width]`, **700 ms**, `cubic-bezier(0.65,0,0.35,1)`
Tab underline	colour change only, `transition-colors` (150 ms default)	`SubTabs`
Tab strip overflow	left/right chevrons fade in only when there is more to reveal; clicking pages the strip by 75 % of its width, smooth-scroll; the active tab is scrolled into view when it changes	`TabScroller`

Interaction	Behaviour	Implementation
Hover on rows / buttons	background one step darker (`hover:bg-slate-50`), `transition-colors`	everywhere
Press	`active:scale-[0.98]` on Share / header buttons	
Toggle	knob slides 16 px, `transition-transform`	
Modal / panel entry	`animate-in fade-in` (+ `slide-in-from-bottom-2` on tab bodies), 200–300 ms	tab content, dialogs
KPI tile select	ring appears, `transition-all`	`KpiStatCard`
Inline status	native select; the pill recolours instantly and a toast confirms	
Wizard rail	clicking a section smooth-scrolls the column; scroll-spy highlights the section in view (`IntersectionObserver` , rootMargin `-12px 0px -55% 0px`)	`WizardStepNav`
Lookup dropdowns (licence class, cargo search)	open on focus/typing, close on blur after 120 ms so a click can land, rendered above everything (`z-30` / portal)	
Toast	appears bottom-right, disappears after 3 s (no animation)	
Scrollbars	thin, translucent slate thumbs app-wide (`scrollbar-width: thin` , WebKit 6 px); tab strips hide theirs (`no-scrollbar`)	`index.css`

No motion is reduced for `prefers-reduced-motion` (TO CONFIRM: add a media query that shortens the header transition).

---

6. Accessibility

6.1 Contrast (WCAG 2.1, normal text ≥ 4.5 : 1, large text / UI ≥ 3 : 1)

Pair	Ratio	Result	Used for
slate-900 on white	17.8	AA/AAA	headings, primary values
slate-700 on white	10.4	AA/AAA	body
slate-600 on white	7.6	AA/AAA	secondary text, outline buttons
slate-500 on white	4.8	AA	subtitles, field labels
slate-500 on slate-50	4.6	AA	labels in tinted headers
slate-400 on white	**2.6**	**fails** for text; passes only as a large/decorative element	KPI tile labels (10 px uppercase), micro labels, idle icons
white on blue-600	5.3	AA	primary buttons
blue-600 on white	5.3	AA	links, active tab
blue-700 on blue-50 / blue-100	6.3 / 5.6	AA	filter chips, info banner
emerald-700 on emerald-50	5.1	AA	Active pills
amber-700 on amber-50	4.9	AA	Maintenance / On Leave pills

Pair	Ratio	Result	Used for
rose-700 on rose-50	5.5	AA	Out of service pills
red-700 on red-50	5.9	AA	"n missing" chips
white on slate-900	17.8	AA/AAA	toast

Action for the rebuild: move 10–11 px labels from `slate-400` to `slate-500` (4.8 : 1) — a one-token change that fixes every failing pair.

6.2 Focus

- shadcn `Button` / `Input` : visible 2 px ring with 2 px offset (`focus-visible:ring-2 … ring-offset-2`).
- Page-form inputs: `focus:ring-2 focus:ring-blue-500/30` + blue border.
- Many plain `<button>` s (tabs, pencils, KPI tiles, row kebabs) rely on the **browser default outline**, which Chromium draws only on keyboard focus — acceptable but inconsistent. TO CONFIRM: adopt one `focus-visible` ring utility for all custom buttons.

6.3 Keyboard

- Every control is a native `<button>` , `<input>` , `<select>` or `<a>` , so Tab order follows the DOM: sidebar → top bar → header actions → tabs → body.
- Yard-location rows are focusable (`tabIndex=0` , `role="link"`) and open on **Enter**. Asset and driver rows are not focusable; their ⋮ menu is (Open driver / Open asset are the keyboard path).
- Menus and modals: close on backdrop click; **Escape** closes the generic modals and dropdowns; the row ⋮ menu and the Columns picker close on backdrop click only (TO CONFIRM: add Escape).
- Native selects (status pills, filters) are fully keyboard-operable.
- Focus is **not** trapped inside modals and does not return to the trigger on close (TO CONFIRM for the rebuild).

6.4 ARIA and semantics

- Landmarks: `<header>` (top bar), `<aside>` sidebar, `<main>` for page content, `<nav aria-label="…">` for every tab strip (e.g. "Carrier fleet profile sections", "Inspection sections").
- Tabs: `aria-current` on the active tab; TabScroller arrows have `aria-label="Scroll tabs left/right"` and are `aria-hidden` + unfocusable while hidden.
- KPI tiles are buttons with `aria-pressed` when they act as filters.
- Row ⋮ buttons carry `title="Actions for <name>"` ; icon-only buttons in Fleet Overview carry `title` ("Edit Section", "Edit Location", "Remove Location"); search clear buttons `aria-label="Clear search"` ; status pills `aria-label="Asset status"` / `"Driver status"` .
- Toast uses `role="status"` ; the view-only strip uses `role="note"` .
- Column headers that are icons only (Fenced/Gated/CCTV…) use `title` ; the sticky Actions header uses `sr-only` text on some tables.
- Gaps to close in the rebuild: modals have no `role="dialog"` / `aria-modal` / `aria-labelledby` ; several Fleet Overview pencils have no accessible name at all (the two at the top of the identity card); table sort buttons do not expose `aria-sort` .

6.5 Other

- Text truncation always pairs with a `title` tooltip, so nothing is lost on narrow columns.
- Colour is never the only signal: status pills carry a word, compliance chips a count, the view-only strip a sentence.
- Minimum touch target on phones: 36–40 px for buttons and pills; the 28 px kebab and 24 px status pill are below the 44 px recommendation (TO CONFIRM).

---

7. Screenshot map

Every state referenced above is in `../screenshots/index.md` : 67 desktop and 65 mobile images named `[tab]-[state]-[device].png` , grouped by tab folder (`fleet-overview/` , `yard-terminals/` , `assets/` , `drivers/`).

Component sheet

01 – Account · Components

Reusable components of the Account section, drawn with the tokens in color-palette.json. Each frame below is one Figma component set; variants are laid out left to right.

BUTTON

primary · hover · disabled · outline · share · danger · ghost · icon · kebab

+ Add Asset | + Hover | Save changes | Export | Share to chat

Delete | ← Back to assets

STATUS PILL (SELECT)

assets: Active · Maintenance · Out of Service · Draft · Deactivated — drivers: On Leave · Inactive · Terminated

ACTIVE | MAINTENANCE | OUT OF SERVICE | DRAFT | DEACTIVATED | ON LEAVE | INACTIVE | TERMINATED | ACTIVE (READ-ONLY)

INPUT

default · placeholder · focus · error · search · select · date · textarea

UNIT NUMBER REQUIRED: ACM-T0100

MODEL: Cascadia

MAKE: Freightliner

VIN (17 CHARACTERS): R7LKD9HLY

Must be 17 characters

Search by Unit #, VIN, make...

OWNERSHIP STRUCTURE: Owned

EXPIRY DATE: mm/dd/yyyy

NOTES: Enter additional asset details...

YES / NO · TOGGLE · CHECKBOX · UPLOAD ZONE

segmented yes/no (blue, danger) · switch off/on · checkbox off/on · upload card

Yes | No | Yes | No | Yes | No

Click to upload or drag & drop

PNG, JPG or PDF · max 10 MB

TABS

section tabs with icon and count (active / idle) · segmented switch · wizard rail item (active / done / idle)

Fleet Overview | Yard Terminals | Assets 18 | Drivers 22

Records | Drivers

3 Registration & plate 1

Vehicle info 4

4 Yard / terminal

PAGE HEADER

expanded (condensed = 32 px icon, 16 px title, no subtitle)

Carrier Fleet Profile

Acme Trucking Inc. — 18 assets · 22 drivers

Fleet Overview | Yard Terminals | Assets 18

KPI TILE

default · selected (filter on) — container-sized, icon from 240 px

TOTAL ASSETS	ACTIVE	MAINTENANCE
18	18	0

SECTION CARD · FACT BLOCK

Fleet Overview card with Edit pencil · detail-page fact grid

Legal / Main Address

1200 North Dupont Hwy
Wilmington, DE 19801
United States

UNIT #	VIN #	PLATE #
ACM-T0100	R7LKD9HLYSP238495	ACE 1000

CHIPS · BADGES · AVATAR · BANNERS

count · missing · filter · cargo · type · avatar · info / warning / out-of-service banners

22 | 18 | 9 MISSING | Status: Inactive × | POWER UNIT | AB

General Freight | Household Goods

View only · a Safety Manager can look at Account here but not change it.


Still needed: bill of sale.

Asset is marked Out of Service. No additional fleet dates required.

TABLE ROW

header with sort · default row · hover row · pinned Actions column

DRIVER ↑	HIRED	ADDED TO FLEET	STATUS	COMPLIANCE	LICENSE	CONTACT	ACTIONS
AB Anjali Bhatia	2021-07-09	2021-07-21	ACTIVE	9 MISSING	BHA37129 · DE · exp 2030-03-07	(302) 209-0333	⋮
AP Anjali Patel	2018-02-11	2018-02-12	ON LEAVE	9 MISSING	PAT55102 · DE · exp 2030-07-01	(302) 555-0168	⋮

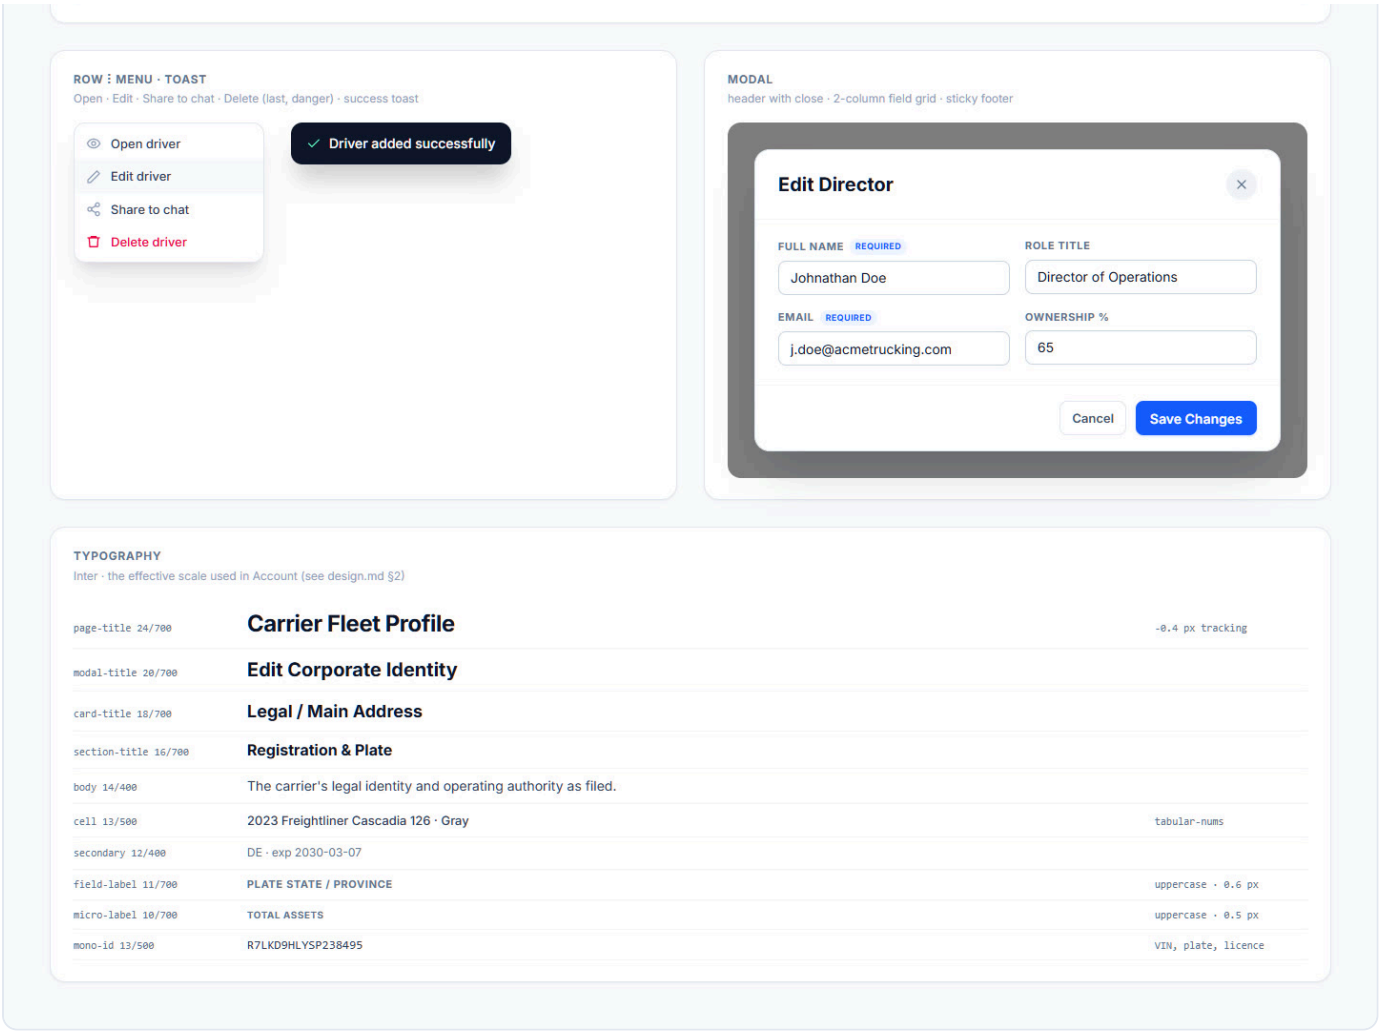

4 Colour palette

primary
#155dfc · blue-600
dark #2b7fff

primary-hover
#1447e6 · blue-700
dark #51a2ff

primary-subtle
#eff6ff · blue-50
dark #162456

primary-border
#bedbff · blue-200
dark #193cb8

secondary
#f1f5f9 · slate-100
dark #1d293d

secondary-foreground
#314158 · slate-700
dark #e2e8f0

background
#f8fafc · slate-50
dark #020618

surface
#ffffff · white
dark #0f172b

text-primary
#0f172b · slate-900
dark #f8fafc

text-body
#314158 · slate-700
dark #cad5e2

text-secondary
#62748e · slate-500
dark #90a1b9

text-muted
#90a1b9 · slate-400
dark #62748e

border
#e2e8f0 · slate-200
dark #1d293d

border-strong
#cad5e2 · slate-300
dark #314158

success
#009966 · emerald-600
dark #00d492

success-text
#007a55 · emerald-700
dark #5ee9b5

success-subtle
#ecfdf5 · emerald-50
dark #002c22

warning
#e17100 · amber-600
dark #ffb900

warning-text
#bb4d00 · amber-700
dark #ffd230

warning-subtle
#fffbeb · amber-50
dark #461901

error
#e7000b · red-600
dark #ff6467

error-text
#c10007 · red-700
dark #ffa2a2

error-subtle
#fef2f2 · red-50
dark #460809

danger
#ec003f · rose-600
dark #ff2056

danger-subtle
#fff1f2 · rose-50
dark #4d0218

info
#1447e6 · blue-700
dark #8ec5ff

info-subtle
#eff6ff · blue-50
dark #162456

neutral-inverse
#0f172b · slate-900
dark #f1f5f9

Every colour the Account section uses, named as tokens. **Light** values are what the app renders today: Tailwind CSS v4's default palette, converted exactly from its OKLCH definitions to sRGB. **Dark** values are a **proposal** — the app has no dark mode (no `dark:` variants, no `prefers-color-scheme` rules).

Machine-readable: color-palette.json · Figma tokens: figma/tokens.json.

Tokens

	Token	Tailwind (light)	Light HEX	Light RGB	Dark HEX (proposed)	Dark RGB	Uses in code	Where it is used
	`primary`	`blue-600`	`#155dfc`	rgb(21, 93, 252)	`#2b7fff`	rgb(43, 127, 255)	269	Primary buttons (Add Asset, Add Driver, Edit Vehicle, Save), active tab text and underline, links, selected KPI ring, toggle "on".
	`primary-hover`	`blue-700`	`#1447e6`	rgb(20, 71, 230)	`#51a2ff`	rgb(81, 162, 255)	125	Hover state of primary buttons; text on primary-subtle chips.
	`primary-subtle`	`blue-50`	`#eff6ff`	rgb(239, 246, 255)	`#162456`	rgb(22, 36, 86)	189	Icon tiles in card and page headers, active tab count badge, filter chips, info strip background.
	`primary-border`	`blue-200`	`#bedbff`	rgb(190, 219, 255)	`#193cb8`	rgb(25, 60, 184)	49	Border of filter chips, info strip, "Required" pill.

	Token	Tailwind (light)	Light HEX	Light RGB	Dark HEX (proposed)	Dark RGB	Uses in code	Where it is used
	`secondary`	`slate-100`	`#f1f5f9`	rgb(241, 245, 249)	`#1d293d`	rgb(29, 41, 61)	368	Secondary surfaces: count badges, avatar circles, segmented control track, hover of icon buttons.
	`secondary-foreground`	`slate-700`	`#314158`	rgb(49, 65, 88)	`#e2e8f0`	rgb(226, 232, 240)	180	Text on secondary surfaces; outline-button text.
	`background`	`slate-50`	`#f8fafc`	rgb(248, 250, 252)	`#020618`	rgb(2, 6, 24)	354	Page body behind the cards; table header band; tinted card headers.
	`surface`	`white`	`#ffffff`	rgb(255, 255, 255)	`#0f172b`	rgb(15, 23, 43)	500	Cards, modals, page header band, top bar, sidebar, tables, inputs.
	`text-primary`	`slate-900`	`#0f172b`	rgb(15, 23, 43)	`#f8fafc`	rgb(248, 250, 252)	325	Page and card titles, primary cell values, modal titles.
	`text-body`	`slate-700`	`#314158`	rgb(49, 65, 88)	`#cad5e2`	rgb(202, 213, 226)	180	Body copy, table cells, form values.
	`text-secondary`	`slate-500`	`#62748e`	rgb(98, 116, 142)	`#90a1b9`	rgb(144, 161, 185)	466	Subtitles, field labels (11 px uppercase), table header text, helper text.
	`text-muted`	`slate-400`	`#90a1b9`	rgb(144, 161, 185)	`#62748e`	rgb(98, 116, 142)	573	Micro labels on KPI tiles, idle icons, placeholders, "—" for empty values. Fails body-text contrast — see §WCAG.
	`border`	`slate-200`	`#e2e8f0`	rgb(226, 232, 240)	`#1d293d`	rgb(29, 41, 61)	445	Card, table, modal and input borders; dividers (slate-100 for in-table rules).
	`border-strong`	`slate-300`	`#cad5e2`	rgb(202, 213, 226)	`#314158`	rgb(49, 65, 88)	223	Form input borders in modals and page forms; dashed upload zones.
	`success`	`emerald-600`	`#009966`	rgb(0, 153, 102)	`#00d492`	rgb(0, 212, 146)	47	Active status dot, check icons, "On file" marks.
	`success-text`	`emerald-700`	`#007a55`	rgb(0, 122, 85)	`#5ee9b5`	rgb(94, 233, 181)	28	Text of Active / Clean pills.
	`success-subtle`	`emerald-50`	`#ecfdf5`	rgb(236, 253, 245)	`#002c22`	rgb(0, 44, 34)	51	Background of Active / Clean pills and success banners.
	`warning`	`amber-600`	`#e17100`	rgb(225, 113, 0)	`#ffb900`	rgb(255, 185, 0)	38	Maintenance / On Leave dot, "expiring soon" icon.
	`warning-text`	`amber-700`	`#bb4d00`	rgb(187, 77, 0)	`#ffd230`	rgb(255, 210, 48)	23	Text of Maintenance / On Leave / Awaiting pills; "Expiring Soon".
	`warning-subtle`	`amber-50`	`#fffbeb`	rgb(255, 251, 235)	`#461901`	rgb(70, 25, 1)	54	Background of warning pills and missing-document strips.

	Token	Tailwind (light)	Light HEX	Light RGB	Dark HEX (proposed)	Dark RGB	Uses in code	Where it is used
	`error`	`red-600`	`#e70 00b`	rgb(231, 0, 11)	`#ff6467`	rgb(255, 100, 103)	60	Destructive buttons, "n missing" icons, validation icons.
	`error-text`	`red-700`	`#c10 007`	rgb(193, 0, 7)	`#ffa2a2`	rgb(255, 162, 162)	34	Text of "n missing" chips, Terminated pill, inline validation messages (red-500 asterisks).
	`error-subtle`	`red-50`	`#fef 2f2`	rgb(254, 242, 242)	`#460809`	rgb(70, 8, 9)	60	Background of "n missing" chips and error banners.
	`danger`	`rose-600`	`#ec0 03f`	rgb(236, 0, 63)	`#ff2056`	rgb(255, 32, 86)	30	Delete items in ⋮ menus, Out-of-service pill text, delete confirmation buttons.
	`danger-subtle`	`rose-50`	`#fff 1f2`	rgb(255, 241, 242)	`#4d0218`	rgb(77, 2, 24)	25	Out-of-service pill and OOS banner background.
	`info`	`blue-700`	`#144 7e6`	rgb(20, 71, 230)	`#8ec5ff`	rgb(142, 197, 255)	125	Text of the "View only" strip and informational banners (shares the primary hue on purpose).
	`info-subtle`	`blue-50`	`#eff 6ff`	rgb(239, 246, 255)	`#162456`	rgb(22, 36, 86)	189	Background of the "View only" strip and info banners.
	`neutral-inverse`	`slate-900`	`#0f1 72b`	rgb(15, 23, 43)	`#f1f5f9`	rgb(241, 245, 249)	325	Toast background; cargo chips (with white text).

The eleven required roles map as: **primary** = `primary`, **secondary** = `secondary`, **background** = `background`, **surface** = `surface`, **text-primary** = `text-primary`, **text-secondary** = `text-secondary`, **border** = `border`, **success** = `success`, **warning** = `warning`, **error** = `error`, **info** = `info`. The other tokens are the subtle / text / hover companions each role needs to render a pill, chip or banner.

WCAG 2.1 contrast

Normal text needs **4.5 : 1** (AA) or 7 : 1 (AAA); large text (≥ 18.66 px bold / 24 px) and essential UI parts need **3 : 1**.

Foreground	Background	Where	Light ratio	Light result	Dark ratio	Dark result
`text-primary`	`surface`	Titles and primary values on cards	17.83 : 1	AAA	17.04 : 1	AAA
`text-primary`	`background`	Titles on the page body	17.04 : 1	AAA	19.27 : 1	AAA
`text-body`	`surface`	Body copy and table cells	10.36 : 1	AAA	12 : 1	AAA
`text-secondary`	`surface`	Subtitles, field labels, table headers	4.76 : 1	AA	6.78 : 1	AA
`text-secondary`	`background`	Labels in tinted header bands	4.55 : 1	AA	7.66 : 1	AAA

Foreground	Background	Where	Light ratio	Light result	Dark ratio	Dark result
`text-muted`	`surface`	KPI tile micro labels, placeholders, empty-value dashes	2.63 : 1	FAIL	3.74 : 1	AA large only — FAIL for body text
`text-muted`	`background`	Micro labels on tinted bands	2.51 : 1	FAIL	4.23 : 1	AA large only — FAIL for body text
`surface`	`primary`	Primary button label (white on blue)	5.25 : 1	AA	4.74 : 1	AA
`primary`	`surface`	Links, active tab, outline-blue text	5.25 : 1	AA	4.74 : 1	AA
`primary-hover`	`primary-subtle`	Chips and badges on blue-50	6.28 : 1	AA	5.6 : 1	AA
`secondary-foreground`	`secondary`	Text on count badges / segmented control	9.45 : 1	AAA	11.86 : 1	AAA
`secondary-foreground`	`surface`	Outline button label	10.36 : 1	AAA	14.46 : 1	AAA
`success-text`	`success-subtle`	Active / Clean pill	5.09 : 1	AA	9.97 : 1	AAA
`warning-text`	`warning-subtle`	Maintenance / On Leave pill	4.85 : 1	AA	10.37 : 1	AAA
`error-text`	`error-subtle`	"n missing" chip, Terminated pill	5.87 : 1	AA	8.42 : 1	AAA
`danger`	`surface`	Delete item in ⋮ menu	4.53 : 1	AA	4.75 : 1	AA
`danger`	`danger-subtle`	Out-of-service pill	4.12 : 1	AA large only — FAIL for body text	4.18 : 1	AA large only — FAIL for body text
`surface`	`danger`	Delete confirmation button	4.53 : 1	AA	4.75 : 1	AA
`info`	`info-subtle`	"View only" strip	6.28 : 1	AA	8.15 : 1	AAA
`surface`	`neutral-inverse`	Toast, cargo chips	17.83 : 1	AAA	16.28 : 1	AAA
`border`	`surface`	Card / input border against the card (non-text, needs 3:1 only for essential UI)	1.23 : 1	FAIL	1.22 : 1	FAIL
`border-strong`	`surface`	Form input border (non-text UI component, WCAG 1.4.11 asks 3:1)	1.49 : 1	FAIL	1.72 : 1	FAIL

Failing pairs (5): `text-muted` on `surface` (kpi tile micro labels, placeholders, empty-value dashes); `text-muted` on `background` (micro labels on tinted bands); `danger` on `danger-subtle` (out-of-service pill); `border` on `surface` (card / input border against the card (non-text, needs 3:1 only for essential ui)); `border-strong` on `surface` (form input border (non-text ui component, wcag 1.4.11 asks 3:1)).

What to do about them:

- `text-muted` (slate-400) is used for **text** on 300+ elements (KPI tile labels, micro labels, placeholders). Move every *text* use to `text-secondary` (slate-500, 4.76 : 1); keep slate-400 for icons and decorative rules only.
- `danger` text (rose-600) on `danger-subtle` is 4.12 : 1 — set pill text to rose-700 (`#c70036` , 5.49 : 1), as the Out-of-service pills in the asset list already do.
- `border` (slate-200) is fine for card outlines, which are not essential to understanding; for **form inputs** use `border-strong` and darken it to slate-400 (`#90a1b9` , 2.63 : 1) if WCAG 1.4.11 compliance is required.

Raw palette in use

All 111 Tailwind colours referenced by the Account code, most used first (counts are class occurrences across the section's source files).

	Tailwind	HEX	RGB	Uses
	`slate-400`	`#90a1b9`	rgb(144, 161, 185)	573
	`white`	`#ffffff`	rgb(255, 255, 255)	500
	`slate-500`	`#62748e`	rgb(98, 116, 142)	466
	`slate-200`	`#e2e8f0`	rgb(226, 232, 240)	445
	`slate-100`	`#f1f5f9`	rgb(241, 245, 249)	368
	`slate-50`	`#f8fafc`	rgb(248, 250, 252)	354
	`slate-900`	`#0f172b`	rgb(15, 23, 43)	325
	`blue-600`	`#155dfc`	rgb(21, 93, 252)	269
	`blue-500`	`#2b7fff`	rgb(43, 127, 255)	225
	`slate-300`	`#cad5e2`	rgb(202, 213, 226)	223
	`slate-600`	`#45556c`	rgb(69, 85, 108)	198
	`blue-50`	`#eff6ff`	rgb(239, 246, 255)	189
	`slate-700`	`#314158`	rgb(49, 65, 88)	180
	`slate-800`	`#1d293d`	rgb(29, 41, 61)	144
	`blue-700`	`#1447e6`	rgb(20, 71, 230)	125
	`blue-100`	`#dbeafe`	rgb(219, 234, 254)	68
	`red-600`	`#e7000b`	rgb(231, 0, 11)	60
	`red-50`	`#fef2f2`	rgb(254, 242, 242)	60
	`amber-50`	`#fffbeb`	rgb(255, 251, 235)	54
	`emerald-50`	`#ecfdf5`	rgb(236, 253, 245)	51
	`blue-200`	`#bedbff`	rgb(190, 219, 255)	49
	`emerald-600`	`#009966`	rgb(0, 153, 102)	47
	`red-500`	`#fb2c36`	rgb(251, 44, 54)	42
	`amber-600`	`#e17100`	rgb(225, 113, 0)	38
	`red-700`	`#c10007`	rgb(193, 0, 7)	34
	`blue-400`	`#51a2ff`	rgb(81, 162, 255)	34
	`black`	`#000000`	rgb(0, 0, 0)	32
	`rose-500`	`#ff2056`	rgb(255, 32, 86)	31
	`rose-600`	`#ec003f`	rgb(236, 0, 63)	30
	`emerald-700`	`#007a55`	rgb(0, 122, 85)	28
	`amber-500`	`#fe9a00`	rgb(254, 154, 0)	28
	`rose-50`	`#fff1f2`	rgb(255, 241, 242)	25

	Tailwind	HEX	RGB	Uses
	red-100	#ffe2e2	rgb(255, 226, 226)	24
	amber-700	#bb4d00	rgb(187, 77, 0)	23
	emerald-200	#a4f4cf	rgb(164, 244, 207)	21
	red-200	#ffc9c9	rgb(255, 201, 201)	20
	amber-200	#fee685	rgb(254, 230, 133)	20
	emerald-500	#00bc7d	rgb(0, 188, 125)	19
	emerald-100	#d0fae5	rgb(208, 250, 229)	18
	green-600	#00a63e	rgb(0, 166, 62)	13
	green-100	#dcfce7	rgb(220, 252, 231)	13
	blue-800	#193cb8	rgb(25, 60, 184)	13
	violet-50	#f5f3ff	rgb(245, 243, 255)	10
	rose-200	#ffccd3	rgb(255, 204, 211)	10
	green-700	#008236	rgb(0, 130, 54)	10
	orange-500	#ff6900	rgb(255, 105, 0)	9
	orange-50	#fff7ed	rgb(255, 247, 237)	9
	yellow-100	#fef9c2	rgb(254, 249, 194)	8
	rose-700	#c70036	rgb(199, 0, 54)	8
	purple-700	#8200db	rgb(130, 0, 219)	8
	green-200	#b9f8cf	rgb(185, 248, 207)	8
	gray-100	#f3f4f6	rgb(243, 244, 246)	8
	blue-300	#8ec5ff	rgb(142, 197, 255)	8
	[#2563EB]	#2563eb	rgb(37, 99, 235)	8
	yellow-500	#f0b100	rgb(240, 177, 0)	7
	violet-600	#7f22fe	rgb(127, 34, 254)	7
	purple-200	#e9d4ff	rgb(233, 212, 255)	7
	orange-600	#f54900	rgb(245, 73, 0)	7
	gray-200	#e5e7eb	rgb(229, 231, 235)	7
	yellow-600	#d08700	rgb(208, 135, 0)	6
	yellow-200	#fff085	rgb(255, 240, 133)	6
	gray-700	#364153	rgb(54, 65, 83)	6
	blue-900	#1c398e	rgb(28, 57, 142)	6
	amber-100	#fef3c6	rgb(254, 243, 198)	6
	yellow-700	#a65f00	rgb(166, 95, 0)	5
	yellow-50	#fefce8	rgb(254, 252, 232)	5
	purple-100	#f3e8ff	rgb(243, 232, 255)	5
	violet-500	#8e51ff	rgb(142, 81, 255)	4

	Tailwind	HEX	RGB	Uses
	sky-50	#f0f9ff	rgb(240, 249, 255)	4
	red-300	#ffa2a2	rgb(255, 162, 162)	4
	purple-50	#faf5ff	rgb(250, 245, 255)	4
	orange-700	#ca3500	rgb(202, 53, 0)	4
	orange-100	#ffedd4	rgb(255, 237, 212)	4
	[#F8FAFC]	#f8fafc	rgb(248, 250, 252)	4
	yellow-800	#894b00	rgb(137, 75, 0)	3
	violet-200	#ddd6ff	rgb(221, 214, 255)	3
	sky-700	#0069a8	rgb(0, 105, 168)	3
	sky-200	#b8e6fe	rgb(184, 230, 254)	3
	rose-400	#ff637e	rgb(255, 99, 126)	3
	indigo-600	#4f39f6	rgb(79, 57, 246)	3
	indigo-50	#eef2ff	rgb(238, 242, 255)	3
	indigo-200	#c6d2ff	rgb(198, 210, 255)	3
	green-500	#00c950	rgb(0, 201, 80)	3
	amber-800	#973c00	rgb(151, 60, 0)	3
	violet-700	#7008e7	rgb(112, 8, 231)	2
	orange-400	#ff8904	rgb(255, 137, 4)	2
	lime-700	#497d00	rgb(73, 125, 0)	2
	lime-500	#7ccf00	rgb(124, 207, 0)	2
	lime-100	#ecfcca	rgb(236, 252, 202)	2
	indigo-700	#432dd7	rgb(67, 45, 215)	2
	indigo-100	#e0e7ff	rgb(224, 231, 255)	2
	green-800	#016630	rgb(1, 102, 48)	2
	green-50	#f0fdf4	rgb(240, 253, 244)	2
	green-400	#05df72	rgb(5, 223, 114)	2
	gray-600	#4a5565	rgb(74, 85, 101)	2
	amber-900	#7b3306	rgb(123, 51, 6)	2
	violet-800	#5d0ec0	rgb(93, 14, 192)	1
	sky-600	#0084d1	rgb(0, 132, 209)	1
	sky-500	#00a6f4	rgb(0, 166, 244)	1
	rose-300	#ffa1ad	rgb(255, 161, 173)	1
	purple-600	#9810fa	rgb(152, 16, 250)	1
	purple-400	#c27aff	rgb(194, 122, 255)	1
	pink-700	#c6005c	rgb(198, 0, 92)	1
	pink-50	#fdf2f8	rgb(253, 242, 248)	1

	Tailwind	HEX	RGB	Uses
	`pink-100`	`#fce7f3`	rgb(252, 231, 243)	1
	`orange-200`	`#ffd6a7`	rgb(255, 214, 167)	1
	`indigo-500`	`#615fff`	rgb(97, 95, 255)	1
	`green-300`	`#7bf1a8`	rgb(123, 241, 168)	1
	`gray-300`	`#d1d5dc`	rgb(209, 213, 220)	1
	`emerald-400`	`#00d492`	rgb(0, 212, 146)	1
	`amber-400`	`#ffb900`	rgb(255, 185, 0)	1

Notes

- A hard-coded #2563EB (Tailwind v3 blue-600) appears 8 times (AssetDirectoryPage, AssetModal, AssetDetailView, EmptyCarrierProfile); the v4 token is #155dfc. TO CONFIRM: replace with bg-blue-600.
- text-muted (slate-400) fails 4.5:1 on white and slate-50; it is used on 10-11 px labels. Recommended fix: use slate-500 for any text.
- Some components mix the red and rose families for errors/danger, and green with emerald for success; the tokens above pick one family per role.

5 Data model

What the Account section stores, collection by collection, with the fields the UI reads and writes, how the collections point at each other, and the indexes the list and filter screens need. One JSON Schema per collection is in collections/ and 3–5 fictional sample documents per collection in sample-data/. All three are generated from one definition, so they cannot drift.

Conventions: `_id` is a readable string where the app already has one (carrier, asset, driver, office, document ids) and an ObjectId otherwise. Dates that are a calendar day (`dob`, `hiredDate`, `plate.expiryDate`) are stored as `YYYY-MM-DD` strings; timestamps (`createdAt`, `at`) as ISO date-times. Every write is multi-tenant: a document belongs to exactly one `carrierId`, and every query starts with it.

> **ASSUMPTION:** the prototype has no database; this model is derived from the TypeScript types the app uses today (`AccountRecord`, `Asset`, `Driver`, `ApplicationData`, `Location`, `AppUser`) and from the forms in page-overview.md. Items marked TO CONFIRM need a product decision.

Collections at a glance

Collection	One document per	Written by	Read by
`carriers`	carrier	Fleet Overview edit modals; carrier creation (Admin)	Fleet Overview, carrier switcher, every module header
`office_locations`	corporate office	Fleet Overview › Corporate Office Locations	Fleet Overview
`directors`	director / officer	Fleet Overview › Directors & Officers	Fleet Overview
`yards`	yard / terminal	Yard Terminals tab	Yard Terminals, asset wizard (Location Name), Maintenance
`assets`	vehicle unit	Add / Edit Asset wizard, inline status, delete	Assets tab, asset detail, Compliance, Monitoring, Maintenance, Inventory, Tickets, Roadside
`drivers`	driver	Add / Edit Driver form, import, inline status, delete	Drivers tab, driver profile, DQ Files, Hiring, HOS, Tickets, Messages
`users`	app user	Settings ▸ Users & Roles	sign-in, carrier scope, role access
`menu_access_overrides`	menu	Users & Roles ▸ Roles	AccessGate (hidden / light / full)
`activity_log`	change	every Account write (server side)	Activity tabs
`documents`	uploaded file	asset wizard, driver form (via Compliance)	Compliances tabs, share dialogs

Relationships

```
carriers 1 ──< office_locations      (office_locations.carrierId)
carriers 1 ──< directors             (directors.carrierId; directors.officeLocationId → office_locations)
carriers 1 ──< yards                 (yards.carrierId)
carriers 1 ──< assets                (assets.carrierId; assets.yardId → yards; yards.assignedAssetIds
mirrors it)
carriers 1 ──< drivers               (drivers.carrierId)
assets   * ──> drivers               (assets.driverAssignments[].driverId, max 2 open rows per unit)
assets/drivers/carriers 1 ──< documents   (documents.subjectType + subjectId)
assets/drivers/… 1 ──< activity_log       (activity_log.subjectType + subjectId)
users    * ──> carriers              (users.accountId, users.managedAccountIds[], users.carrierRoles keys)
users    1 ──> drivers               (users.driverId, role "driver" only)
menu_access_overrides                keyed by menu; "account" governs this section
```

Rules the relationships imply:

- Deleting a carrier is not offered in Account; if it ever is, it must cascade to all six child collections or be refused while children exist.
- Deleting an asset must clear it from `yards.assignedAssetIds`; deleting a driver must close its rows in `assets.driverAssignments` (set `endDate`). Both are refused with 409 while the unit is on an open work order / hand-over (TO CONFIRM).
- `fleetCounts` on the carrier is what was *filed*; the live numbers on the Fleet Overview tiles come from `count(assets where operationalStatus != Deactivated)` and `count(drivers where status != Terminated and deletedAt is null)`.
- `complianceMissing`, `dqCompletionPct`, `riskScore` and `yards.score` are **computed** and stored for fast lists; the Compliance service recomputes the first three whenever a record or document changes, and the yards service recomputes `score` on every write.

`carriers`

One document per carrier. Everything the Fleet Overview tab shows except the office-location and director tables, which are their own collections because they have their own add / edit / remove flows.

Field	Type	Required	Default	Description
`_id`	string	yes	—	Carrier id, e.g. "acct-001". Referenced by every other collection as `carrierId`.
`legalName`	string	yes	—	Legal name as registered.
`dbaName`	string	no	`""`	Doing-business-as name.
`status`	string	yes	`"Active"`	Operating status of the record. One of: `Active`, `Inactive`, `Suspended`, `Pending`.
`country`	string	yes	`"US"`	Home country. One of: `US`, `CA`.
`identity.dotNumber`	string	no	`""`	USDOT number. Unique across carriers when set.
`identity.mcNumber`	string	no	`""`	FMCSA MC number (read from the MC Certificate record in Compliance; kept here as a cache).
`identity.safetyRegType`	string	no	`""`	Which Canadian safety registration the number below is. One of: ``, `CVOR`, `NSC`.
`identity.safetyRegNumber`	string	no	`""`	CVOR or primary NSC number.

Field	Type	Required	Default	Description
`identity.nscNumbers`	string[]	no	`[]`	Extra provincial NSC numbers ("AB-99012").
`identity.rinNumber`	string	no	`""`	Registered Importer Number.
`identity.businessType`	string	yes	`"Corporation"`	One of: `Corporation`, `LLC`, `Sole Proprietor`, `Partnership`.
`identity.stateOfInc`	string	yes	—	State / province of incorporation (code).
`identity.extraProvincial`	boolean	no	`false`	Operates commercial vehicles across provincial / federal borders.
`authority.operationClassification`	string[]	no	`[]`	Items: `Authorized for Hire`, `Private Carrier`, `Exempt For Hire`.
`authority.carrierOperation`	string[]	no	`[]`	Items: `Interstate`, `Intrastate`, `Cross-Border`.
`authority.hazmatOperation`	string[]	no	`[]`	Items: `Hazmat`, `Non-Hazmat`.
`authority.fmcsaAuthorityTypes`	string[]	no	`[]`	Items: `Motor Carrier of Property`, `Motor Carrier of Household Goods`, `Broker of Property`.
`legalAddress.street`	string	no	`""`	Street line, as written on the record.
`legalAddress.city`	string	no	`""`	City.
`legalAddress.state`	string	no	`""`	State or province code (DE, ON).
`legalAddress.zip`	string	no	`""`	ZIP or postal code.
`legalAddress.country`	string	no	`"United States"`	"United States" or "Canada". One of: `United States`, `Canada`.
`legalAddress.apt`	string	no	`""`	Apartment, suite, etc.
`mailingAddress.streetOrPoBox`	string	yes	—	Street address or PO box.
`mailingAddress.city`	string	yes	—	
`mailingAddress.state`	string	yes	—	
`mailingAddress.zip`	string	yes	—	
`mailingAddress.country`	string	yes	`"United States"`	One of: `United States`, `Canada`.
`fleetCounts.powerUnits`	int	yes	`0`	As filed (MCS-150); the live count comes from `assets`.
`fleetCounts.drivers`	int	yes	`0`	As filed; the live count comes from `drivers`.
`fleetCounts.nonCmv`	int	no	`0`	Vehicles under 10,001 lbs.
`cargoTypes`	string[]	no	`[]`	MCS-150 cargo classifications as labels ("General Freight").
`cargoFamilies`	string[]	no	`[]`	Derived from `cargoTypes` on write (canonical family tags).
`safetyRating`	string	no	`"Not Rated"`	One of: `Satisfactory`, `Conditional`, `Unsatisfactory`, `Not Rated`.
`riskScore`	int	no	`null`	0–100, computed nightly from compliance, inspections and violations; read-only on this API.

Field	Type	Required	Default	Description
`serviceProfileId`	string	no	`null`	Service profile the carrier was created under → `service_profiles._id` (outside this section).
`createdByUserId`	string	no	`null`	→ `users._id`.
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ "identity.dotNumber": 1 }`	unique, sparse	DOT lookup and duplicate protection.
`{ serviceProfileId: 1 }`	—	Admins list the carriers under their service profile.
`{ legalName: "text", dbaName: "text" }`	text	Carrier switcher search.

Schema: collections/carriers.json · Samples: sample-data/carriers.json

`office_locations`

The carrier's offices (HQ, regional offices). Not yards — those are `yards`.

Field	Type	Required	Default	Description
`_id`	string	yes	—	"LOC-acct-001-1" style id.
`carrierId`	string	yes	—	→ `carriers._id`.
`label`	string	yes	—	Display label ("Corporate HQ - Wilmington").
`address`	string	yes	—	Full address on one line.
`contact`	string	yes	—	Contact person or desk ("Head Office").
`phone`	string	yes	—	E.164 or formatted phone.
`operatingHours.weekdays`	string	no	`""`	e.g. "08:00 - 18:00".
`operatingHours.saturday`	string	no	`""`	
`operatingHours.sunday`	string	no	`"Closed"`	
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1 }`	—	All offices of a carrier.

Schema: collections/office_locations.json · Samples: sample-data/office_locations.json

`directors`

People with ownership or an officer role at the carrier. Personal data.

Field	Type	Required	Default	Description
`_id`	objectId	yes	—	
`carrierId`	string	yes	—	→ `carriers._id`.
`name`	string	yes	—	Full name.
`roleTitle`	string	no	`""`	"Director of Operations".
`email`	string	yes	—	
`phone`	string	yes	—	
`stockClass`	string	no	`""`	"Class A Common Stock".
`ownershipPct`	number	yes	`0`	0–100.
`dateAppointed`	date	no	`null`	YYYY-MM-DD.
`dateResigned`	date	no	`null`	YYYY-MM-DD; null while serving.
`responsibility`	string	no	`""`	Primary responsibility, free text.
`isPrimary`	boolean	no	`false`	Shown first.
`officeLocationId`	string	no	`null`	→ `office_locations._id` (the office they sit in).
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, isPrimary: -1, name: 1 }`	—	The table, primary first.

Schema: collections/directors.json · Samples: sample-data/directors.json

`yards`

Yards / terminals with their physical-security profile. The Yard Terminals tab.

Field	Type	Required	Default	Description
`_id`	objectId	yes	—	
`carrierId`	string	yes	—	→ `carriers._id`.
`locationId`	string	yes	`"LOC-" + seq`	Display code "LOC-1001"; unique per carrier.
`name`	string	yes	—	
`address.street`	string	no	`""`	Street line, as written on the record.
`address.city`	string	no	`""`	City.
`address.state`	string	no	`""`	State or province code (DE, ON).
`address.zip`	string	no	`""`	ZIP or postal code.

Field	Type	Required	Default	Description
`timezone`	string	no	`""`	IANA zone ("America/New_York").
`status`	string	yes	`"Active"`	One of: `Active`, `Maintenance`, `Deactivated`.
`security.fenced`	boolean	yes	`false`	Fenced perimeter.
`security.gated`	boolean	yes	`false`	Gated entry.
`security.cctv`	boolean	yes	`false`	CCTV surveillance.
`security.guard`	boolean	yes	`false`	Security guard on site.
`security.restricted`	boolean	yes	`false`	Restricted areas defined.
`score`	int	yes	`0`	0–100, computed on write from `security` (20 points per feature; the app shows ≥90 Excellent, ≥75 Good, ≥60 Fair, else Low). TO CONFIRM the weighting.
`group`	string	no	`"Yard / Terminal Locations"`	Band the row is grouped under.
`assignedAssetIds`	string[]	no	`[]`	→ `assets._id` based here (mirror of `assets.yardId`).
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, locationId: 1 }`	unique	Display code per carrier.
`{ carrierId: 1, status: 1 }`	—	Status filter.
`{ name: "text", "address.street": "text", locationId: "text" }`	text	Search box.

Schema: collections/yards.json · Samples: sample-data/yards.json

`assets`

One document per unit. Mirrors the Add / Edit Asset wizard section by section. Monitoring reminders and compliance records live in their own collections (Compliance section) and reference `assets._id`.

Field	Type	Required	Default	Description
`_id`	string	yes	—	"acct-001-a-0100" style id.
`carrierId`	string	yes	—	→ `carriers._id`.
`unitNumber`	string	yes	—	Unique per carrier ("ACM-T0100").
`assetCategory`	string	yes	`"CMV"`	Derived from `assetType`. One of: `CMV`, `Non-CMV`.
`assetType`	string	yes	—	One of: `Truck`, `Trailer`, `Non-CMV Vehicle`.

Field	Type	Required	Default	Description
`vehicleType`	string	no	`""`	One of the type's list (Power Unit, Dry Van, Pickup…) or the typed-in "Other" name.
`operationalStatus`	string	yes	`"Active"`	The inline status pill. One of: `Active`, `Maintenance`, `OutOfService`, `Drafted`, `Deactivated`.
`vin`	string	yes	`—`	Exactly 17 characters; unique per carrier.
`year`	int	no	`null`	1900 … current year + 2.
`make`	string	yes	`—`	
`model`	string	yes	`—`	
`color`	string	no	`""`	
`weights.gross`	number	no	`null`	Loaded weight.
`weights.grossUnit`	string	no	`"lbs"`	One of: `lbs`, `kg`.
`weights.unloaded`	number	no	`null`	
`weights.unloadedUnit`	string	no	`"lbs"`	One of: `lbs`, `kg`.
`odometer.value`	number	no	`null`	Required when status is Active.
`odometer.unit`	string	no	`"mi"`	One of: `mi`, `km`.
`plate.number`	string	no	`""`	
`plate.jurisdiction`	string	no	`""`	State / province code.
`plate.type`	string	no	`"IRP"`	One of: `IRP`, `Local`.
`plate.country`	string	no	`"USA"`	One of: `USA`, `Canada`.
`plate.issueDate`	date	no	`null`	
`plate.expiryDate`	date	no	`null`	Drives the "Plate expiry" tile and chip.
`plate.monitoring.enabled`	boolean	no	`true`	
`plate.monitoring.basedOn`	string	no	`"expiry_date"`	One of: `expiry_date`, `issue_date`.
`plate.monitoring.recurrence`	string	no	`"annually"`	One of: `annually`, `quarterly`, `custom`.
`plate.monitoring.reminderDays`	int[]	no	`[90, 60, 30]`	Days before.
`plate.monitoring.channels`	string[]	no	`["email", "in-app"]`	Items: `email`, `in-app`, `sms`.

Field	Type	Required	Default	Description
`yardId`	objectId	no	`null`	→ `yards._id`; null = Unassigned.
`driverAssignments`	object[]	no	`[]`	Max 2 rows: `{ driverId → drivers._id, startDate, endDate? }`.
`annualSafety`	object	no	`null`	Last annual safety inspection: `{ performedOn, odometer, hours, vendorName, performedBy (vendor|driver|mechanic), driverId?, mechanicName?, labour, parts, currency, notes, remarks }`.
`ownership.structure`	string	yes	`"Owned"`	One of: `Owned`, `Leased`, `Financed`, `Rented`.
`ownership.marketValue`	number	no	`null`	
`ownership.currency`	string	no	`"USD"`	One of: `USD`, `CAD`.
`ownership.ownerName`	string	no	`""`	
`ownership.leasingName`	string	no	`""`	Leased: leasing company.
`ownership.lienHolderBusiness`	string	no	`""`	Financed: lien holder.
`ownership.rentalAgencyName`	string	no	`""`	Rented: agency.
`ownership.agreementStartDate`	date	no	`null`	Leased / Financed.
`ownership.agreementEndDate`	date	no	`null`	
`ownership.monthlyPayment`	number	no	`null`	
`billOfSale`	object	no	`null`	`{ recordName, purchasePrice, seller, street, city, zip, documentId → documents._id }` — also filed as a compliance record.
`insurance.liabilityPolicyNumber`	string	no	`""`	Policy number on the pink slip.
`insurance.pinkSlipExpiry`	date	no	`null`	
`insurance.pinkSlipDocumentId`	string	no	`null`	→ `documents._id`.
`insurance.addedDate`	date	no	`null`	Required when status is Active.
`insurance.removedDate`	date	no	`null`	
`dateAdded`	date	yes	`today`	Date added to fleet.
`dateRemoved`	date	no	`null`	Required when Deactivated.

Field	Type	Required	Default	Description
`address.street`	string	no	`""`	Street line, as written on the record.
`address.city`	string	no	`""`	City.
`address.state`	string	no	`""`	State or province code (DE, ON).
`address.zip`	string	no	`""`	ZIP or postal code.
`address.country`	string	no	`"United States"`	"United States" or "Canada". One of: `United States`, `Canada`.
`notes`	string	no	`""`	≤ 2000 chars.
`complianceMissing`	int	no	`0`	Computed: required compliance records with no document. Shown as the "n missing" chip.
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, unitNumber: 1 }`	unique	Unit numbers are unique per carrier.
`{ carrierId: 1, vin: 1 }`	unique	One record per VIN per carrier.
`{ carrierId: 1, operationalStatus: 1 }`	—	KPI tiles and status filter.
`{ carrierId: 1, assetCategory: 1 }`	—	CMV / Non-CMV sub-tabs.
`{ carrierId: 1, "plate.expiryDate": 1 }`	—	Expiring-plate monitoring and sort.
`{ carrierId: 1, "driverAssignments.driverId": 1 }`	—	Which unit a driver is on.
`{ unitNumber: "text", vin: "text", make: "text", model: "text", "plate.number": "text" }`	text	Search box.

Schema: collections/assets.json · Samples: sample-data/assets.json

`drivers`

One document per driver. The Add / Edit Driver form (the hiring application in page mode) writes it section by section. Personal data: `ssn` is stored encrypted with only the last four in clear; `dob` and licence numbers are personal too.

Field	Type	Required	Default	Description
`_id`	string	yes	—	"DRV-001-0010" style id.
`carrierId`	string	yes	—	→ `carriers._id`.
`driverType`	string	yes	—	Picked at the top of the form; drives labels and the HOS window. One of: `us-only`, `canada-only`, `cross-border`.

Field	Type	Required	Default	Description
`status`	string	yes	`"Active"`	The inline status pill. One of: `Active`, `On Leave`, `Inactive`, `Terminated`.
`firstName`	string	yes	`—`	
`middleName`	string	no	`""`	
`lastName`	string	yes	`—`	
`suffix`	string	no	`""`	
`name`	string	yes	`derived`	"First Last", kept for search and lists.
`avatarInitials`	string	no	`derived`	
`email`	string	no	`""`	Unique per carrier when set.
`phone`	string	no	`""`	
`cellPhone`	string	no	`""`	
`dob`	date	no	`null`	Date of birth.
`ssnEncrypted`	string	no	`null`	SSN / SIN encrypted at rest (AES-256-GCM, key outside the DB).
`ssnLast4`	string	no	`""`	Last four digits for display ("•••-••-6129").
`gender`	string	no	`""`	
`citizenship`	string	no	`""`	
`authorizedToWork.us`	boolean	no	`false`	Legal right to work in the United States.
`authorizedToWork.ca`	boolean	no	`false`	Legal right to work in Canada.
`position`	string	no	`""`	Position type ("Company Driver").
`operatesInUS`	boolean	no	`false`	"Will this driver operate in or cross into the United States?"
`hiredDate`	date	yes	`—`	Start date; every tenure / DQ clock counts from it.
`dateAdded`	date	yes	`today`	When the record was entered (on or after `hiredDate`). The "Added to fleet" column.
`terminal`	string	no	`""`	Home terminal label.
`carrierCode`	string	no	`""`	Carrier-internal driver code.
`address.street`	string	no	`""`	Street line, as written on the record.

Field	Type	Required	Default	Description
`address.city`	string	no	`""`	City.
`address.state`	string	no	`""`	State or province code (DE, ON).
`address.zip`	string	no	`""`	ZIP or postal code.
`address.country`	string	no	`"United States"`	"United States" or "Canada". One of: `United States`, `Canada`.
`address.unit`	string	no	`""`	Unit / apt.
`address.addr2`	string	no	`""`	Building, floor.
`resided3Years`	boolean	no	`true`	"Residence 3+ years?"
`previousResidences`	object[]	no	`[]`	`{ address, unit, country, city, state, zip, startDate, endDate }` when `resided3Years` is false.
`emergencyContacts`	object[]	no	`[]`	`{ name, relation, phone, email }`; the form captures the first.
`licenses`	object[]	no	`[]`	Repeatable: `{ number, country, authority, class, issueDate, expiryDate, medicalExpiry, current, commercial, endorsements[], restricted, restrictions, isPrimary, status, frontDocumentId, backDocumentId }`. `class` is one of "Class 1 / A" … "Class M".
`licensePrimary`	object	no	`derived`	`{ number, state, expiry }` copied from the primary licence for lists.
`disqualification`	object	no	`{}`	Six questions keyed `denied, drivingWhileSuspended, alcoholOffense, substanceOffense, reckless, failedDotTest` → `{ answer: "Yes"|"No", when: {m,y}, explain, documentId }`.
`travel`	object	no	`{}`	`{ citizenshipCountry, workAuthUS, workAuthCA, passport{ number, country, expiry, documentId }, visa{ has, number, type, expiry, documentId, monitor, reminderDays[] }, workPermit{…}, twic{ has, number, expiry, documentId }, fast{…} }`. Each document is also filed as a compliance record.
`drivingExperience`	object[]	no	`[]`	`{ equipmentClass, freightTypes[], regions[], from, to, miles, ownerOperator }`.
`employment`	object[]	no	`[]`	`{ company, start, end, address…, telephone, position, reasonLeaving, terminated, current, mayContact, operatedCMV, subjectFMCSR, safetySensitive, documentIds[] }`.
`employmentGaps`	object[]	no	`[]`	`{ start, end, comments }`.
`education`	object[]	no	`[]`	`{ school, start, end, city, state, country, telephone, study, graduation }`.
`accidents`	object[]	no	`[]`	`{ date, type, state, commercialVehicle, atFault, ticketed, details }`.
`violations`	object[]	no	`[]`	`{ date, charge, state, commercialVehicle, penalty, fineAmount }`.

Field	Type	Required	Default	Description
`military`	object	no	`null`	`{ served, country, branch, start, end, rank, dd214, dd214DocumentId }`.
`hos`	object	no	`null`	`{ days: { "YYYY-MM-DD": hours }, note }` — 8 days (US) or 14 (Canada / cross-border) before `hiredDate`.
`signature`	object	no	`null`	`{ declarationAccepted, applicantName, signedDate, signatureDocumentId, certified }`.
`dqCompletionPct`	int	no	`0`	Computed: DQ file completeness. The "DQ File" column.
`complianceMissing`	int	no	`0`	Computed: required records missing. The "n missing" chip.
`deletedAt`	date	no	`null`	Soft delete (TO CONFIRM) — keeps compliance history readable.
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, status: 1, deletedAt: 1 }`	—	KPI tiles, status filter, hiding deleted rows.
`{ carrierId: 1, email: 1 }`	unique, sparse	No two drivers share an email on one carrier.
`{ carrierId: 1, "licensePrimary.number": 1 }`	—	Licence lookup from monitoring and roadside.
`{ carrierId: 1, hiredDate: -1 }`	—	Default sort / tenure.
`{ name: "text", email: "text", phone: "text", "licensePrimary.number": "text", carrierCode: "text" }`	text	Search box.

Schema: collections/drivers.json · Samples: sample-data/drivers.json

`users`

App users. Account visibility is the role's menu access (full / light / hidden) and the carriers the user can open. Owned by Settings ▸ Users & Roles; listed here because the section cannot be rendered without it.

Field	Type	Required	Default	Description
`_id`	string	yes	–	
`name`	string	yes	–	
`email`	string	yes	–	Unique; the login.
`passwordHash`	string	no	`null`	argon2id; null for invited users.
`role`	string	yes	–	Role on the primary carrier. One of: `super-admin`, `admin`, `fleet-admin`, `safety-manager`, `user`, `driver`.

Field	Type	Required	Default	Description
`status`	string	yes	`"Invited"`	One of: `Active`, `Invited`, `Deactivated`.
`accountId`	string	no	`null`	Primary carrier → `carriers._id`.
`managedAccountIds`	string[]	no	`[]`	Carriers the user can open (empty for super-admin = all).
`carrierRoles`	object	no	`{}`	`{ carrierId: role }` — a different role per carrier.
`serviceProfileId`	string	no	`null`	Primary service profile (admins).
`serviceProfileIds`	string[]	no	`[]`	
`driverId`	string	no	`null`	For role `driver`: → `drivers._id`.
`lastSignInAt`	date	no	`null`	
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ email: 1 }`	unique	Login.
`{ accountId: 1 }`	—	
`{ managedAccountIds: 1 }`	—	Carrier scope checks.

Schema: collections/users.json · Samples: sample-data/users.json

`menu_access_overrides`

The default menu-access table lives in code (`roles.data.ts`). This collection holds only the cells an admin changed, keyed by menu. Account's key is `account`.

Field	Type	Required	Default	Description
`_id`	string	yes	—	Menu key ("account", "inventory", ...).
`overrides`	object	yes	`{}`	`{ role: "full"|"light"|"hidden" }` for the roles that differ from the default.
`updatedByUserId`	string	no	`null`	→ `users._id`.
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes: none beyond `_id`.

Schema: collections/menu_access_overrides.json · Samples: sample-data/menu_access_overrides.json

`activity_log`

Append-only audit trail. The asset and driver Activity tabs read it; so does the review of who changed a status.

Field	Type	Required	Default	Description
`_id`	objectId	yes	—	
`carrierId`	string	yes	—	→ `carriers._id`.
`subjectType`	string	yes	—	One of: `carrier`, `office_location`, `director`, `yard`, `asset`, `driver`.
`subjectId`	string	yes	—	The document changed.
`action`	string	yes	—	One of: `created`, `updated`, `status_changed`, `deleted`, `imported`, `shared`, `document_filed`.
`by.userId`	string	yes	—	→ `users._id`.
`by.name`	string	yes	—	Snapshot of the user's name at the time.
`at`	date	yes	`now`	
`detail`	string	no	`""`	One sentence ("Status changed Active → On Leave").
`before`	object	no	`null`	Changed fields, previous values.
`after`	object	no	`null`	Changed fields, new values.

Indexes

Index	Options	Why
`{ carrierId: 1, subjectType: 1, subjectId: 1, at: -1 }`	—	An item's Activity tab, newest first.
`{ carrierId: 1, at: -1 }`	—	Carrier-wide log.

Schema: collections/activity_log.json · Samples: sample-data/activity_log.json

`documents`

Owned by the Compliance & Documents section; listed here because the asset wizard (bill of sale, pink slip) and the driver form (licence images, travel documents, DD-214, signature) create records in it and Account references them by id.

Field	Type	Required	Default	Description
`_id`	string	yes	—	
`carrierId`	string	yes	—	
`subjectType`	string	yes	—	One of: `asset`, `driver`, `carrier`.
`subjectId`	string	yes	—	→ `assets._id` / `drivers._id` / `carriers._id`.
`kind`	string	yes	—	"bill_of_sale", "pink_slip", "license_front", "license_back", "passport", "visa", "work_permit", "twic", "fast", "dd214", "signature", …

Field	Type	Required	Default	Description
`name`	string	yes	—	File name.
`mimeType`	string	yes	—	image/png, image/jpeg, application/pdf.
`size`	int	yes	—	Bytes (≤ 10 MB).
`storageKey`	string	yes	—	Object-store key; served through a signed URL, never public.
`uploadedBy`	string	yes	—	→ `users._id`.
`uploadedAt`	date	yes	`now`	

Indexes

Index	Options	Why
`{ carrierId: 1, subjectType: 1, subjectId: 1 }`	—	Documents of one record.

Schema: collections/documents.json · Samples: sample-data/documents.json

Sample data

Every document in sample-data/ is fictional: three carriers (a US corporation, a Canadian cross-border carrier, a new Texas LLC), their offices, directors, yards, five assets covering every ownership structure and status, four drivers covering the three driver types and every status, five users covering every role, and matching activity and document rows. Names, emails (`.example` / `example.com`), phones (555 numbers), licence numbers, VINs and SSN last-fours are invented. `ssnEncrypted` and `passwordHash` are shown truncated on purpose.

TO CONFIRM

1. Yard `score` weighting (20 points per security feature is assumed).
2. Soft-delete for drivers (`deletedAt`) so compliance history survives.
3. Refusing asset / driver deletes while open work orders or hand-overs exist.
4. Whether `fleetCounts` should be editable at all once live counts exist.
5. Encryption key management for `ssnEncrypted` (KMS vs application secret).

6 Agent instructions — summary

Sections 1, 2, 4, 6 and 8 of `docs/agent.md`. The file structure (§3), the full API (§5) and the do's and don'ts (§7) are in the file itself.

1. Purpose

Account (`/account/profile`, sidebar item #1) is the carrier's fleet profile: one carrier, four sections.

Section	Answers
Fleet Overview	Who is this carrier legally (USDOT / CVOR / NSC, authority, addresses, officers, cargo) and how big is it?
Yard Terminals	Where does it park, and how secure is each yard?
Assets	Every truck, trailer and non-CMV vehicle: plate, ownership, status, compliance, and the door into the unit's full record.
Drivers	Everyone on the roster: status, licence, compliance, and the door into the driver's full file.

Everything in Account is **scoped to one carrier** (the one chosen in the top-bar switcher or the user's own). Other modules (Compliance, Monitoring, Maintenance, Tickets…) read the assets and drivers created here; Account is their source of truth for *who* and *what* exists.

---

2. Tech stack

2.1 Current (the prototype you are maintaining)

Layer	Choice
UI	React 19.2 + TypeScript 5.9, Vite 7, Tailwind CSS 4.1 (utilities only; `cn()` = clsx + tailwind-merge), lucide-react icons, react-hook-form + zod (asset wizard), xlsx (driver import)
Routing	A path string held in `App.tsx` state (`handleNavigate`), **not** react-router routes, even though react-router-dom is installed. New pages are added as `if (path === …)` branches in `App.tsx`.
Data	Module-level stores backed by `localStorage` and `window` events, read with `useSyncExternalStore`. Seed data is generated per carrier from `accounts.data.ts`. There is **no backend**.
Auth / roles	`src/data/users.data.ts`, `src/pages/users-roles/roles.data.ts` (menu access table), `AccessGate.tsx` (hidden / light / full). Demo sign-in only.
Build / check	`npx tsc -b` (type-check; the root tsconfig is a solution file, so `tsc --noEmit` checks nothing) and `npx vite build` (catches missing exports that tsc does not). Both must pass.

2.2 Target (what the documentation brief asks the rebuild to use)

ASSUMPTION — TO CONFIRM with the product owner: React + TypeScript front end as above, a **Node.js (Express or Fastify) REST API**, and **MongoDB** with the collections in ../data/schema.md. Section 5 defines that API. Keep the front-end store modules as the single place that calls it, so the pages do not change.

---

4. Behaviour you must preserve

These come from the product owner's own corrections during development. Treat them as requirements.

1. **Lists are one line per row**, truncated with a `title` tooltip. Never let a row grow to two lines.
2. **Every row action lives in the ⋮ menu** (`RowActions` → `KebabMenu`): Open · Edit · Share to chat · (module extras) · **Delete last and red**. Never a bare pencil + bin pair.
3. **Status is changed inline** with the pill select (`AssetStatusSelect`, `DriverStatusSelect`), saved immediately, confirmed with a toast. Also on the detail page header.
4. **Full-page forms wear the Wizard chrome** (`WizardHeader` + `WizardStepNav` + `WizardSection`): Add/Edit Asset, Add/Edit Driver. Modals keep header and footer in view; only the middle scrolls.
5. **One "Share to chat" button** (`ShareButton`) next to Edit on every record page; the dialog is `ShareToChat` fed by `share-payloads.ts`.
6. **Preserve existing UI when fixing a requirement** — change only what the requirement targets; do not restyle neighbours.
7. **Build only what the current request asks**; no speculative tabs or sections.
8. **Add Driver reuses the application form** (`ApplicationFormView`, page mode) so hiring and Account capture the same data; the driver-type picker drives US/Canada labels and the 8/14-day Hours-of-Service window.
9. **Asset wizard "Other" vehicle type** stores the typed name as the vehicle type itself.
10. **KPI tiles filter their own list**; clicking the active tile (or Total) clears the filter.
11. Carrier scope: a user only ever sees the carriers `canOpenCarrier` allows; the page shows `EmptyCarrierProfile` when none applies.
12. Headers condense on scroll (`useCondensingHeader`); the body is its own scroller with `[overflow-anchor:none]`; never pad a page out to keep a fold.

---

6. Validation and security rules

Authentication. Every Account route requires a signed-in user. Unauthenticated → 401 and the client shows the login page.

Authorisation. Menu access per role (defaults in `roles.data.ts`; editable in Users & Roles ▸ Roles): Super Admin, Admin, Fleet Admin = **full**; Safety Manager, User = **light**; Driver = **hidden**. Enforce on the server, not only in the UI: *light* may call GET only and gets 403 on writes; *hidden* gets 403 on everything under `/carriers/:id/*` for Account. The client additionally hides the menu (hidden) or shows the "View only" strip (light). **TO CONFIRM:** whether light should also disable the edit controls in the UI (today they are rendered).

Carrier scope. `:carrierId` must be in `GET /me`'s carrier list. Super Admin sees all; Admin only the carriers under their service profile; Fleet Admin / Safety Manager / User only their assignments.

Field validation (server and client, same zod schemas):

- Asset: `unitNumber` required, unique per carrier; `vin` exactly 17 chars, unique per carrier; `make`, `model` required; `year` 1900 … current+2; `dateAdded` required; `insuranceAddedDate` required when status is Active; `odometer` required and ≥ 0; `dateRemoved` required when Deactivated; `notes` ≤ 2000 chars; driver assignment rows need `driverId` + `startDate`, max 2 rows.
- Driver: first and last name required; email, when present, RFC-5322 shape and unique per carrier; dates `YYYY-MM-DD`; licence class from `LICENSE_CLASS_VALUES`; status from the four allowed values; `driverType` from the three driver types. **TO CONFIRM:** which further fields block Save (today none do).
- Director: `name`, `email`, `phone`, `ownershipPct` (0–100) required. Office location: `label`, `address`, `contact`, `phone` required. Mailing address: all five fields required. Yard: `name` required; `security` booleans.
- Import: reject files over 5 MB or 2,000 rows; report per-row reasons; never partially apply a row.

Passwords / re-authentication. Account does not manage passwords (that is Settings ▸ Users & Roles); apply the app-wide rule there. **Require a fresh re-authentication (within 5 min) for destructive writes in Account:** deleting a driver, deleting an asset, deleting a yard, changing a driver's status to Terminated. ASSUMPTION until confirmed; today only a `confirm()` dialog guards them.

Rate limits (proposed): 60 writes / minute / user on Account routes; 5 imports / hour / carrier; 10 DOT lookups / minute / carrier.

Personal data. Drivers and directors are people: never log request bodies containing their SSN/SIN, licence numbers or dates of birth; the `share` endpoints must only attach documents the caller can read. Screenshots and recordings for documentation are taken against fictional demo data only and are not masked; never capture a real customer's data.

Audit. Every write under `/carriers/:id/*` appends an activity entry (who, what, when, before/after) — the Activity tabs on asset and driver pages read it.

---

8. Acceptance checklist

Say "done" only when every line is true.

Build

- [ ] `npx tsc -b` exits 0.
- [ ] `npx vite build` exits 0.
- [ ] `npx eslint .` reports no new errors in the files you touched.

Fleet Overview

- [ ] All eight cards render for a carrier; the no-carrier page renders for a user with no carrier.
- [ ] Each pencil opens its own modal with the fields, options and required marks in page-overview §2; Cancel discards; Save shows the matching toast and the card updates.
- [ ] Add / Edit / Remove office location and Add / View / Edit director work and persist across a reload.

Yard Terminals

- [ ] Search, Status and Security filters narrow the grouped table; the empty state appears for no match.
- [ ] Row click opens the view modal; ⋮ offers Open / Edit / Share to chat / Delete; Delete asks to confirm and toasts.
- [ ] Add New Location saves with the five security toggles and a computed score.

Assets

- [ ] KPI tiles filter and clear; sub-tabs split CMV / Non-CMV; search, Columns, pagination work.
- [ ] Inline status select saves and toasts; the table never wraps to two lines; the Actions column stays pinned when the table scrolls sideways.
- [ ] Add Asset enforces the zod rules (unit, 17-char VIN, make, model, dates, odometer); "Other" vehicle type stores the typed name; a bill of sale files a document; Edit reopens with every value.
- [ ] Asset detail shows the tiles and all 11 tabs; Edit Vehicle opens the wizard pre-filled; Share to chat opens the dialog.

Drivers

- [ ] KPI tiles, search, status filter chip, Columns, Export/Import, Add Driver all present; pagination works.
- [ ] Inline status select saves and toasts; ⋮ offers Open / Edit / Share to chat / Open DQ file / Delete.
- [ ] Import accepts CSV/XLSX with the documented headers, previews, creates rows, toasts the count.
- [ ] Add Driver shows the driver-type picker and all 15 sections; Save creates the driver, files travel documents, toasts; Edit reopens pre-filled.
- [ ] Driver profile shows status select, Share to chat, Print, Edit Profile, the four tiles and all 13 tabs.

Cross-cutting

- [ ] Every list row has a one-line layout with tooltips; every row action is inside ⋮ with Delete last and red.
- [ ] The header condenses on scroll-down and returns on scroll-up on the page, the asset detail and the driver profile.
- [ ] Phone width (390 px): no horizontal page scroll; tables become cards; modals keep their footer in view.
- [ ] Roles: Driver cannot see the menu; Safety Manager / User see the "View only" strip; server rejects their writes with 403.
- [ ] No real customer data in logs, fixtures committed to git, or documentation captures (demo data only).
- [ ] Zero console errors in a full click-through at 1440 px and 390 px.

7 Links

Figma file	**TO CONFIRM — not created.** No Figma access in the documenting session. Build guide, tokens (`design/figma/tokens.json`) and components (`design/figma/components.html`) are ready: see `design/figma-link.md` .
Video	`video/account-walkthrough.mp4` — 3 min 27 s, 1920 × 1080, H.264, captions burned in; script with timestamps in `video/script.md` .
Hosted docs	Not hosted — by decision. The documentation is this folder and this PDF.
App (local)	`http://localhost:5173/` → sign in with a demo test account → sidebar **Account** (`/account/profile`).

Files in this folder

CHECKLIST.md — the Step 12 final check: what was verified, and the 30 open decisions (TO CONFIRM) that need an answer.

docs/

File	What it is	Status
docs/page-overview.md	Every tab, sub-tab, field, button, toggle, modal, state and role difference, as a tree + tables (Step 1)	✅ done
docs/design.md	Layout, typography, components, icons, interactions, accessibility, linked to screenshots (Step 5)	✅ done
docs/agent.md	Build / maintain instructions for an AI coding agent: stack, structure, API, validation, acceptance checklist (Step 6)	✅ done

data/

File	What it is	Status
data/schema.md	MongoDB data model: 10 collections, every field with type / required / default, relationships, indexes (Step 7)	✅ done
data/collections/	One JSON Schema (draft-07) per collection, generated from the same definition as schema.md (Step 7)	✅ done
data/sample-data/	2–5 fictional documents per collection, validated against the schemas (Step 7)	✅ done

design/

File	What it is	Status
design/color-palette.json	28 colour tokens with HEX/RGB, usage, light + proposed dark values, 22 WCAG contrast pairs, the 112 raw Tailwind colours in use (Step 8)	✅ done
design/color-palette.md	The same palette, readable, with swatches and fixes for the failing pairs (Step 8)	✅ done
design/figma-link.md	Figma build guide: what to import, page / frame / component structure. **The Figma file itself is TO CONFIRM** — no Figma access in the documenting session (Step 9)	⚠️ link pending
design/figma/	`tokens.json` (DTCG variables, Light + Dark modes, 15 text styles) and `components.html` (13 component sets, importable with html.to.design) (Step 9)	✅ done

File	What it is	Status
design/exports/	Component sheet + 13 component PNGs, vector `color-tokens.svg`, 16 labelled desktop + mobile key frames (Step 9)	✅ done

screenshots/

Folder	Contents	Status
screenshots/index.md	One line per image with a caption, plus the states that cannot be captured (Step 3)	✅ done
screenshots/desktop/fleet-overview/ · yard-terminals/ · assets/ · drivers/	67 captures at 1440 px, `[tab]-[state]-desktop.png` (Step 3)	✅ done
screenshots/mobile/fleet-overview/ · yard-terminals/ · assets/ · drivers/	65 captures at 390 px, `[tab]-[state]-mobile.png` (Step 3)	✅ done
screenshots/hosted-docs.png	Screenshot of a hosted docs site (Step 11)	➖ not needed — the folder is not hosted

video/

File	What it is	Status
video/account-walkthrough.mp4	1080p H.264 walkthrough (3 min 27 s) of every tab and main action, captions burned in, nothing masked (Step 4)	✅ done
video/script.md	The caption / voice-over script with timestamps (Step 4)	✅ done

pdf/

File	What it is	Status
pdf/account-section.pdf	Everything above in one A4 document: cover, contents, overview, all 132 screenshots with captions, design spec, colour palette, data model, agent summary, links (Step 10)	✅ done