02 – Inventory

Company property and who holds it — List, Drivers, Assets, Vendors

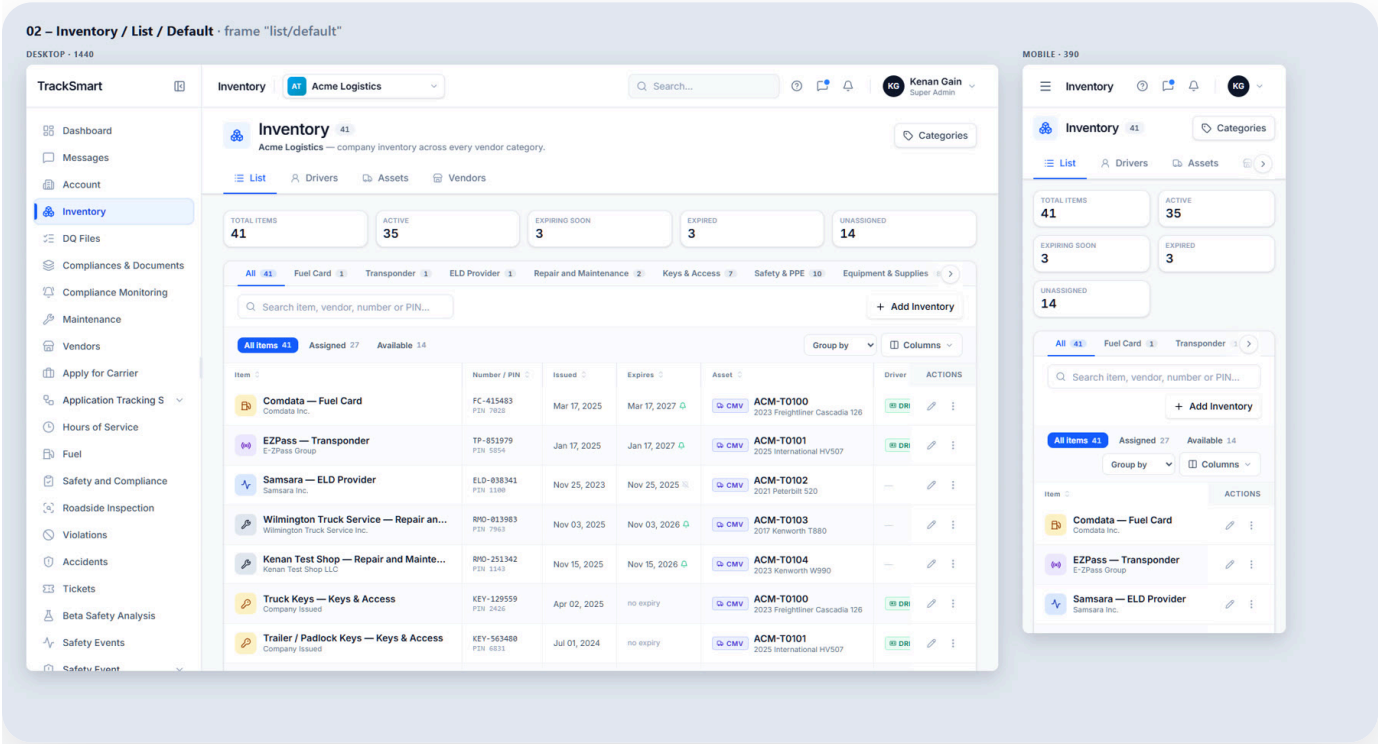

APP	SECTION	DATE	VERSION
TrackSmart fleet compliance prototype	**Menu option #2** Inventory · /inventory	**23 October 2026**	**1.0** test accounts, demo data

Contents

1 Page overview
Every tab, field, button, modal, state and role difference

2 Screenshots
238 captures — desktop 1440 px and mobile 390 px, with captions

3 Design specification
Layout, typography, components, icons, interactions, accessibility

4 Colour palette
31 colour tokens, light and proposed dark, WCAG contrast

5 Data model
MongoDB collections, fields, relationships, indexes, sample data

6 Agent instructions (summary)
Purpose, stack, rules to preserve, security, acceptance checklist

7 Links
Figma, video, files in this folder

Nothing in this document is masked: every name, address, email and phone number is fictional demo data from the prototype's test accounts.

1 Page overview

App: TrackSmart (fleet compliance prototype) · **Section:** sidebar menu #2 "Inventory" · **Documented:** 2026-10-23 · **Source of truth:** the running app (test accounts only) cross-checked against `src/pages/inventory/*` and the routes in `src/App.tsx`.

> Everything below exists in the app today. Anything not seen on screen is marked **ASSUMPTION:** (inferred from code) or **TO CONFIRM:** (needs a product decision or a check I could not make). Demo figures (41 items, 22 drivers, …) are for the carrier **Acme Logistics** (`acct-001` , legal name Acme Trucking Inc.); expiry dates are seeded relative to today, so the Active / Expiring / Expired mix moves with the calendar.

---

0. Entry point and frame

Item	Value
Sidebar item	**Inventory** (icon: boxes), second item under Dashboard / Messages / Account
Routes	`/inventory` (List) · `/inventory/drivers` · `/inventory/assets` · `/inventory/vendors` — plus the item, holder, manage, vendor and sign-form pages in the tree below
Navigation model	Path held in React state (`App.tsx handleNavigate`); the browser URL does not change and a reload lands on the Dashboard. Every screen is reached by clicking.
Top-bar title	"Inventory" on the List; "Inventory by Driver" / "Inventory by Asset" on those tabs; "Add Inventory" on the add form. Item pages and holder pages have no entry and show "TrackSmart" (TO CONFIRM).
Carrier scope	One carrier at a time — the one in the top-bar **Switch carrier** dropdown (Super Admin / Admin) or the user's own. Every count, list and picker is scoped to it. Switching carrier resets search and filters.
Section tabs	**List** · **Drivers** · **Assets** · **Vendors** — an on-page tab strip under the page title (`SubTabs` , aria "Inventory sections"); each tab is its own route.
Header	The app's standard list header (`ListPageHeader`): icon + title + count pill + one-line description; it **condenses** after ~140 px of scroll (title shrinks, description folds, a strip of KPI figures appears) and expands again on the way up. The tab strip never scrolls away.

Page-level states

State	What the user sees
Loading	None. Data is local (seed + localStorage overlays) and renders immediately. ASSUMPTION: a real backend needs a skeleton.
Empty carrier	KPIs at 0, the Assigned / Available chips disabled, and "No inventory items match your filters · Try a different category, or show all items."
View-only (light access)	Blue strip under the top bar: "**View only** · a Safety Manager can look at Inventory here but not change it." Every control still works — the inventory pages read no role (TO CONFIRM, §9).
No access (hidden)	"Not in your menu" page: "**Inventory** is not part of what a **{Role}** on **{carrier}** can open." · "Access per role is set in Users & Roles ▸ Roles." · button **Go to Dashboard**.
Success	No toasts anywhere in Inventory. A save navigates away and the change is visible on the page it lands on.
Error	No inline field errors on the item form (Save stays disabled until valid); inline red errors only in the Categories modal and vendor forms; not-found pages for stale item / holder ids.

1. Tree (what exists inside Inventory)

```
Inventory
├── List                          /inventory
│   ├── Header  [Categories → "Item Category" modal]
│   ├── KPI tiles (5)  Total Items · Active · Expiring Soon · Expired · Unassigned
│   ├── Category tab rail          All · Fuel Card · Transponder · … · Other
│   ├── Toolbar                    Search · [Add Inventory → Add item page]
│   ├── Filter row                 All items · Assigned · Available · Group by · Columns · Reset
│   ├── Table                      Item · Number/PIN · Issued · Expires · Asset · Driver · Status · Actions
│   │   ├── row click              → Item detail page
│   │   ├── ✎ Edit                  → Edit item page
│   │   └── ⋮  Assign / Change assignment → "Assign {item}" dialog · Share to chat → Share dialog
│   └── Pager                      Rows 8/15/25/50
├── Item detail                   /inventory/items/:id
│   ├── Header  [Edit] [⋮ Share to chat]
│   └── Tabs  Information · Monitoring · Activity
├── Add item / Edit item          /inventory/items/new · /inventory/items/:id/edit   (full-page wizard)
│   ├── 1 Item                     Vendor · Category · Record name · Status · Assigned to (Driver / Asset)
│   └── 2 Details                  Number · PIN · Issue date · Expiry date · Alert (Monitoring &
Notifications)
├── Drivers                       /inventory/drivers   ("Inventory by Driver")
│   ├── KPI tiles (5, clickable filters)  Drivers · Holding inventory · Holding nothing · Expiring soon ·
Expired
│   ├── Toolbar                    Search · Columns · Showing n of N
│   ├── Filter row                 All drivers · Cross Border · US Only · Canada Only · Group by · Reset
│   ├── Table                      Driver · Status · Driver type · Returnable · (Expiring · Expired · No
alert) · Actions
│   │   ├── row click              → Driver holder page
│   │   └── ⋮  Open driver · Assign inventory · Share to chat
│   └── Legend + Pager
├── Assets                        /inventory/assets    ("Inventory by Asset")  — same component, per unit
│   ├── Table                      Asset · Status · Items · Driver returnable · Asset removable · (…) ·
Actions
│   └── ⋮  Open asset · Manage inventory · Share to chat
├── Holder page (driver / asset)  /inventory/drivers/:id · /inventory/assets/:id
│   ├── Header  [Manage inventory] [⋮ Share to chat]
│   └── Tabs  Overview · Inventory · Monitoring · Activity
├── Manage inventory              /inventory/drivers/:id/assign · /inventory/assets/:id/assign   (full-page
wizard)
│   ├── 1 Inventory                tick list: held items (untick = take off) + free items (tick = give out)
│   ├── 2 Driver Notification      (driver page only) collect / hand-back messages · forms to sign · where &
when
│   └── "Confirm these changes" dialog → Save changes / Save and send
├── Vendors                       /inventory/vendors   (see §8)
│   ├── Vendor list · Vendor profile page · Add vendor · Edit vendor dialog · Categories
└── Driver sign-form              /inventory/sign-form   (driver seat, opened from a collection card in
Messages)
    └── Receipt form · tick what you received · signature · Sign & confirm
```

Reachable but with no link in the UI: `/inventory/drivers/:id/add` and `/inventory/assets/:id/add` (the add form pre-pointed at a holder). Legacy paths `/inventory/handover*`, `/inventory/driver-inventory*`, `/inventory/take-back/*` render the List. `InventoryDriversPage.tsx` and `InventoryAssetsPage.tsx` are dead code (not routed).

2. Tab: List (`/inventory` · `InventoryListPage.tsx`)

Purpose. The carrier's whole inventory — fuel cards, transponders, ELDs, keys, PPE, devices, documents — in one sortable, groupable table. Search it, narrow it by category and by assignment, open an item, edit it, assign it or share it.

2.1 Header

Element	Detail
Icon	Boxes, blue square
Title	**Inventory** + count pill (all items, tooltip "{n} items")
Description	"**{carrier}** — company inventory across every vendor category." (hidden below `sm`; folds when condensed)
Action	**Categories** (tag icon) → "Item Category" modal (§2.9)
Condensed strip	Chips "Items · Active · Expiring · Expired · Unassigned" with their figures (not clickable)

2.2 KPI tiles

Grid 2 → 3 (`md`) → 5 (`lg`). Counts are for the whole carrier and ignore filters. **Clicking a tile does nothing** (no handler).

Tile	Counts	Icon · accent
Total Items	every item	Layers · blue
Active	status Active	CircleCheck · emerald
Expiring Soon	status Expiring Soon	Clock · amber
Expired	status Expired	AlertTriangle · red
Unassigned	on neither a unit nor a driver	CircleSlash · slate

Acme today: 41 · 35 · 3 · 3 · 14.

2.3 Category tab rail

`All {n}`, then one tab per category that has rows after the assignment filter (category name + count), then `Other {n}` for items with no known category. Acme: All 41 · Fuel Card 1 · Transponder 1 · ELD Provider 1 · Repair and Maintenance 2 · Keys & Access 7 · Safety & PPE 10 · Equipment & Supplies 8 · Devices & Electronics 6 · Cards & Documents 5. Chevrons "Scroll tabs left / right" appear when the rail overflows. If the active category empties after a filter change the rail falls back to All. An item's category is its own `categoryId`, falling back to its vendor's.

2.4 Toolbar and filter row

Control	Type	Behaviour
Search	text, placeholder "Search item, vendor, number or PIN..."	case-insensitive on item name, vendor name, serial, PIN (not the vendor's company name)
Add Inventory	button (plus icon)	→ Add item page
All items · Assigned · Available	filter chips with live counts	Assigned = on a unit or a driver; Available = on neither. A chip at 0 is disabled; "All items" never is.

Control	Type	Behaviour
Group by	select (tooltip "Group the list"), blue when set	Options: *Group by* (none) · **Assignment** (Assigned, Available) · **Status** (Expired, Expiring Soon, Active — urgency order) · **Category** (A–Z, Other) · **Vendor** (company name; all accessories in one "Company Issued" band). Bands are labelled rows with a count and never split across pages.
Columns	button → "Toggle columns" panel	Item 🔒 · Number / PIN · Issued · Expires · Asset · Driver · Status · Actions 🔒. Not remembered.
Reset	button (X), tooltip "Clear the filters on this row"	shown only while a chip, grouping, category or search is set; clears those four (not columns or sort)

2.5 Table

One table at every width (horizontal scroll on small screens), zebra rows, Actions column sticky on the right. Headers sort ascending → descending → off; blanks always last.

Column	Content
Item	category icon tile, name ("Comdata — Fuel Card", "Truck Keys — Keys & Access"), vendor company underneath ("Comdata Inc.", "Company Issued")
Number / PIN	serial (mono) and "PIN ####"
Issued	"Mar 17, 2025"
Expires	date + bell (green = alert set, tooltip "Alert on expiry date · remind 30d, 7d, on the day"; grey bell-off = "No alert set"), or "no expiry"
Asset	CMV (indigo) / Non-CMV (orange) chip, unit number, "{year} {make} {model}"; "—" or "Unknown asset"
Driver	green "Driver" chip, name, "License …" or "Assigned directly"; grey "Unassigned" pill when on nobody and no unit; "—" when on a unit only
Status	pill: Active (emerald) · Expiring Soon (amber) · Expired (red)
Actions	✎ **Edit** → Edit item page · ⋮ **More actions**: **Assign** (unassigned) or **Change assignment** (assigned) → Assign dialog; **Share to chat** → Share dialog

Row click — or Enter / Space on a focused row (`role="link"`) — opens the item detail page.

2.6 Pager

"Showing **1–15** of **41** items" · Rows 8 / 15 (default) / 25 / 50 · Previous / Next · windowed page numbers with "…". Resets to page 1 on any search, filter, grouping or carrier change.

2.7 States

State	Detail
Default	All tab, All items chip, no grouping, no sort, 15 rows
Condensed header	after scrolling the body
No results	Layers icon · "No inventory items match your filters" · "Nothing matches **{q}** in this view." (searching) or "Try a different category, or show all items." · **Clear filters** (when search / chip / category is set)
Deep link	Opening an inventory record link from a chat lands on that item's detail page

2.8 "Assign {item}" dialog (row ⋮ → Assign / Change assignment)

Centred card (`max-w-lg`). Closes only with **×** or **Cancel** (no backdrop or Escape close).

Part	Detail
Header	truck icon · "Assign {item}" · "{serial} · Currently: {Not assigned | unit · driver | a driver no longer on the roster}"
UNIT block	only if the item is ticked for Asset. Hint "It belongs to this unit and comes off when the unit leaves the fleet." Picker "Select a unit".
DRIVER block	only if ticked for Driver. Hint "This person is answerable for it and hands it back when they leave." Picker "Select a driver".
Both	blue note "This item is ticked for both, so it can be filed in both places at once — on the unit, and on the person who carries it. Leave either blank if only one of them is settled."
Picker (opens in place)	search "Search by unit #, VIN, make/model, plate..." / "Search by name, license, terminal, status..."; unit rows: unit #, type + status chips, year make model, current driver or "No driver assigned", "VIN •••1234 · Plate · ST · miles"; driver rows (Active only): name, status / licence state / terminal chips, type, "License … · Exp … · phone"; no match "No vehicles match "{q}"" / "No drivers match "{q}""; footer "{n} of {total} · Esc to close"; × "Clear assignment"
Footer	**Unassign** (only when assigned) · **Cancel** · **Save assignment** (disabled, tooltip "Pick a unit or a driver first", until something is picked)
Writes	assignment patch on the item + activity "Assigned to vehicle and driver" / "Assigned to driver" / "Assigned to vehicle", or "Unassigned · Taken back from {holder}". No message is sent from here.

Which blocks show: fuel card, transponder, truck keys → both; PPE, uniform → Driver only; ELD, repair shop → Unit only.

2.9 "Item Category" modal (header → Categories)

Blurred backdrop; backdrop click or Esc closes; page scroll locked.

Part	Detail
Title	"Item Category" · "Single source of truth for what kind of things your inventory holds."
Bar	"{n} categories" (12) · **Add Category** (hidden while a form is open)
New Category card	**Name *** (placeholder "e.g. Telematics", autofocus) · **Description (optional)** ("Short description") · Cancel · **+ Add**
Errors (red box)	"Category name is required." · `A category named "{name}" already exists.` (case-insensitive)
Category row	tag tile, name, description, "{n} item(s)" pill, ✎ "Edit category", 🗑 "Delete category" — or 🔒 "In use by {n} items" when it has items
Edit card	'Editing "{name}"' · same fields · Cancel · Save (duplicate → same error; empty name → Save does nothing)
Delete — empty	'Delete "{name}"?' · "Nothing is filed under it, so nothing else changes. This can't be undone." · Cancel · **Delete category** (red)
Delete — in use	'"{name}" can't be deleted' · "**{n} items are** filed under this category. Move them to another category first, and this one can go." · up to 4 item names + "and {n} more" · **Close**
Empty	"No categories yet" · "Add one above to start grouping vendors."
Footer	**Done**

The 12 categories: Fuel Card · Transponder · ELD Provider · GPS Tracking · Dashcam · Repair and Maintenance · Keys & Access · Safety & PPE · Equipment & Supplies · Devices & Electronics · Cards & Documents · Others. **Changes made here are not saved** — they live in the page's memory, are lost on navigation, and the category rail and item form keep using the built-in list (TO CONFIRM, §12).

2.10 Share dialog (row ⋮ → Share to chat; also on item and holder pages)

The app-wide Share dialog: "Share {item}" · "Send the item in a chat, or to an outsider by email" · **Send via** In-app chat / External chat / Email · recipient search ("Search people…" / saved or new contact) · Subject (defaults to the item name) · Message ("Add a note…") · Attachments (Device / From app; starts empty) · Preview / Edit · send button **Share in chat** / **Send & create chat** / **Email documents** (disabled until a recipient or valid email) · success screen "Shared in Messages" with **Done** and **Open in Messages**. The message carries a record link (type `inventory`, label, "{vendor} · {serial}") that opens the item.

---

3. Item pages

3.1 Item detail (`/inventory/items/:id` · `InventoryItemDetailPage.tsx`)

Purpose. Read one item: what it is, where it is, what it counts down to, and what has happened to it. Editing is a separate page.

Region	Detail
Header	"‹ Back to {previous page}" · boxes tile · item name (h1) · status pill · "**{vendor}** · {category} · {serial}" · **Edit** (blue) → Edit page · ⋮ **Share to chat** (no delete)
Tabs	**Information** · **Monitoring** · **Activity {n}**

Information

- *Item* card ("What it is, and what is printed on it."): Vendor · Category · Number · PIN ("—") · Issue date · Expiry date ("Never expires") · Notes (only when set — repair-shop seeds carry "Service vendor inventory record tied to fleet maintenance coverage.").
- *Assignment* card ("Where it is, and whose hands it is in."): **ASSET** chip + unit + year make model, or "Not on a vehicle." · **DRIVER** chip + name + licence, or "Nobody is holding this." · **Vendor contact** "{contact} · {email/phone}" (vendor items only). No assign buttons here.

Monitoring

- *Alert* card ("What this counts down to, and when it says so."). On: green "Monitoring is on" · Counting from (Issue / Expiry / Custom date) · Renews ("Annually (Every 1 Year)", "Does not recur", …) · Reminders ("30 days before, on the day") · Sent by ("In-app · Email" / "Nowhere"). Off: grey "No alert is set" · "This runs out on {date} and nobody will be told." or "There is no expiry date on this item, so there is nothing to count down to." · **Set one up** → Edit page.
- *Next date* card ("The date the alert counts back from."): big date + "Due today" / "{n} days overdue" (red) / "{n} days from now" (amber ≤ 30, else green) · Issued · Expires ("Never"); or "This item has no expiry and no custom date, so there is nothing to come due."

Activity — timeline, newest first. *System* entries are derived (never stored): "Added to inventory · From {vendor} · Number {serial}", "Assigned · {unit} · {driver}", "Expired · Ran out on {date}". *Office* / *Driver* entries are recorded: "Added to inventory", "Item updated — {n} changes" with the change list ("Number: A → B · Status: Active → Expired · Driver: X → none · Alert turned on"), assignment events, "Asked to collect it", "Receipt signed", "Collected by driver", "Handed back to the office". Empty: "Nothing has been recorded against this item yet."

Not found: "That inventory item no longer exists" · "It may have been removed, or it belongs to another carrier." · **Back to Inventory**.

3.2 Add item / Edit item (`/inventory/items/new`, `/inventory/items/:id/edit` · `AddInventoryItemPage.tsx` + `InventoryItemFields.tsx`)

Purpose. Create an item, or change one. Full-page wizard (`WizardEditor`): header with "← Back to Inventory", title **Add Inventory** / **Edit Inventory — {item}**, subtitle "Item details, dates and alert.", actions **Cancel** (→ List, in both modes) and **✓ Save Inventory** / **✓ Update Inventory** (grey and disabled until valid). Left rail "Progress · Complete each section" with steps **1 Item** and **2 Details** (answered-field counts, green check, click to scroll, scroll-spy) — hidden below `md`.

Section 1 — Item ("Who it is from, and what to call it.")

Field	Type	Required	Rules / options
Vendor *	select	**enforced**	the carrier's vendors (all vendors if it has none); defaults to the first. Changing it changes the category (unless one was chosen by hand) and renames an auto-named item.
Category *	select	marked, not enforced	"Select a category…" + the 12 categories; defaults to the vendor's; hint "What kind of thing this is."
Record name *	text	marked, not enforced	default "{vendor} — {category}"; hint "Defaults to the vendor and its category."; a typed name survives vendor / category changes; cleared → shows the default
Status *	select	always set	Active (default) · Expiring Soon · Expired — **set by hand, not derived from dates**
Assigned to *	2 tick cards	at least one stays ticked	**Driver** "The driver returns it to the carrier when they leave, or when they move to a different asset." · **Asset** "It is removed when the asset leaves the carrier's fleet." Default **Asset** only. Hint "Tick both where the item belongs to the unit and a person is answerable for it."

Section 2 — Numbers, Dates & Monitoring (rail "Details"; "What is printed on it, how long it runs, and when to be told.")

Field	Type	Required	Rules
Number *	text, "e.g. FC-558271"	**enforced** (trimmed, not empty)	no format or uniqueness check
PIN	text, "e.g. 4421"	no	—
Issue date *	date	**enforced**	—
Expiry date	date	no	hint "Leave blank for something that never runs out — a yard key." No check that it is after the issue date.
Alert — Monitoring & Notifications	switch (default **Off**) + panel	—	**Monitor based on** Issue date / Expiry date (default) / Custom date · **Date to monitor** (read-only chip, or a date input for Custom) · **Renewal recurrence** (Issue-date basis only): Does not recur, Monthly, Quarterly (Every 3 Months), Semi-Annually (Every 6 Months), Annually (Every 1 Year) (default), Every 2 Years, Every 3 Years, Every 5 Years · **Notification reminders** 90 / 60 / 45 / 30 (default) / 15 / 7 days before, On the date · **Notification channels** Email ✓, In-App ✓ · **Projected Notification Schedule** sentence. Amber warning when on, basis = Expiry and no expiry date: "There is no expiry date to count back from yet — add one above, or point the alert at the issue date or a custom one."

Validation = Vendor + Number + Issue date. There are **no error messages**: Save simply stays disabled. Save on **Add** stores the item (id `inv-add-<time>`), logs "Added to inventory" and returns to the List, where the new item is first. Save on **Edit** stores the changes, logs "Item updated — {n} changes" and opens the item's detail page. Assignment is not edited here (it is carried through unchanged).

---

4. Tabs: Drivers and Assets (`/inventory/drivers`, `/inventory/assets` · `InventoryHoldersPage.tsx`)

Purpose. The same inventory counted the other way round — per person and per vehicle: what each one holds and what needs attention. One component serves both tabs.

Region	Drivers	Assets
Header	user icon · **Inventory by Driver** + count of items held (tooltip "{n} items across {k} drivers") · "**{carrier}** — what each driver is holding, and what needs attention."	truck icon · **Inventory by Asset** · "... what each asset is holding ..."
KPI tiles — **clickable filters**	**Drivers** (all) · **Holding inventory** · **Holding nothing** · **Expiring soon** · **Expired**	**Assets** · Holding inventory · Holding nothing · Expiring soon · Expired
Acme today	22 · 12 · 10 · 1 · 0 (19 items held)	18 · 8 · 10 · 2 · 2 (17 items)
Search	"Search driver, or an item they hold..." (name, sub-line, held item name or serial)	"Search unit, make, or an item on it..."
Columns	Driver 🔒 · Status · Driver type · Returnable items · Expiring · Expired · No alert · Actions 🔒 (last three off by default)	Asset 🔒 · Status · Items · Driver returnable · Asset removable · Expiring · Expired · No alert · Actions 🔒
Right of toolbar	"Showing {n} of {N}"	same
Chips	**All drivers** · **Cross Border** · **US Only** · **Canada Only** (driver type from DQ files; 0 → disabled)	—
Group by	Jurisdiction · Status · Holdings	Status · Holdings
Reset	clears tile filter, chip, grouping and search	same
Row	icon chip (greyed when holding nothing) · name · sub-line (driver type / terminal) · status pill (Active, On Leave, Inactive, Terminated) · driver-type badge · counts ("—" for 0)	unit · "2025 International HV507" · CMV / Non-CMV badge · status (Active, Maintenance, Out of service, Deactivated, Draft) · counts
Row click	→ driver holder page	→ asset holder page
⋮ menu	**Open driver** · **Assign inventory** · **Share to chat**	**Open asset** · **Manage inventory** · **Share to chat**
Legend under the table	"**Returnable** — travels with whoever drives it, and has to come back" · "**On the vehicle** — fitted to the vehicle, and has to come off" · "**No alert** — has an expiry date nobody will be told about"	"**Driver returnable** — ..." · "**Asset removable** — ..." · "No alert — ..."
Pager	"Showing 1–15 of 22 drivers", Rows 8 / 15 / 25 / 50	"... assets"
No results	"No drivers match this view" · "Try a different search, or show all drivers."	"No assets match this view"
Share	"Share {name}" · "What this driver is holding, in a chat or by email" — attachments = the held items grouped by how they are held; default subject "{name} — inventory"	same for the vehicle

Every roster driver / fleet unit is listed, including those holding nothing; holders that are not on the roster show as "Unknown driver" / "Unknown asset" with status "Off roster". Default order: most items first, then A–Z. *Expiring* = within 30 days; *No alert* = has an expiry date but monitoring off.

---

5. Holder page (`/inventory/drivers/:id`, `/inventory/assets/:id` · `HolderDetailPage.tsx` + `HolderInventoryPanel.tsx`)

Purpose. One driver's or one unit's inventory as a page of its own.

Region	Detail
Header	"‹ Back to …" · ID-card / truck tile · title · sub-line with " · **{n} expired**" (rose) or " · **{n} expiring**" (amber) · **Manage inventory** → Manage page · ⋮ **Share to chat**
Tabs	**Overview** · **Inventory {n}** · **Monitoring {n}** · **Activity {n}**
Overview	four figures: **Items held** · **Also on a unit** (driver page) / **Also on a driver** (asset page) · **Expiring soon** · **Expired**
Inventory	attention pills ("{n} expired", "{n} expiring soon") · category strip (All + held categories) · search "Search item, vendor, serial or PIN…" · sort buttons **Expiry** (default) / **Vendor** / **Issued** · status select All statuses / Active / Expiring Soon / Expired · Group by Assigned to / Status / Category / Vendor · Reset · table **Item · Type · Serial · PIN · Issued · Expires ("{n}d overdue" / "in {n}d") · Assigned to (Both / Driver / Asset / Unassigned) · Status · ✎** (min. 980 px wide, scrolls on phones) · pager Rows 5 / 8 / 15 / 25 · row → item page
Inventory — empty	"Nothing on file" · "Nothing is issued to this driver, riding in their cab, or signed across to them." / "Nothing is kept on this vehicle or carried by whoever drives it." · filtered: "Nothing matches that" · "Clear the search or pick a different filter."
Monitoring	"Dates being watched" · "Soonest first. An item with no date to watch is not listed." · rows: colour bar (blue returnable / slate removable), item name (→ item page), bell + basis or "No alert set", date, "{n}d overdue" / "in {n}d" · empty "Nothing on {title} has a date to watch."
Activity	"Activity" · "Everything that happened to what this holds, newest first." · each entry prefixed with the item name · empty "Nothing has happened yet."
Not found	"That driver is no longer here" / "That asset is no longer here" · "They may have been removed, or belong to another carrier." · **Back to Drivers / Assets**

Defects seen in code (TO CONFIRM, §12): the title shows the raw id (e.g. "DRV-001-0001") because the route never passes the holder's name; and a real driver holding nothing (e.g. Barbara Cox) gets the not-found page instead of an empty one.

The same Inventory panel (with a **Manage inventory** button) is embedded in the driver profile and the asset record in Account.

---

6. Manage inventory (`/inventory/drivers/:id/assign`, `/inventory/assets/:id/assign` · `AssignInventoryPage.tsx`)

Purpose. Put inventory on, or take it off, one holder in one list of ticks — and, for a driver, draft and send the collection / hand-back message with any forms they must sign.

Region	Detail
Header	"← Back to …" · **Manage inventory — {holder}** · "Driver · {n} item(s) held" / "{CMV | Non-CMV} · {year make model} · {n} item(s) held"
Step bar	driver: **1 Inventory** · **2 Driver Notification**; asset: **Inventory** only
Sticky action bar	**‹ Back** (disabled on step 1) · status "Nothing picked yet — tick something on the list." or "{n} change(s) · {x} going on · {y} coming off · {z} message(s)" · primary button: grey/disabled at 0 changes; dark **Driver Notification ›** (tooltip "Something you have picked travels with the driver. Read what they will be told first.") until the notify step has been read; then **Save & send** / **Save changes** → confirmation

Step 1 — Inventory (`ItemPickList`)

- One list: items already on the holder (ticked) then free items (driver page: items ticked for Driver and on nobody; asset page: ticked for Asset and on no unit).
- Category strip · search "Search unassigned items…" · "{held} on it — {free} free to give out" / "On nobody, in this carrier's inventory." · chips All items / Assigned / Available (when something is held) · Group by Assignment / Category / Vendor / Handling / Status · Reset.

- Table: tick · **Item name · Category · Serial** (+ PIN) · **Driver returnable** (Yes / No / N/A) · **Issue date · Expiry date** ("no expiry") · **Status**. Ticking a free row tints it blue ("Put {item} on this driver → {holder}"); unticking a held row turns it rose and strikes the name ("Take {item} off this driver").
- Empty: "Nothing is on this driver, and every item in this carrier's inventory is already somewhere else. Take one back first, or add a new item." · no match: "Nothing matches "{q}"" / "Nothing in this category."
- Demo: Jason Cooper holds *Comdata — Fuel Card* and *Truck Keys*; six spare items are free to give out (Spare Truck Keys (set), Spare Yard Gate Fob, Spare Hi-Vis Vests (box), Spare Safety Gloves (box), Spare Tablet (expired), Blank Logbooks).

Step 2 — Driver Notification (driver page only; "The collection list that lands in the driver app.")

- "{Driver} collects {n}" list with **Driver returnable** chips.
- Switch **"Ask them to collect it when you save"** (default on): "It lands in their chat as a checklist they tick off in the driver app. What they confirm comes back onto the item." / off: "The kit still goes onto the vehicle. Nobody is asked to come for it." Hand-backs are always sent — amber "One hand-back is still going out. Somebody is carrying kit this save takes off the record, and not asking for it is how it stays in a pocket."
- **Forms to sign** (violet block, switch default on, **Uniform & Equipment Issue Receipt** pre-attached): "{n} forms to sign" · "The form goes out in the same message, filled in from what they tick off, and filed onto their record once signed." · per form **Read it** (full-screen preview "As {driver} will see it — filled in from what you have picked." + Close) and × · **+ Add a form** picker ("Search the form catalog...", groups *Company paperwork* — Direct Deposit Authorization, Emergency Contact Information, Tax Withholding (W-4 / TD1), Uniform & Equipment Issue Receipt, Fuel Card Agreement — and *Policy & consent forms*).
- **Collected from / handed to**: The office (default) / Somebody else (+ "Who has it — e.g. Mike Johnson, yard office") · **By when (optional)** date-time.
- One message card per plan: driver, "Collects {n}" / "Hands in {n}", editable 6-line draft ("Hi Jason — you've been assigned an item. Please collect it from the office: • ... Tick them off below once you have them."), "Drafted from what is moving. Type to make it yours." / "Your wording — it will not be rewritten if the list changes.", **Reset to draft**, **Open chat**.

Confirm dialog — "Confirm these changes" · "{holder} — this is what will happen when you save." · "Going onto this driver ({n})" / "Coming off it ({n})" with Driver / Asset chips · **Who gets told** ("Nobody. Everything here stays with the driver, so there is no message to send." or "Jason Cooper collects 1 item from the office and signs 1 form") · **Go back** · **✓ Save and send** / **✓ Save changes**.

On save the assignment changes are stored, each item logs "Assigned to driver / vehicle" or "Unassigned", messages are posted into the driver's chat as a collection card ("Asked to collect it", "Receipt to sign" on each item), and the page returns to the Drivers / Assets tab. No toast. The asset page never sends a message.

---

7. Driver collection and sign-form (Messages card → `/inventory/sign-form` · `CollectionFormPage.tsx`, `InlineFormFill.tsx`)

Purpose. The driver's half of a hand-out: tick off what they picked up (or handed back) and sign the receipt, which is filed on their record.

Who	What they see
Office, in Messages	The collection card read-only: "Waiting for {driver} to confirm what they picked up." + **Open in driver app**
Driver seat, in Messages	The card is live: title "Collect from the office" / "Hand back to the office" (or "... from / to {person}"), "Tick what you have picked up.", "{n} items · issued by {who} · {holder}", pills "from {place}" / "by {due}", **Select all / Clear all**, every line pre-ticked with a route chip (Assigned / In the cab / Sign for), **Receipt to sign** with **Fill it in**, footer "{n} of {all} ticked · the receipt lists these", primary **Sign & confirm** / "I have collected these" / "Collected {n} of {all}"

Who	What they see
Driver Mobile App	Home tile **Collect from the office** — "{n} lists waiting — tick off what you pick up"; empty "Nothing to collect"; "Already collected"; signing happens on an in-app "Sign the receipt" screen

Sign-form page — "‹ Back" · violet file-signature tile · **{form title}** (e.g. "Uniform & Equipment Issue Receipt") · "{driver} · {n} item(s) · {k} more form(s) after this" · pills unit / from / by.

- Statement panel (open by default): "Tick what you received, and what you are agreeing to" — the **Items received ({n})** table with a **Got** tick column and "Issued for {unit}.", then the statement ("I acknowledge receipt of the company property listed above… may be deducted from my final pay where permitted by law.").
- Fields: Employee name, Issue date (prefilled) · **Signature** pad · Print Name · Date.
- Footer hint "Tick what you received." / "Sign above to finish." / "Signing files a copy on {name}'s record." · ✓ **Sign & confirm** / **Sign & next form** — disabled until every signature is drawn and at least one item is ticked.
- "Nothing to sign here" when opened without a request (e.g. after a reload: "This page opens from a collection message, and it was not opened from one — a reload loses which receipt you were signing."), when the collection is gone, already signed ("This one has been signed and filed.") or the form detached · **Back to the message**.

On signing: a signed copy (tag "Filled in system", "Signed by X on DATE", the item list) is filed on the driver's compliance record; each item logs "Receipt signed"; when no forms remain the collection is confirmed ("Collected by driver" / "Not collected"; a hand-back clears the driver from the item: "Handed back to the office"); back to Messages, where the card reads "Signed by {driver} on {date} — filed on their record." and "All {n} confirmed by {driver}." The filed copy opens from Compliances & Documents with 👁 **Form** (Form view / PDF view, themes Standard / Compact / Enhanced / Traditional / Black & White, Print, Download PDF).

---

8. Tab: Vendors (`/inventory/vendors` · `VendorsListPage.tsx` + `VendorsTable.tsx`)

Purpose. The shops and suppliers the carrier buys from — the same list the sidebar **Vendors** menu shows (`/vendors`, without the Inventory tabs), and the vendors an inventory item or a work order is filed against.

8.1 List

Region	Detail
Header	store icon · **Vendors** + count pill (tooltip "{n} vendors") · "**{carrier}** — {n} vendors this carrier buys from" · **+ Add Vendor** → Add Vendor page · the four Inventory tabs
KPI tiles (clickable filters)	**Total Vendors** (all) · **Active** · **Inactive** — Acme 41 / 41 / 0
Toolbar	search "Search vendor, contact or address…" (name, company, email, phone, address) · **Group by** (select "Band the list"): Status · Jurisdiction (state, else country, else "No address") · **Columns** (Vendor 🔒, Address, Contact, Status, Actions 🔒) · **Reset**
Table	**Vendor** (store icon, name " · company") · **Address** (pin + "street, apt, city, ST zip" or "—") · **Contact** (mail + email · phone, or "—") · **Status** (ACTIVE / INACTIVE pill) · ⋮ **Actions for {name}**: **Share to chat** · **Edit** · **Delete** (red). Fixed layout, min 920 px, scrolls sideways on phones; Actions column sticky. Row click → vendor profile.
Pager	"Showing 1–15 of 41 vendors", Rows 8 / 15 / 25 / 50
No results	"No vendors match your filters" · "Nothing matches **{q}** in this view." / "Try another status, or show them all." · **Clear filters** (also what the Inactive tile shows today — there are no inactive vendors)
Delete	dialog **Delete "{name}"?** · "It will stop appearing when anyone raises a work order or files inventory against a vendor. Records that already name it are not changed." · Cancel · **Delete vendor** (red). No guard for items still filed against it; no undo.

Region	Detail
Share	"Share {name}" · "A vendor record, in a chat or by email" · items: vendor, email, phone, address · subject "{name} — vendor"

There is **no category strip** on this list (by design: "a vendor's category is an inventory concept"). The list **includes** the 36 "Company Issued" placeholder rows each carrier gets for its accessories (Truck Keys, Safety Gloves, …: no address, no contact) — Acme shows 5 real vendors + 36 of those (TO CONFIRM, §12).

8.2 Vendor profile (row click → `/maintenance/vendors/:id`, rendered by Maintenance's `VendorPage`)

Region	Detail
Header	"← Vendors" (back to where it came from) · store icon · name · status pill · "{company} · {category} · {n} work orders · {n} bills". The Edit / Share buttons in the component are not shown here (no handlers passed).
Tabs	**Overview** · **Inventory {n}** · **Work Orders {n}** · **Repair bills {n}** · **Activity {n}**
Overview	five figures: **Total spent** (per currency, "Nothing billed"), **Bills** ("x service · y roadside"), **Work orders** ("x still open"), **Inventory** ("item(s) on the fleet"), **Last job** (date or "Never") · **How to reach them** (Contact, Email, Phone, Address) · **Costs** (per currency: Service records vs Roadside repairs bars; empty "Nothing billed yet")
Inventory	"Inventory from this vendor" · "{n} item(s) filed against them — cards, transponders, keys and anything else they issued." · Item · Serial · Assigned to · Expires · Status; empty "Nothing filed against this vendor" · "Items added in Inventory under this vendor show up here." Row click → the Inventory List (not the item).
Work Orders	the shared work-orders table filtered to this vendor (All / Open / Completed / Cancelled, Group by), empty "Nothing has been sent to this vendor"
Repair bills	"Repair bills and total" · All / Service records / Roadside · Billed · Invoice # · For · Unit · Labour · Parts · Total · footer "TOTAL BILLED" per currency; empty "This vendor has not billed us"
Activity	"Work order raised — …", "Service billed — USD 935.00", "Roadside repair billed — USD 412.60"; empty "Nothing has happened with this vendor yet."

Demo: **Wilmington Truck Service** — 1 item, 9 work orders, 38 bills, USD 31,353.60 spent. A "Company Issued" row opens an empty profile (all contact fields "—").

8.3 Add Vendor (`/inventory/vendors/new` · `AddVendorPage.tsx`)

Full page: "← Back to Vendors" · breadcrumb "Acme Trucking Inc. / Inventory / Vendors / Add Vendor" (carrier name hard-coded) · **Add Vendor** · **Cancel** · **✓ Save Vendor** (grey until a name is typed). Footer tip "Tip: Asset and driver assignments live on inventory items, not on the vendor itself."

Section	Field	Type	Required	Placeholder / options
1 Vendor Identity & Classification — "Who this vendor is and what services they provide."	Vendor Name *	text	**yes** (trimmed)	"e.g. Comdata"
	Company Name (Optional)	text	no	"e.g. Comdata Inc."
2 Contact Information — "Primary point of contact at this vendor."	Contact Name	text	no	"e.g. Jane Smith"
	Email	email (not validated)	no	"contact@vendor.com"
	Phone	text	no	"(555) 555-0100"
3 Vendor Address — "Primary business location."	Country	select	no	United States (default) · Canada — changing it clears the state
	Street Address	text	no	"1200 North Dupont Highway"

Section	Field	Type	Required	Placeholder / options
	Apartment, suite, etc. (Optional)	text	no	"(Optional)"
	City	text	no	"Wilmington"
	State / Province	select	no	"Select..." + 51 US codes incl. DC, or 13 Canadian codes
	ZIP Code / Postal Code	text	no	"19801" / "K1A 0B1"

Save: the vendor is added at the top of the list (category "Others", status Active, this carrier) and the page returns to the list. No toast, no error messages.

8.4 Edit Vendor dialog (row ⋮ → Edit · `VendorFormDialog.tsx`)

"Edit Vendor" · "Update vendor information below." · **Company Information**: Company Name * ("e.g. Fleet Maintenance Pro"), Contact Name ("e.g. John Doe"), Email ("contact@company.com"), Phone ("(555) 555-0000") · **Address**: Country ("Select country": USA / Canada), Unit / Suite ("Suite 100"), Street Address ("123 Main Street"), City, State/Province ("Select"), ZIP / Postal Code ("12345" / "A1A 1A1") · **Cancel** · **Save Changes**. The vendor's Name, Status and Category are not editable here — so a vendor can never be made Inactive from the UI. The whole sheet scrolls (header and footer scroll away).

---

9. Roles and visibility

Access comes from the role table in Users & Roles ▸ Roles (`DEFAULT_MENU_ACCESS`, overridable). Super Admin is always Full.

Menu (key)	Admin	Fleet Admin	Safety Manager	User	Driver
Inventory (`inventory`) — every `/inventory/*` page incl. its Vendors tab	Full	Full	**Light**	Full	Hidden
Vendors (`vendors`) — `/vendors`	Full	Full	**Light**	Full	Hidden

- **Full** — in the menu, every control works.
- **Light** — in the menu, with the "View only" strip. The Inventory pages read no role or read-only flag, so Add, Edit, Assign, Manage, Delete vendor and Share all still work (TO CONFIRM, §12).
- **Hidden** — not in the menu; the path shows the "Not in your menu" page.
- **Driver** — never sees the office pages. A driver's allowed paths are the Driver Mobile App, Messages, their own profile, Apply for Carrier and the **sign-form page**; their share of Inventory is the collection card in Messages, the "Collect from the office" screen in the app, and the receipt they sign.

---

10. Shared behaviours and storage

Behaviour	Detail
Carrier scope	Every list, picker and count is the active carrier's; items and vendors carry the carrier (`accountId`).
Status	**Stored, not derived.** Seeded from the expiry date (expired < 0 days, Expiring Soon ≤ 30 days, else Active) and then set by hand on the form; the List KPIs, chips and groups read the stored value while the Drivers / Assets / holder pages count expiring / expired from the dates.

Behaviour	Detail
Handling vs assignment	*Handling* (the Driver / Asset ticks) says where an item **may** go; *assignment* (`assignedTo` = unit, `assignedDriverId` = person) says where it **is**. An item can be on a unit, on a person, on both or on neither.
Reserved items	On the Manage page an item already on another holder of the same kind is not offered; the List's Assign dialog can move it directly.
Monitoring feed	Items with an alert switched on appear on Compliance Monitoring (source pill "Inventory", priority from days left and reminders, link back to the item). The notification bell does not include inventory.
Activity	Every add, edit, assignment, message, signature and confirmation is logged on the item (role Office / Driver); "Added", "Assigned" and "Expired" entries are derived from the record.
Messages	Hand-outs and hand-backs are chat messages with a collection card; signed receipts are filed on the driver's compliance record (`onbform:` / `consent:` records) and open from Compliances & Documents.
Persistence (prototype)	localStorage: `inv_item_additions_v1` (new items), `inv_item_edits_v1` (changes over the seed), `inv_item_activity_v1` (trail), `messages:conversations:v3` (collection cards), `compliance-data-v3` (signed receipts). **In memory only** (lost on reload): vendors added / edited / deleted, categories, the sign-form hand-off.
Toasts	none in this section

---

11. Not in the UI (left out on purpose, or missing)

- **Deleting an inventory item** — no delete exists anywhere (List, item page or store).
- **Import / export** of items or vendors.
- **Quantity** — a "box of gloves" is one row; there is no stock count.
- **Re-deriving status from dates** — status is a field the user sets.
- **Vendor status / category** — not editable after creation (Add Vendor files every new vendor under "Others", Active).
- The **holder preset add form** (`/inventory/drivers/:id/add`, `/inventory/assets/:id/add`) exists but nothing links to it.
- Dead code: `InventoryDriversPage.tsx`, `InventoryAssetsPage.tsx`, `carrier-vendors.data.ts`, `asset-inventory-bridge.ts`.

---

12. TO CONFIRM (open questions)

Product behaviour

1. **Light role (Safety Manager)** shows "View only" but every Inventory control still works. Should Add / Edit / Assign / Manage / Delete be disabled in light mode? (§9)
2. **Status** is chosen by hand and never recomputed. Should it be derived from the expiry date (≤ 30 days = Expiring Soon, past = Expired)? (§10)
3. **Item delete** does not exist. Needed (soft delete, keeping the activity trail)? (§11)
4. **KPI tiles on the List** do nothing when clicked, while the Drivers / Assets / Vendors tiles filter. Make them filters too? (§2.2)
5. **Categories** added, renamed or deleted in the modal are not saved and are ignored by the rail and the item form. Should they persist and drive both? (§2.9)
6. **"Company Issued" placeholder vendors** (36 per carrier) are listed on the Vendors tab. Hide them, as Maintenance and the asset form already do? (§8.1)
7. **Vendors** added, edited or deleted are kept in memory only, and a new vendor does not appear in the item form's Vendor list. Persist and share one vendor store? (§8)
8. **Vendor profile** shows the record as it was before an edit (it reads Maintenance's copy first), and its Edit / Share buttons are not shown. (§8.2)

9. **Vendor Name, Status and Category** cannot be edited, so no vendor can ever be made Inactive. (§8.4)
10. **Deleting a vendor** has no check for items or work orders still filed against it. Block, or reassign? (§8.1)

Defects seen in code 11. **Holder page title** shows the raw id ("DRV-001-0001") instead of the driver's name or unit number. (§5) 12. **A driver or unit holding nothing** opens the not-found page instead of an empty holder page. (§5) 13. **Unassigning a seeded item does not stick**: the stored patch drops `undefined` fields, so the seeded assignment comes back. Affects Unassign in the dialog, untick on the Manage page and a confirmed hand-back. (§2.8, §6) 14. **Item detail page does not show edits to seeded items** (it reads the seed without the edit overlay), although Save lands there. (§3.1) 15. **Item detail Category** comes from the vendor, not the item's own category. (§3.1) 16. **Edit with an unknown id** silently opens the Add form and creates a new item. (§3.2) 17. **Vendor profile Inventory tab** lists seeded items only (not items added in the app), and its rows open the List rather than the item. (§8.2) 18. **Edit Vendor dialog** stores Country as "USA" while the data uses "United States"; the whole sheet scrolls, so Save scrolls out of view. (§8.4) 19. **Add Vendor breadcrumb** always says "Acme Trucking Inc.". (§8.3) 20. **Holder share links** may not open the holder (only the List consumes record links). (§4) 21. **Top-bar title** reads "TrackSmart" on item and holder pages. (§0)

Validation and data 22. **Item form**: Category, Record name and Status are marked required but not enforced; no check that the expiry date is after the issue date; no uniqueness check on Number. Add these? (§3.2) 23. **Item form errors**: Save just stays disabled with no message. Show inline errors instead? (§3.2) 24. **Alert assignee** is shown on the item page when set, but nothing in the form sets it. (§3.1) 25. **Recurrence** ("Renews annually") is shown but nothing rolls the dates forward. Intended to auto-renew? (§3.1) 26. **No-carrier and empty-carrier states** could not be captured (every demo carrier has inventory). (§0) 27. **Vendor profile opened from Inventory** lives at `/maintenance/vendors/:id`, so the sidebar highlights **Maintenance**, not Inventory, and the top bar reads "Vendor". (§8.2)

2 Screenshots

238 captures of every tab and state, named `[tab]-[state]-[device].png`. Full-page captures are shown at full height; the source PNGs are in `screenshots/`.

List

Desktop · 1440 px

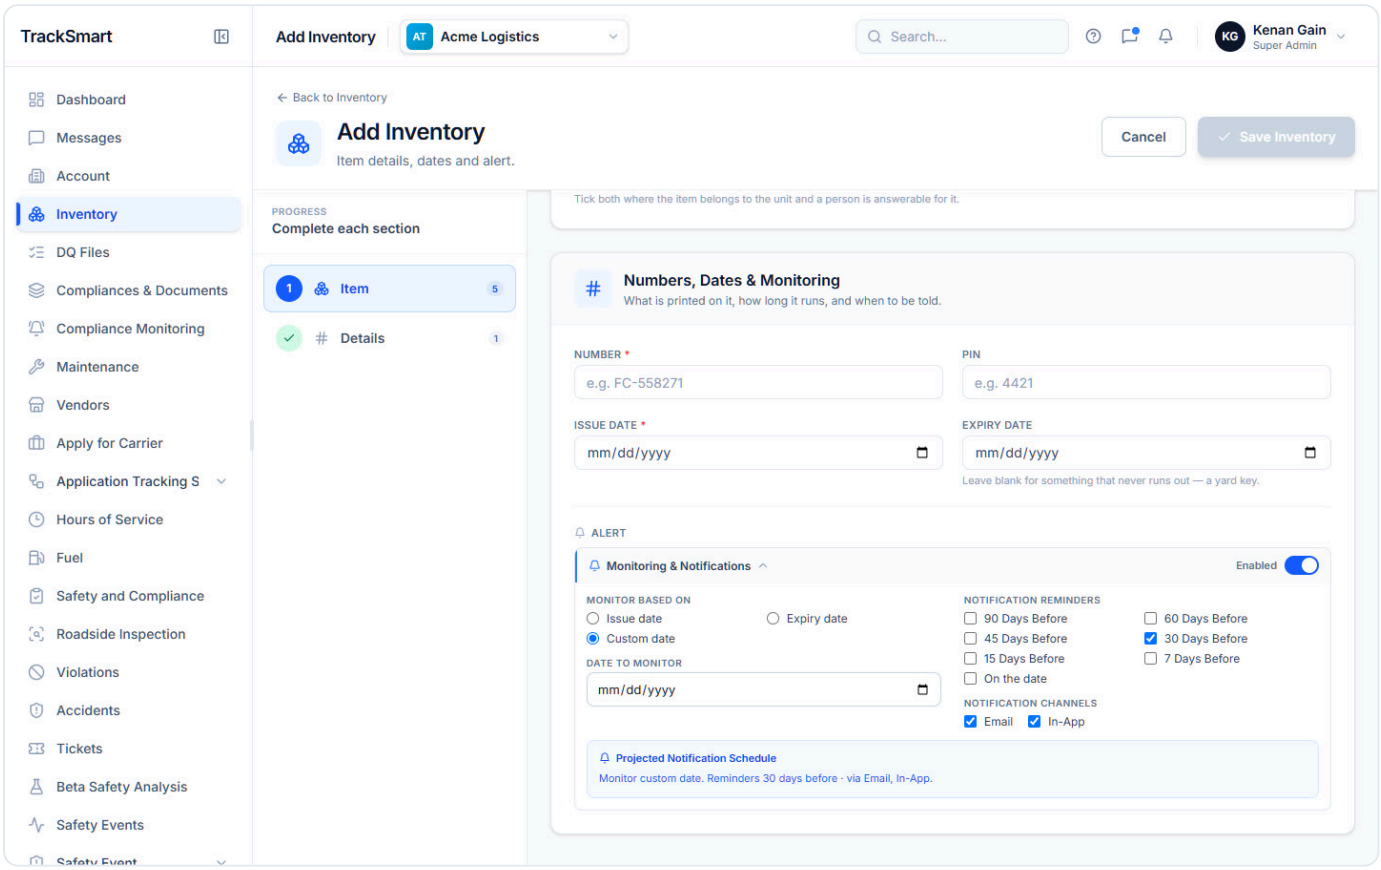

`list-add-item-alert-custom-desktop.png` — Monitor based on Custom date: the date to monitor becomes an input.

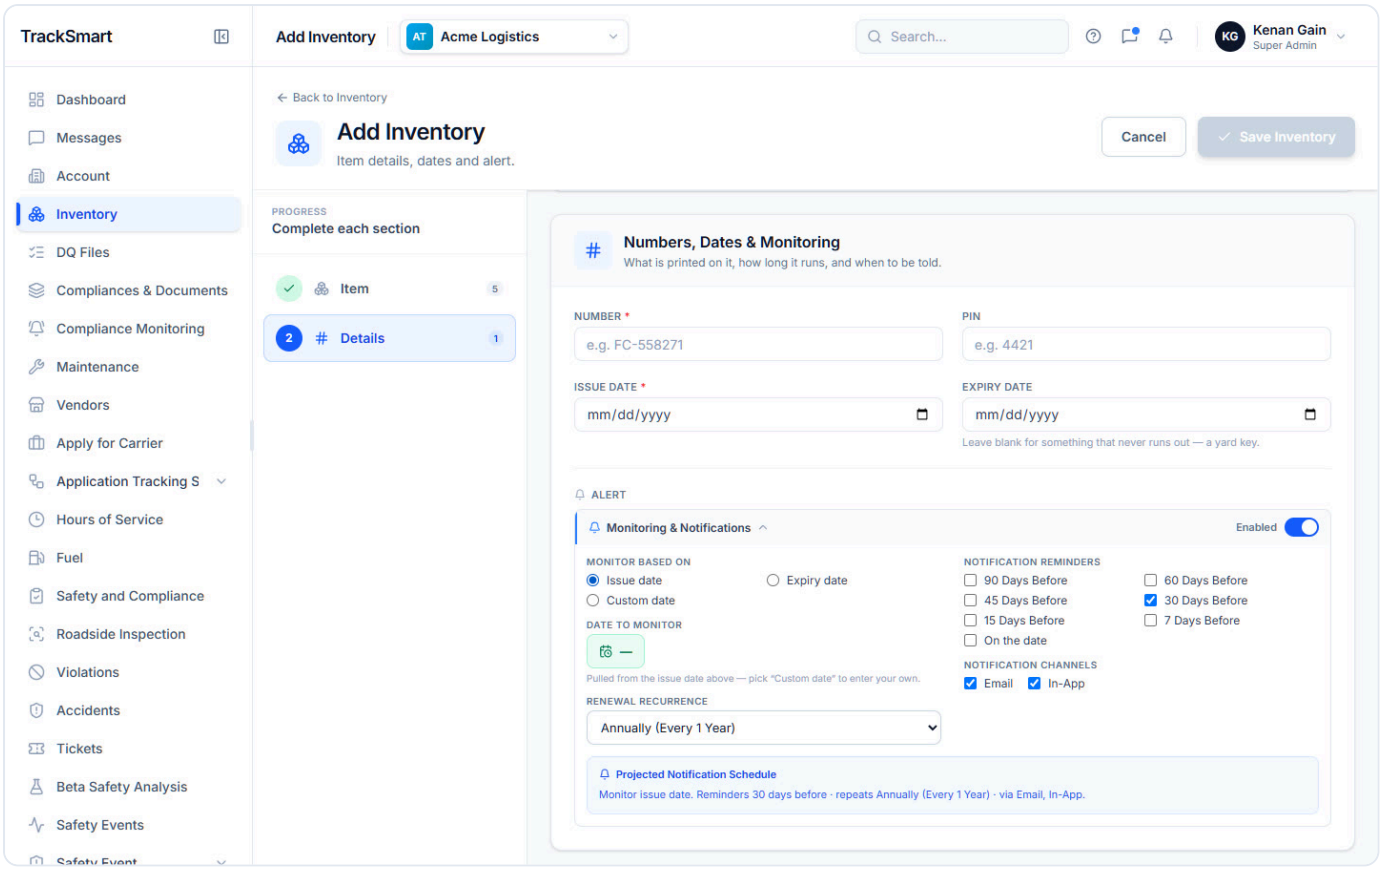

`list-add-item-alert-issue-basis-desktop.png` — Monitor based on Issue date: the Renewal recurrence select appears.

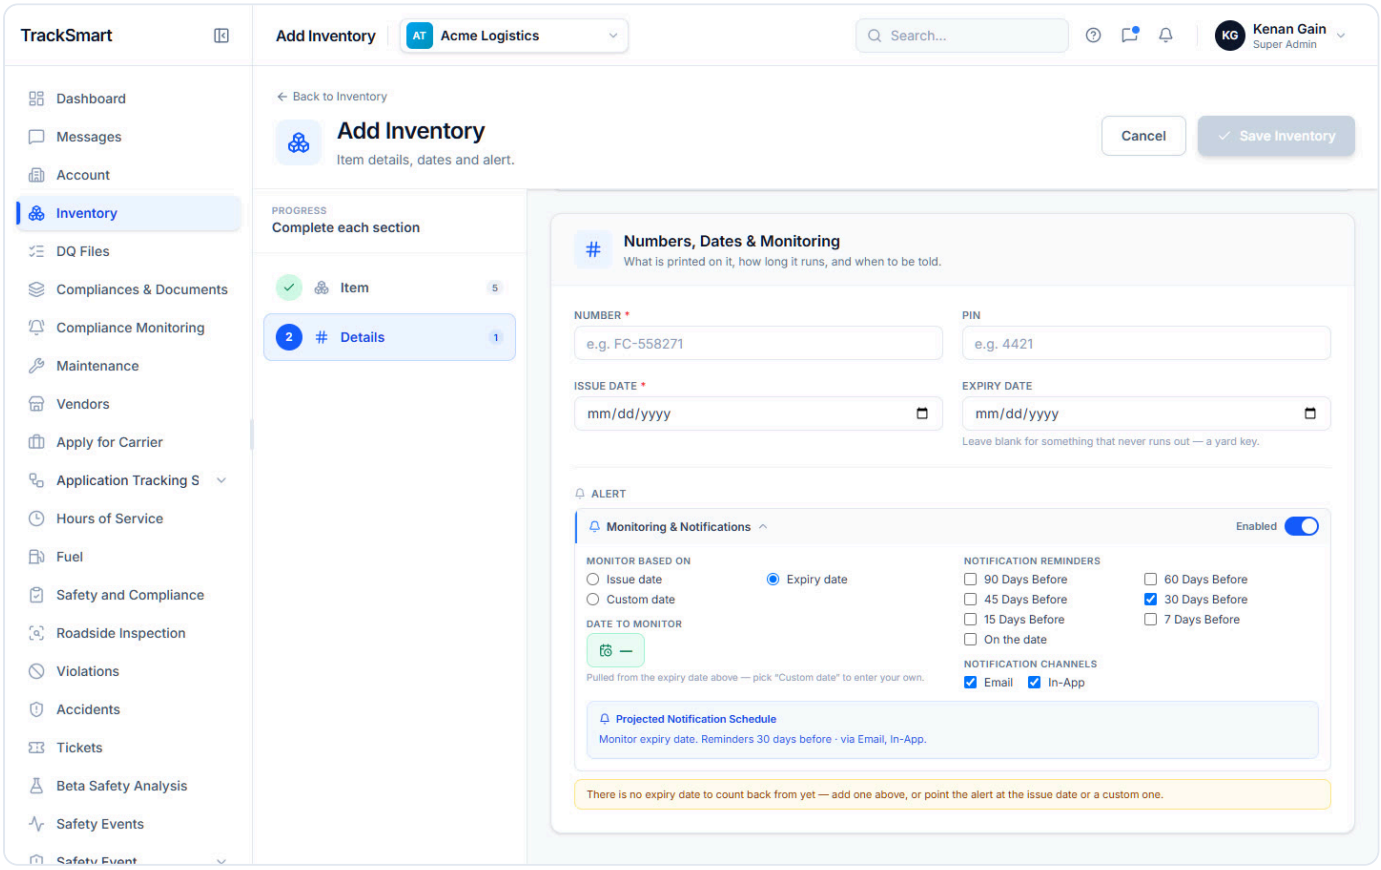

`list-add-item-alert-no-expiry-warning-desktop.png` — Alert switched on with no expiry date yet: the amber warning, reminders, channels and the projected schedule.

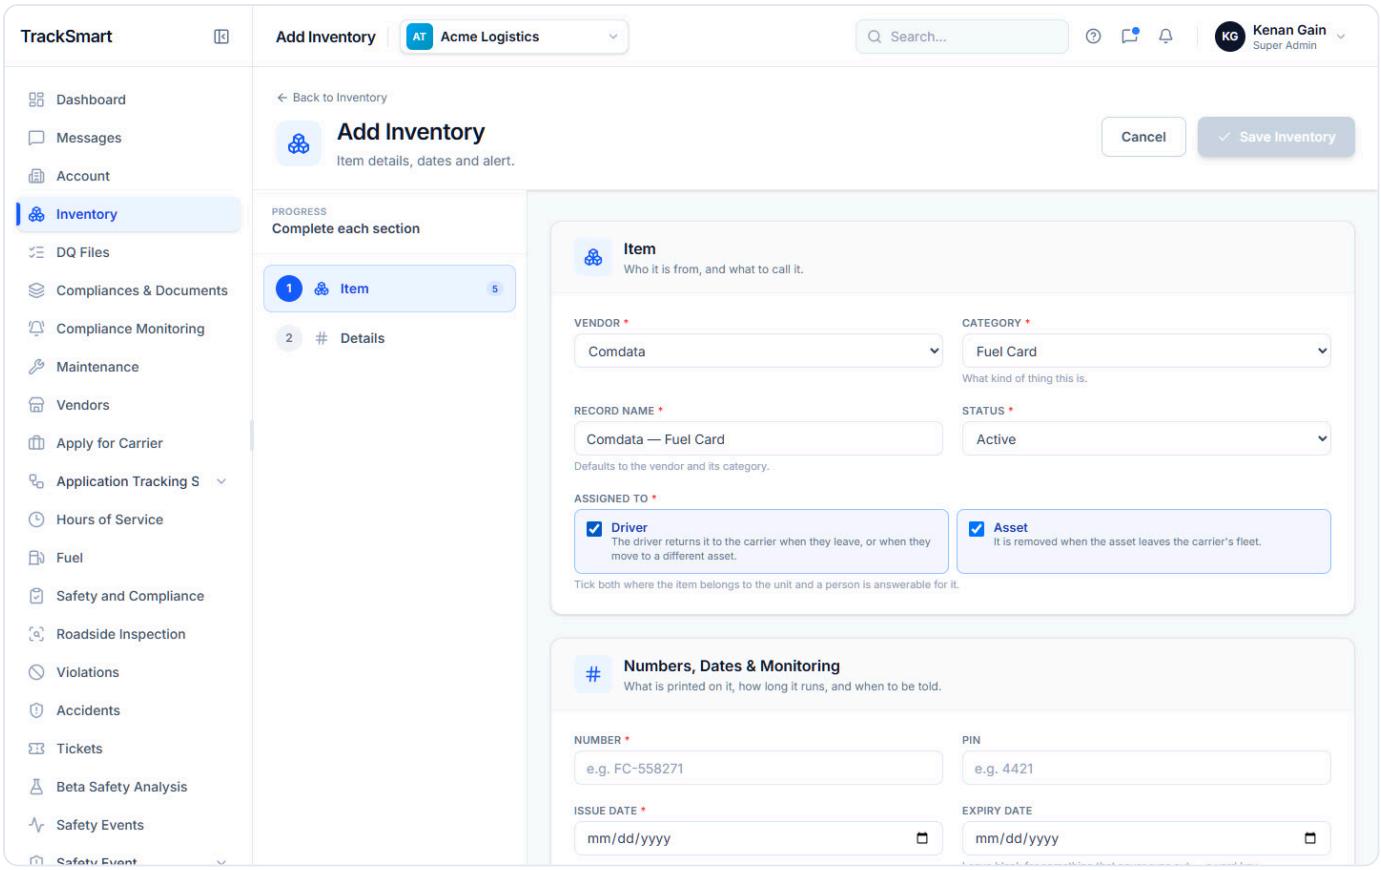

`list-add-item-assigned-both-desktop.png` — "Assigned to" with both Driver and Asset ticked.

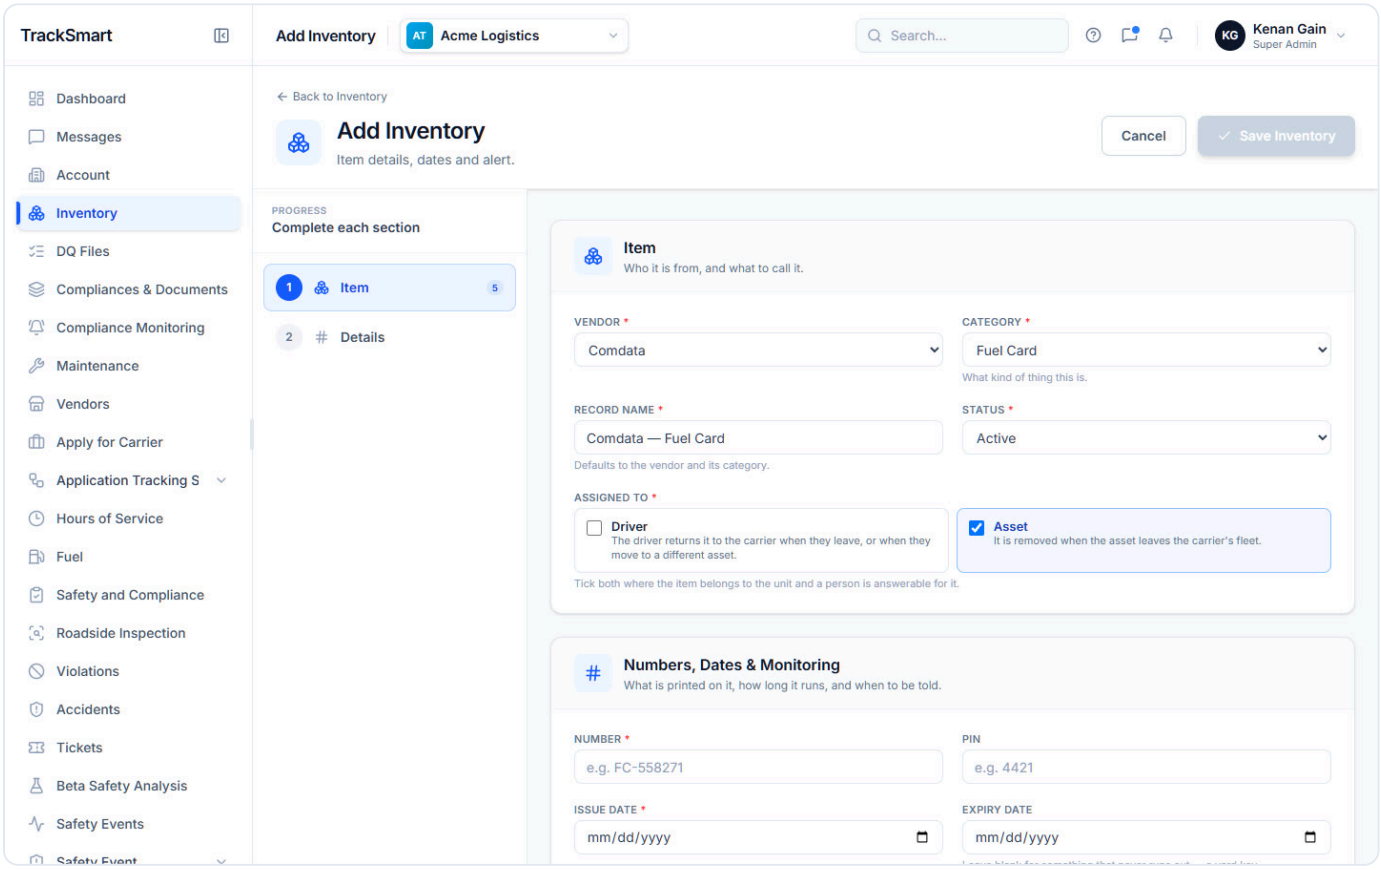

`list-add-item-default-desktop.png` — Add Inventory: the wizard with its Progress rail (desktop); Save Inventory stays grey until Vendor, Number and Issue date are in.

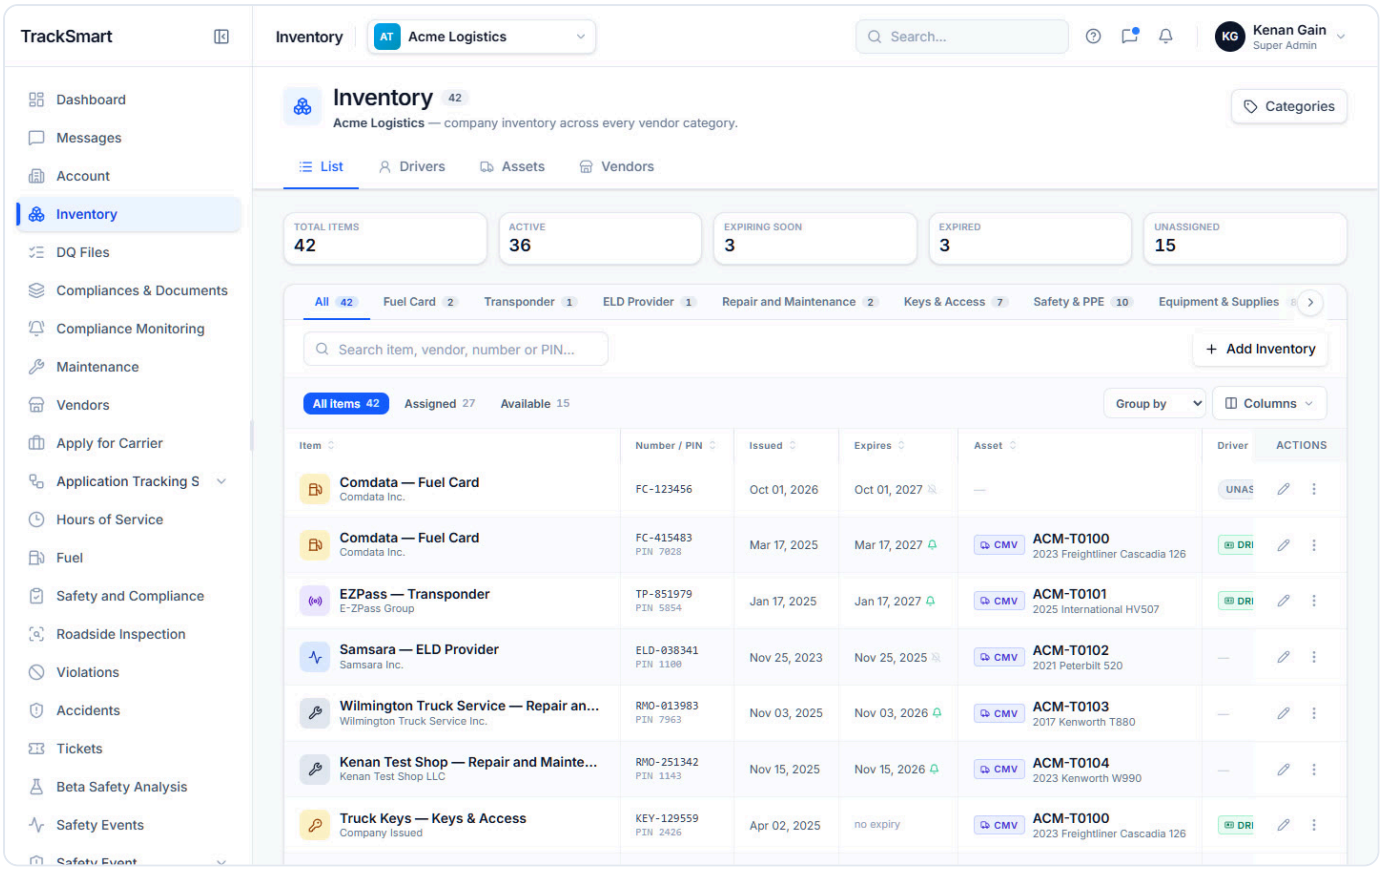

`list-add-item-saved-desktop.png` — After Save: back on the List with the new item at the top (no toast).

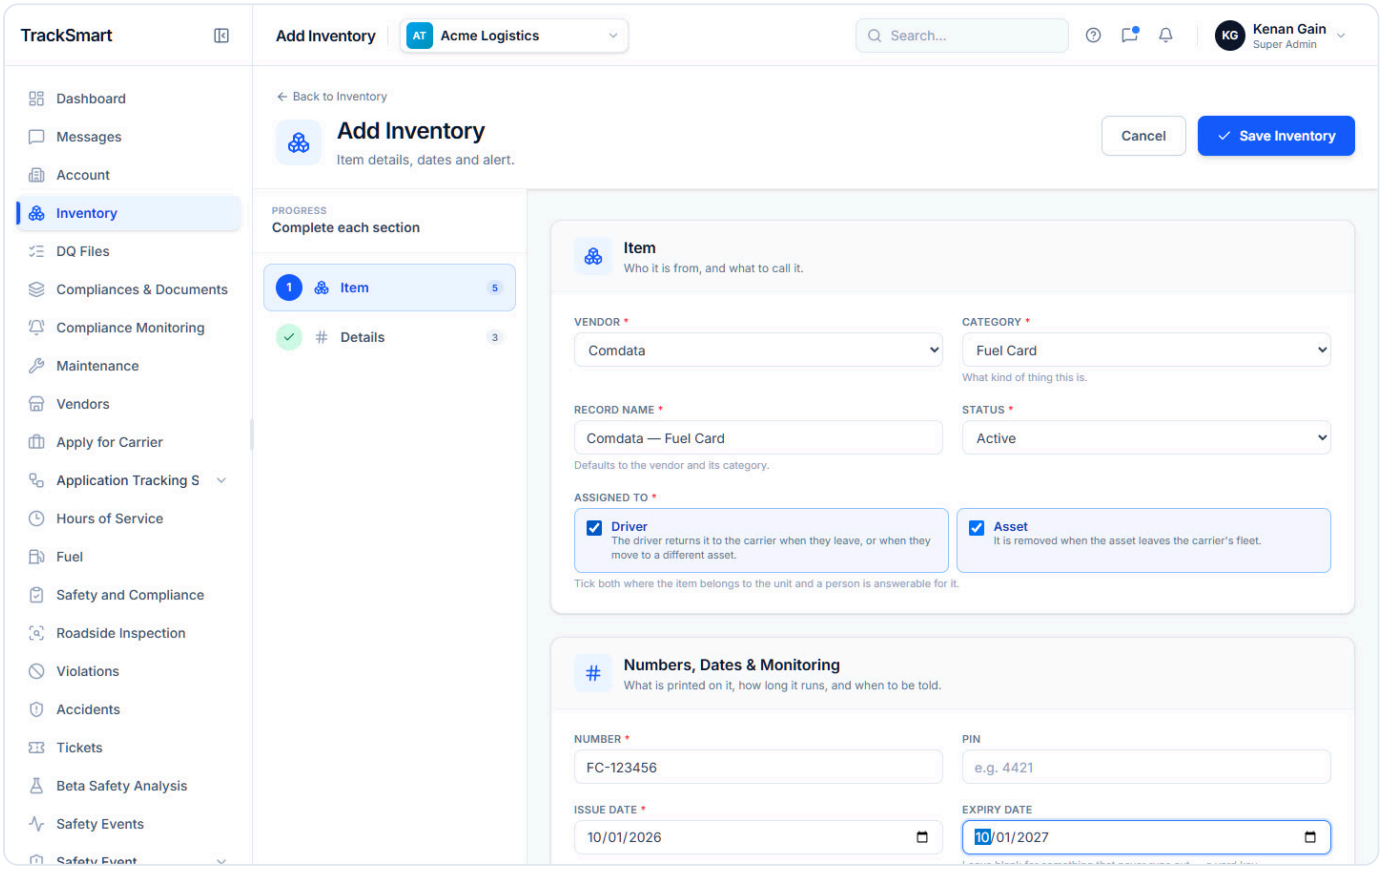

`list-add-item-valid-desktop.png` — Number and Issue date filled: the rail counts every answered field and Save Inventory turns blue.

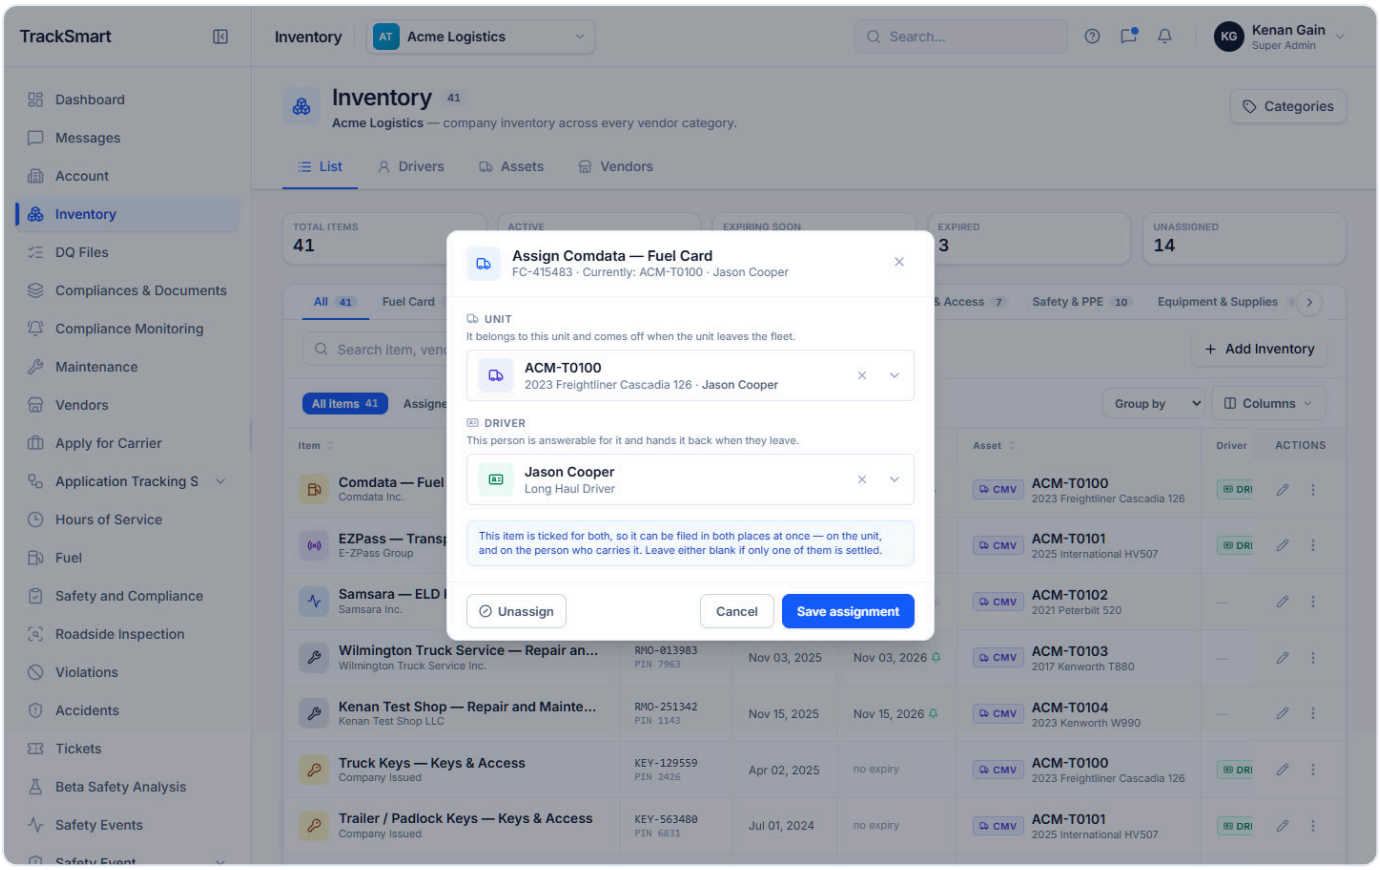

`list-assign-dialog-both-desktop.png` — "Assign Comdata — Fuel Card": ticked for both, so a Unit and a Driver block and the blue both-places note; Unassign, Cancel, Save assignment.

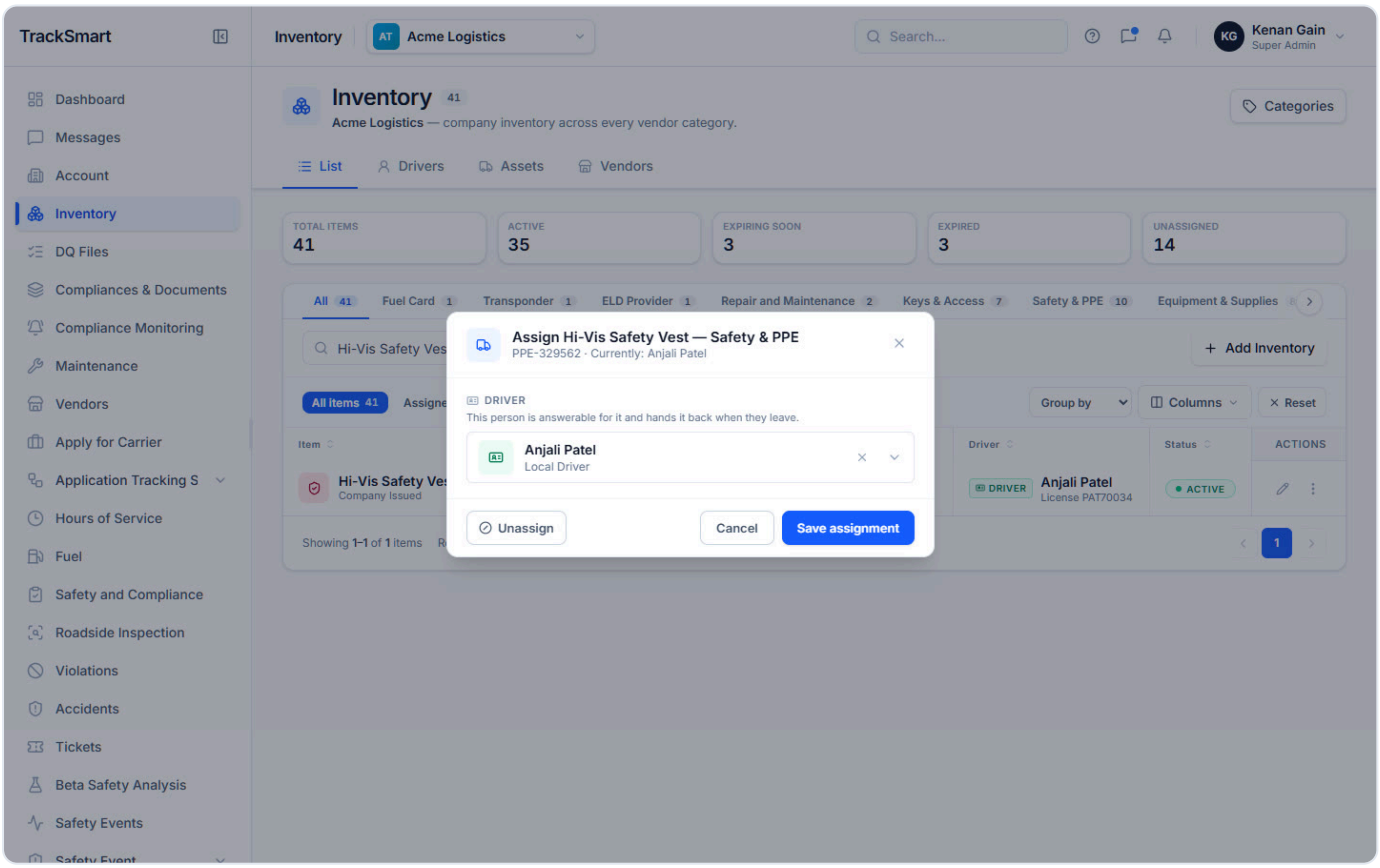

`list-assign-dialog-driver-only-desktop.png` — PPE is ticked for Driver only: the dialog shows just the Driver block.

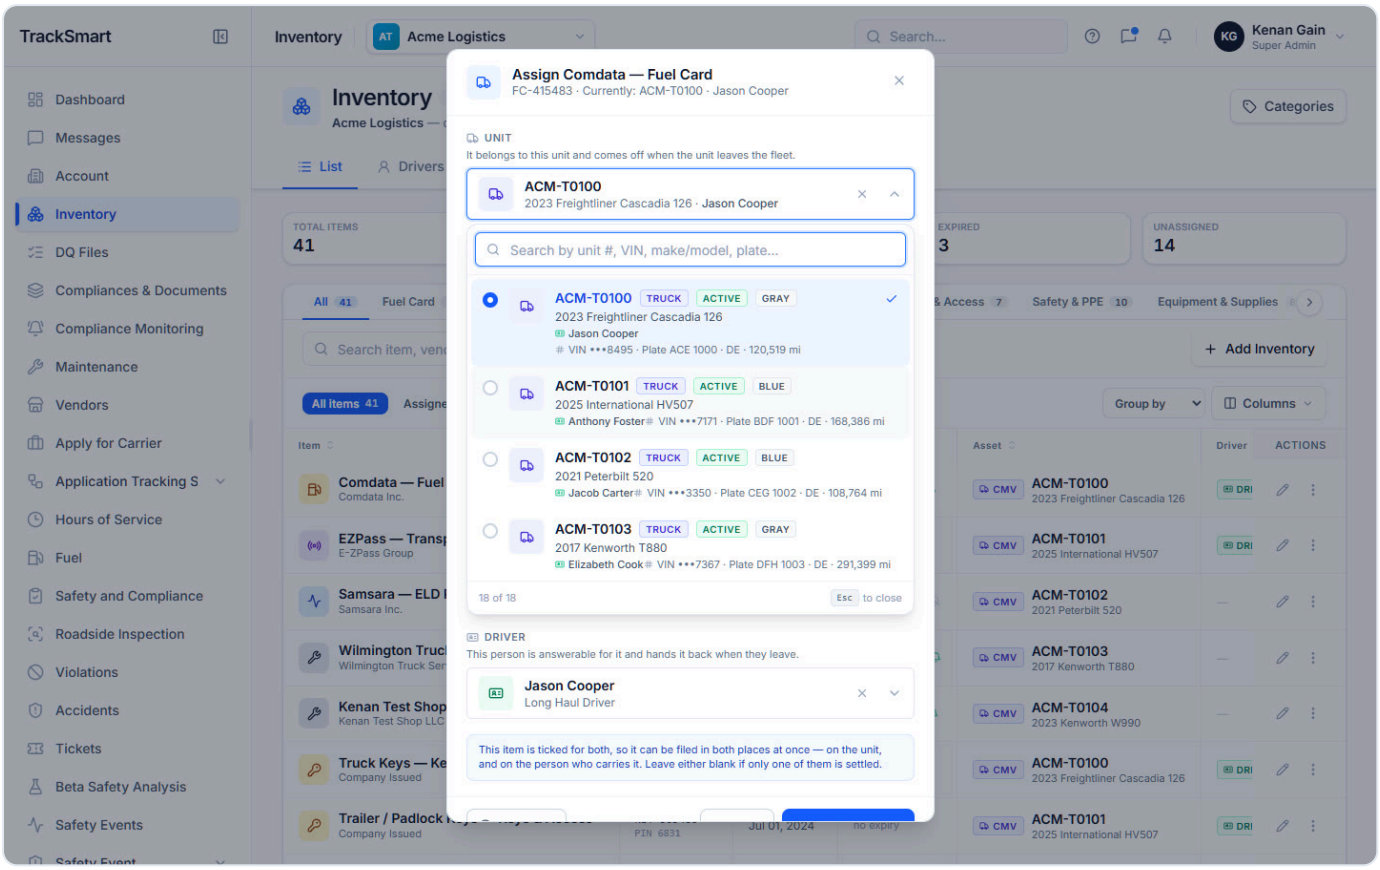

`list-assign-dialog-picker-open-desktop.png` — Unit picker open in the dialog: search, unit rows with type and status chips, current driver, VIN / plate / miles, "n of N · Esc to close".

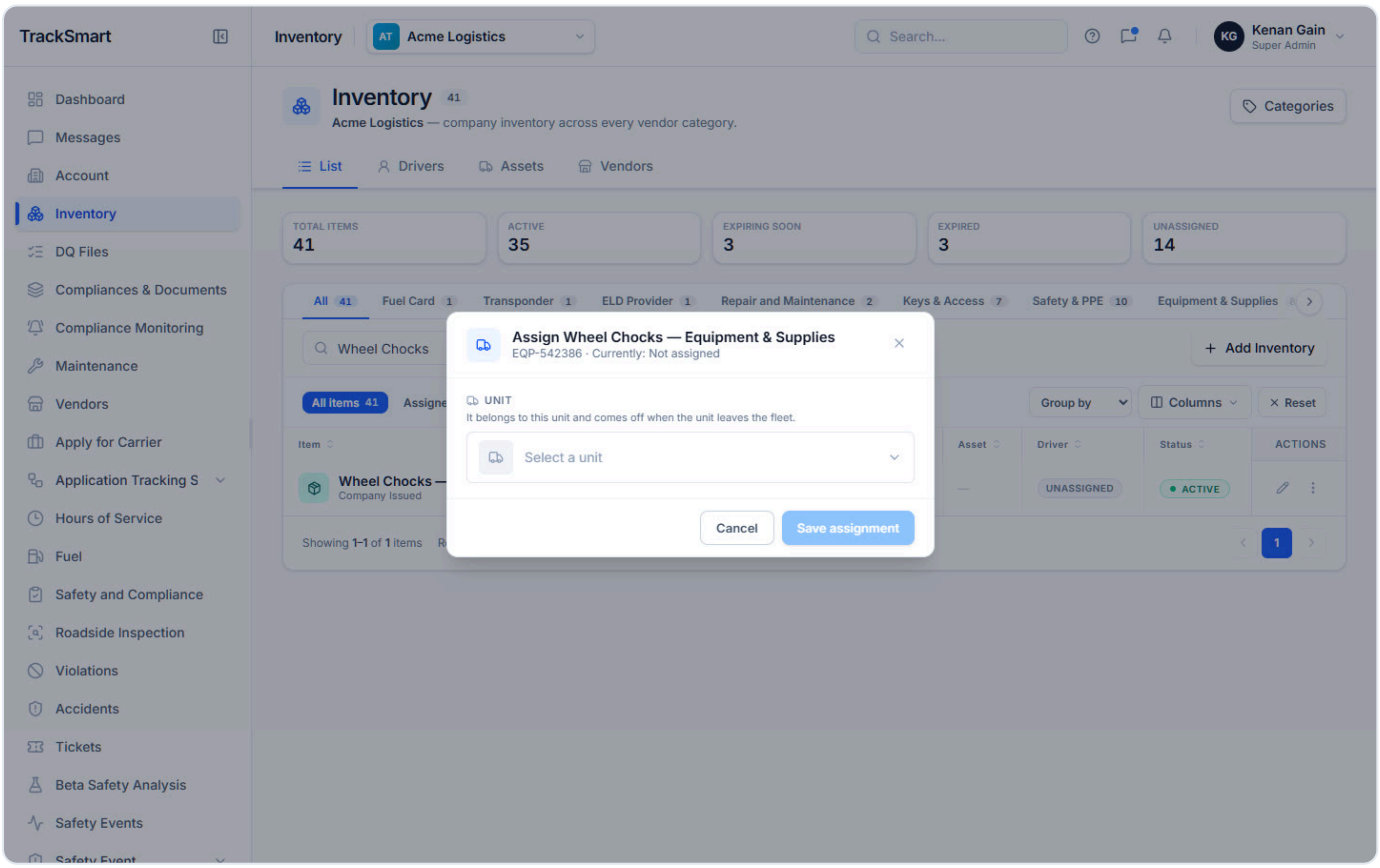

`list-assign-dialog-unassigned-desktop.png` — Yard stock: "Currently: Not assigned", no Unassign button, Save assignment disabled until a unit is picked.

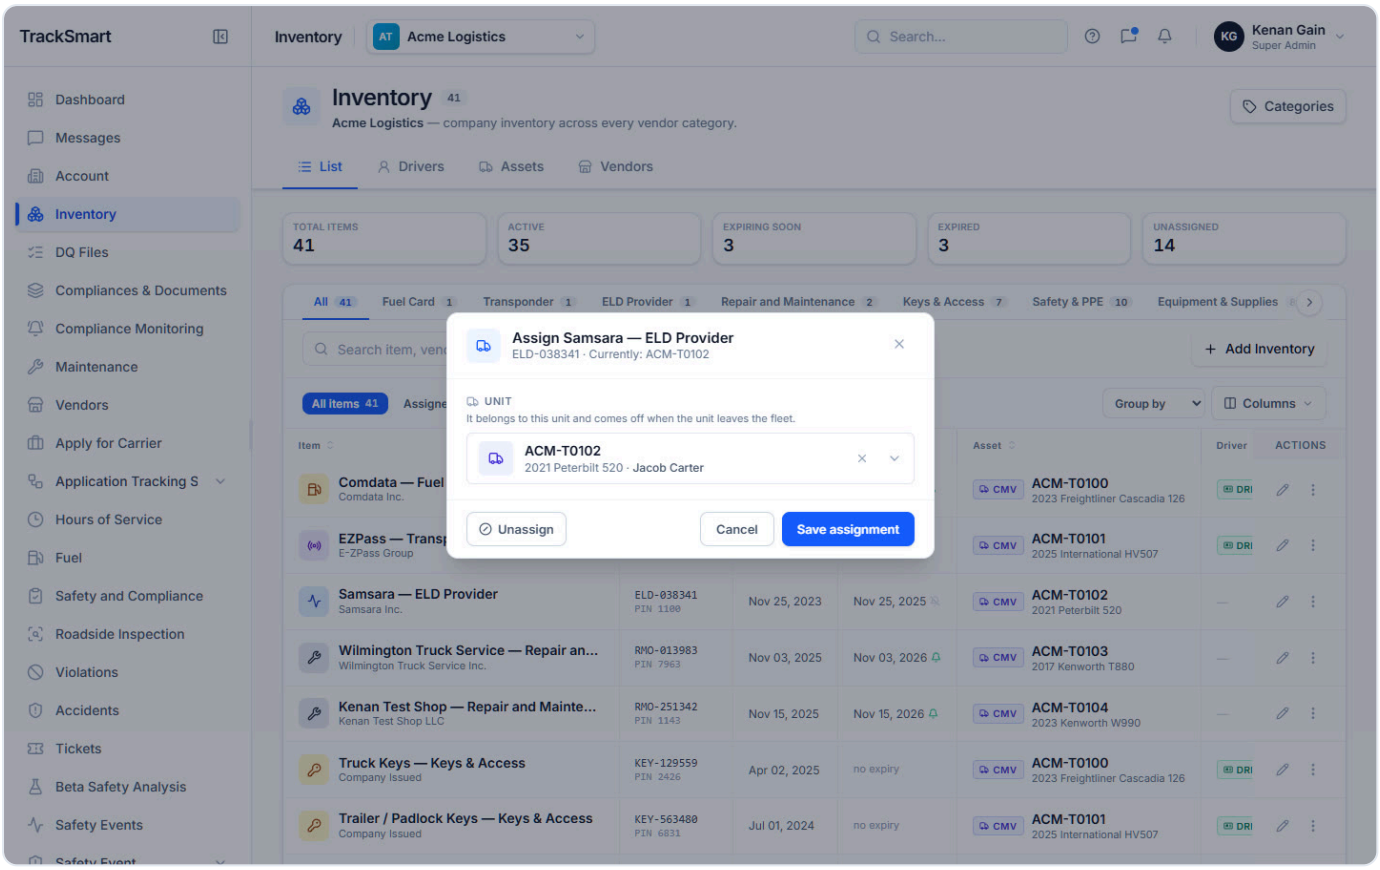

`list-assign-dialog-unit-only-desktop.png` — An ELD is ticked for Asset only: the dialog shows just the Unit block.

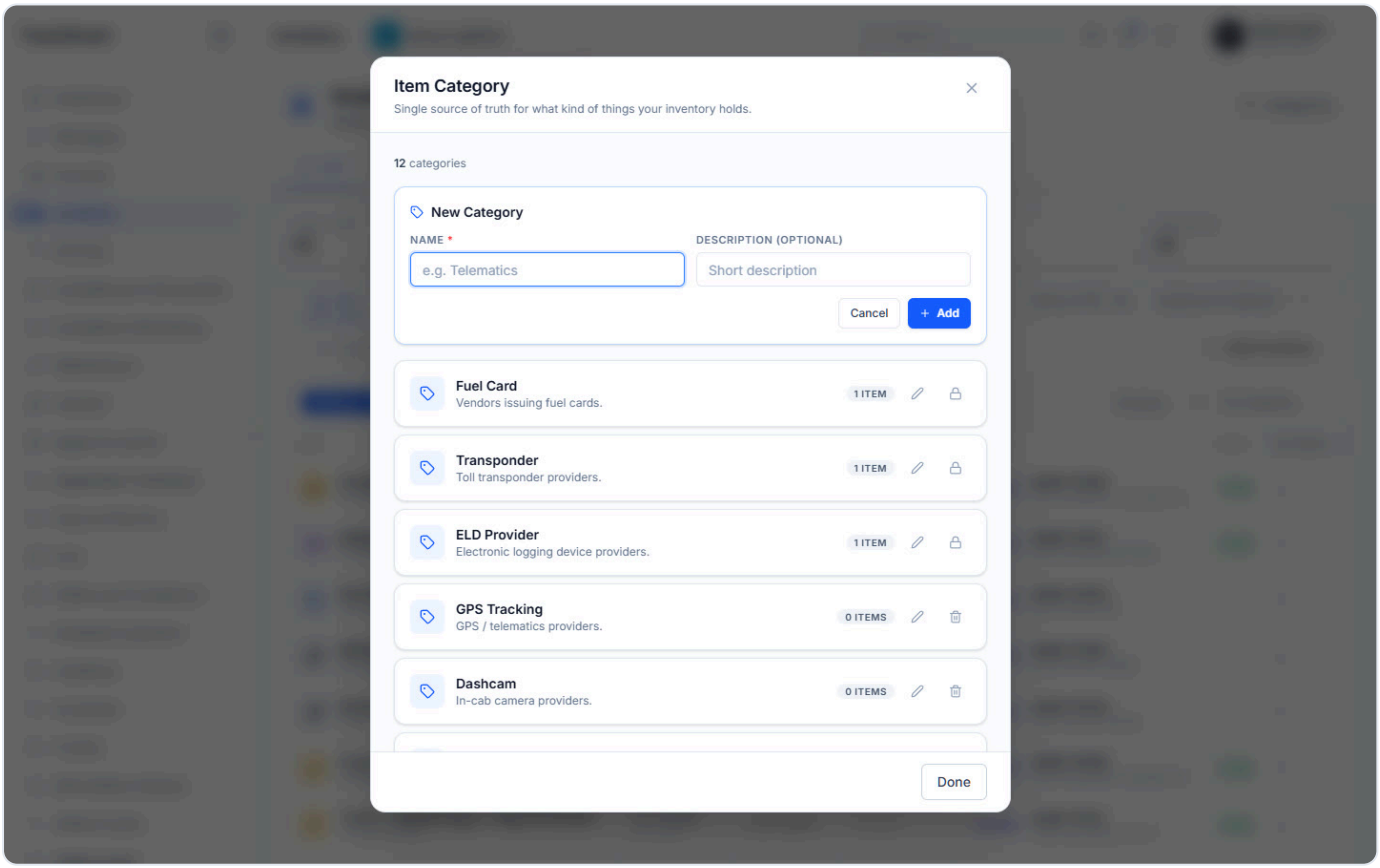

`list-categories-add-form-desktop.png` — New Category card: Name (required) and Description (optional).

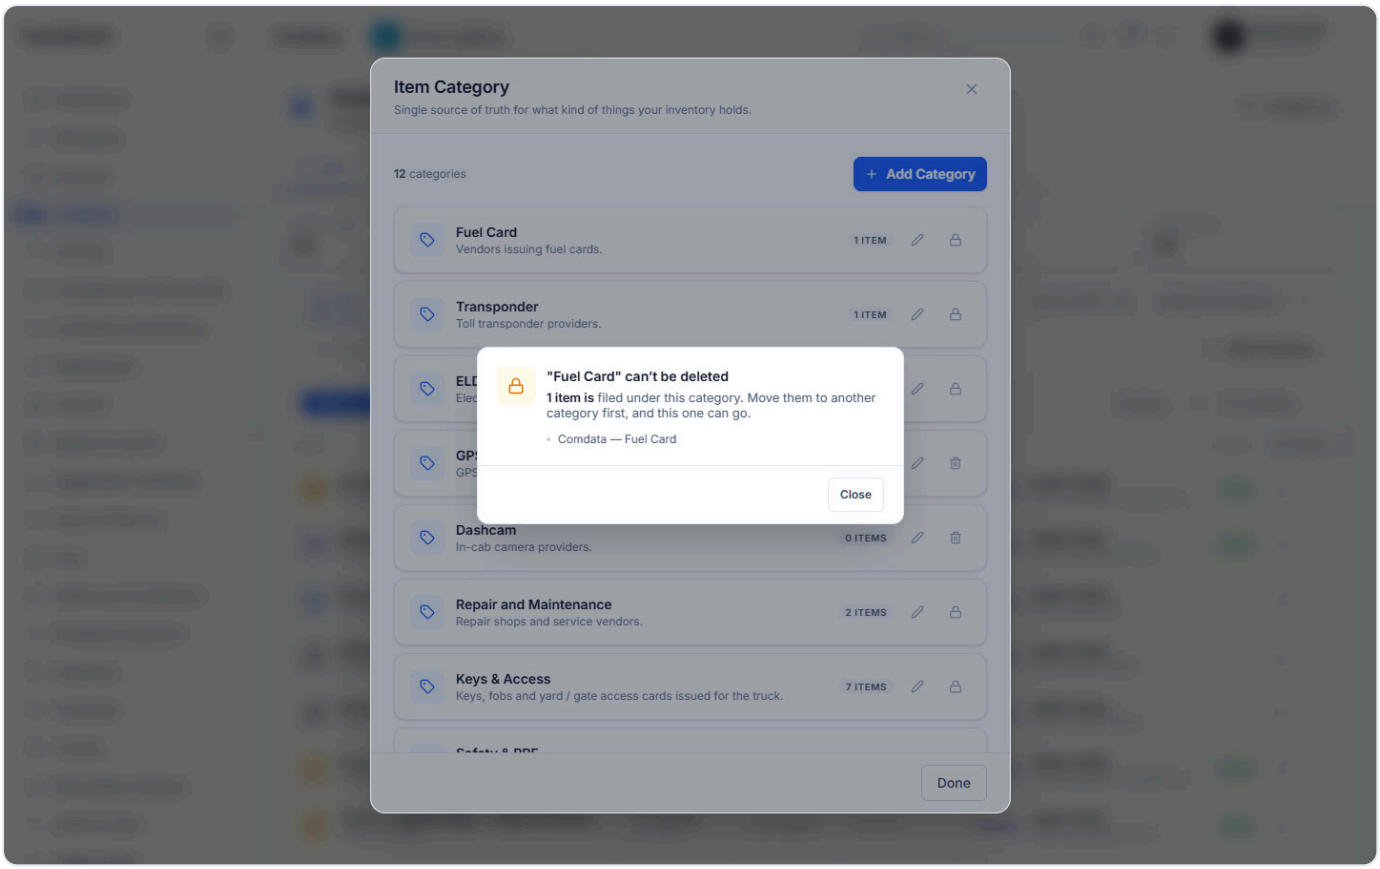

`list-categories-delete-blocked-desktop.png` — A category in use cannot be deleted: the dialog names the items filed under it.

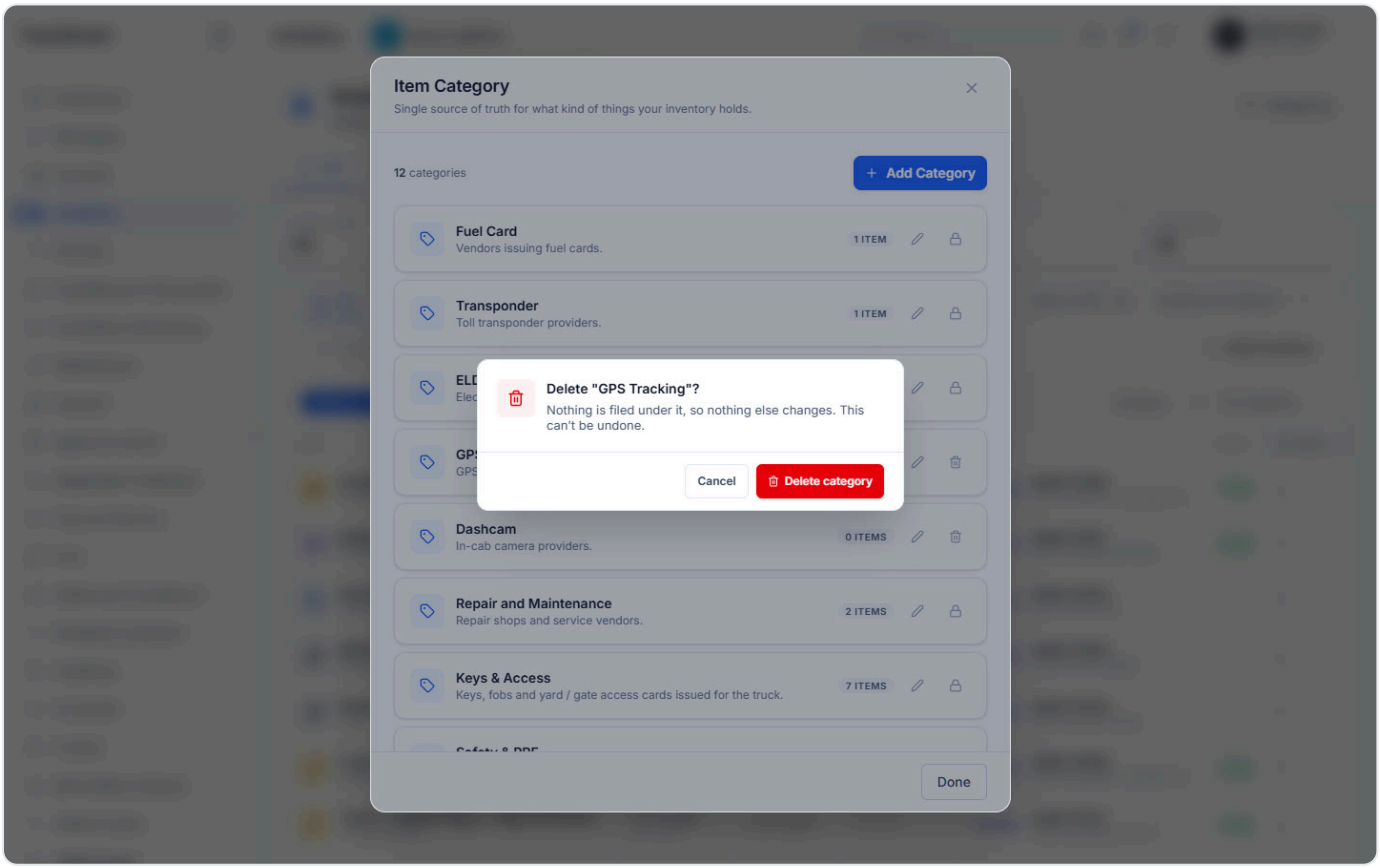

`list-categories-delete-confirm-desktop.png` — An empty category asks first: "Delete "..."? Nothing is filed under it..." with a red Delete category.

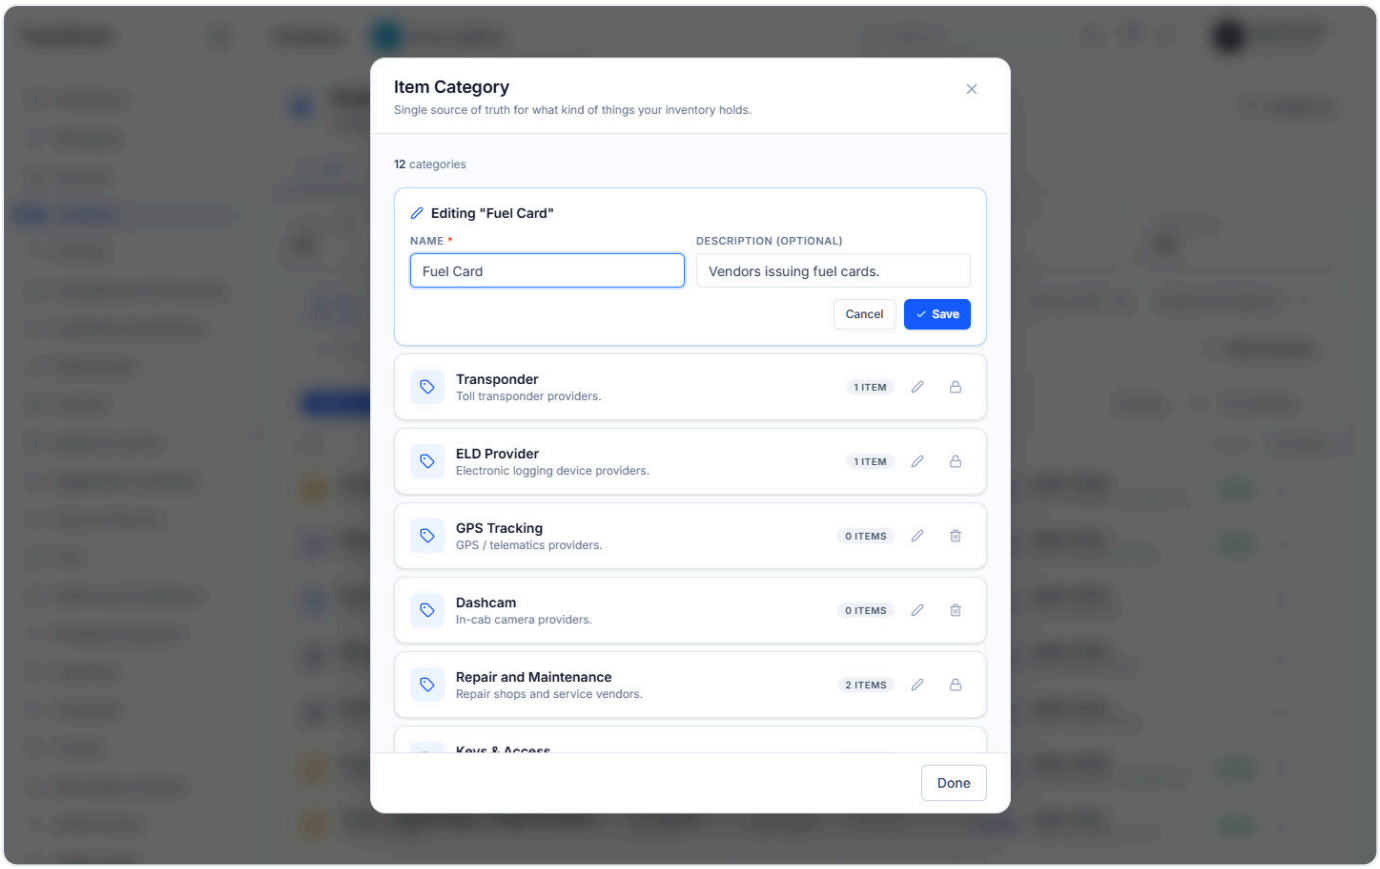

`list-categories-edit-desktop.png` — Editing a category in place: same fields, Cancel / Save.

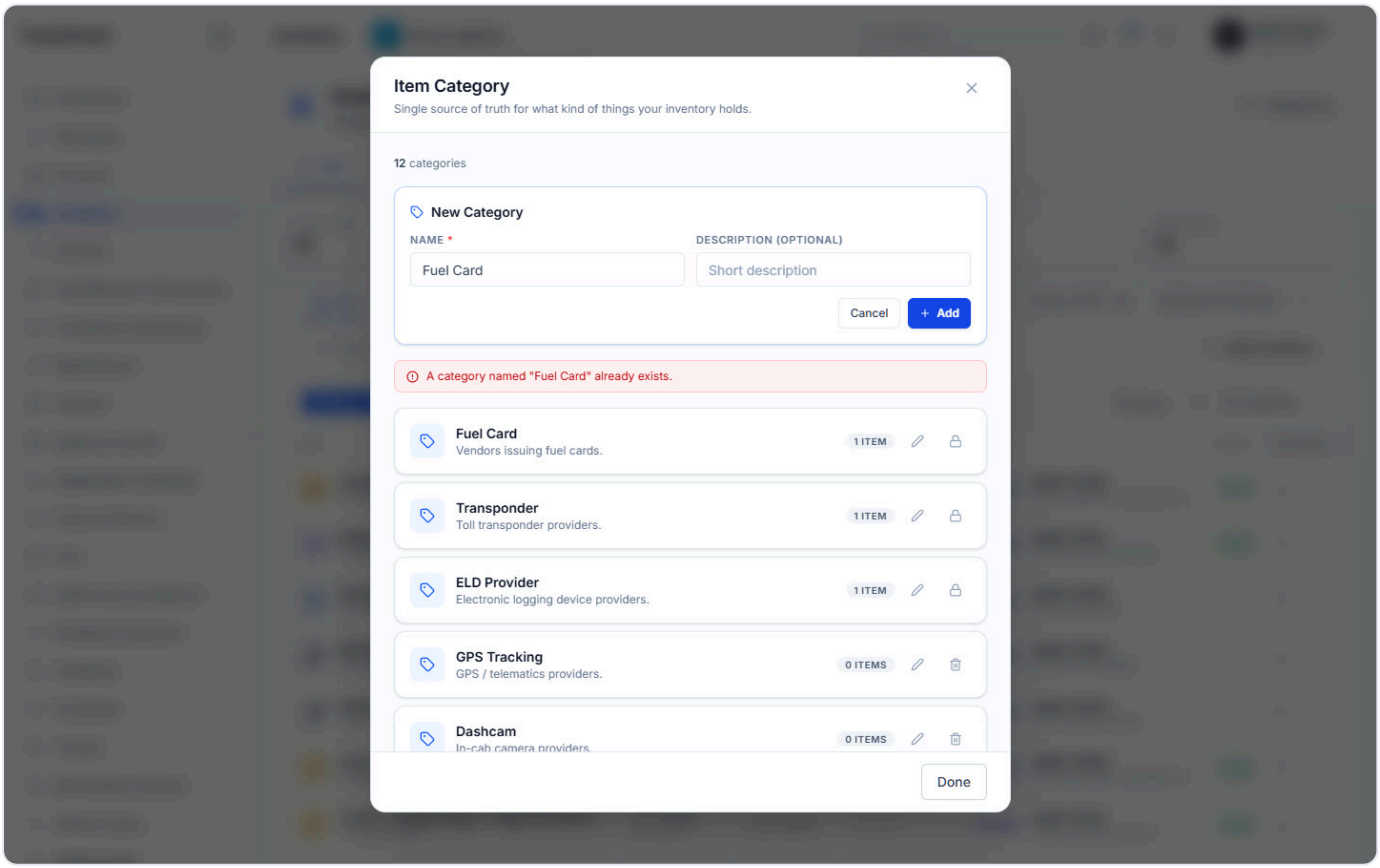

`list-categories-error-duplicate-desktop.png` — Validation: a name that exists already — "A category named "Fuel Card" already exists."

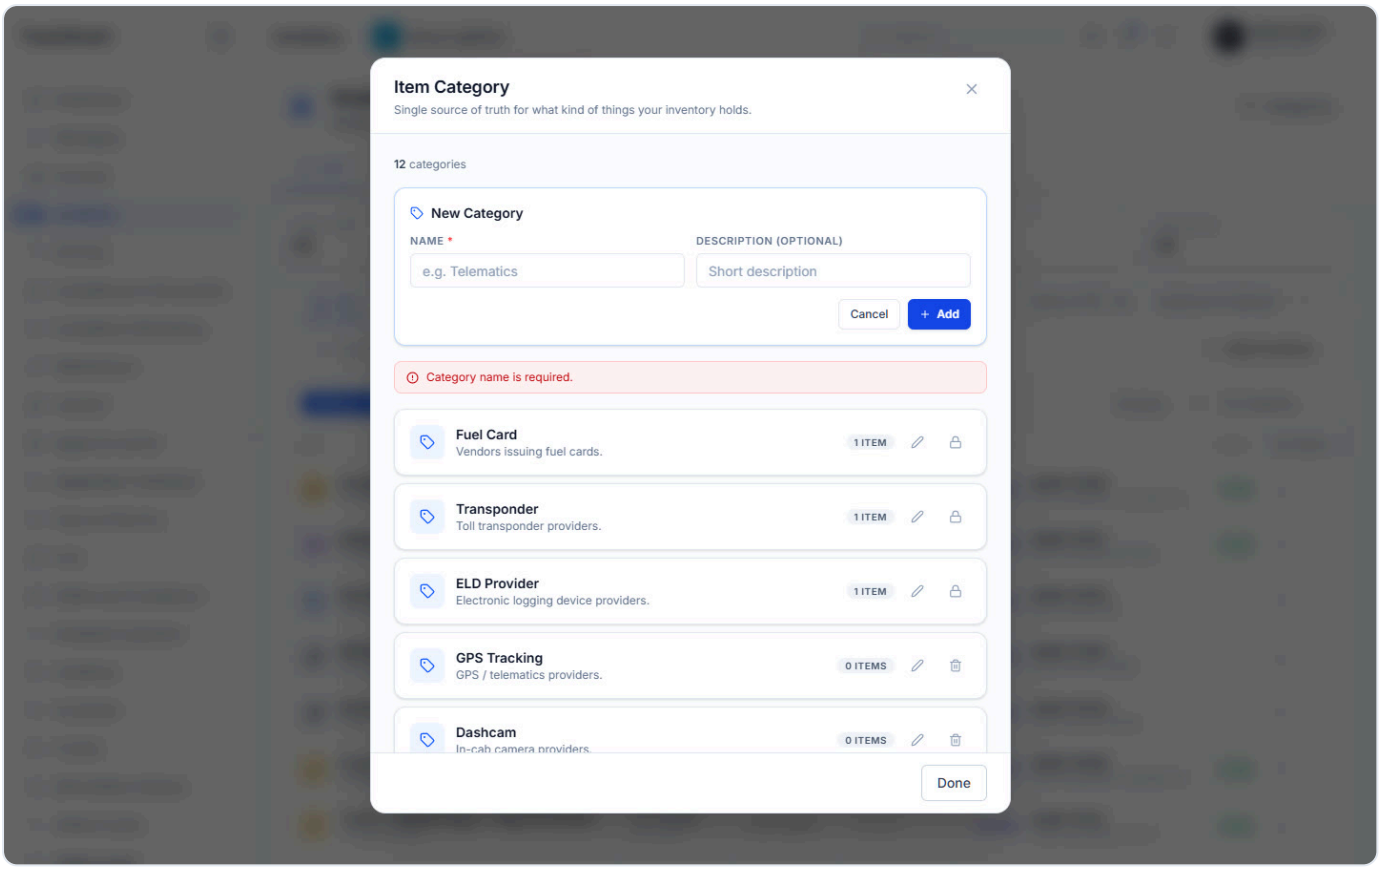

`list-categories-error-required-desktop.png` — Validation: "Category name is required."

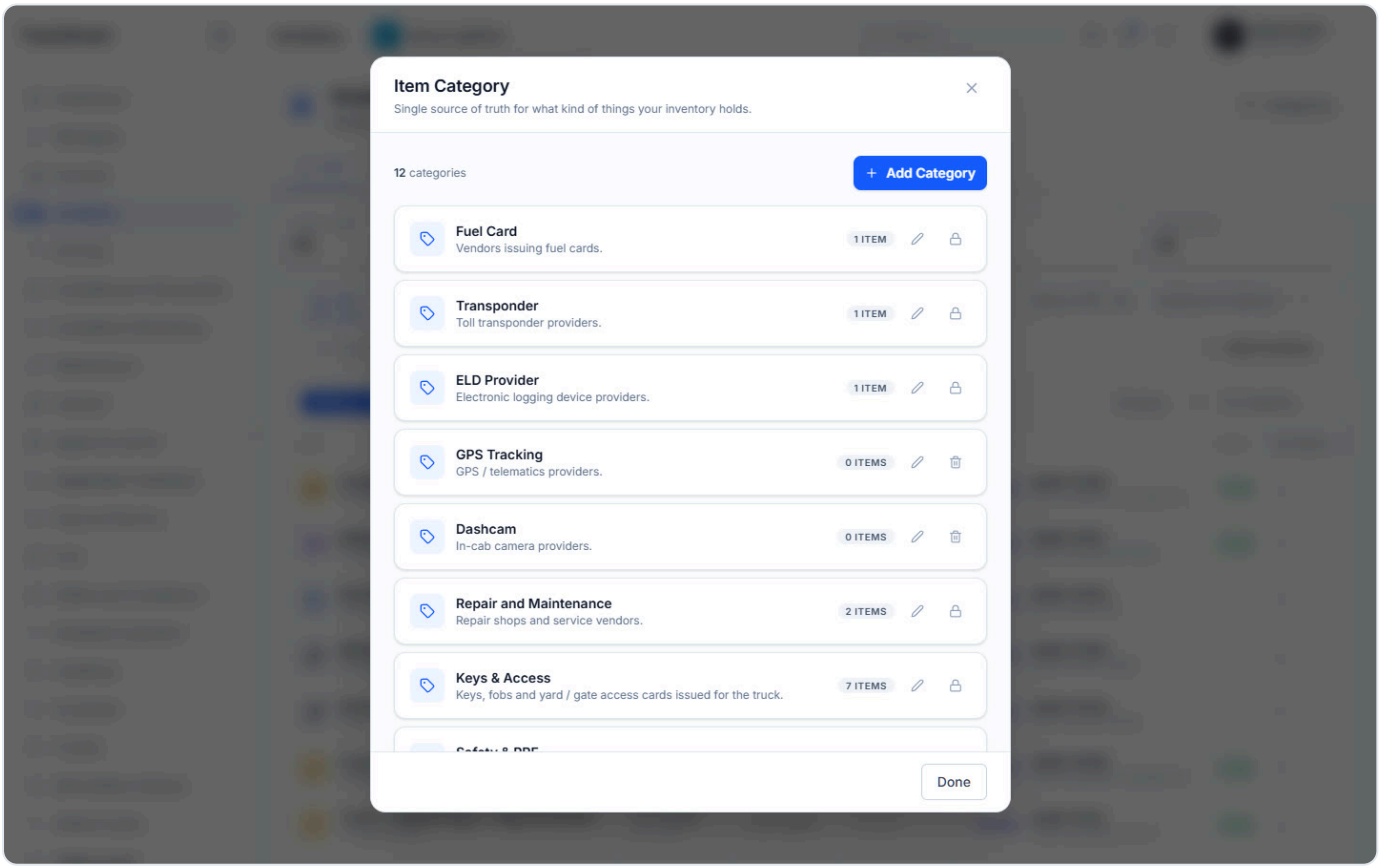

`list-categories-modal-desktop.png` — "Item Category" modal: the 12 categories with item counts; in-use ones are locked against delete.

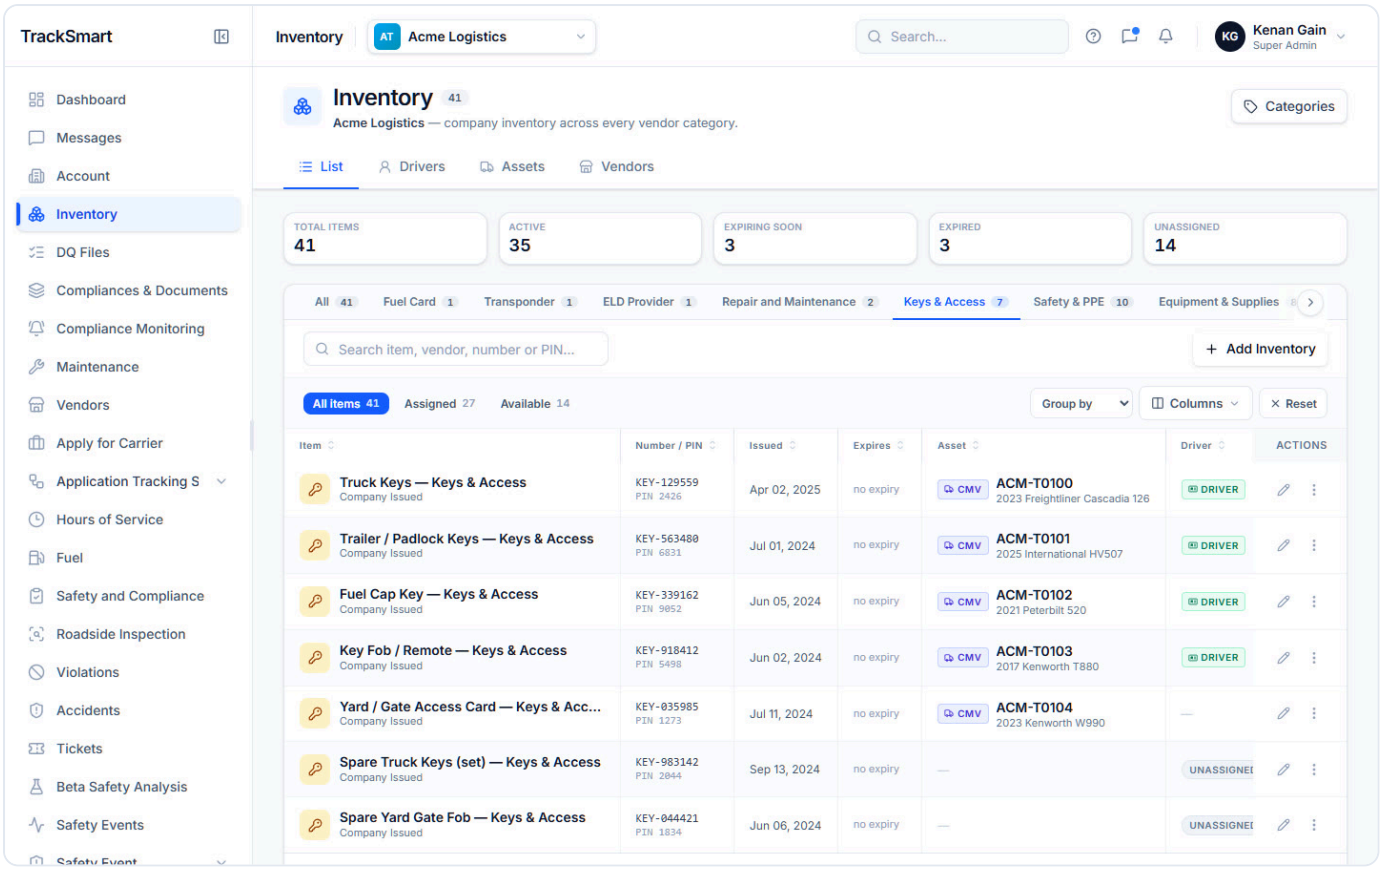

`list-category-keys-desktop.png` — Category rail on "Keys & Access": only that category's items, counts per tab.

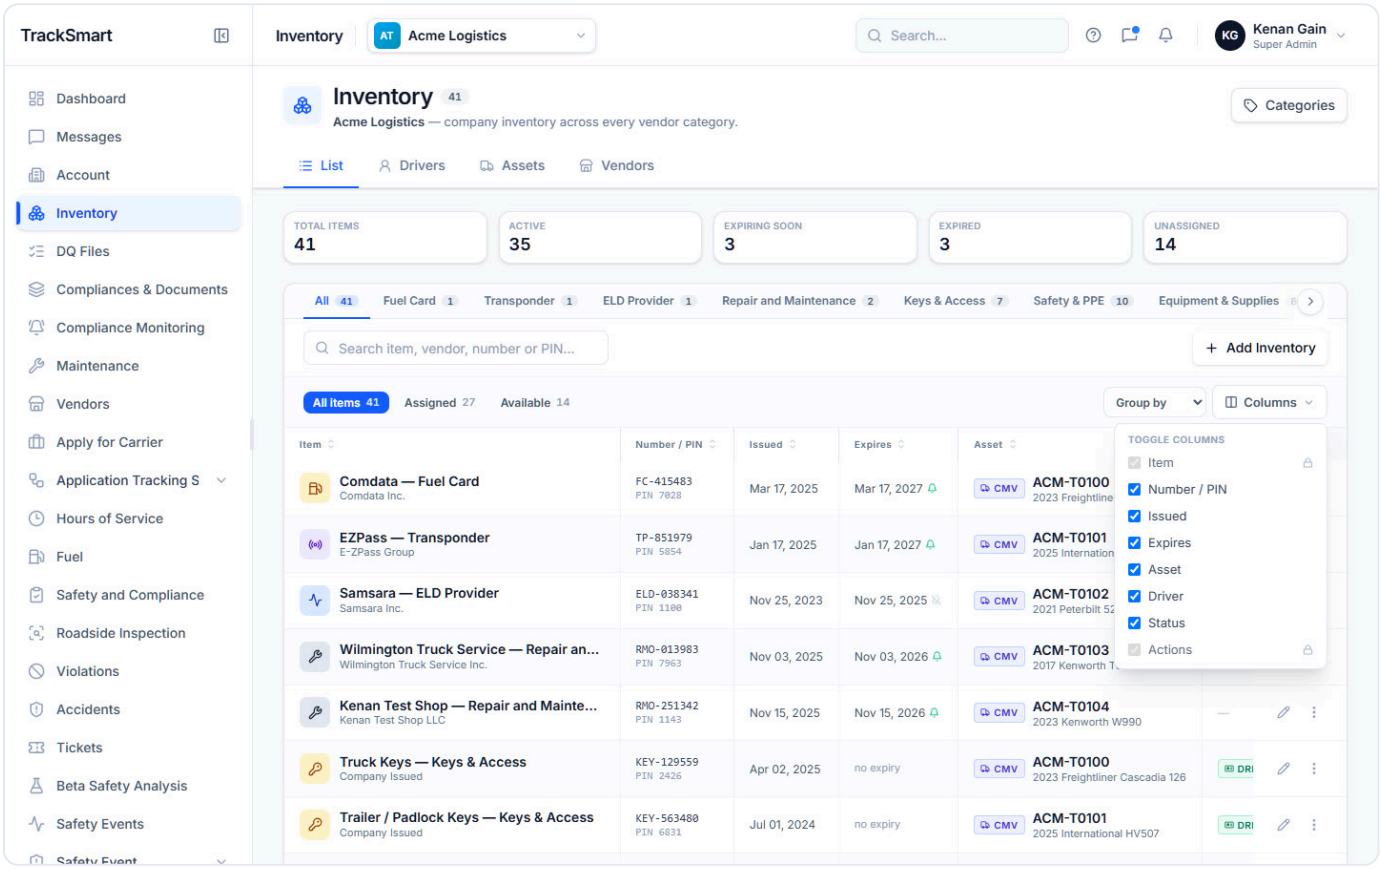

`list-columns-picker-desktop.png` — Columns picker: Item and Actions are locked; the other six columns can be hidden.

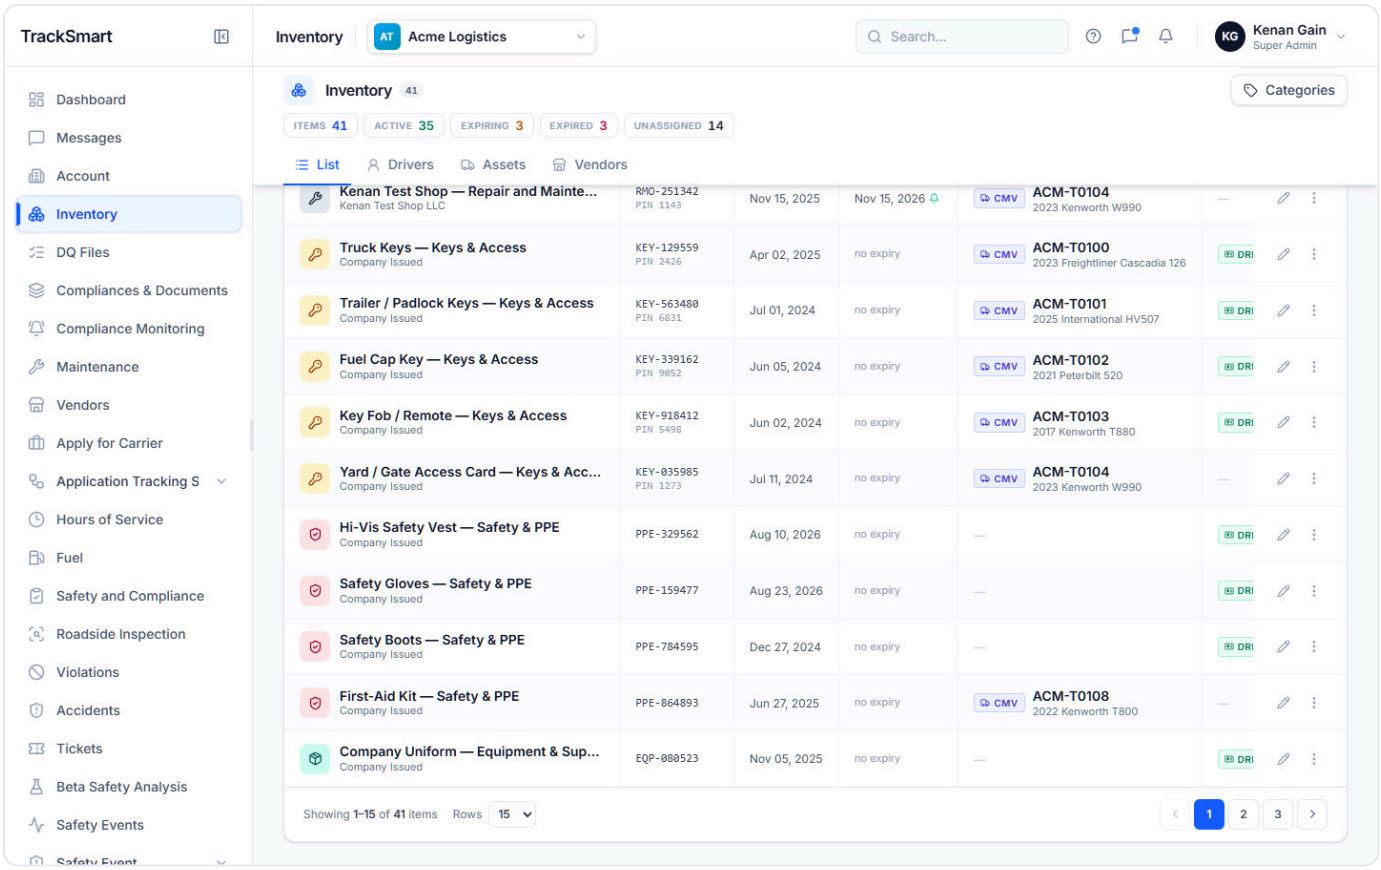

`list-condensed-header-desktop.png` — List scrolled: the header condenses and the KPI figures ride in a strip under the title.

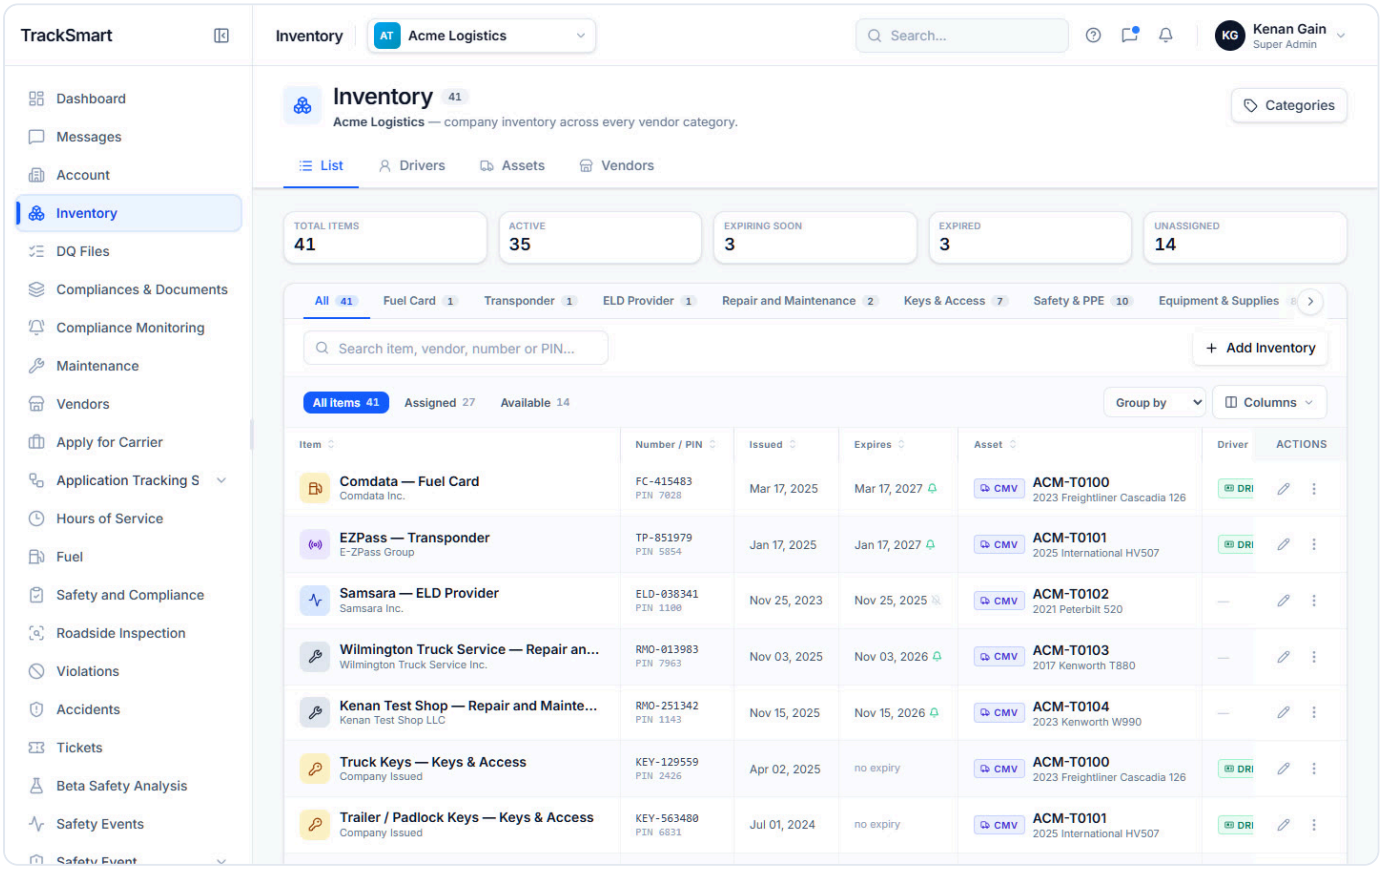

`list-default-desktop.png` — List tab: header with Categories, the five KPI tiles, the category rail, search + Add Inventory, the assignment chips, Group by, Columns and the first 15 items.

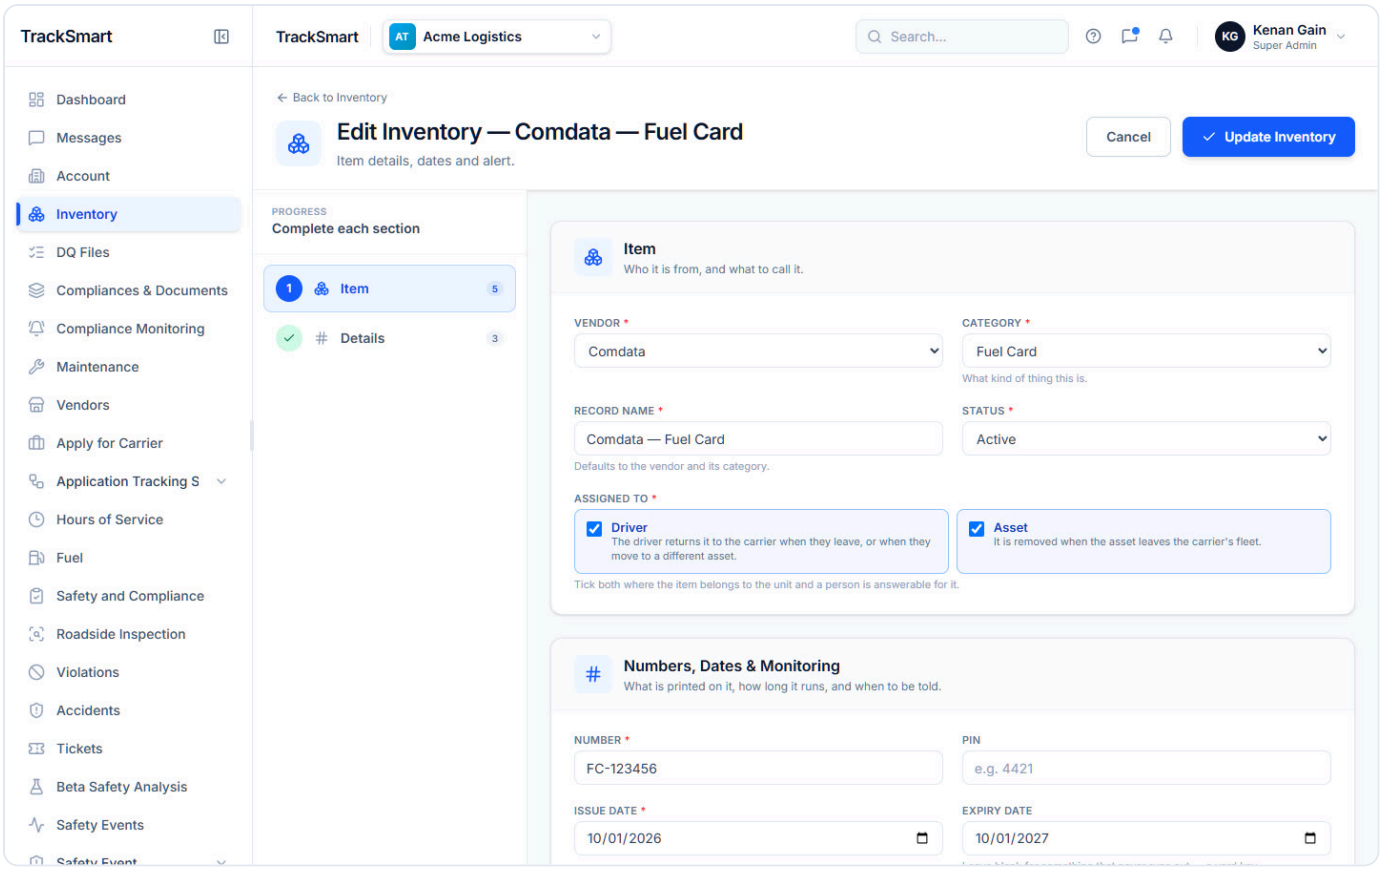

`list-edit-item-desktop.png` — Edit Inventory — {item}: the same wizard, filled in; the button reads Update Inventory.

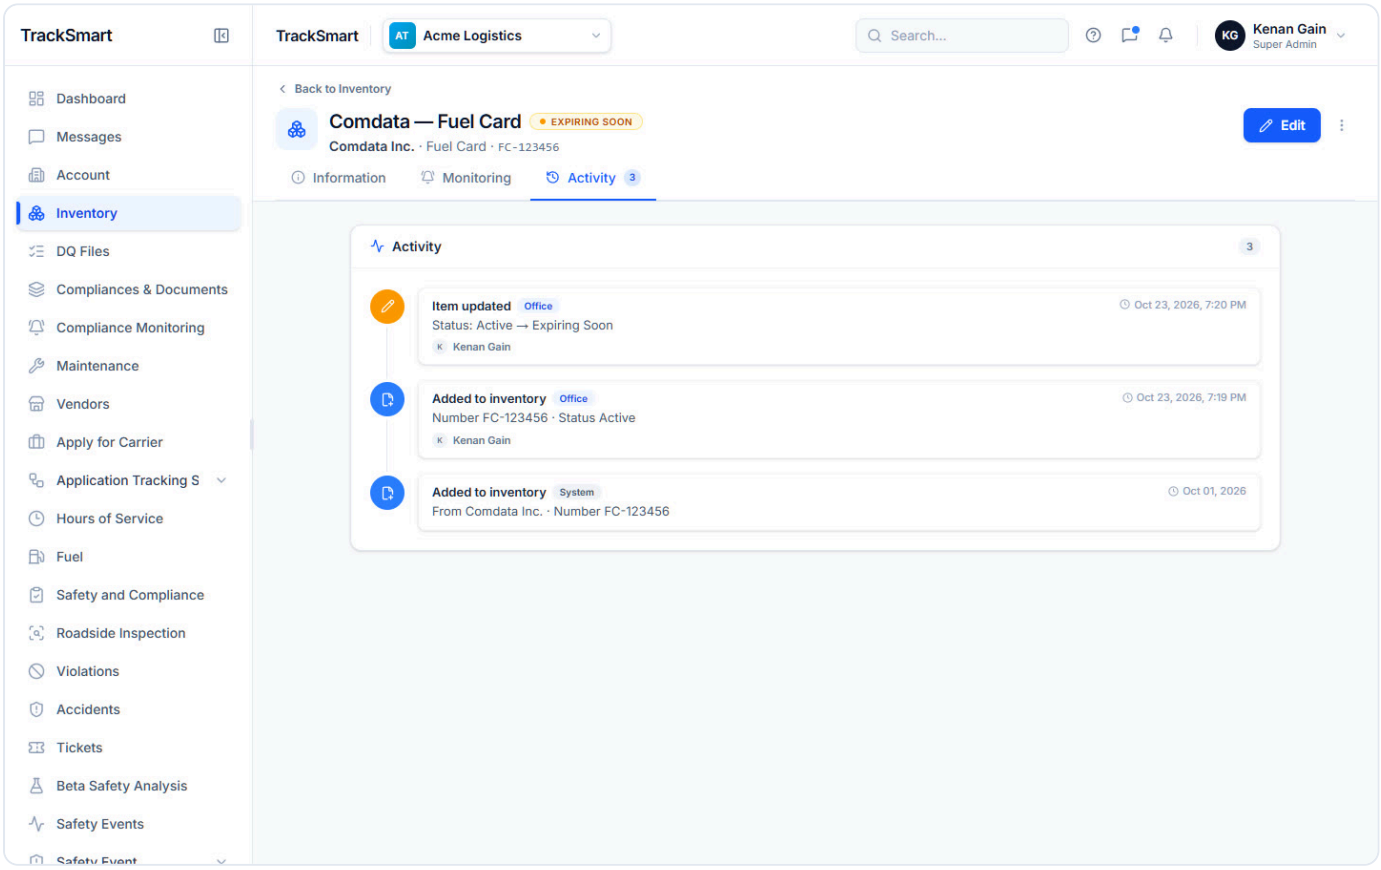

`list-edit-item-saved-activity-desktop.png` — After Update: the item page, Activity tab with the recorded "Item updated" entry and its change list.

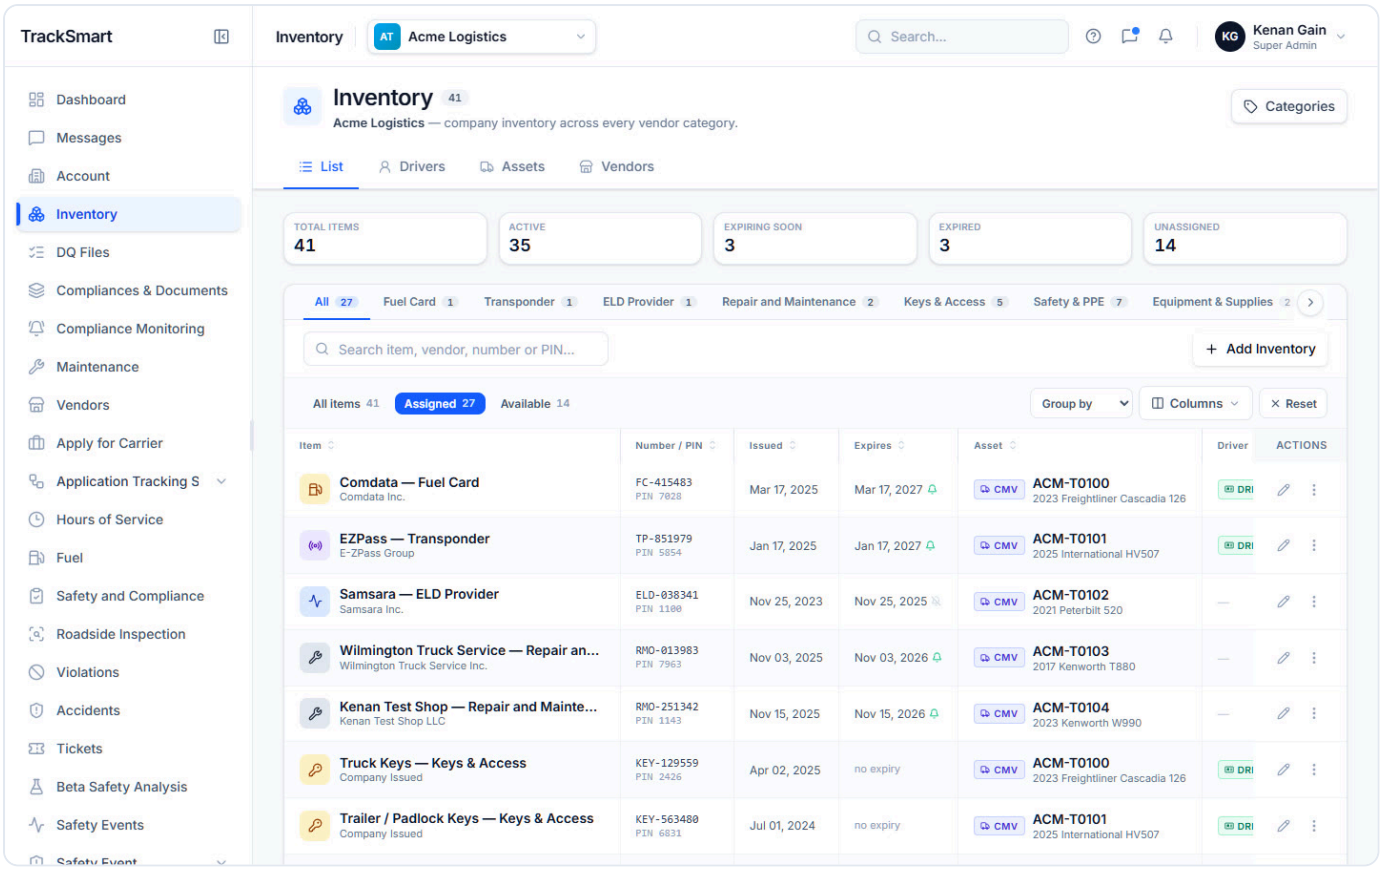

`list-filter-assigned-desktop.png` — Chip "Assigned": items on a unit or a driver; the Reset button appears.

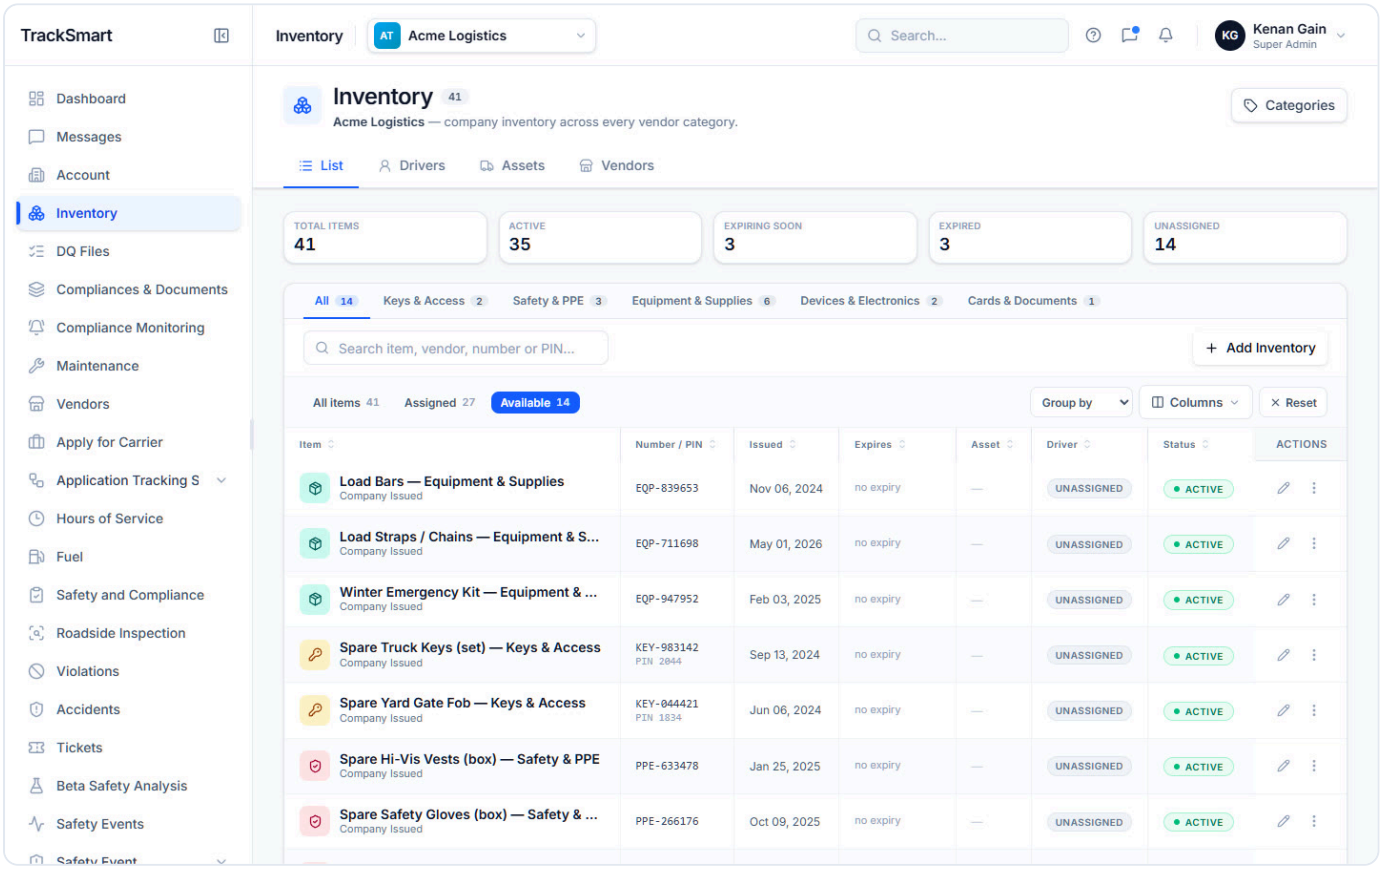

`list-filter-available-desktop.png` — Chip "Available": items on nobody and no unit — the yard stock.

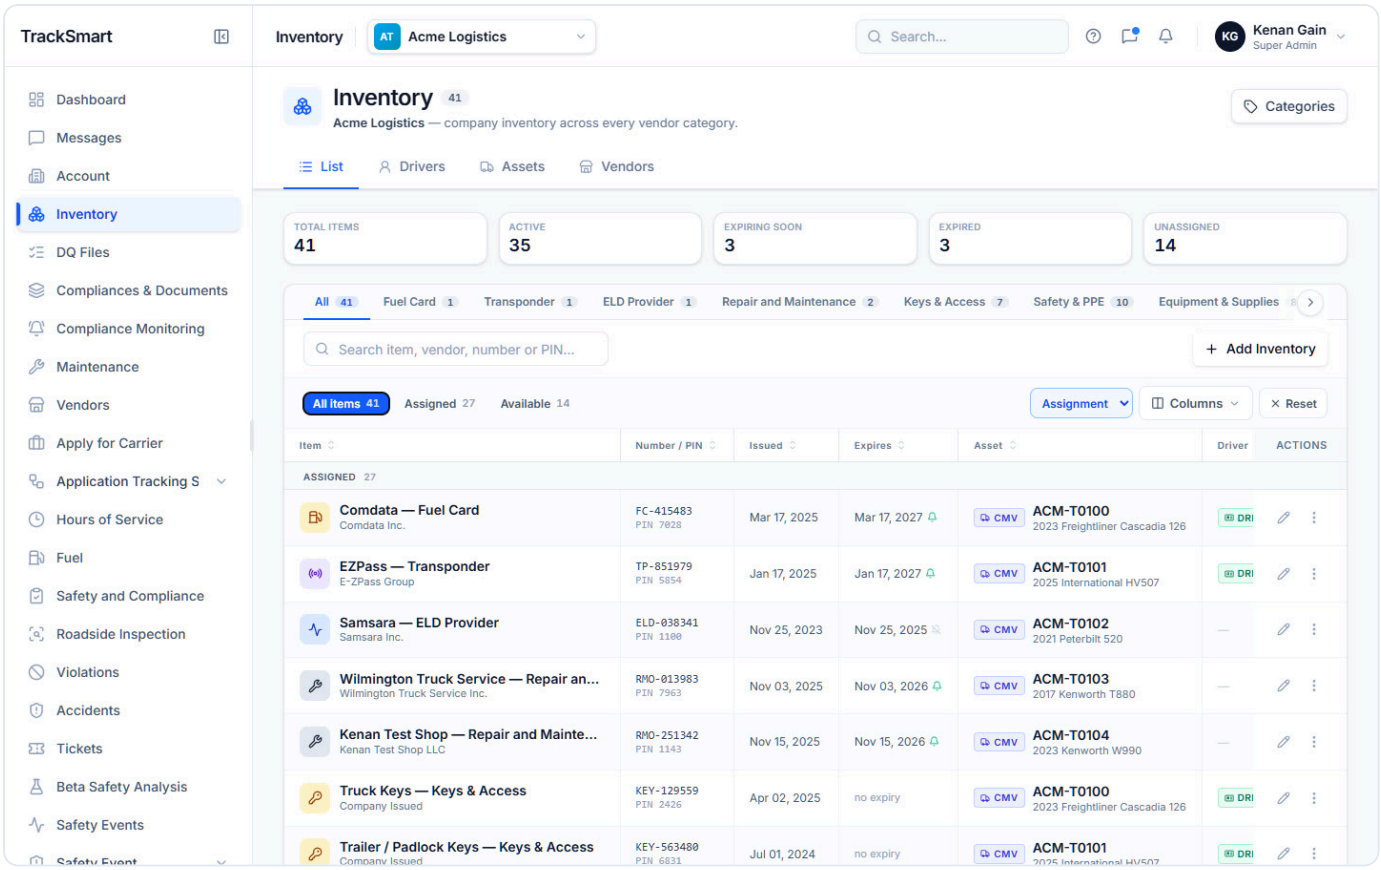

`list-group-assignment-desktop.png` — Group by Assignment: "Assigned" and "Available" bands with their counts.

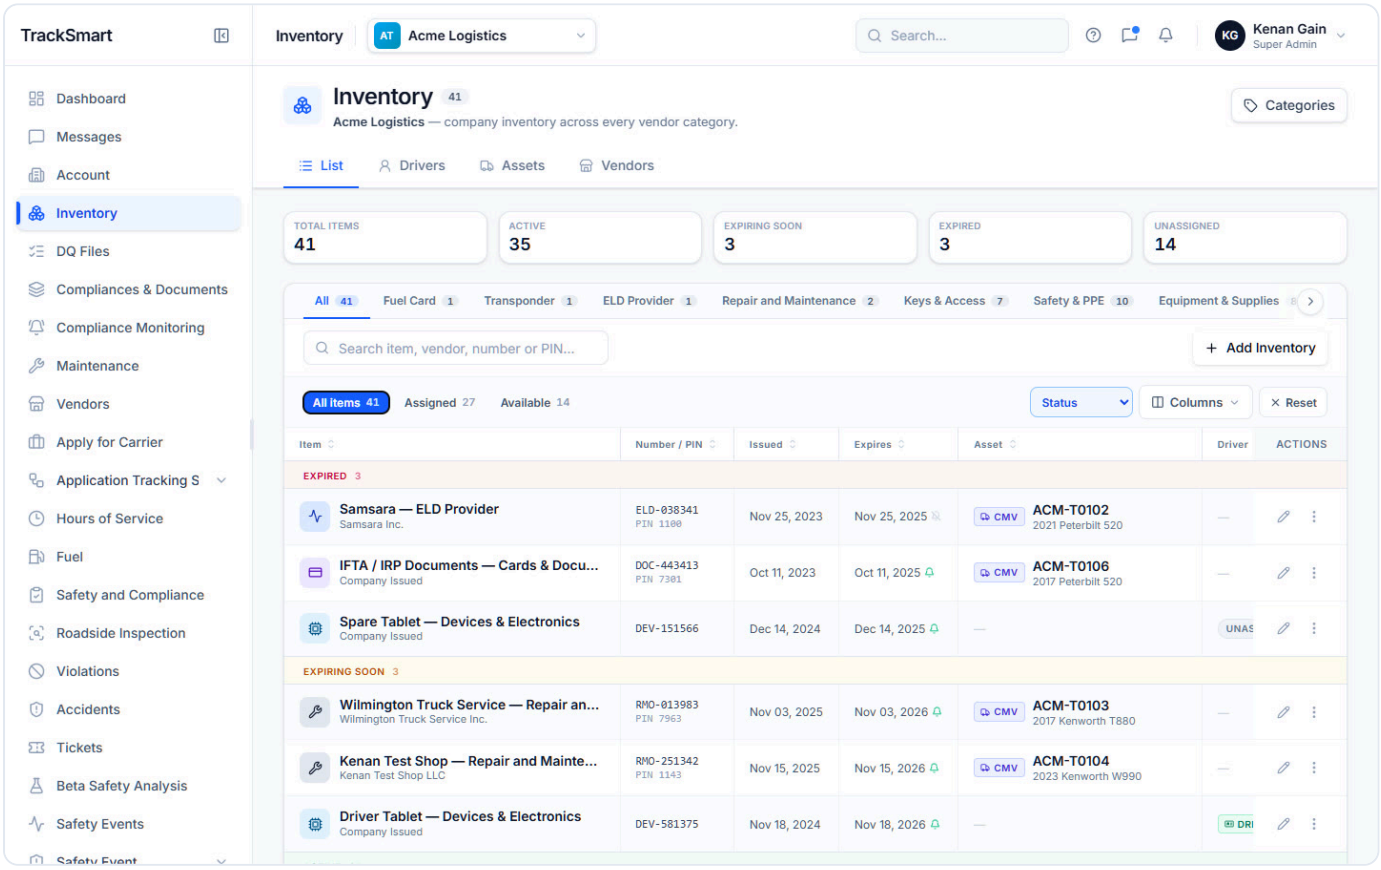

`list-group-status-desktop.png` — Group by Status: Expired, Expiring Soon, Active — most urgent first.

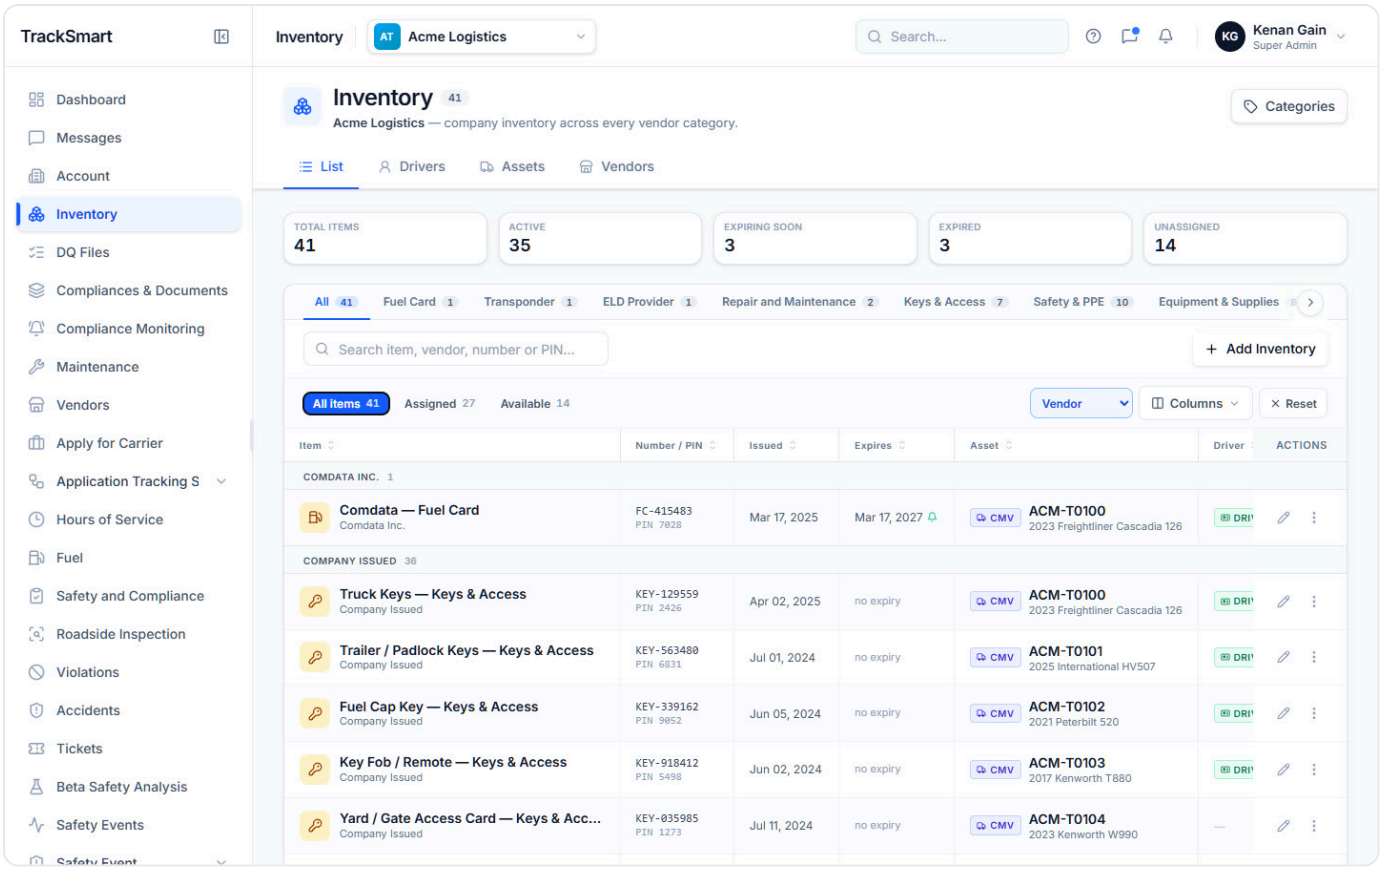

`list-group-vendor-desktop.png` — Group by Vendor: one band per supplier; company-issued accessories in one "Company Issued" band.

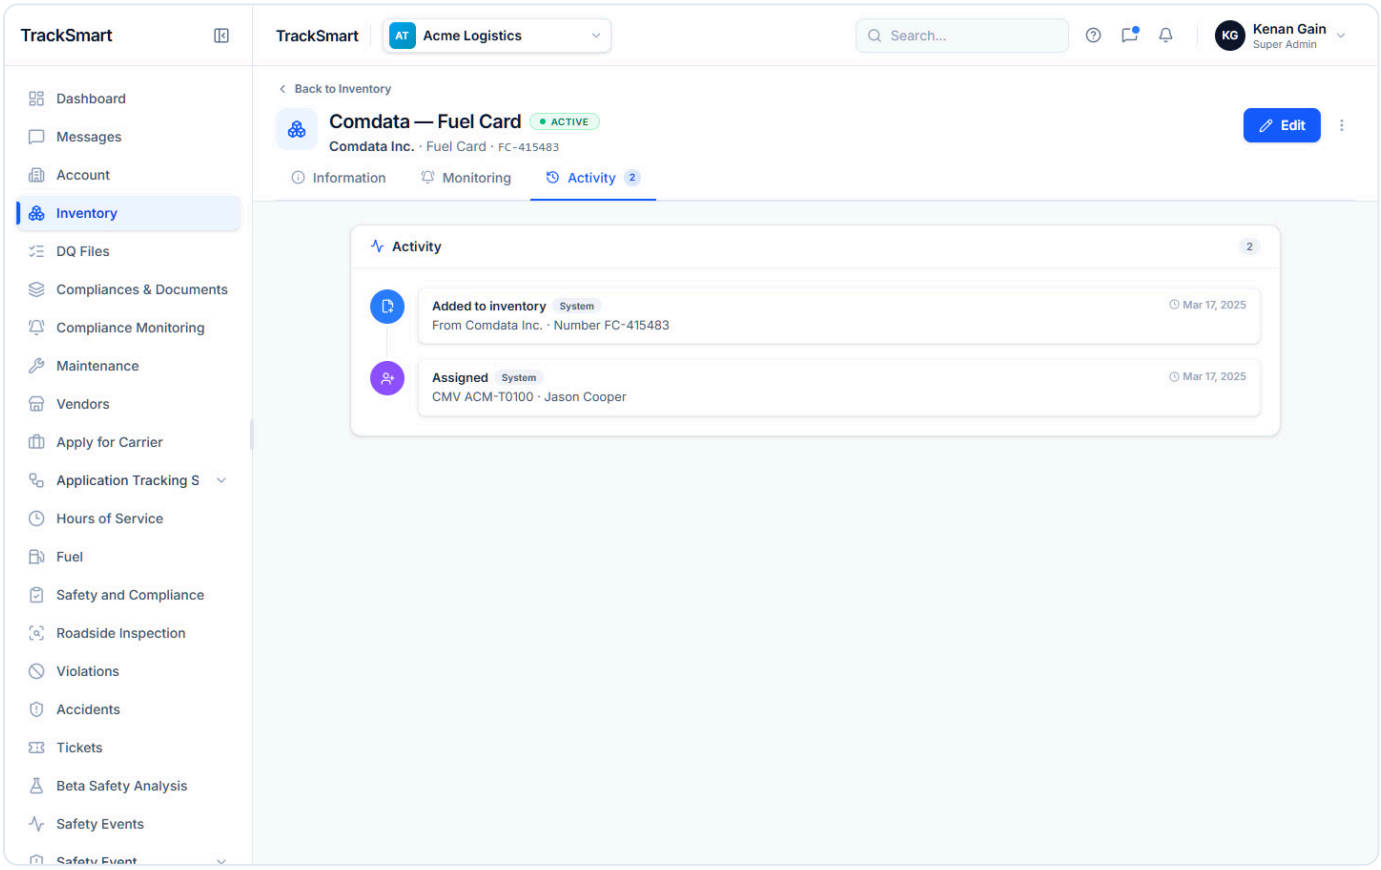

`list-item-detail-activity-desktop.png` — Activity tab: the item's trail, newest first (System entries derived from the record).

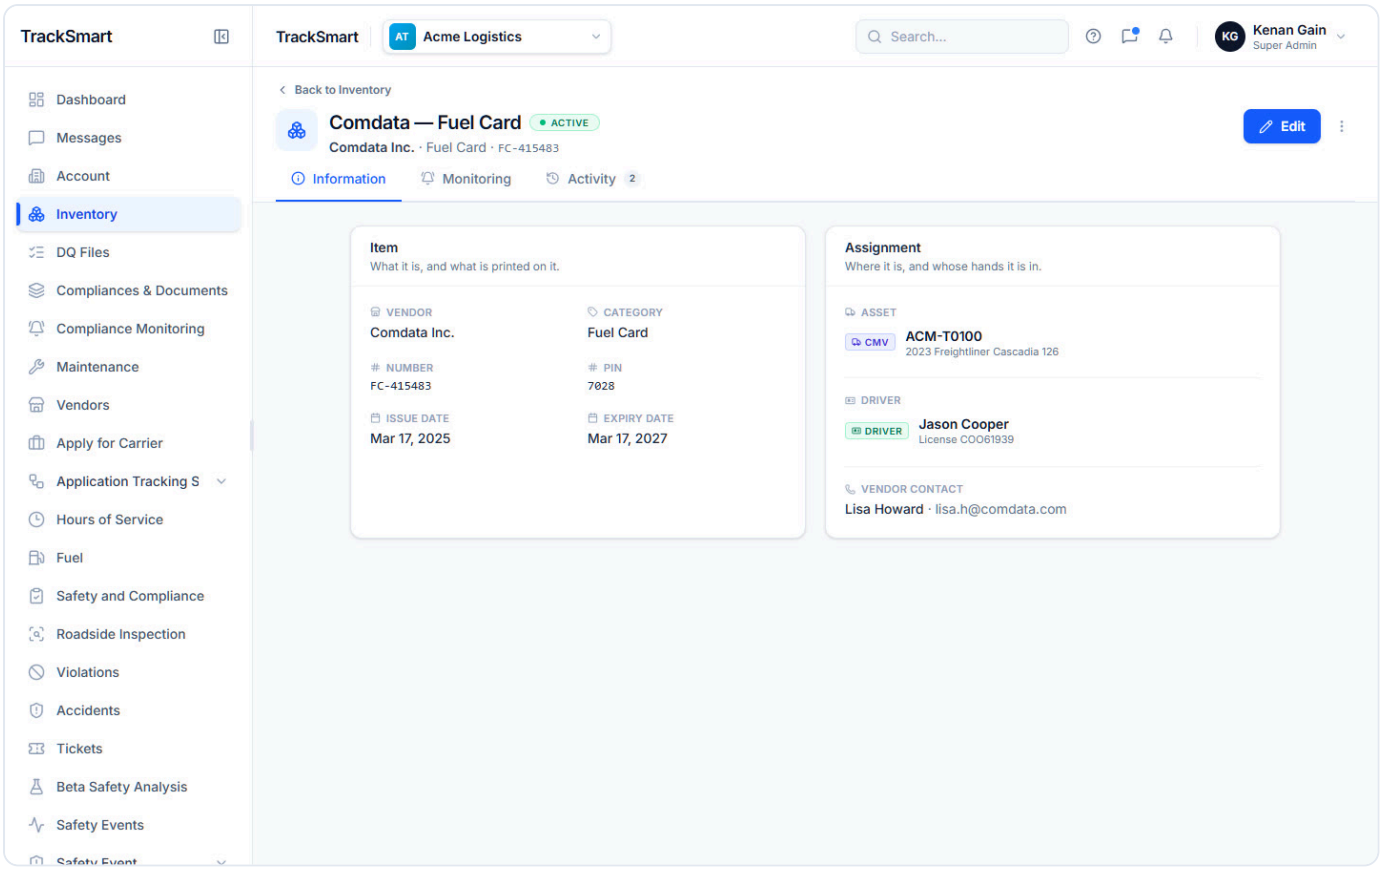

list-item-detail-information-desktop.png — Item page, Information tab: the Item card and the Assignment card with unit, driver and vendor contact.

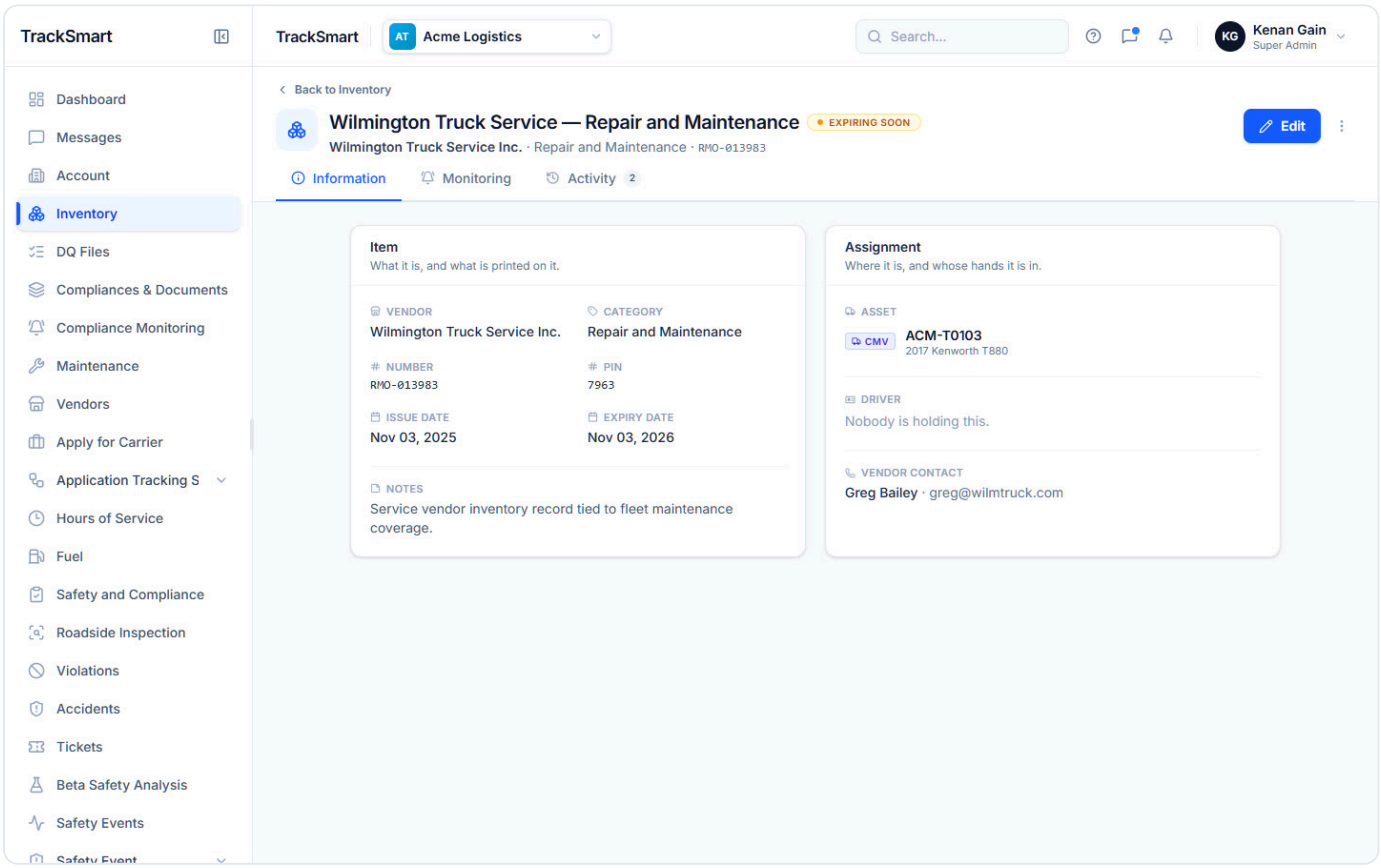

list-item-detail-information-notes-desktop.png — A repair-shop item: the Notes fact appears on the Item card.

list-item-detail-information-unassigned-desktop.png — An item on nobody: "Not on a vehicle." · "Nobody is holding this."

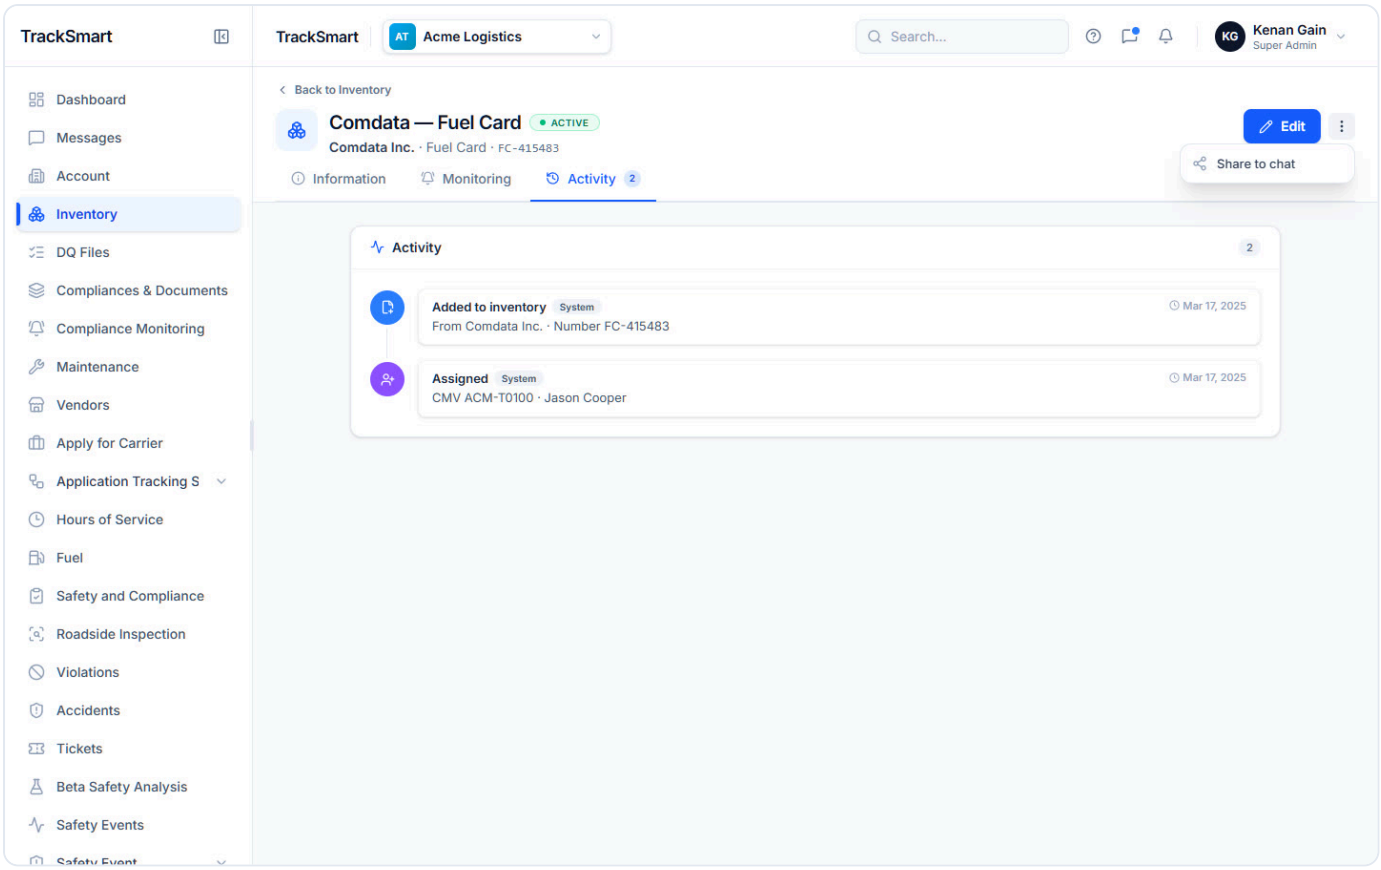

`list-item-detail-menu-desktop.png` — Header ⋮ menu: Share to chat (items cannot be deleted).

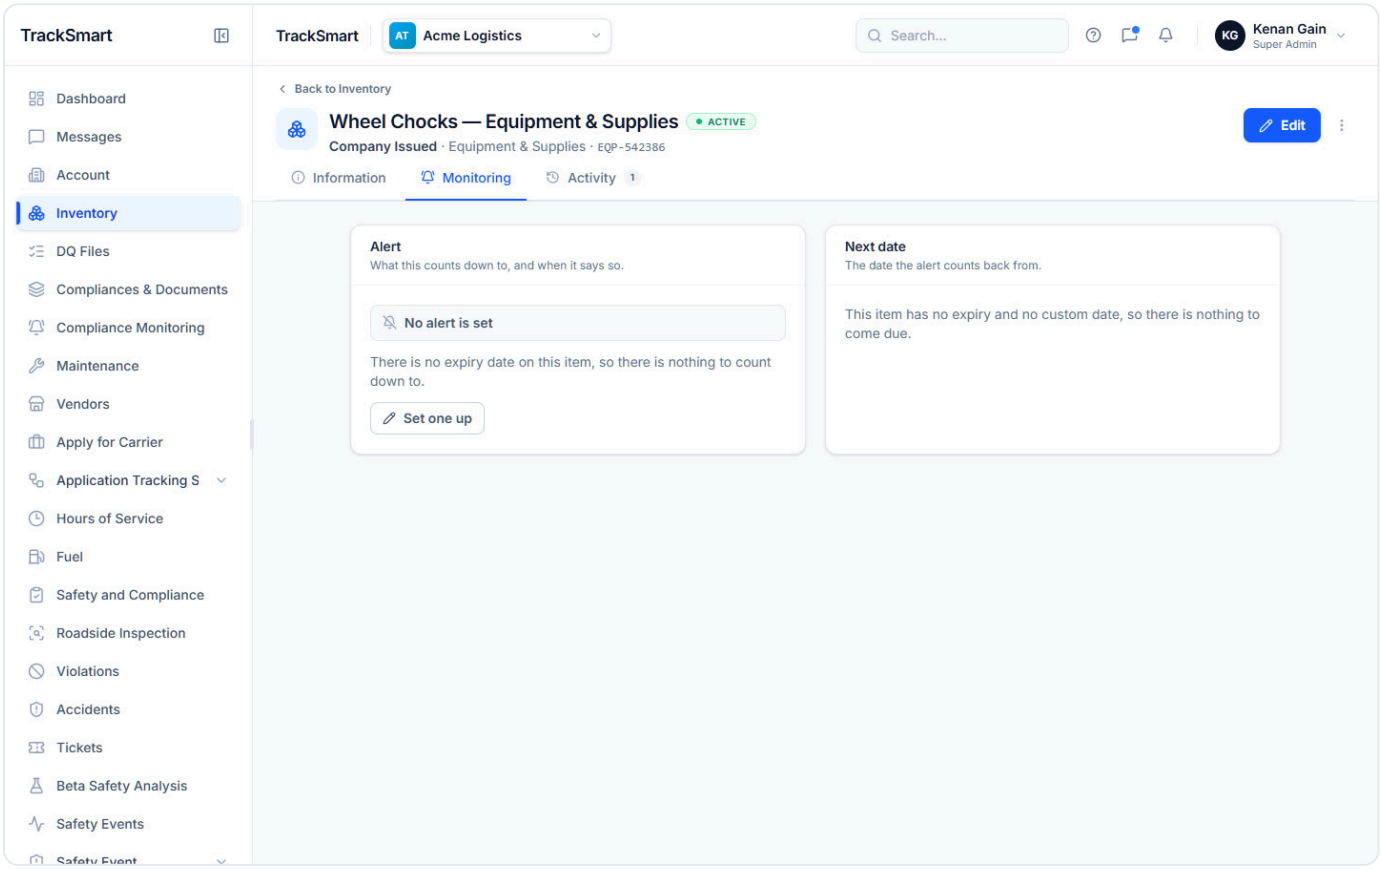

`list-item-detail-monitoring-no-expiry-desktop.png` — An item with no expiry: nothing to count down to, nothing to come due.

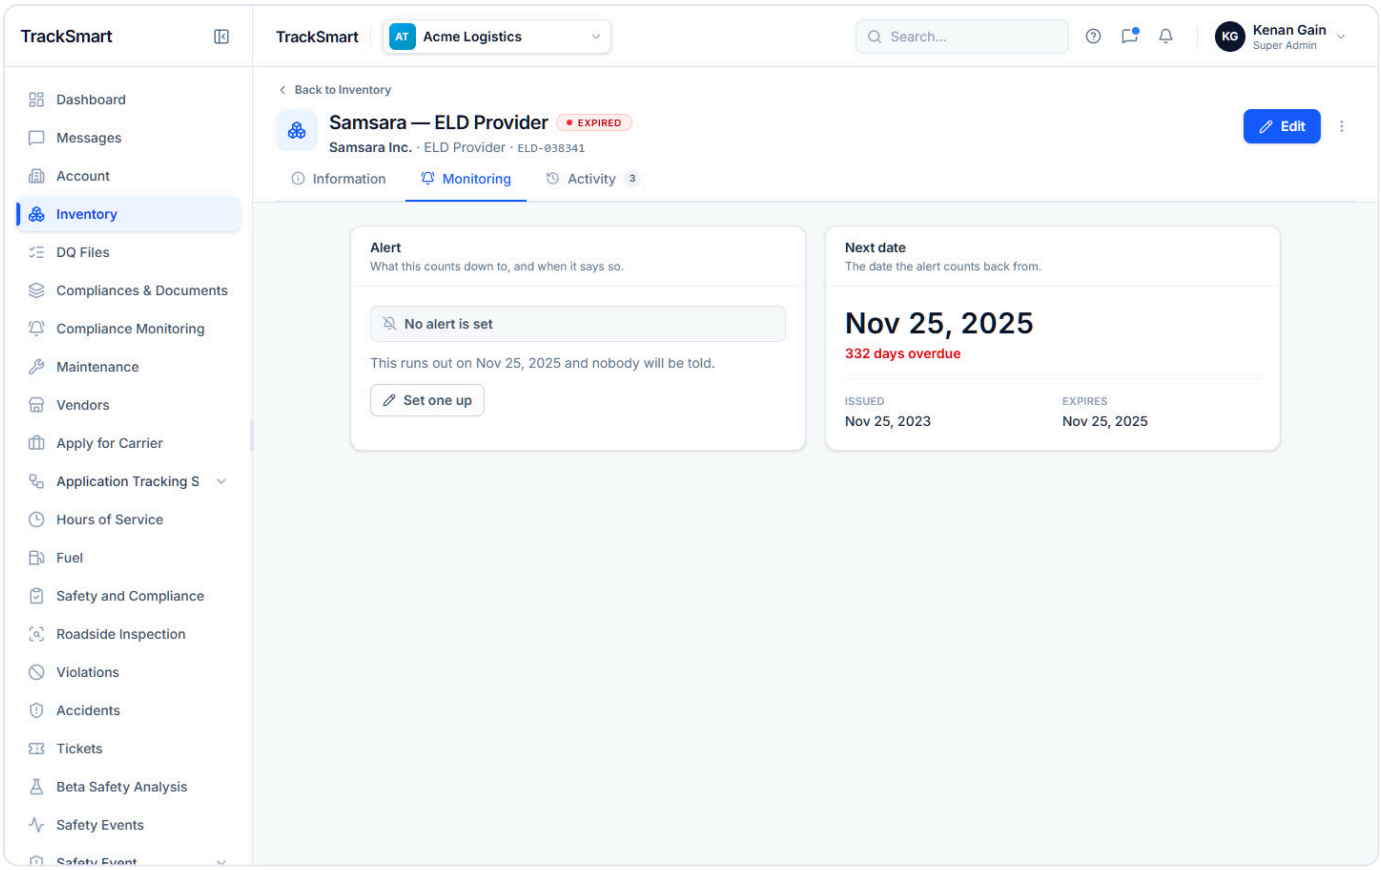

`list-item-detail-monitoring-off-desktop.png` — No alert set on an item that expires: "This runs out on … and nobody will be told." with Set one up; the Next date shows how far overdue it is.

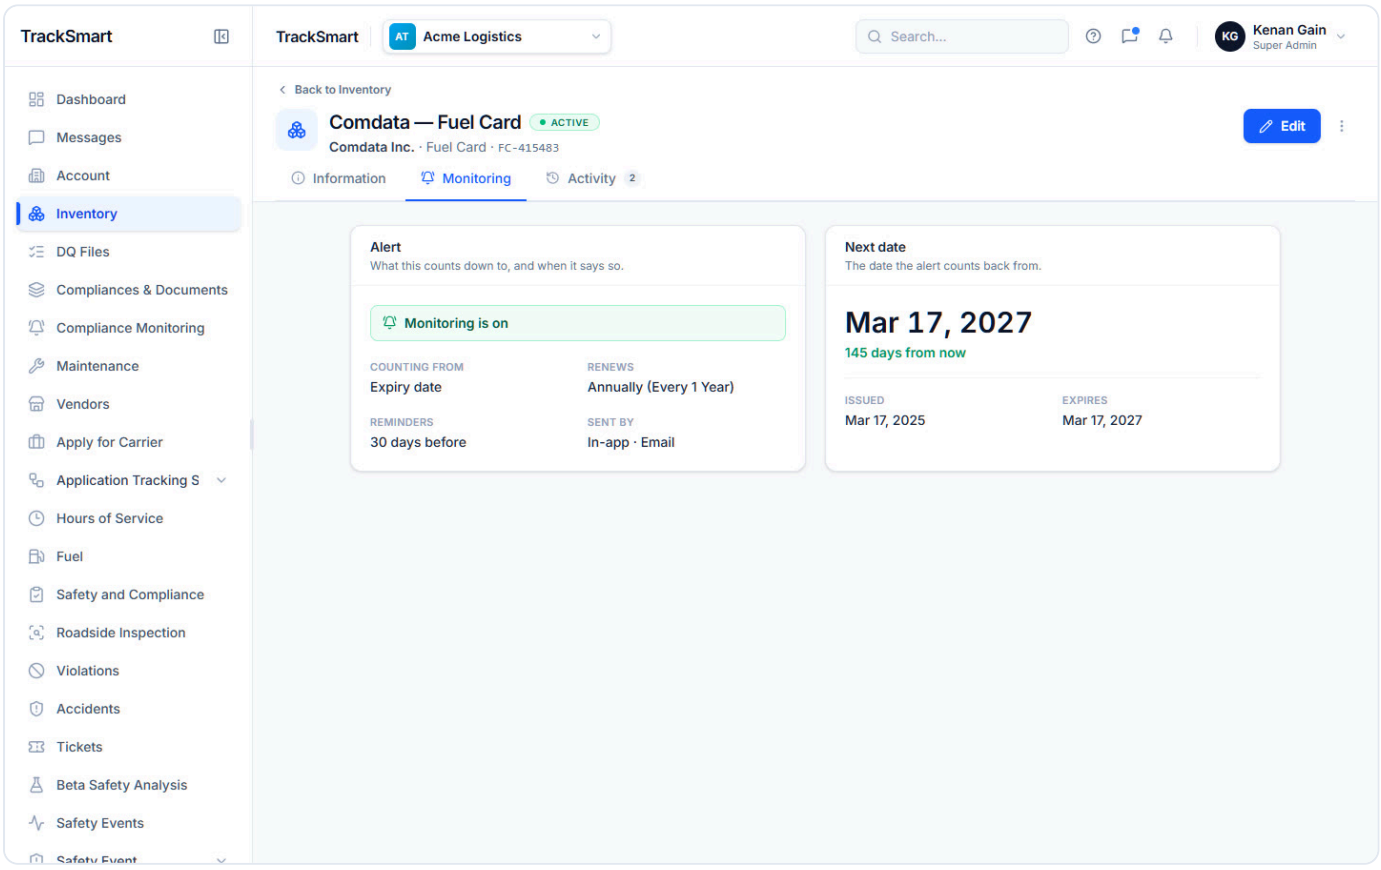

`list-item-detail-monitoring-on-desktop.png` — Monitoring tab with an alert on: what it counts from, renewal, reminders, channels — and the Next date card.

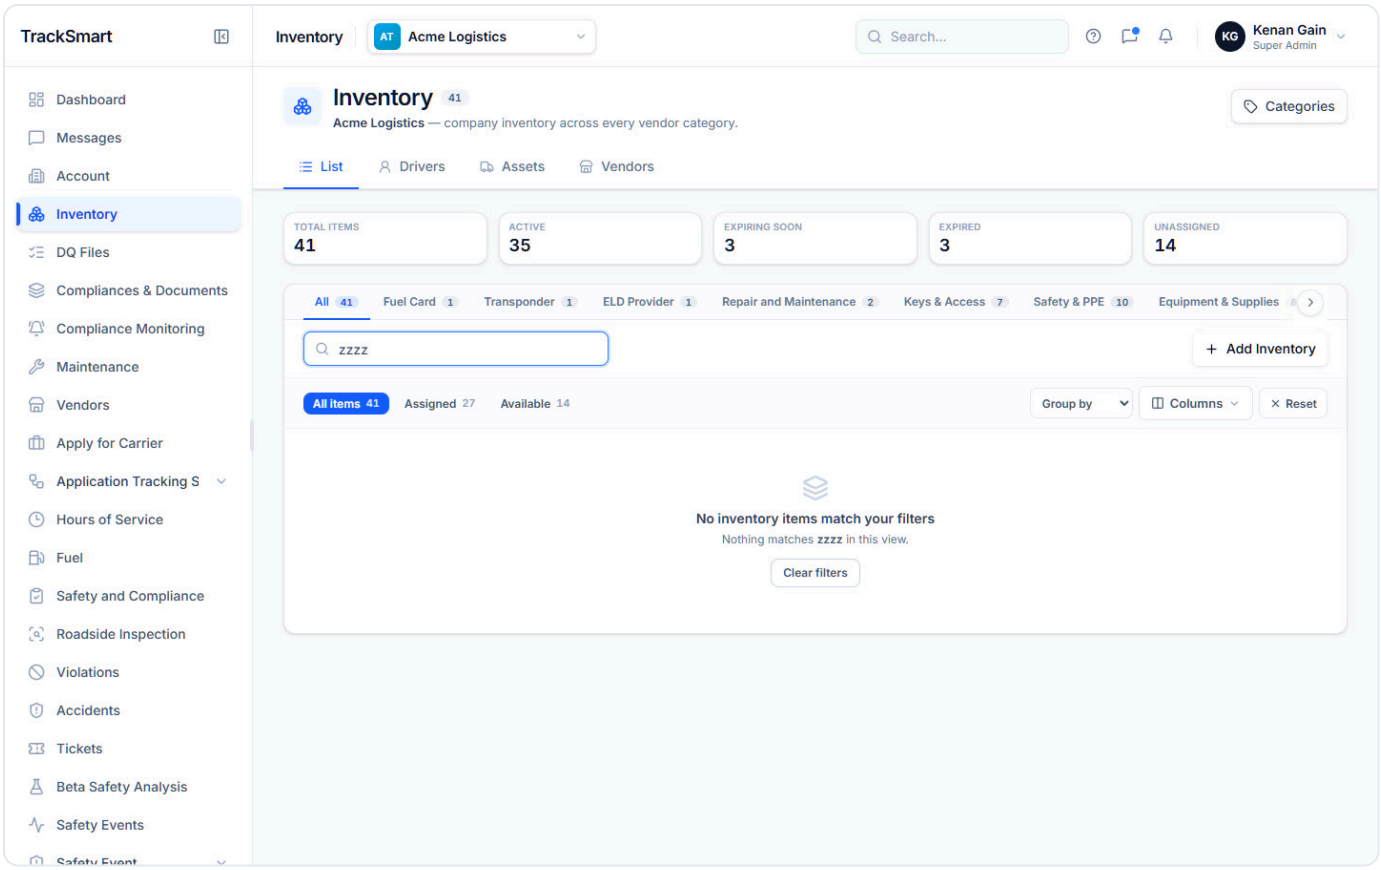

`list-no-results-desktop.png` — No results: "No inventory items match your filters" with Clear filters.

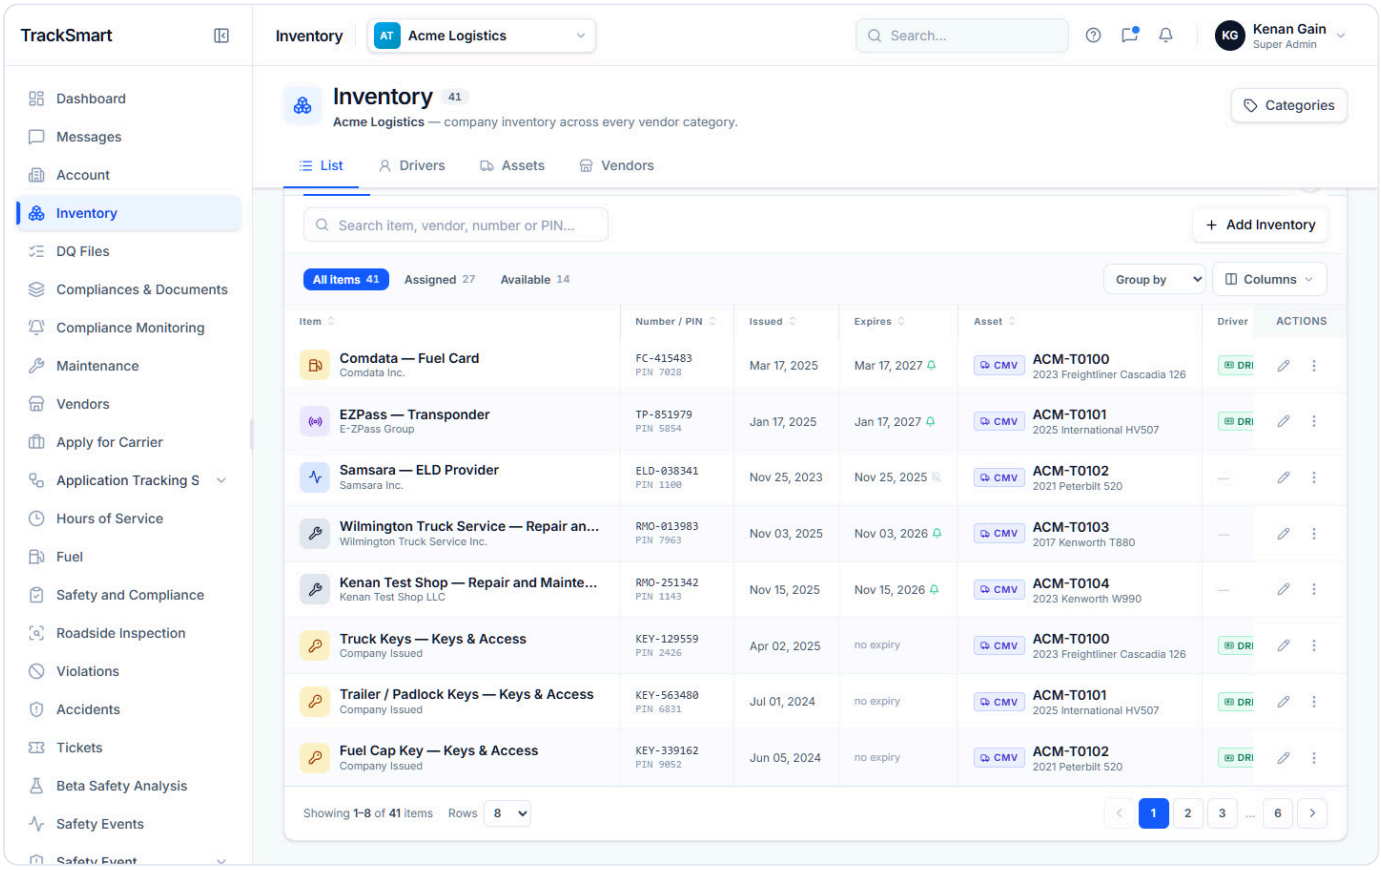

`list-pager-rows-8-desktop.png` — Pager set to 8 rows: "Showing 1–8 of 41 items", windowed page numbers.

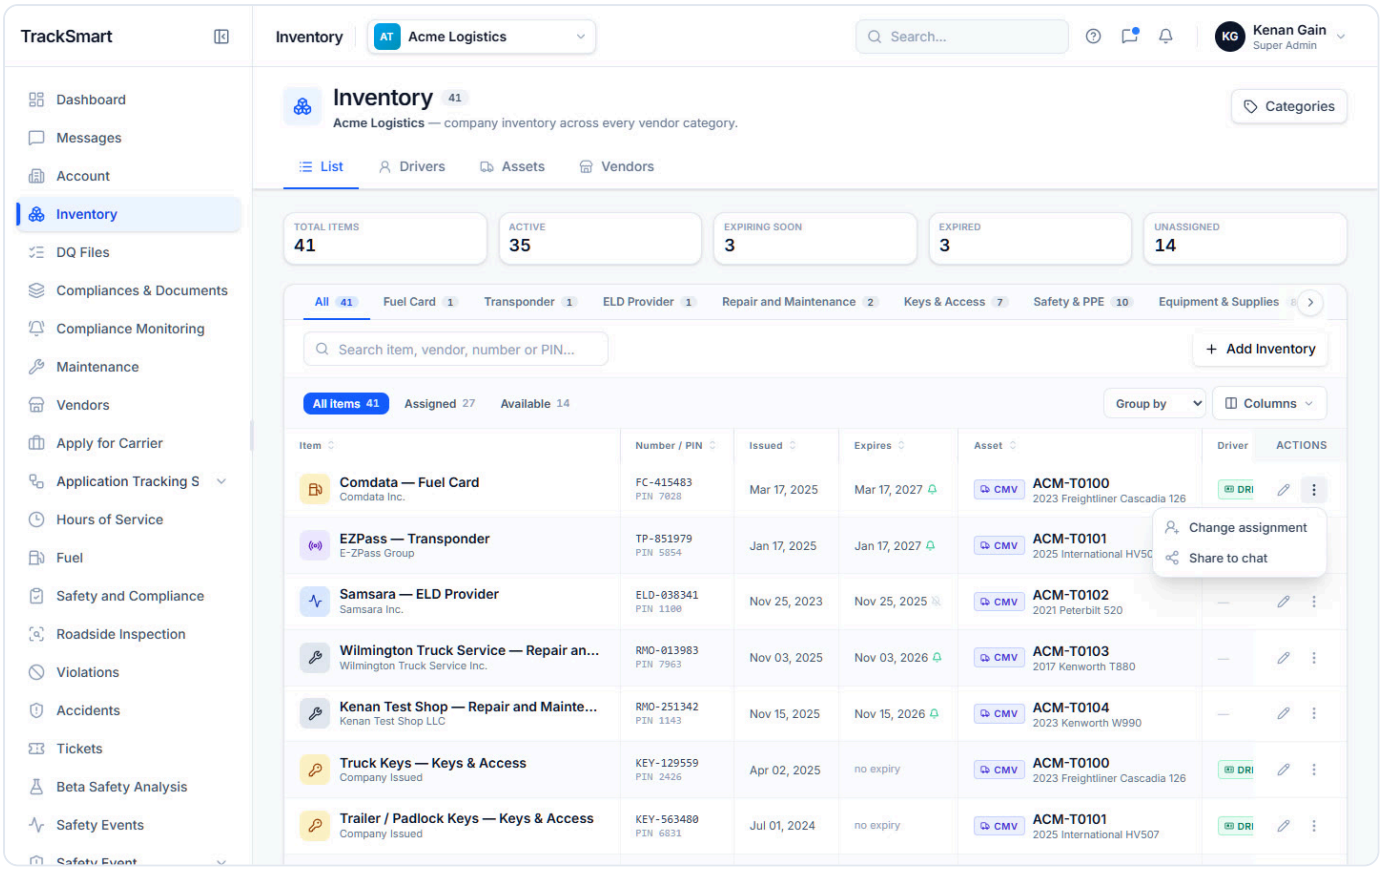

`list-row-menu-desktop.png` — Row ⋮ menu on an assigned item: Change assignment and Share to chat.

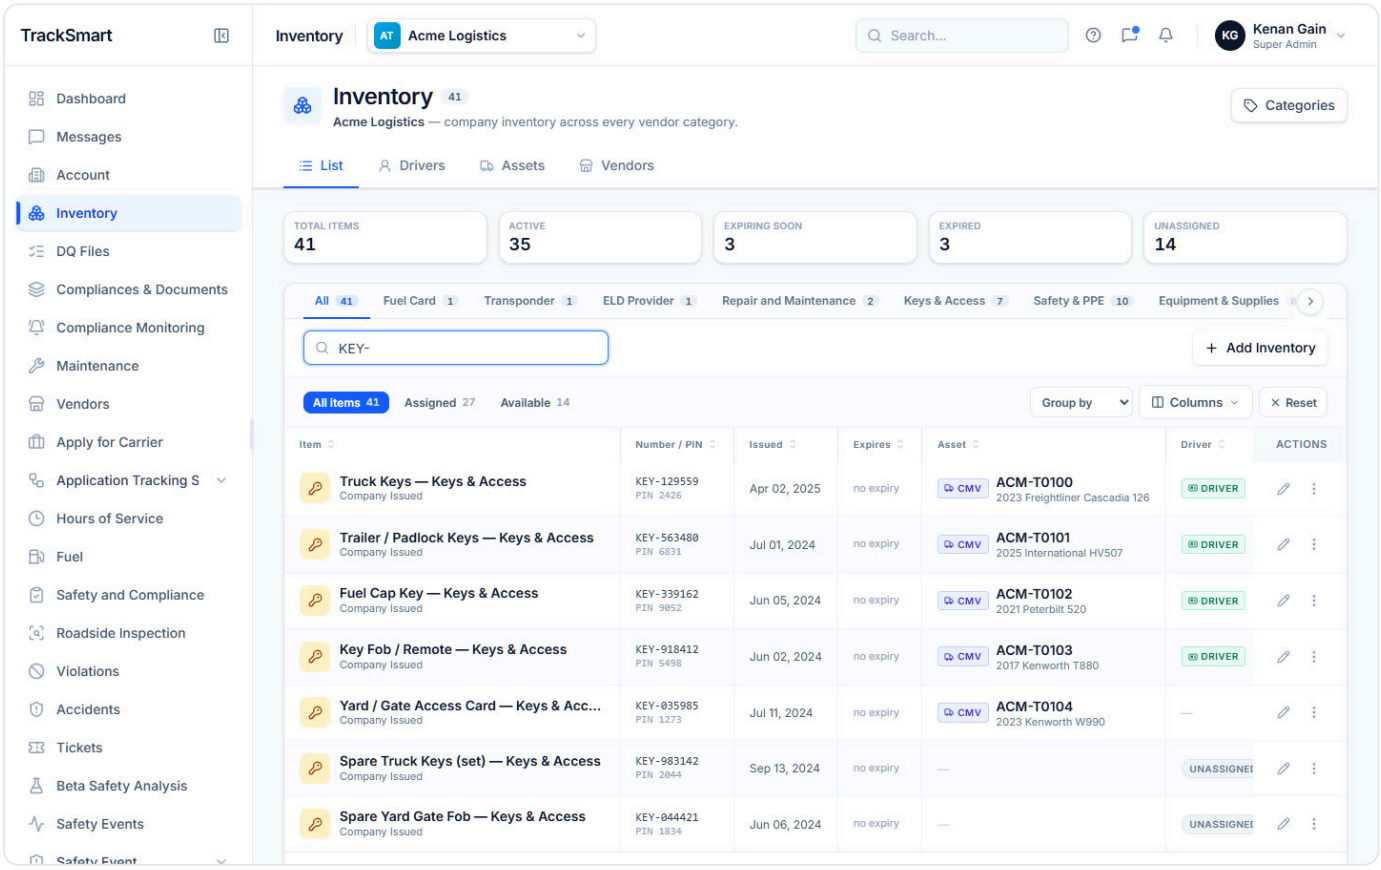

`list-search-desktop.png` — Search "KEY-": matches on item name, vendor, number or PIN.

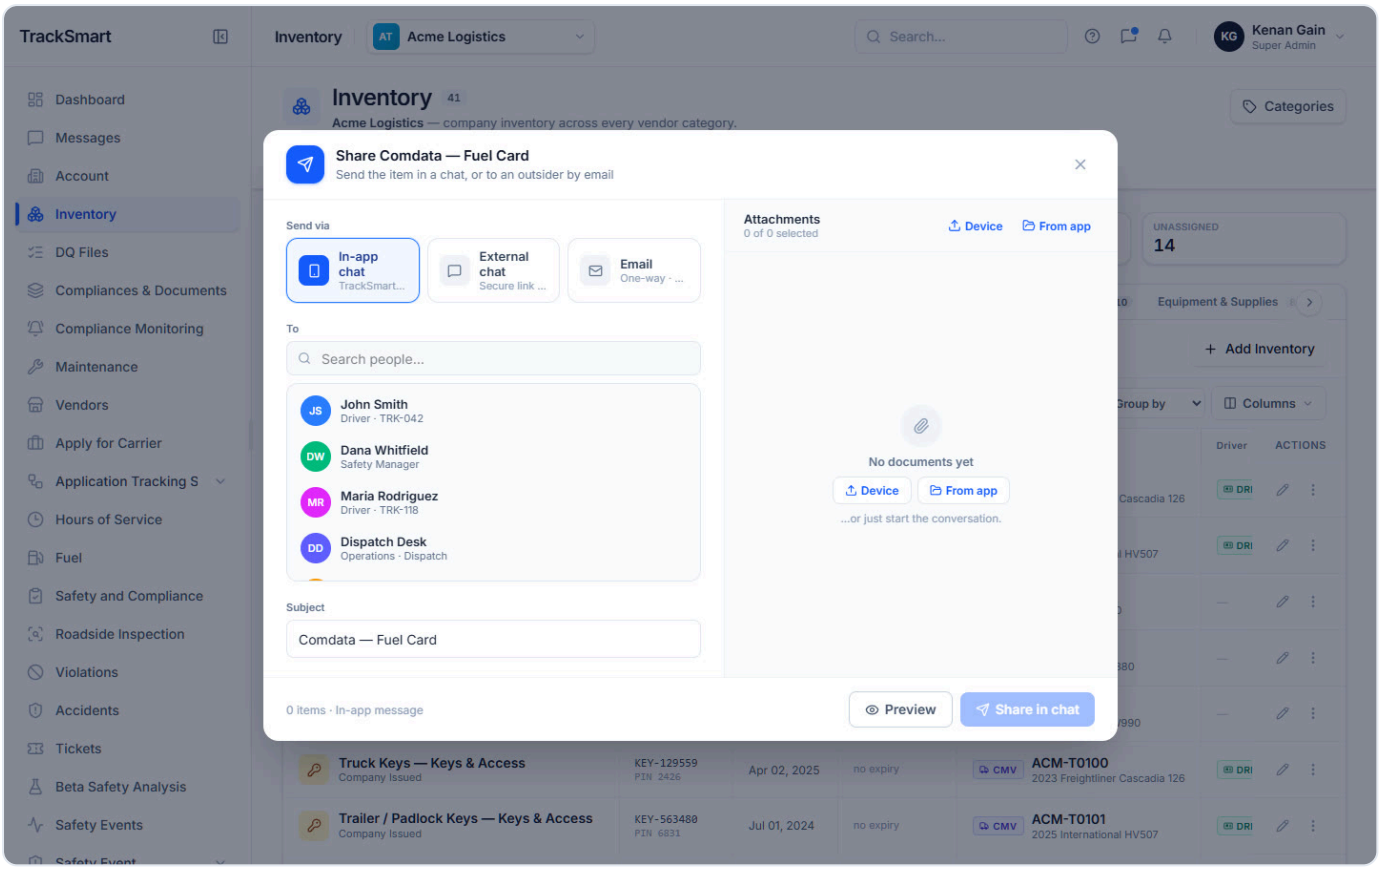

`list-share-dialog-desktop.png` — Share to chat: Send via In-app / External chat / Email, recipient, subject, message, attachments.

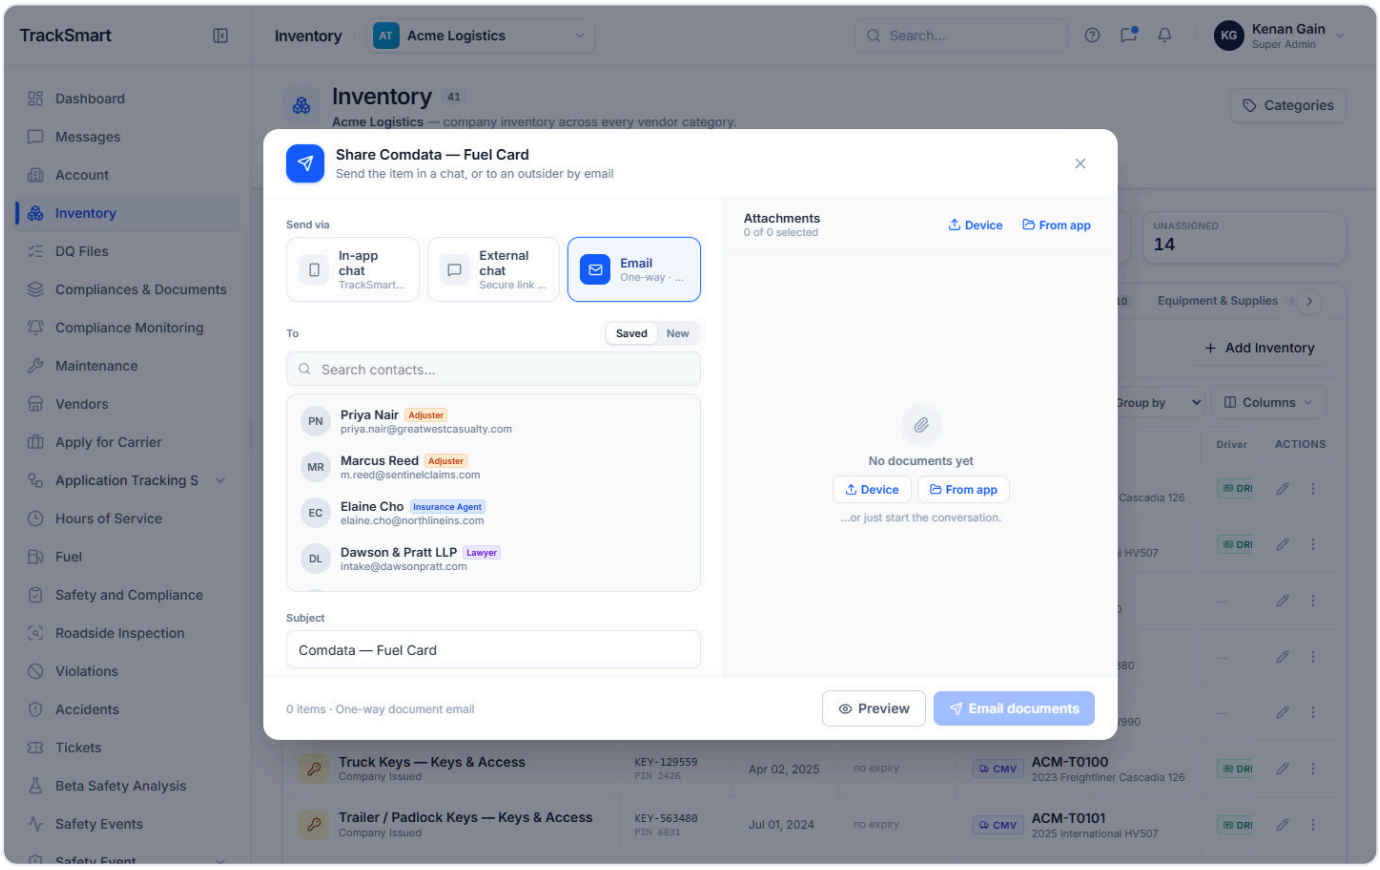

`list-share-dialog-email-desktop.png` — Share by email: an outsider's address instead of a chat recipient.

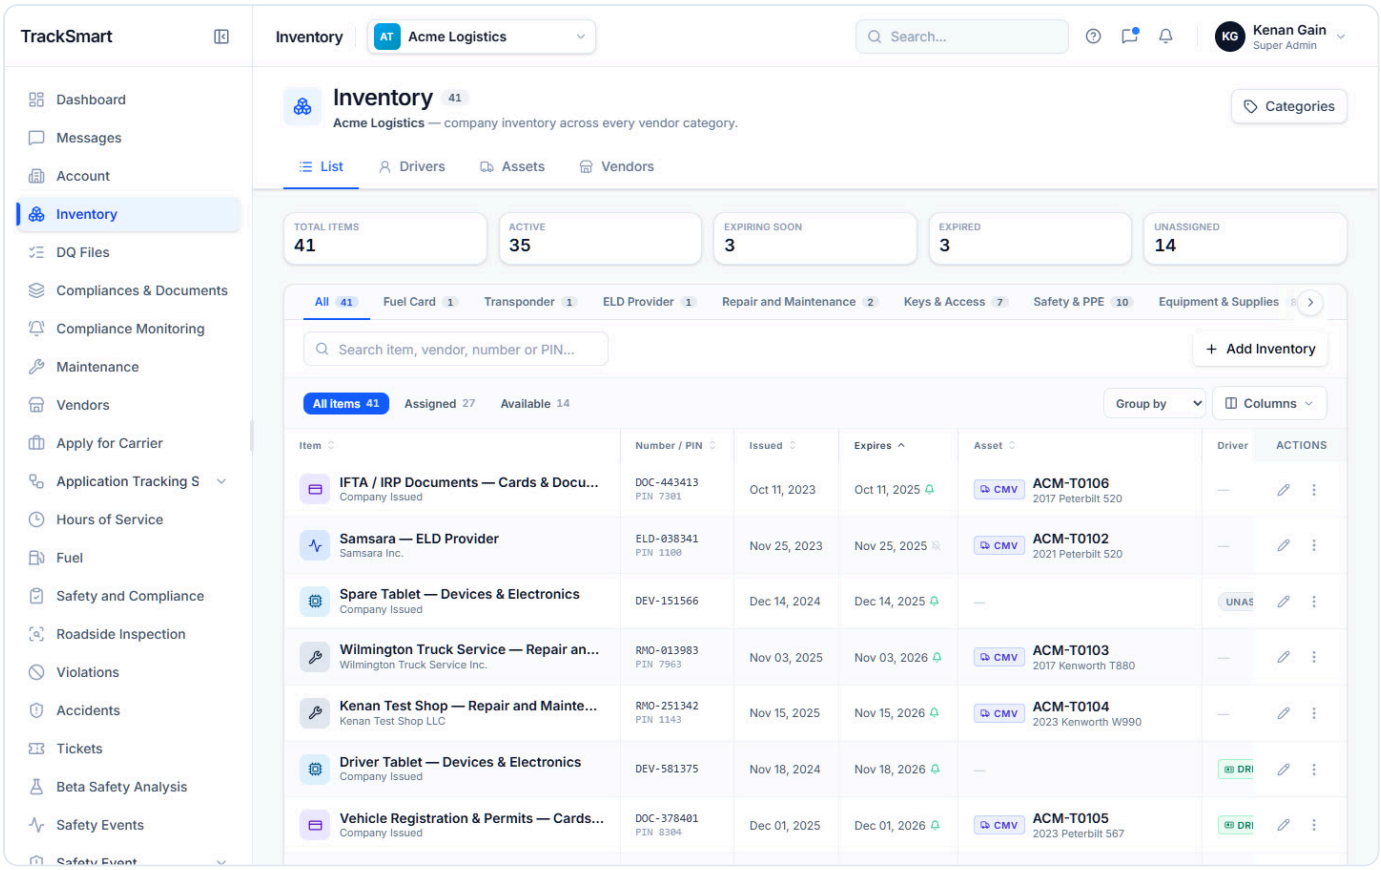

`list-sort-expires-desktop.png` — Sorted by Expires (ascending): the header turns blue with an up chevron; "no expiry" sorts last.

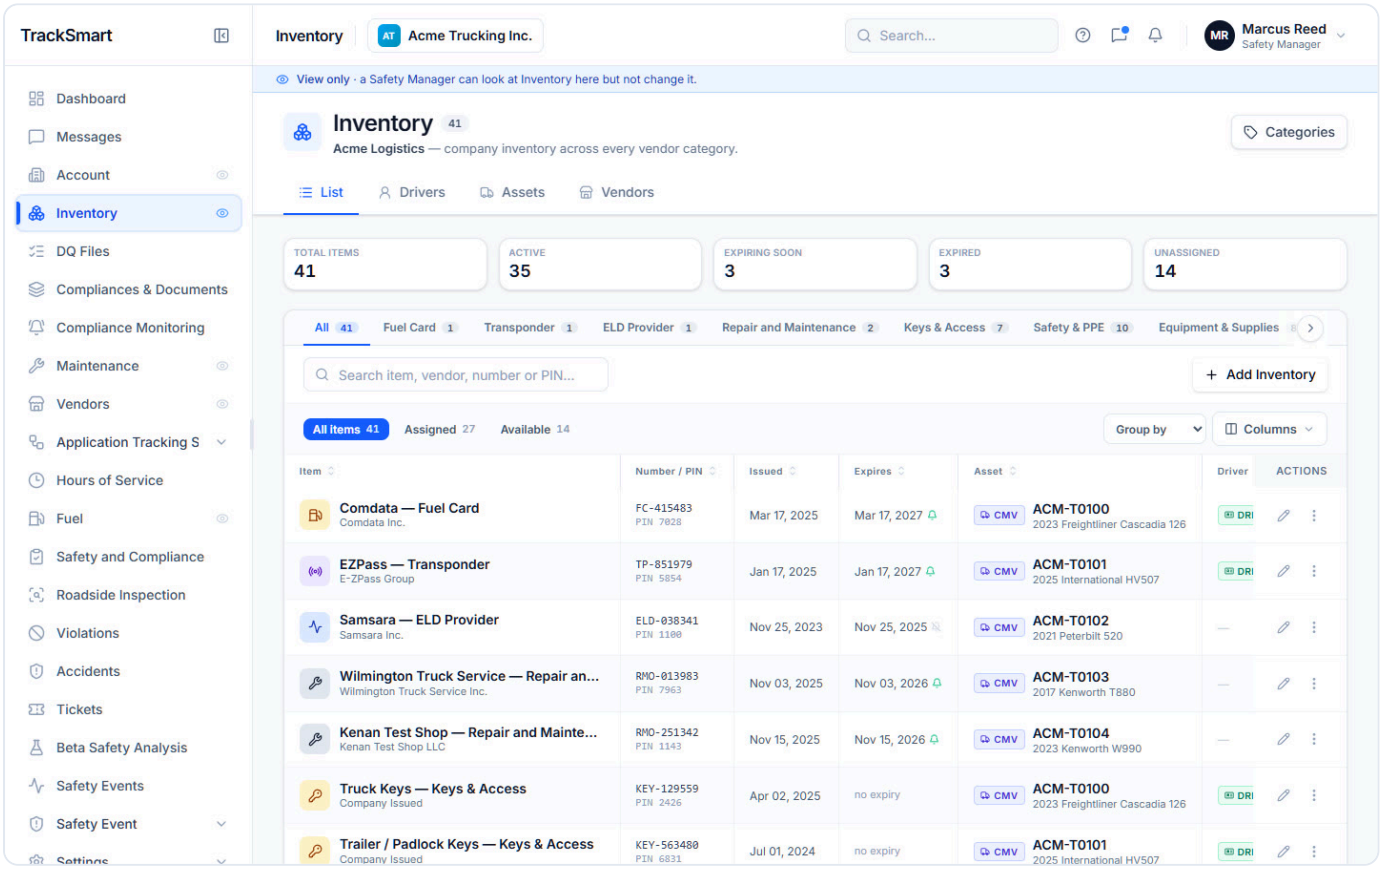

`list-view-only-desktop.png` — Inventory as a Safety Manager (light access): the blue "View only" strip; every control is still rendered and works (TO CONFIRM).

Mobile · 390 px

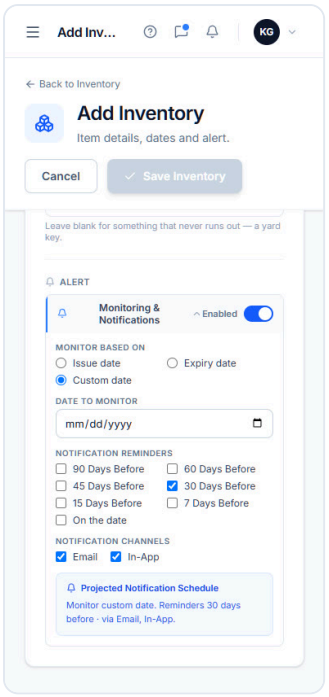

`list-add-item-alert-custom-mobile.png`
Monitor based on Custom date: the date to monitor becomes an input.

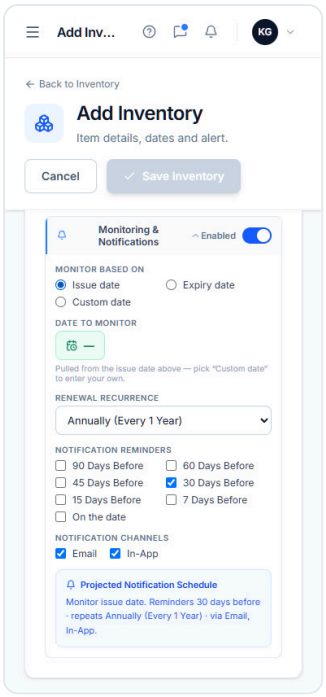

`list-add-item-alert-issue-basis-mobile.png`
Monitor based on Issue date: the Renewal recurrence select appears.

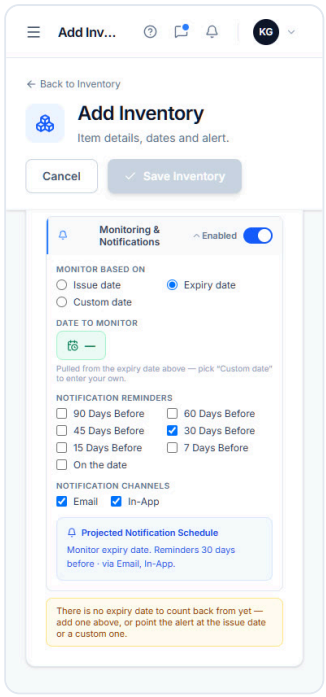

`list-add-item-alert-no-expiry-warning-mobile.png`
Alert switched on with no expiry date yet: the amber warning, reminders, channels and the projected schedule.

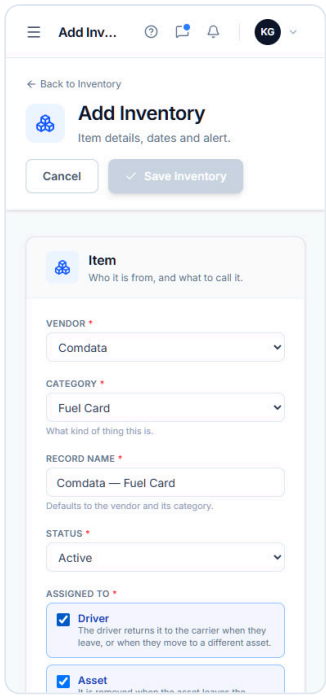

`list-add-item-assigned-both-mobile.png`
"Assigned to" with both Driver and Asset ticked.

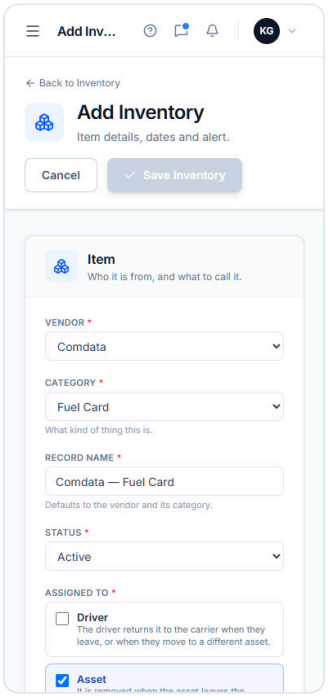

`list-add-item-default-mobile.png`
Add Inventory: the wizard with its Progress rail (desktop); Save Inventory stays grey until Vendor, Number and Issue date are in.

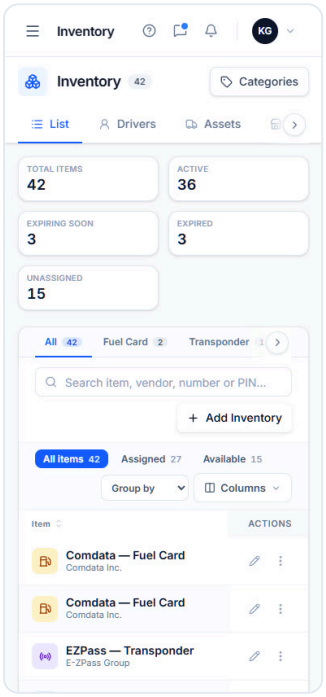

`list-add-item-saved-mobile.png`
After Save: back on the List with the new item at the top (no toast).

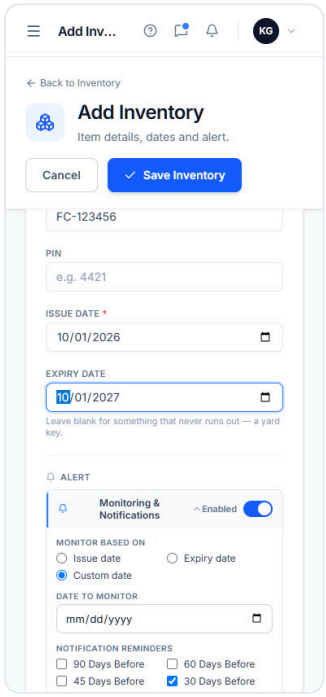

`list-add-item-valid-mobile.png`
Number and Issue date filled: the rail counts every answered field and Save Inventory turns blue.

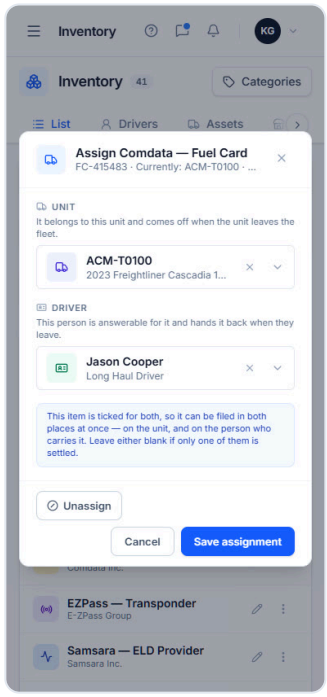

`list-assign-dialog-both-mobile.png`
"Assign Comdata — Fuel Card": ticked for both, so a Unit and a Driver block and the blue both-places note; Unassign, Cancel, Save assignment.

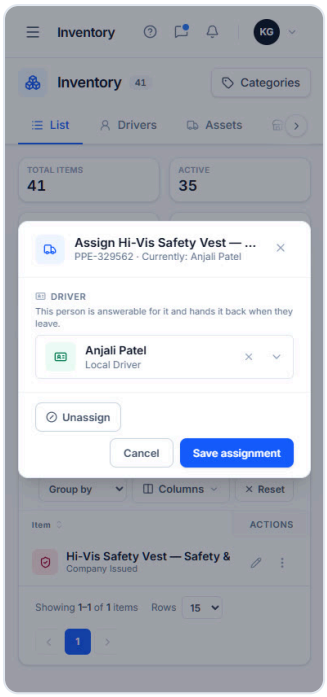

list-assign-dialog-driver-only-mobile.png
PPE is ticked for Driver only: the dialog shows just the Driver block.

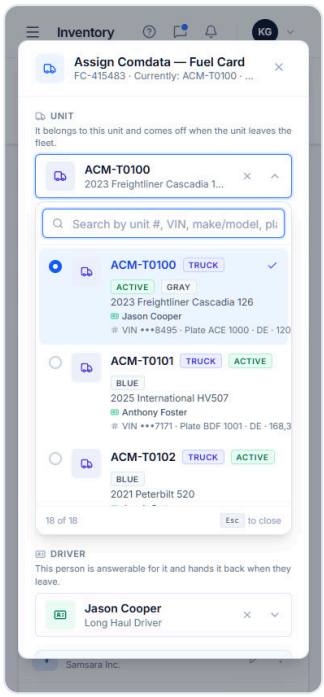

list-assign-dialog-picker-open-mobile.png
Unit picker open in the dialog: search, unit rows with type and status chips, current driver, VIN / plate / miles, "n of N · Esc to close".

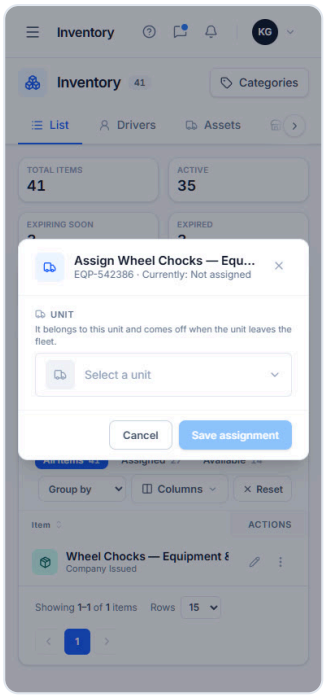

list-assign-dialog-unassigned-mobile.png
Yard stock: "Currently: Not assigned", no Unassign button, Save assignment disabled until a unit is picked.

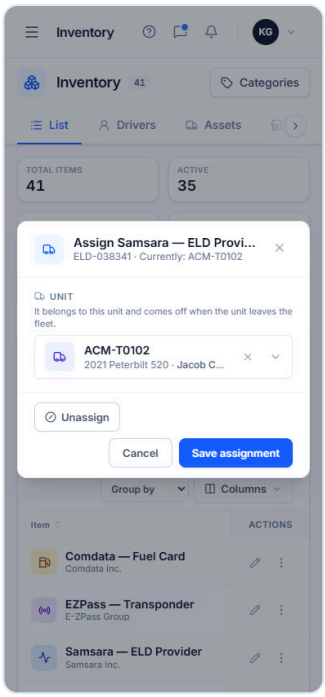

list-assign-dialog-unit-only-mobile.png
An ELD is ticked for Asset only: the dialog shows just the Unit block.

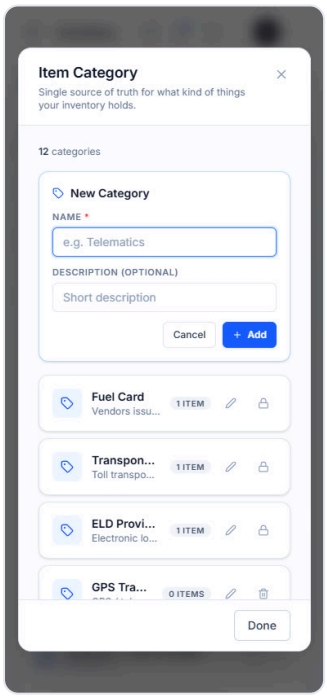

list-categories-add-form-mobile.png
New Category card: Name (required) and Description (optional).

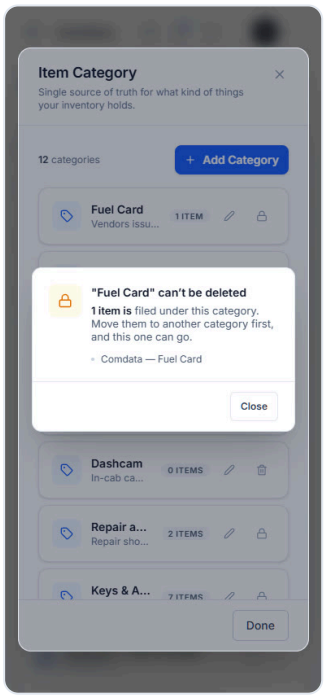

list-categories-delete-blocked-mobile.png
A category in use cannot be deleted: the dialog names the items filed under it.

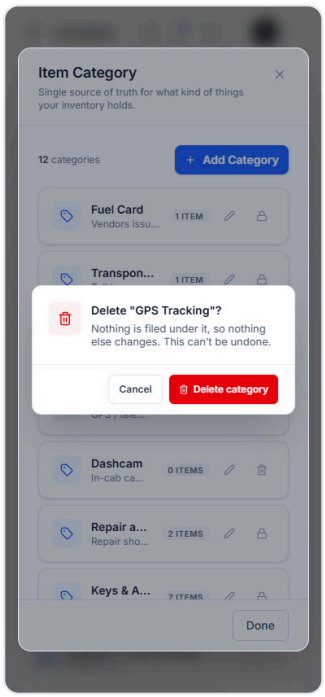

list-categories-delete-confirm-mobile.png
An empty category asks first: "Delete "..."? Nothing is filed under it..." with a red Delete category.

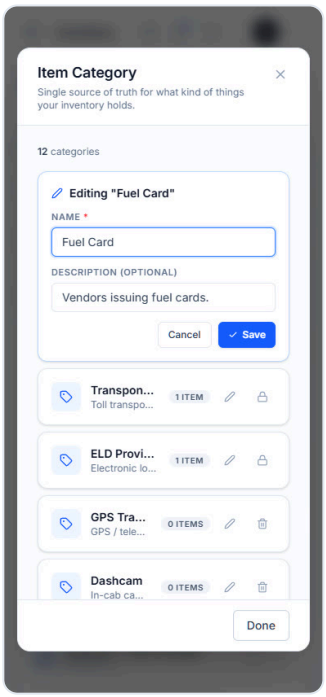

list-categories-edit-mobile.png
Editing a category in place: same fields, Cancel / Save.

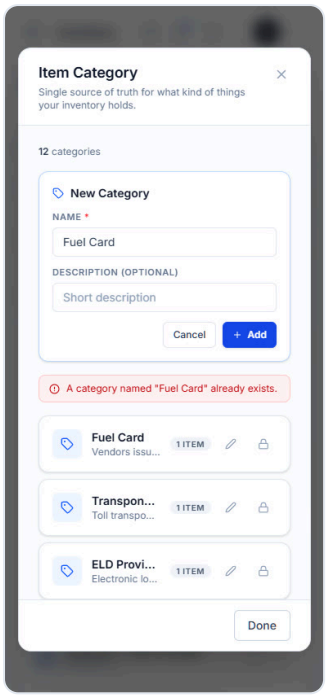

`list-categories-error-duplicate-mobile.png`
Validation: a name that exists already — "A category named "Fuel Card" already exists."

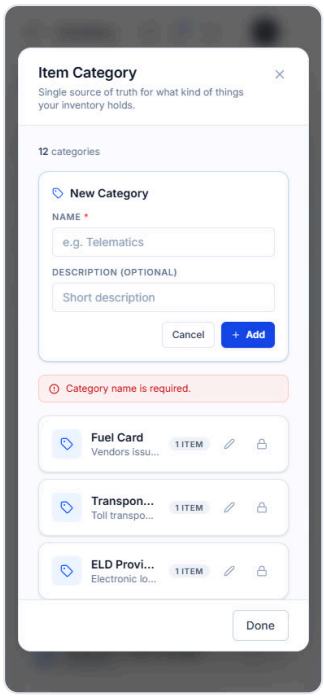

`list-categories-error-required-mobile.png`
Validation: "Category name is required."

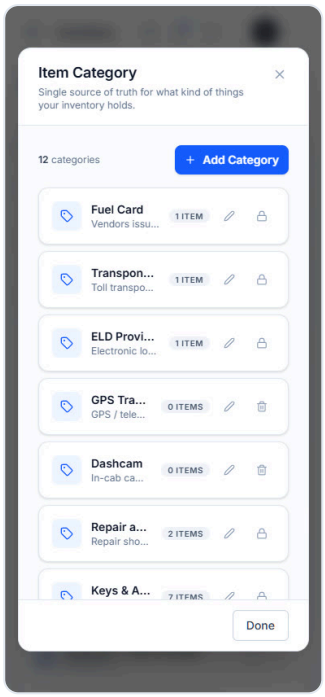

`list-categories-modal-mobile.png`
"Item Category" modal: the 12 categories with item counts; in-use ones are locked against delete.

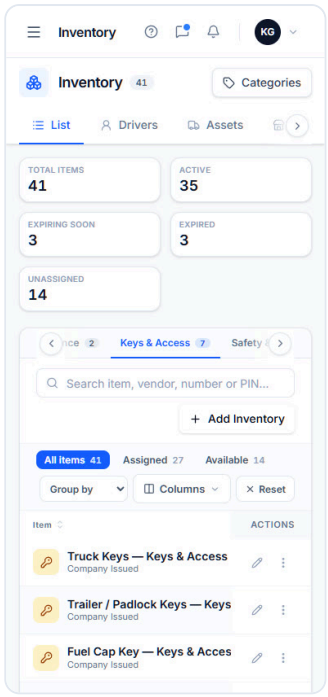

`list-category-keys-mobile.png`
Category rail on "Keys & Access": only that category's items, counts per tab.

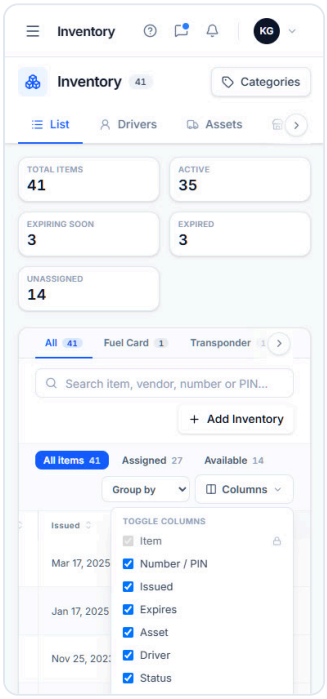

`list-columns-picker-mobile.png`
Columns picker: Item and Actions are locked; the other six columns can be hidden.

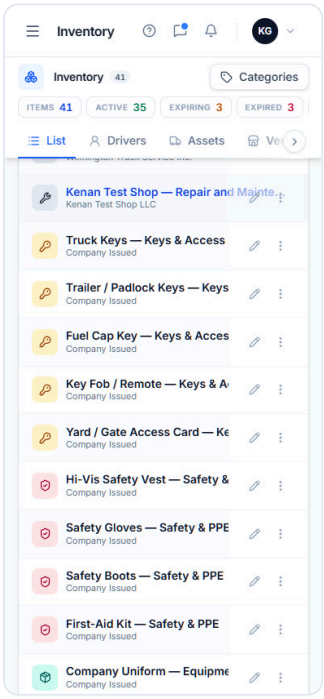

`list-condensed-header-mobile.png`
List scrolled: the header condenses and the KPI figures ride in a strip under the title.

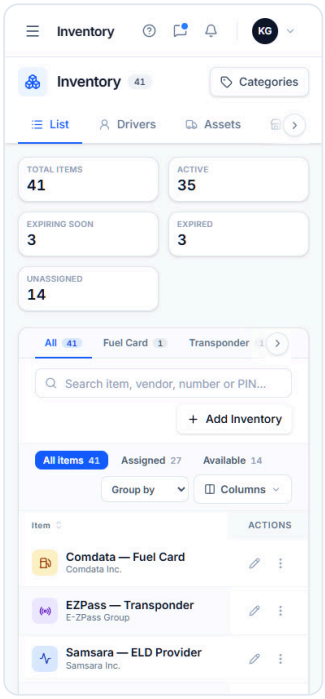

`list-default-mobile.png`
List tab: header with Categories, the five KPI tiles, the category rail, search + Add Inventory, the assignment chips, Group by, Columns and the first 15 items.

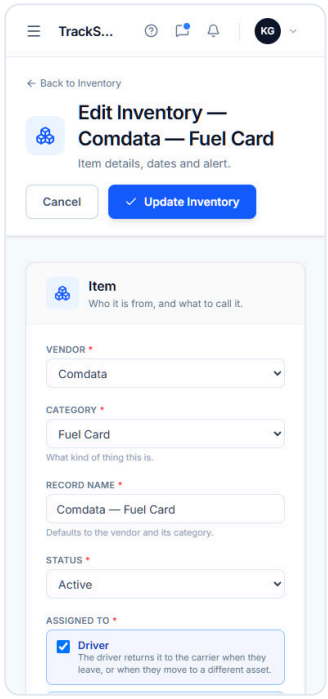

`list-edit-item-mobile.png`
Edit Inventory — {item}: the same wizard, filled in; the button reads Update Inventory.

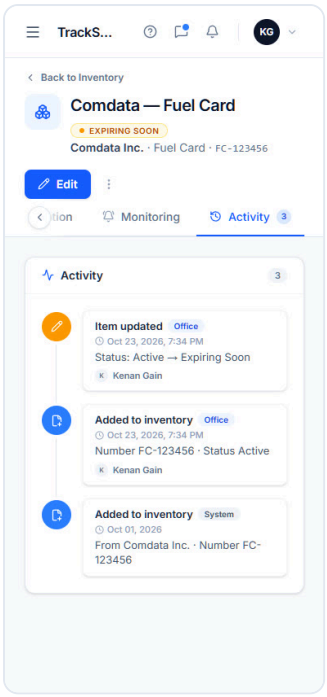

`list-edit-item-saved-activity-mobile.png`
After Update: the item page, Activity tab with the recorded "Item updated" entry and its change list.

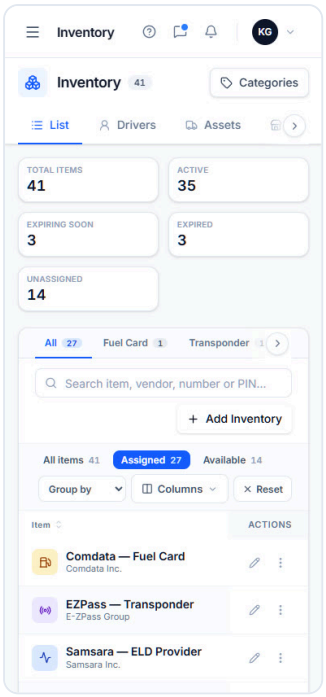

`list-filter-assigned-mobile.png`
Chip "Assigned": items on a unit or a driver; the Reset button appears.

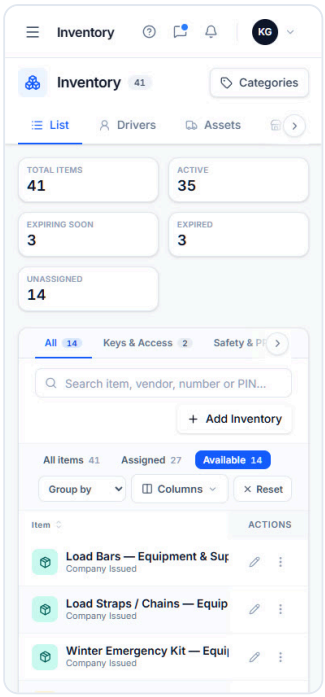

`list-filter-available-mobile.png`
Chip "Available": items on nobody and no unit — the yard stock.

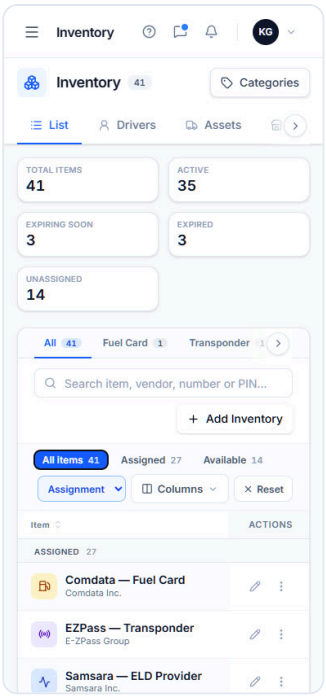

`list-group-assignment-mobile.png`
Group by Assignment: "Assigned" and "Available" bands with their counts.

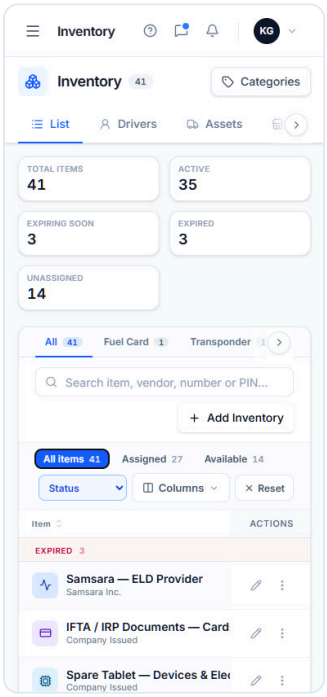

`list-group-status-mobile.png`
Group by Status: Expired, Expiring Soon, Active — most urgent first.

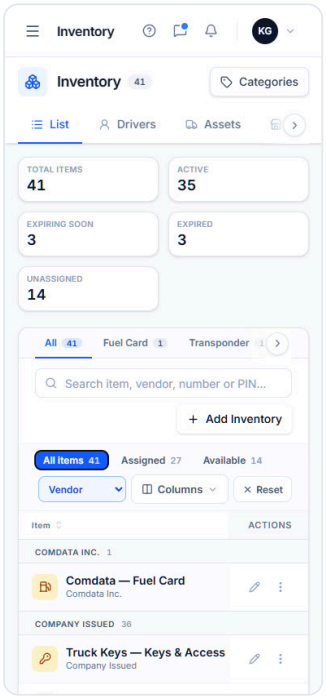

`list-group-vendor-mobile.png`
Group by Vendor: one band per supplier; company-issued accessories in one "Company Issued" band.

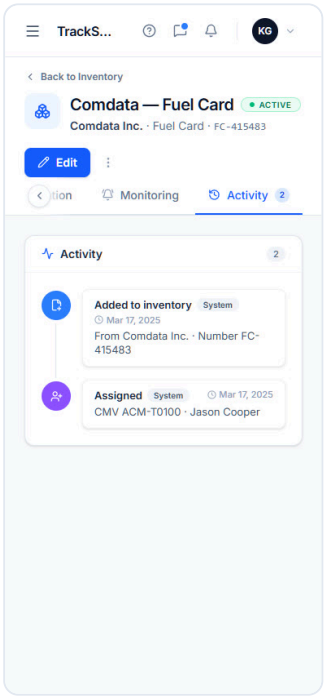

`list-item-detail-activity-mobile.png`
Activity tab: the item's trail, newest first (System entries derived from the record).

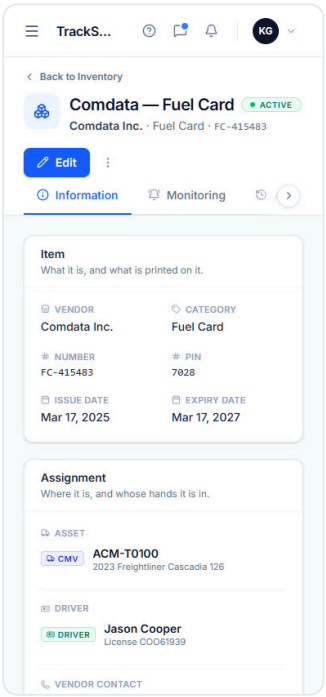

`list-item-detail-information-mobile.png`
Item page, Information tab: the Item card and the Assignment card with unit, driver and vendor contact.

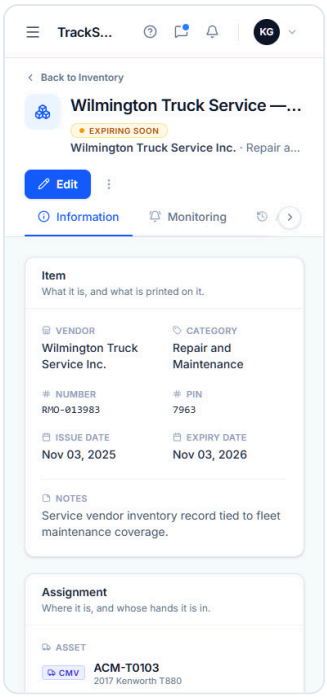

`list-item-detail-information-notes-mobile.png`
A repair-shop item: the Notes fact appears on the Item card.

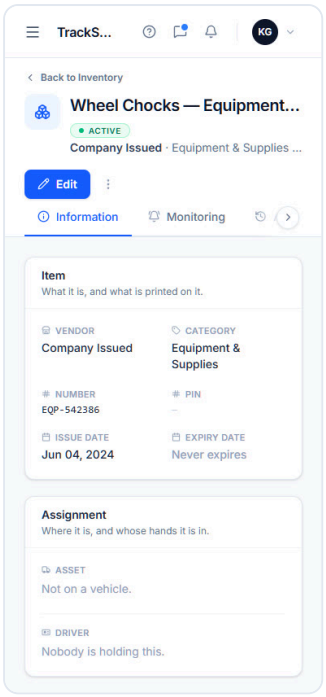

`list-item-detail-information-unassigned-mobile.png`
An item on nobody: "Not on a vehicle." · "Nobody is holding this."

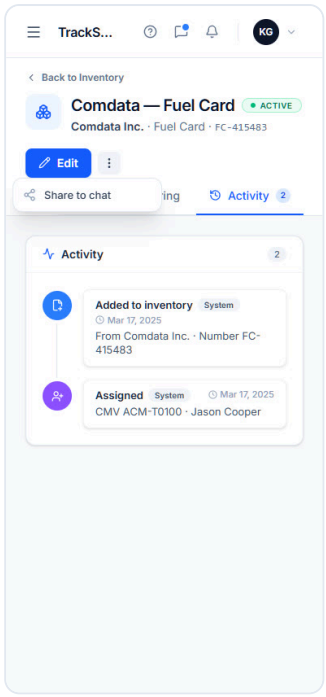

`list-item-detail-menu-mobile.png`
Header ⋮ menu: Share to chat (items cannot be deleted).

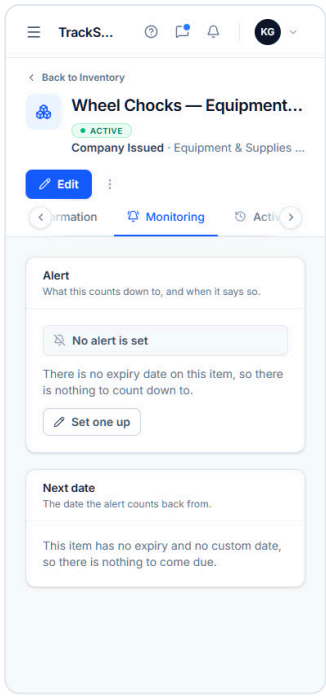

`list-item-detail-monitoring-no-expiry-mobile.png`
An item with no expiry: nothing to count down to, nothing to come due.

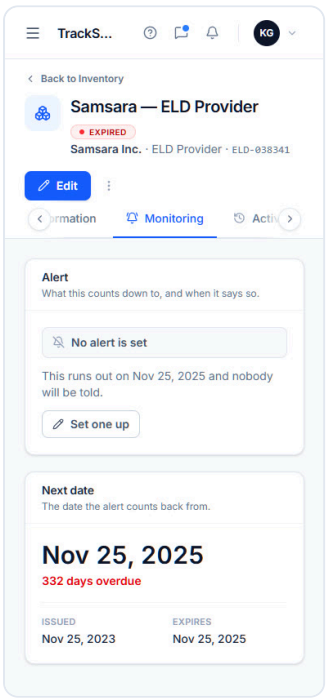

`list-item-detail-monitoring-off-mobile.png`
No alert set on an item that expires: "This runs out on ... and nobody will be told." with Set one up; the Next date shows how far overdue it is.

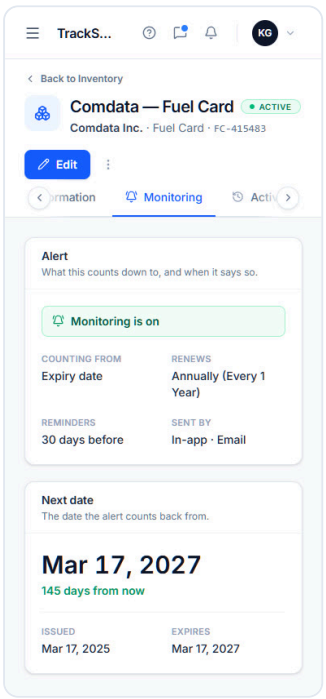

`list-item-detail-monitoring-on-mobile.png`
Monitoring tab with an alert on: what it counts from, renewal, reminders, channels — and the Next date card.

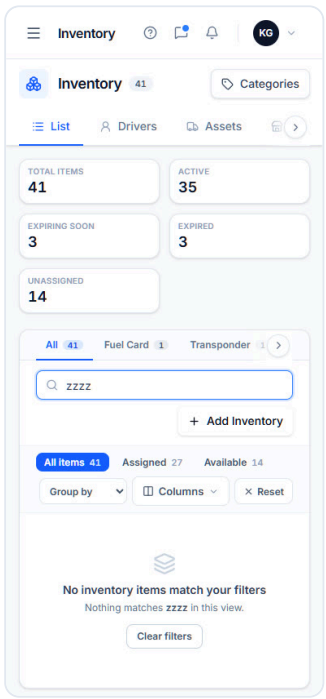

`list-no-results-mobile.png`
No results: "No inventory items match your filters" with Clear filters.

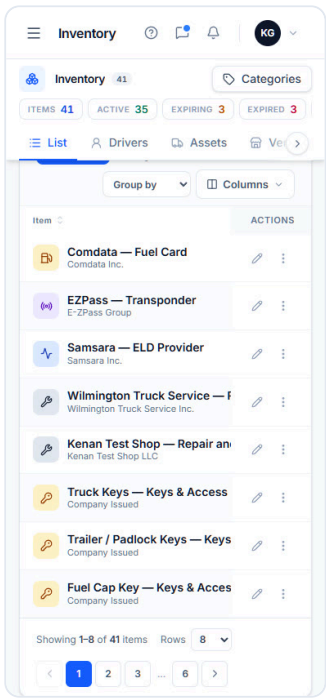

`list-pager-rows-8-mobile.png`
Pager set to 8 rows: "Showing 1–8 of 41 items", windowed page numbers.

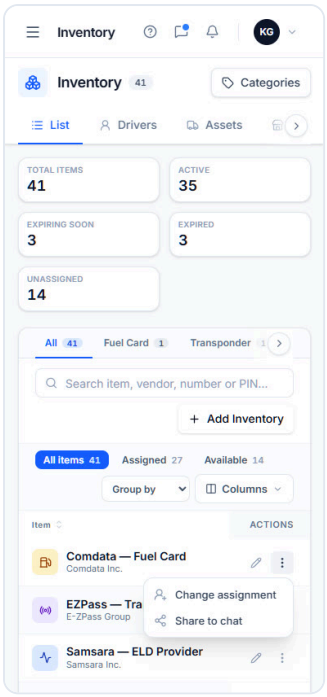

list-row-menu-mobile.png
Row ⋮ menu on an assigned item: Change assignment and Share to chat.

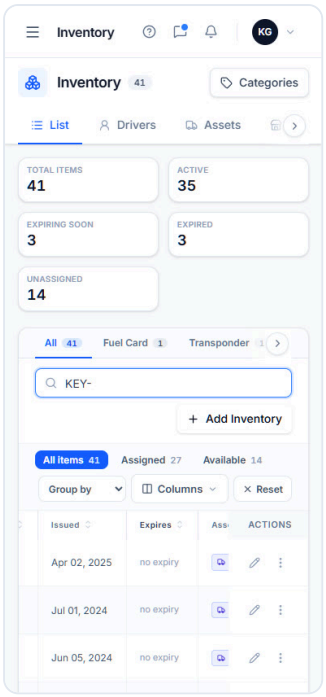

list-search-mobile.png
Search "KEY-": matches on item name, vendor, number or PIN.

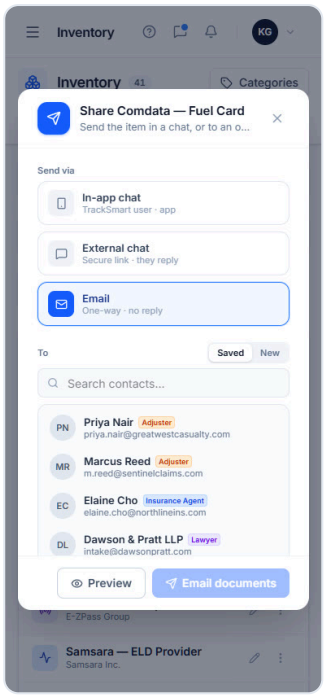

list-share-dialog-email-mobile.png
Share by email: an outsider's address instead of a chat recipient.

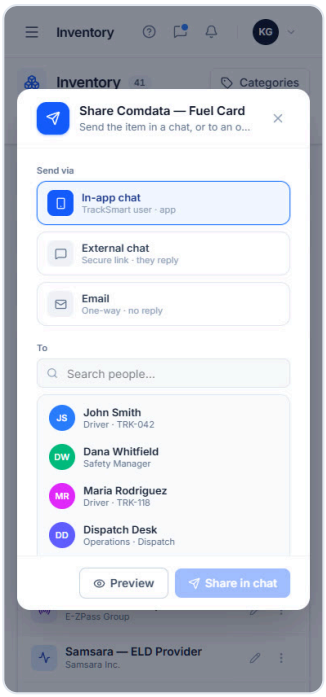

list-share-dialog-mobile.png
Share to chat: Send via In-app / External chat / Email, recipient, subject, message, attachments.

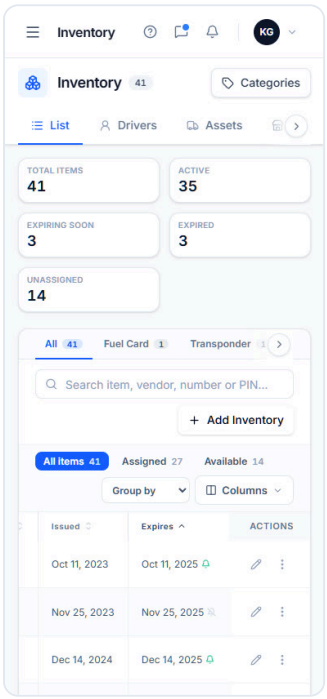

list-sort-expires-mobile.png
Sorted by Expires (ascending): the header turns blue with an up chevron; "no expiry" sorts last.

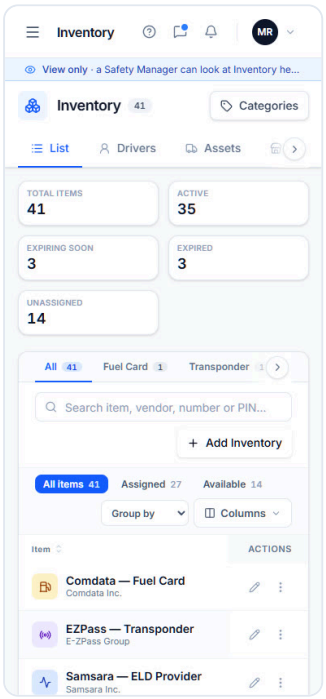

list-view-only-mobile.png
Inventory as a Safety Manager (light access): the blue "View only" strip; every control is still rendered and works (TO CONFIRM).

Drivers

Desktop · 1440 px

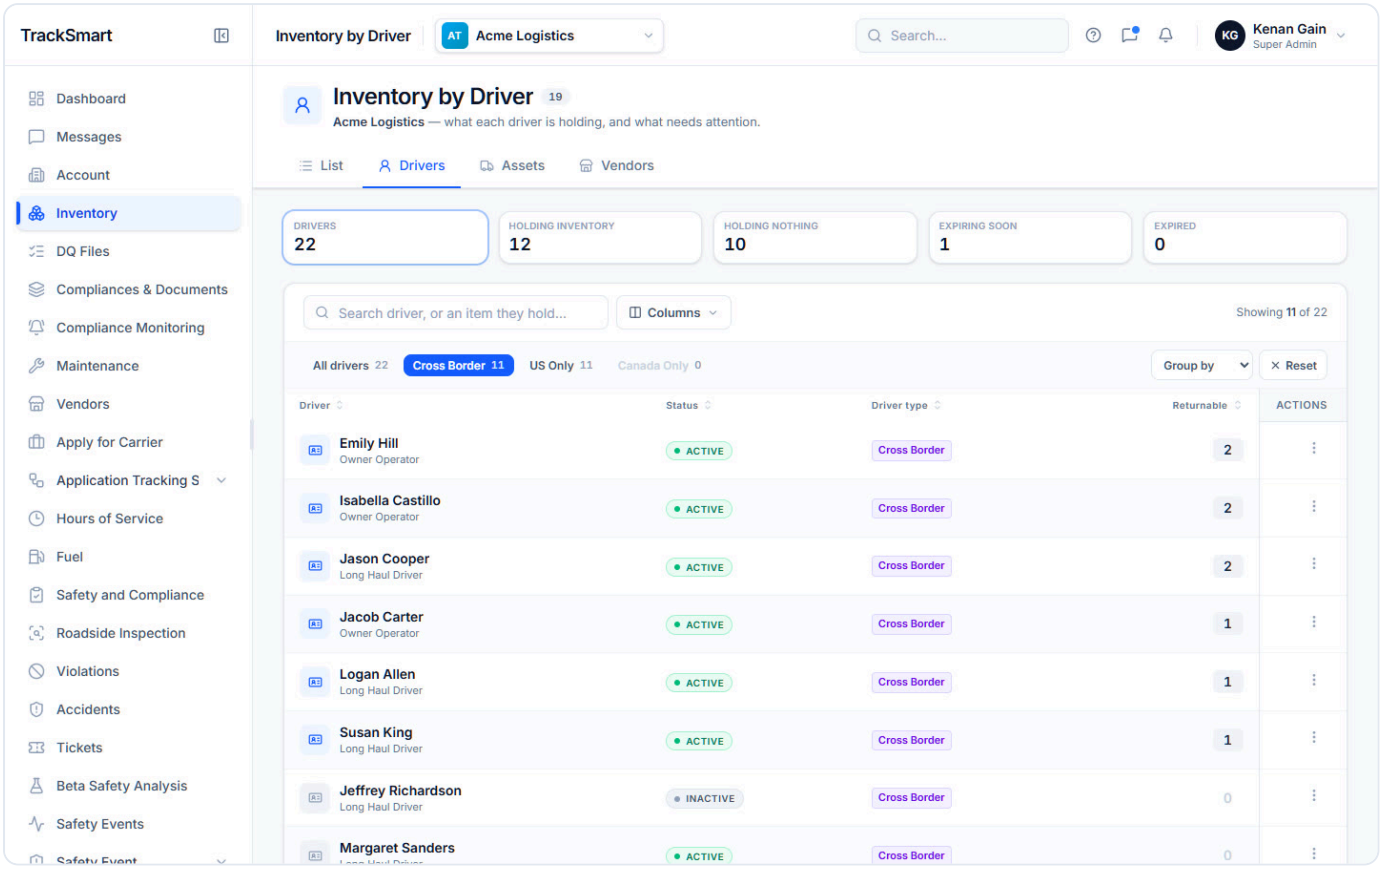

drivers-chip-cross-border-desktop.png — Driver-type chip "Cross Border" (from the DQ files).

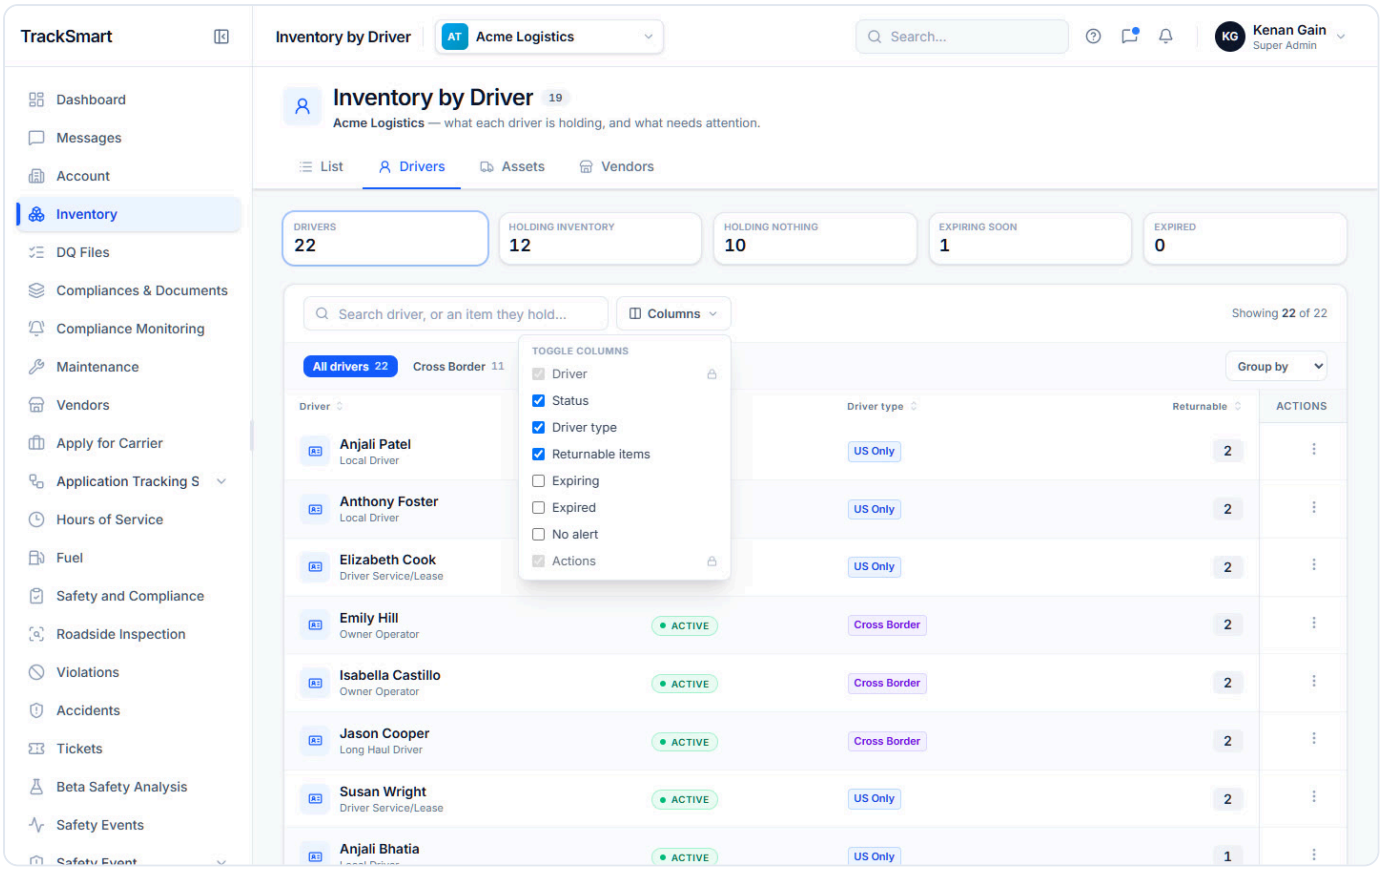

drivers-columns-picker-desktop.png — Columns picker: Expiring, Expired and No alert can be added.

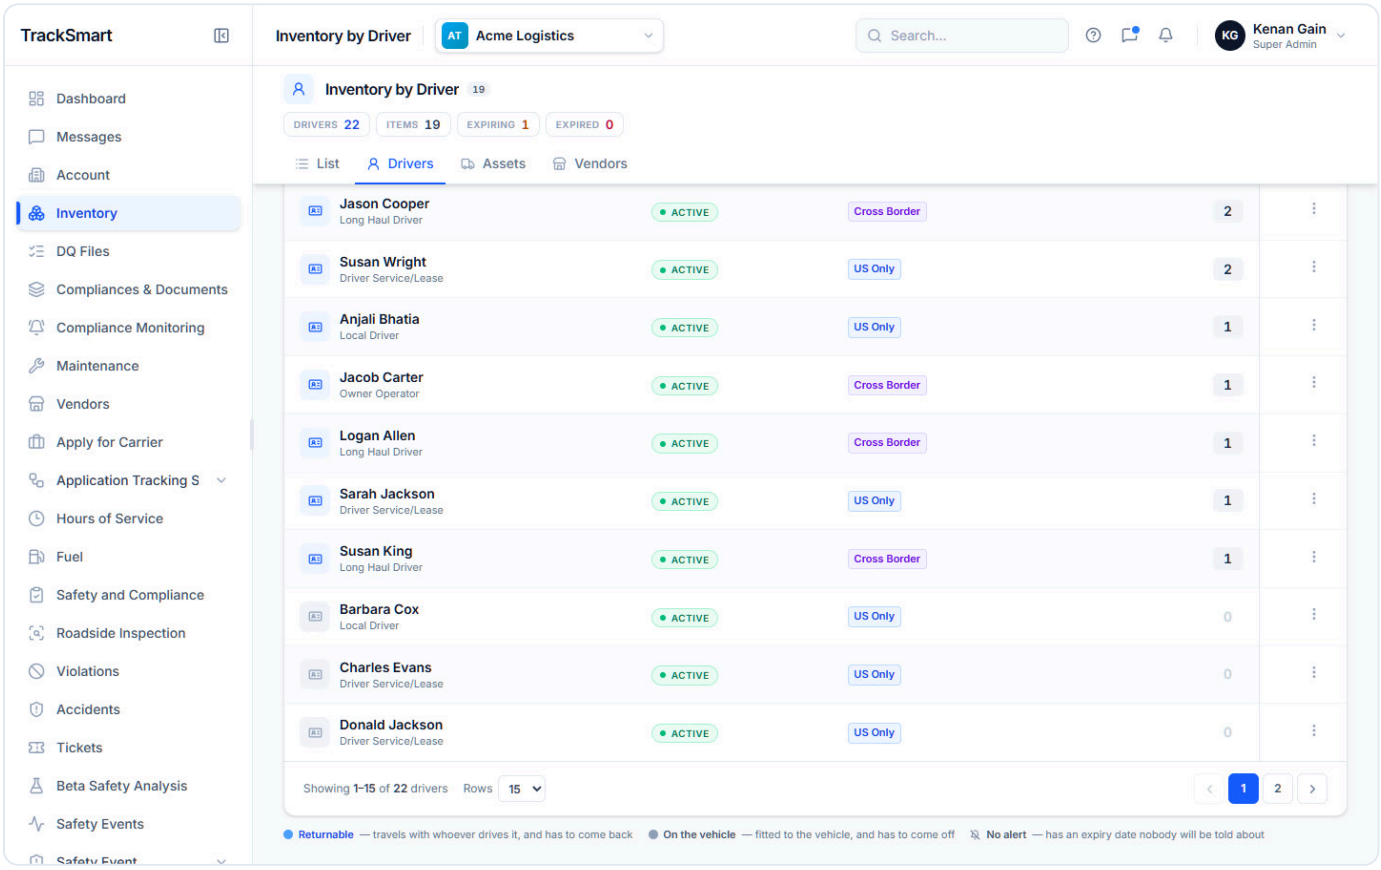

drivers-condensed-header-desktop.png — Drivers tab scrolled: the condensed header with its KPI figures.

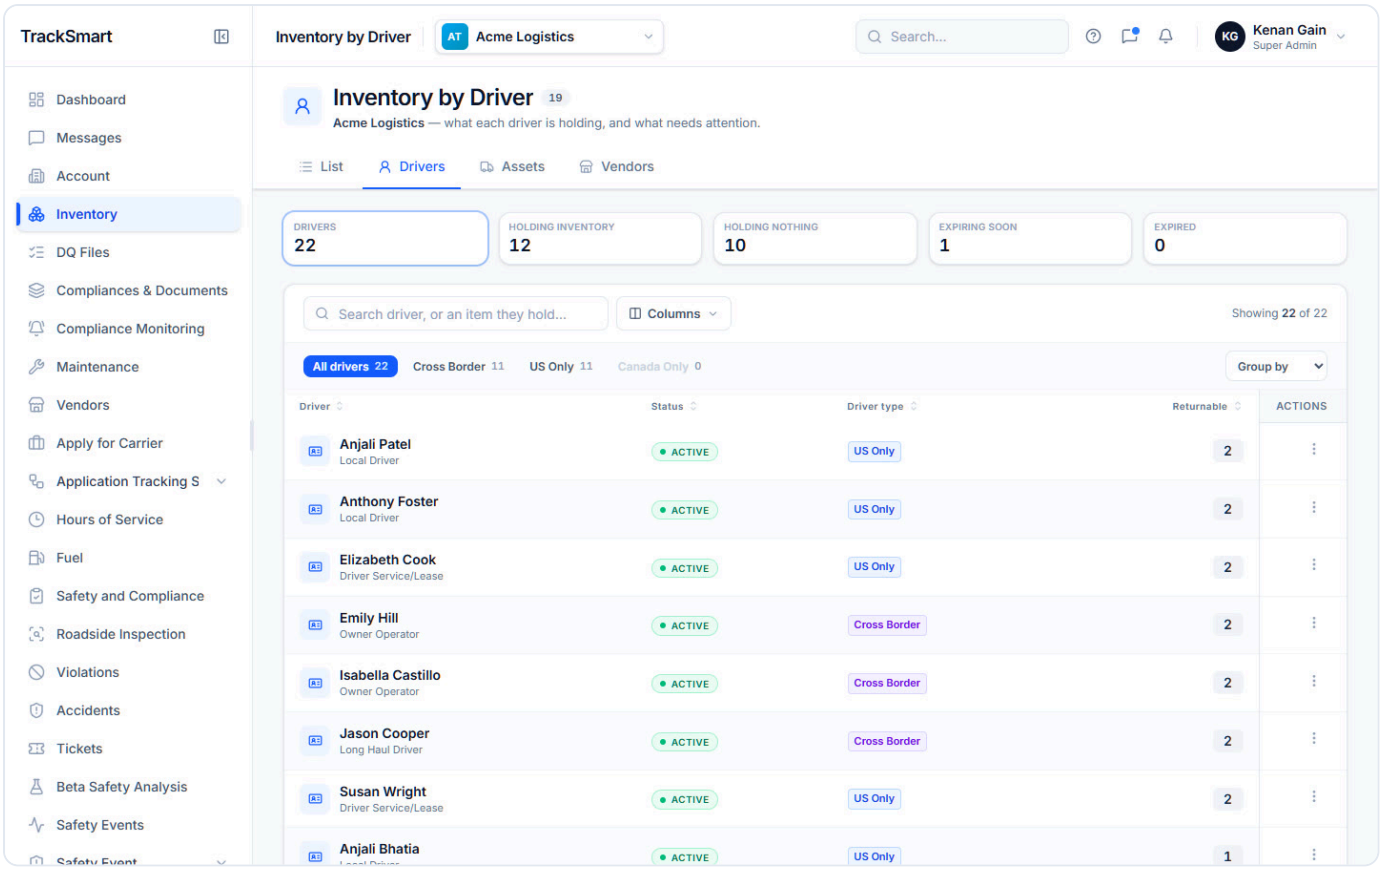

`drivers-default-desktop.png` — Drivers tab ("Inventory by Driver"): KPI tiles that filter, search, Columns, the driver-type chips, Group by and every roster driver with what they hold.

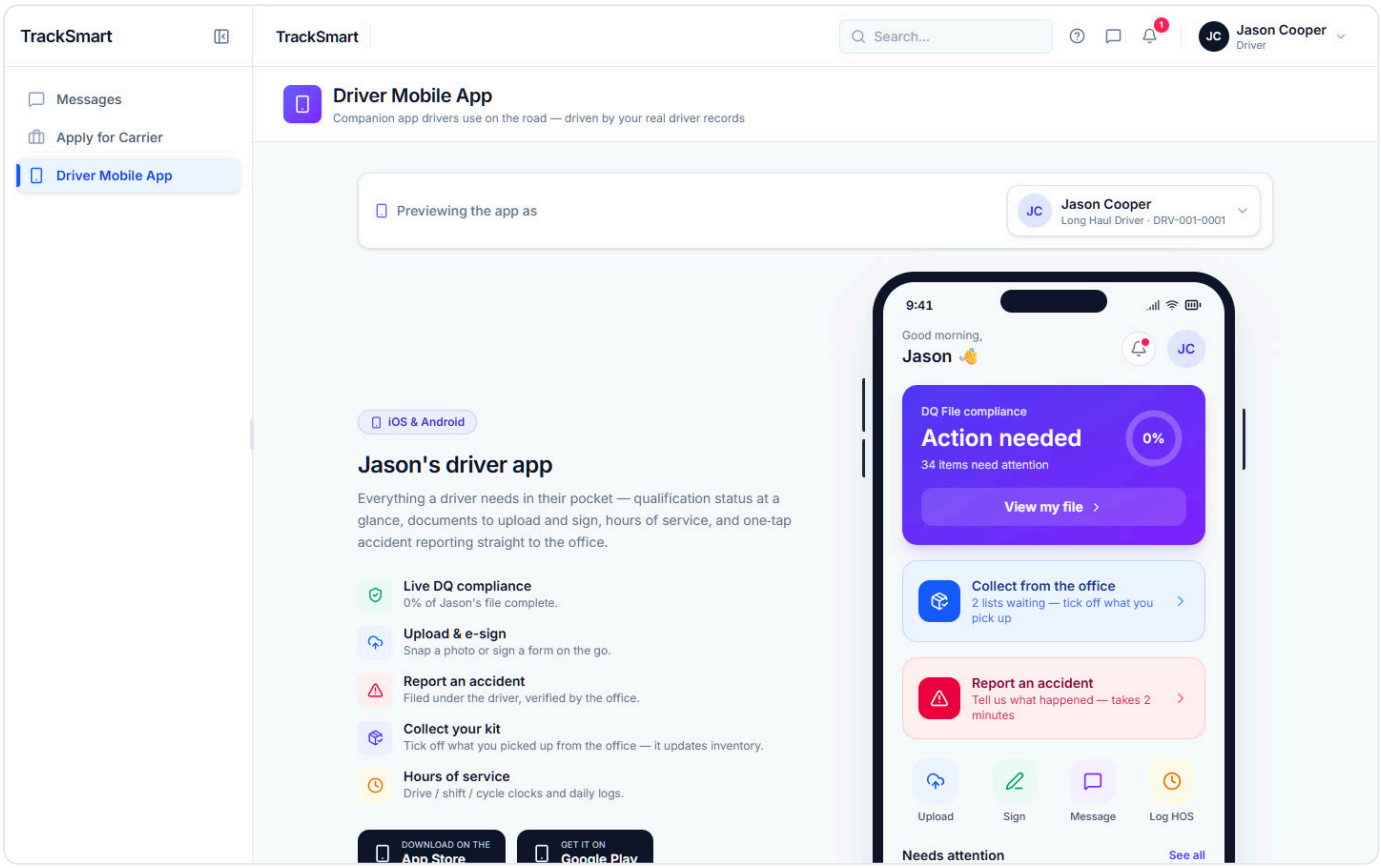

`drivers-driver-app-home-desktop.png` — Signed in as the driver (Jason Cooper): the Driver Mobile App home with the "Collect from the office" tile.

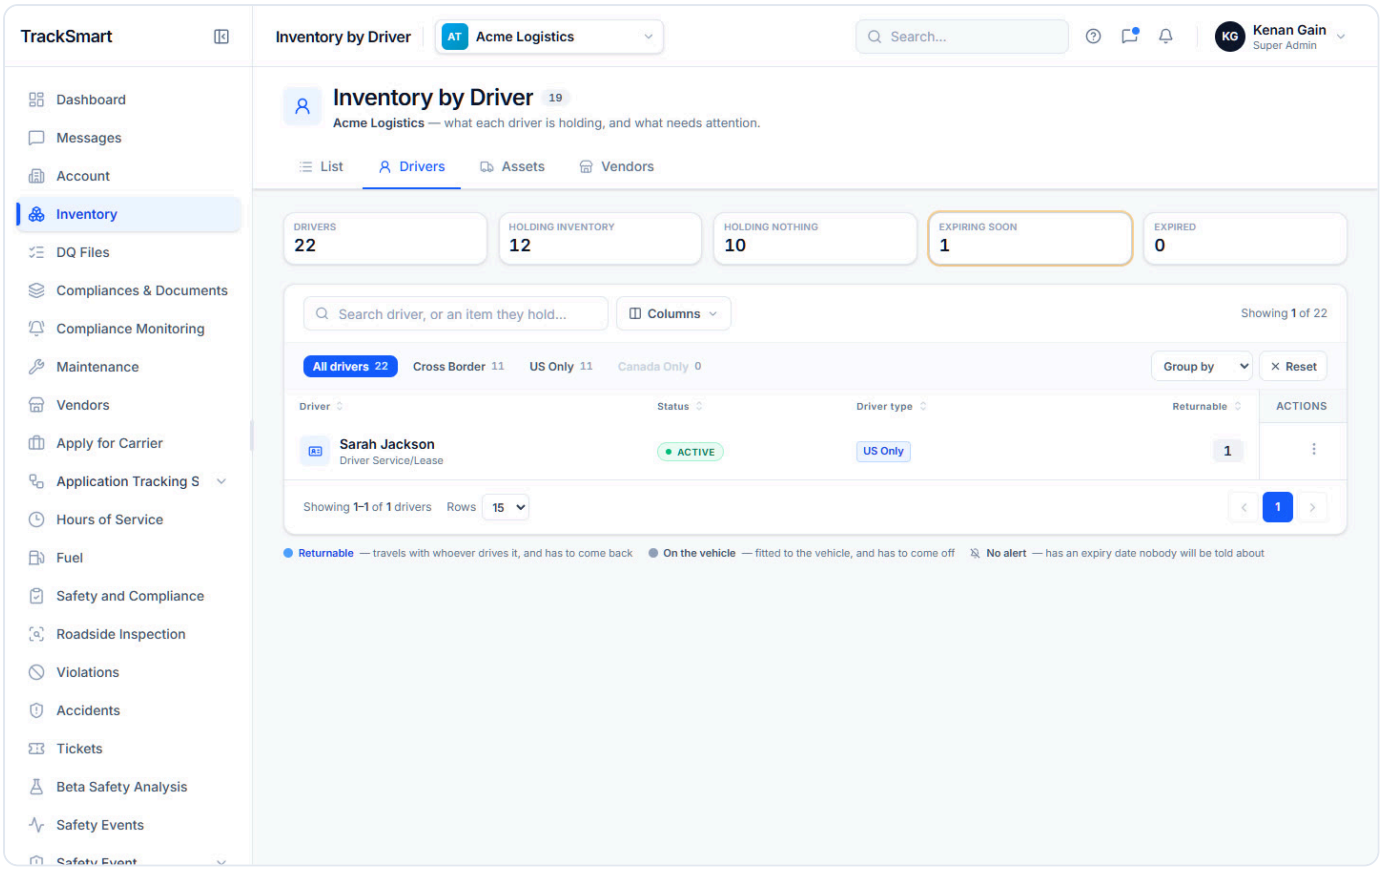

drivers-filter-expiring-desktop.png — KPI tile "Expiring soon": the drivers holding something that runs out within 30 days.

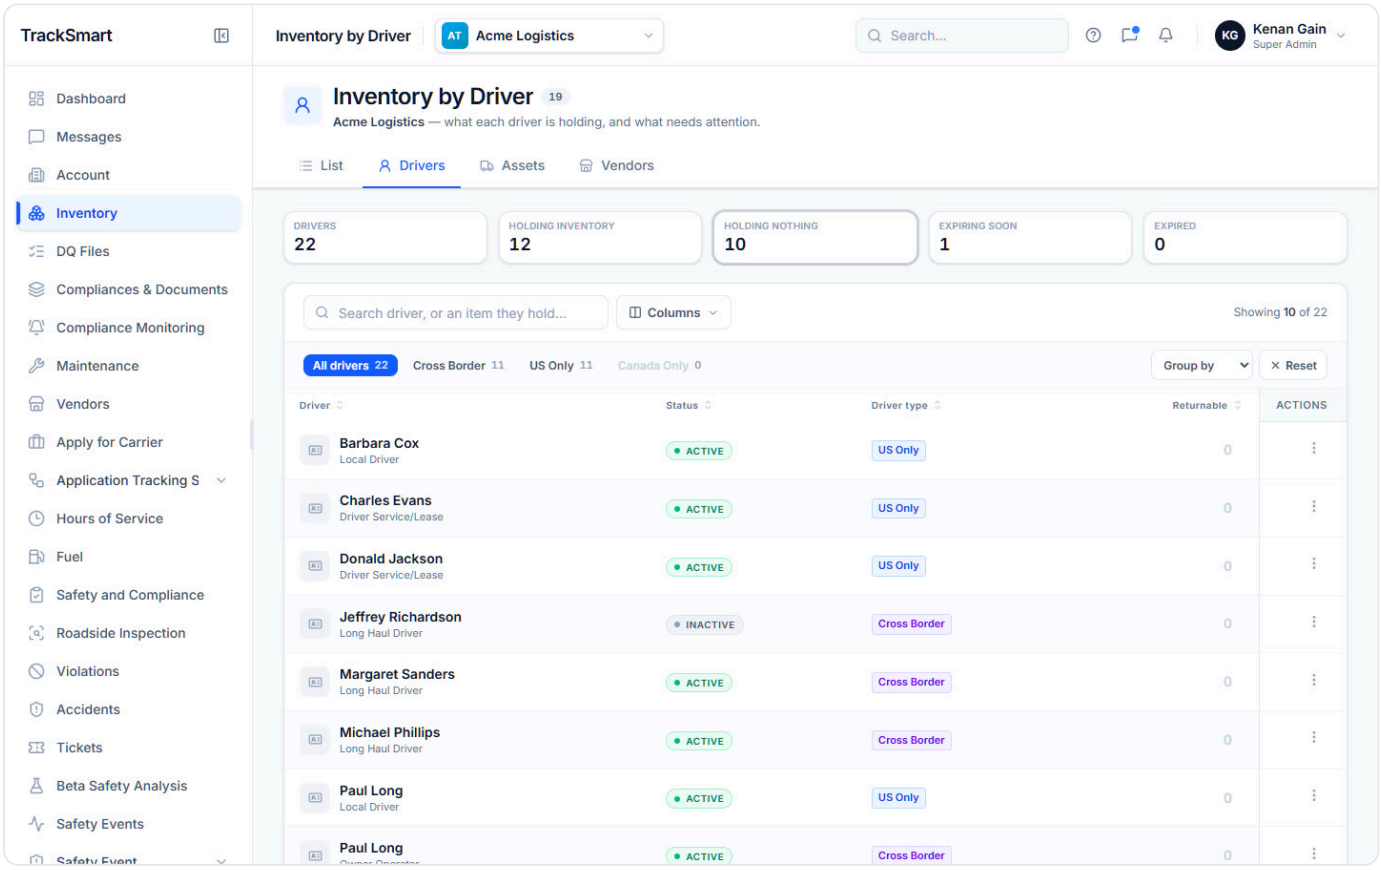

drivers-filter-holding-nothing-desktop.png — KPI tile "Holding nothing" used as a filter: drivers with no inventory, greyed; Reset appears.

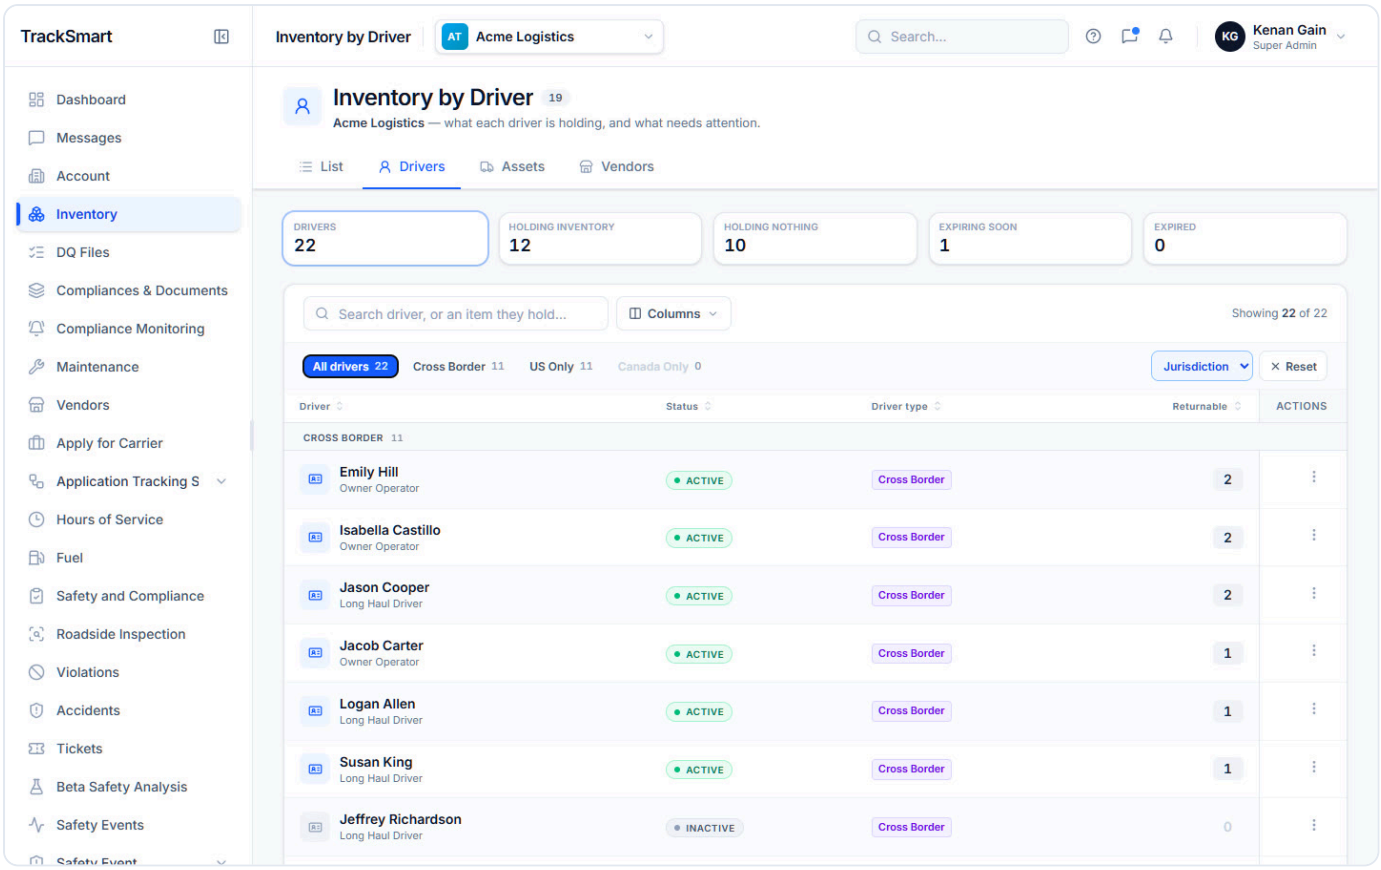

drivers-group-jurisdiction-desktop.png — Group by Jurisdiction: bands per driver type.

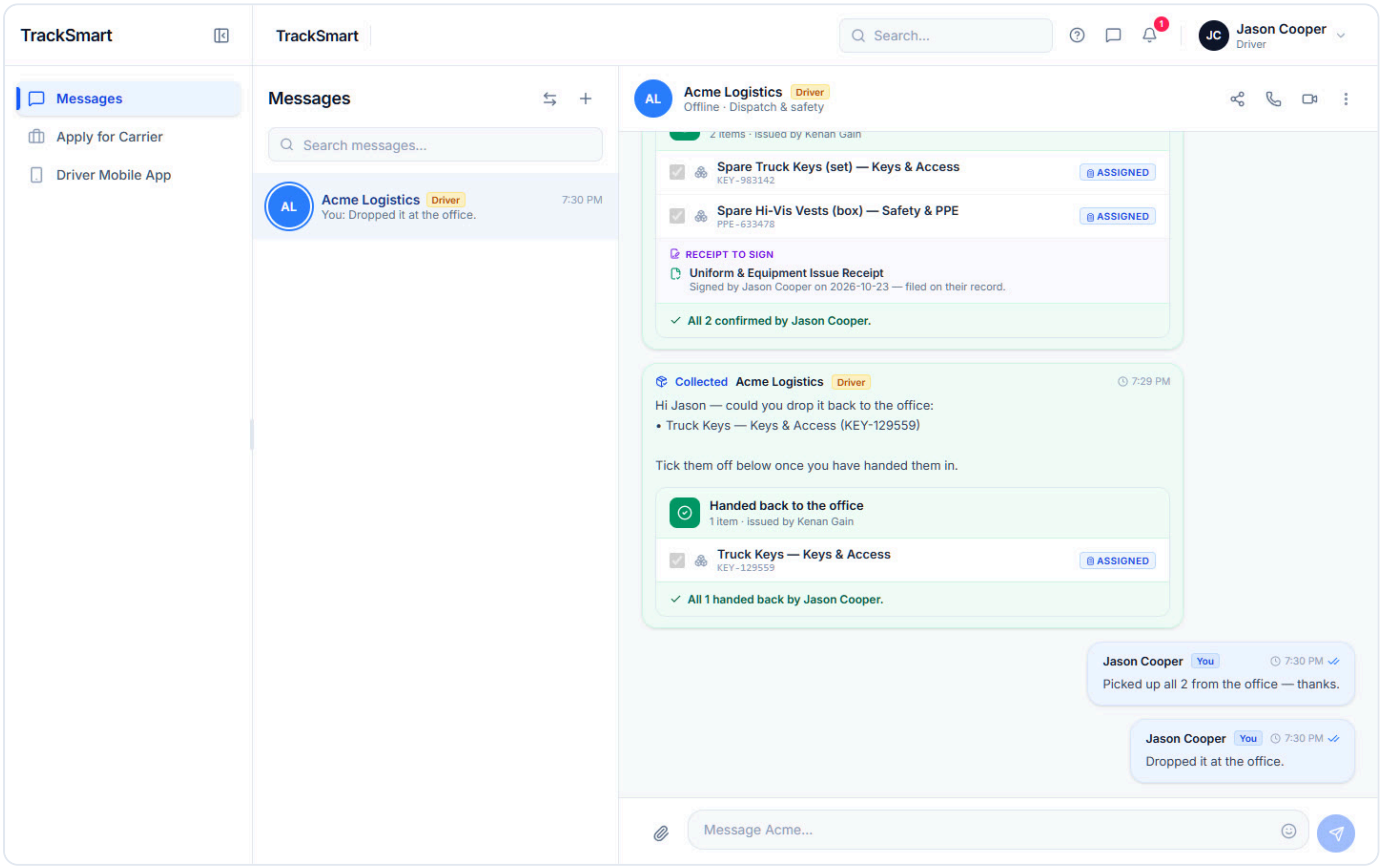

drivers-handback-confirmed-desktop.png — The driver confirms the hand-back: the card reads Handed back to the office and the item comes off the driver.

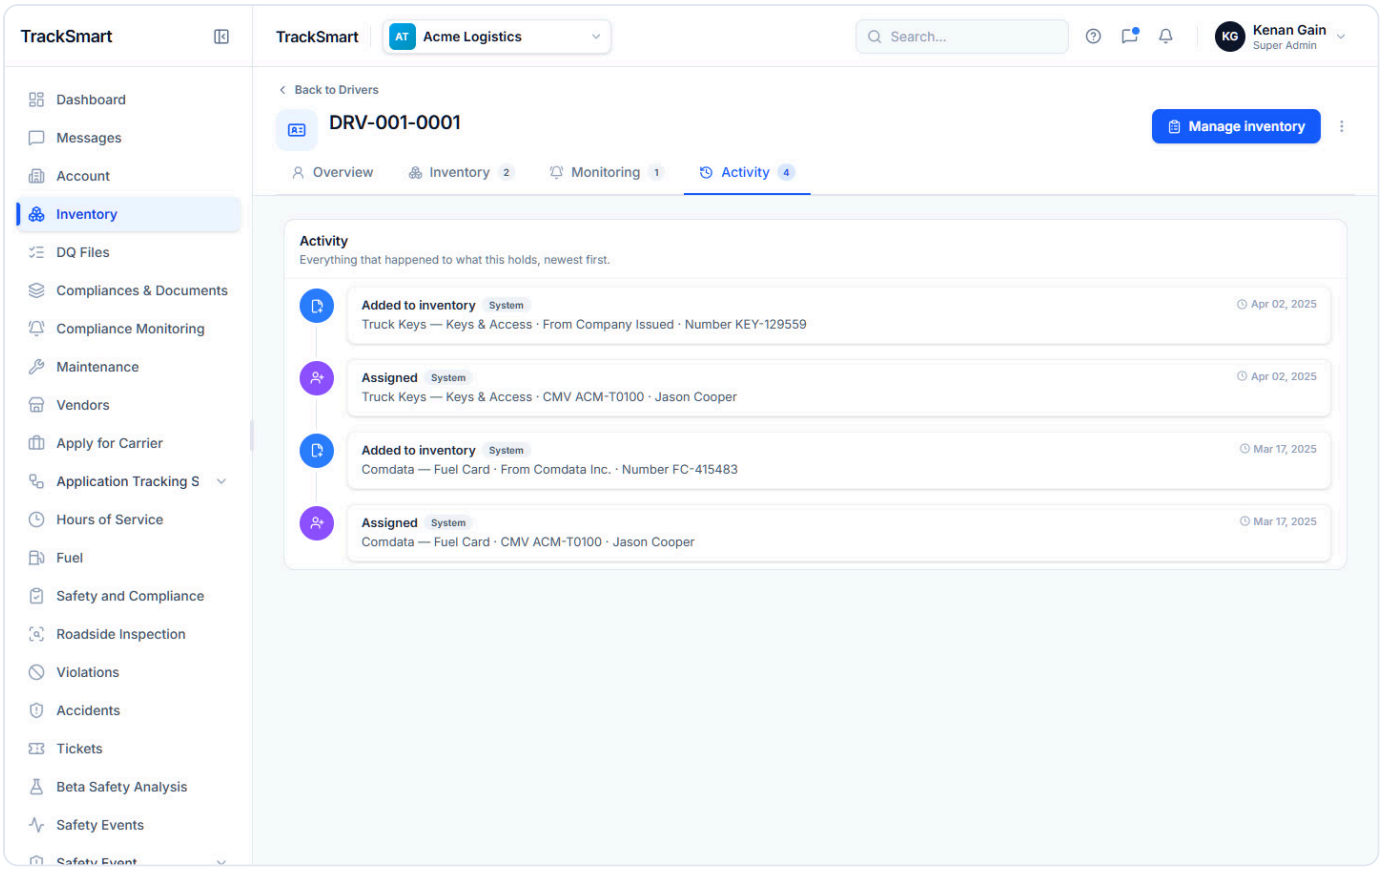

`drivers-holder-activity-desktop.png` — Activity tab: everything that happened to what this driver holds.

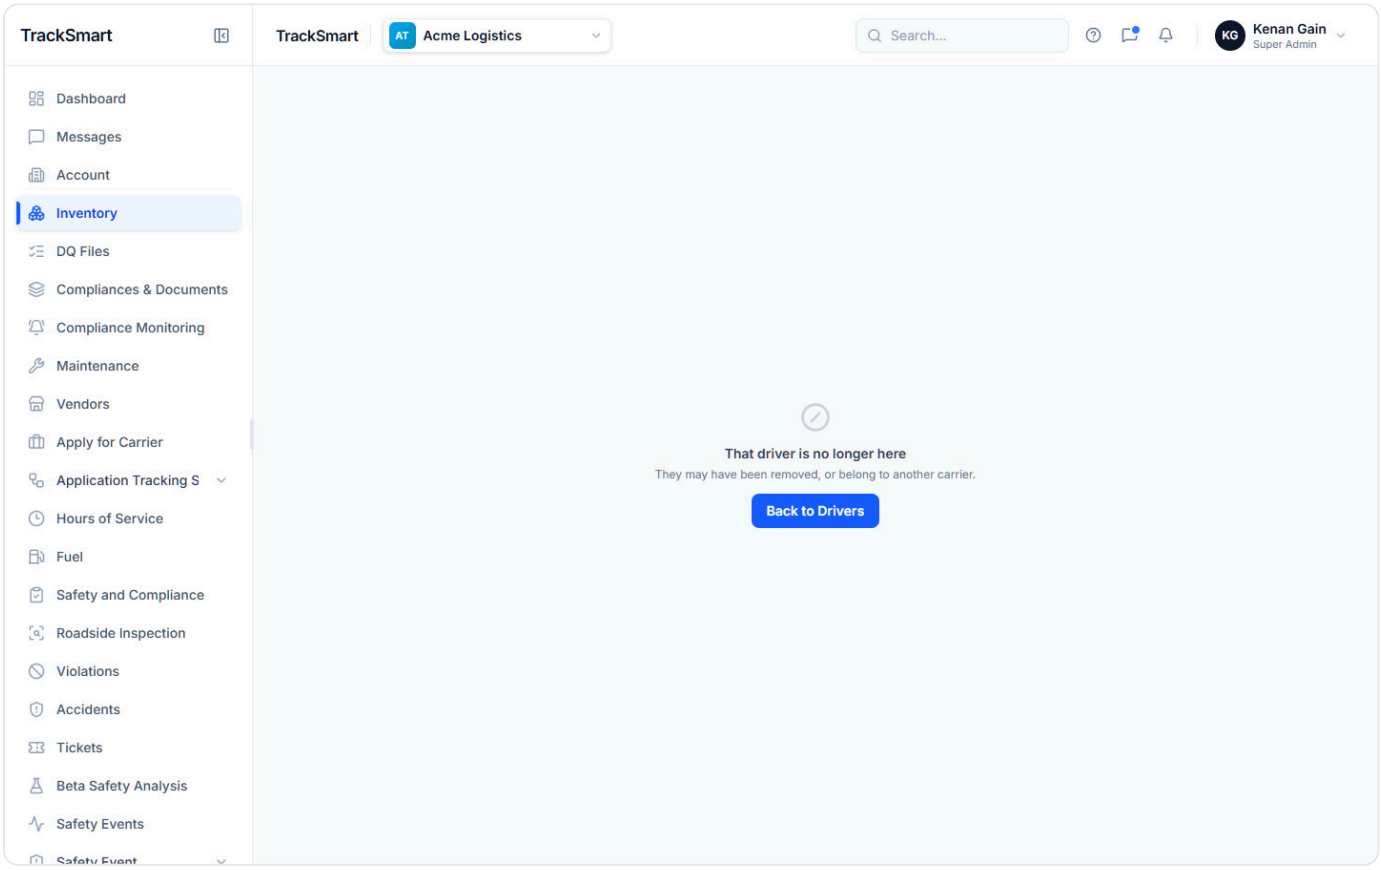

`drivers-holder-empty-not-found-desktop.png` — A driver holding nothing opens the not-found page ("That driver is no longer here") instead of an empty one (TO CONFIRM — likely a bug).

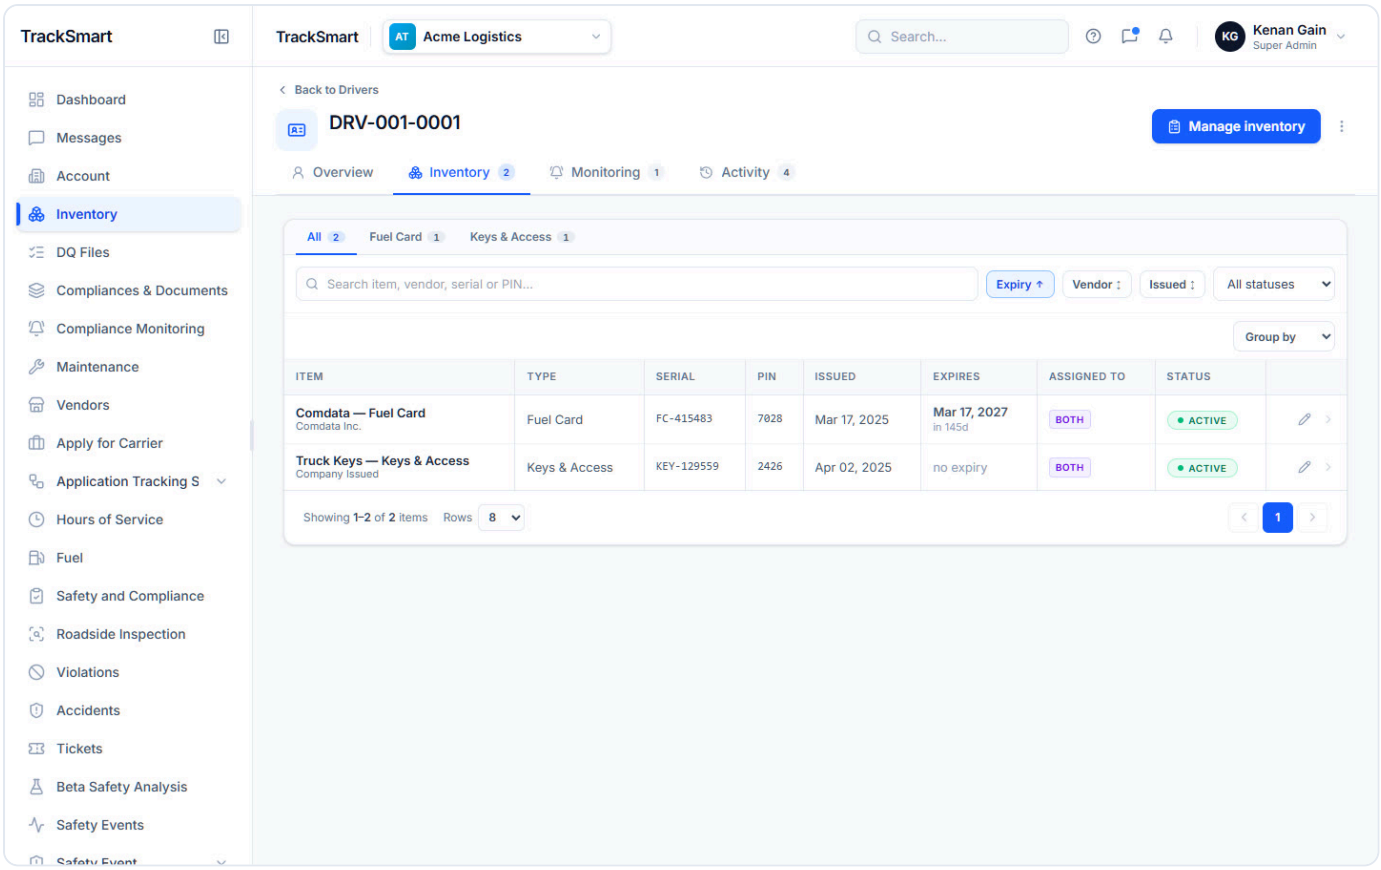

`drivers-holder-inventory-desktop.png` — Inventory tab: what the driver holds — category strip, search, Expiry / Vendor / Issued sort, status and Group by, the item table.

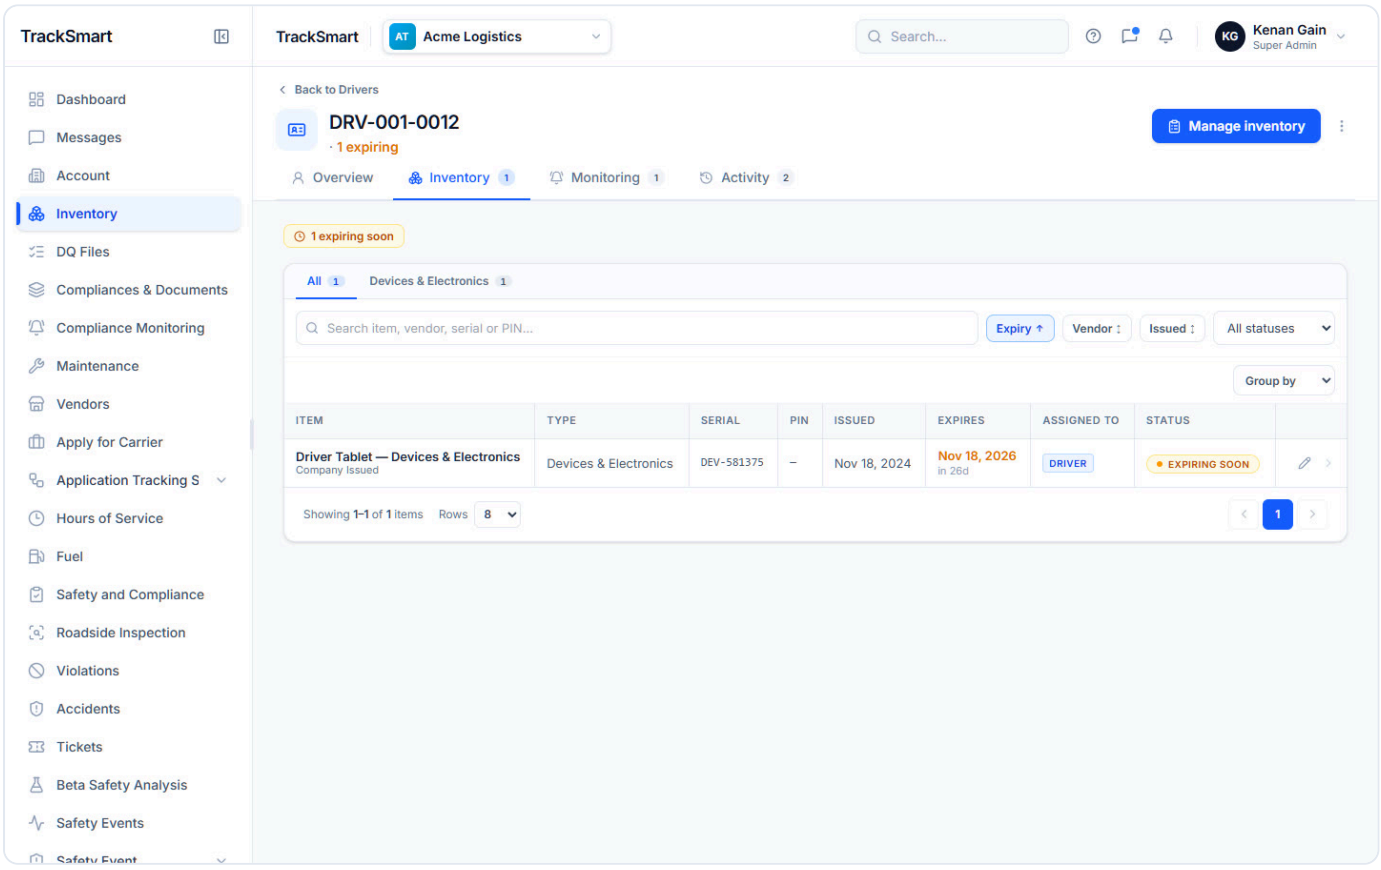

`drivers-holder-inventory-expiring-desktop.png` — A driver holding an item that runs out soon: amber "1 expiring" in the header and on the tab.

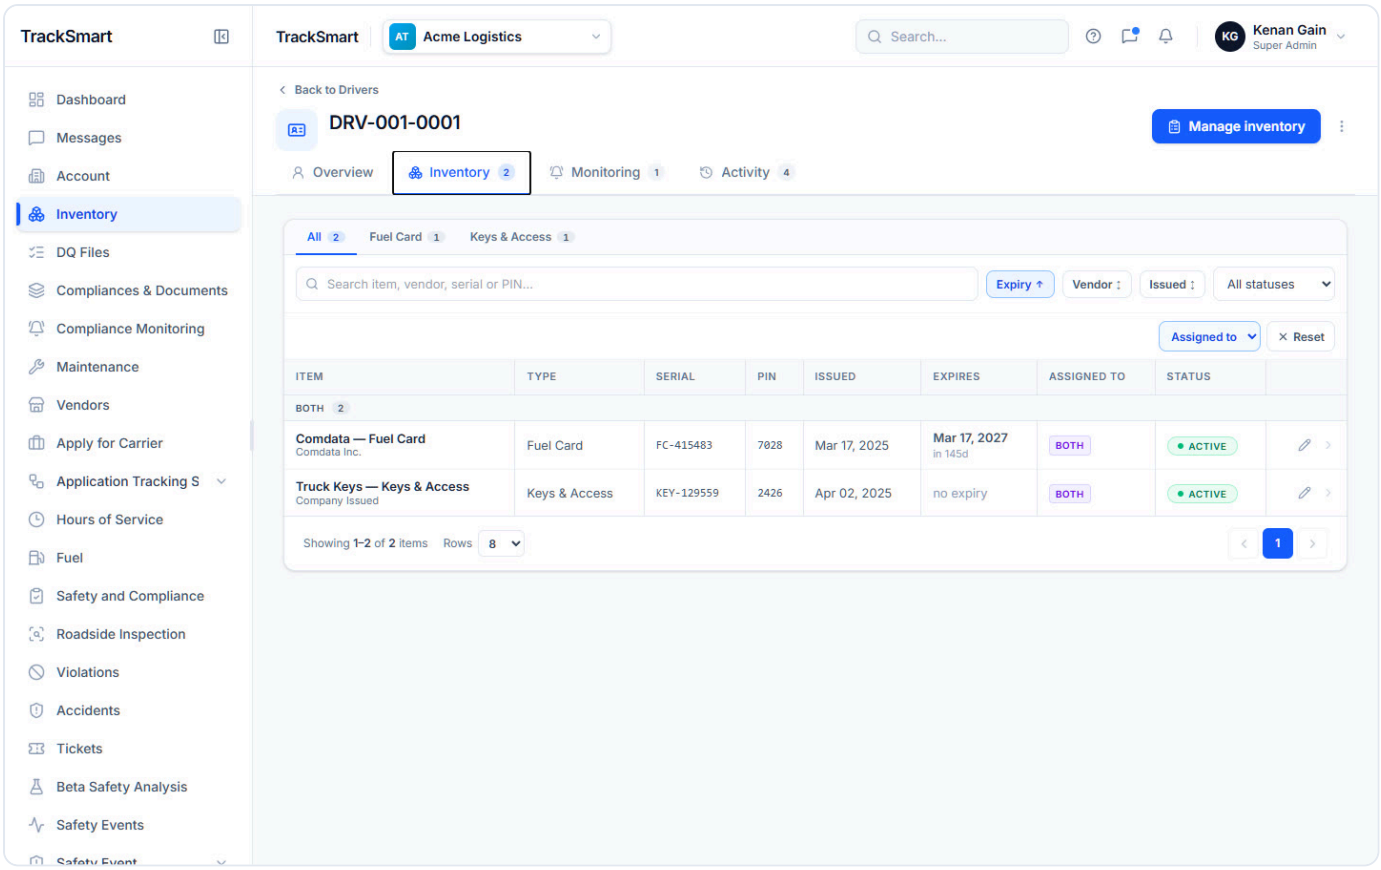

drivers-holder-inventory-grouped-desktop.png — Inventory tab grouped by "Assigned to" (Both / Driver / Asset).

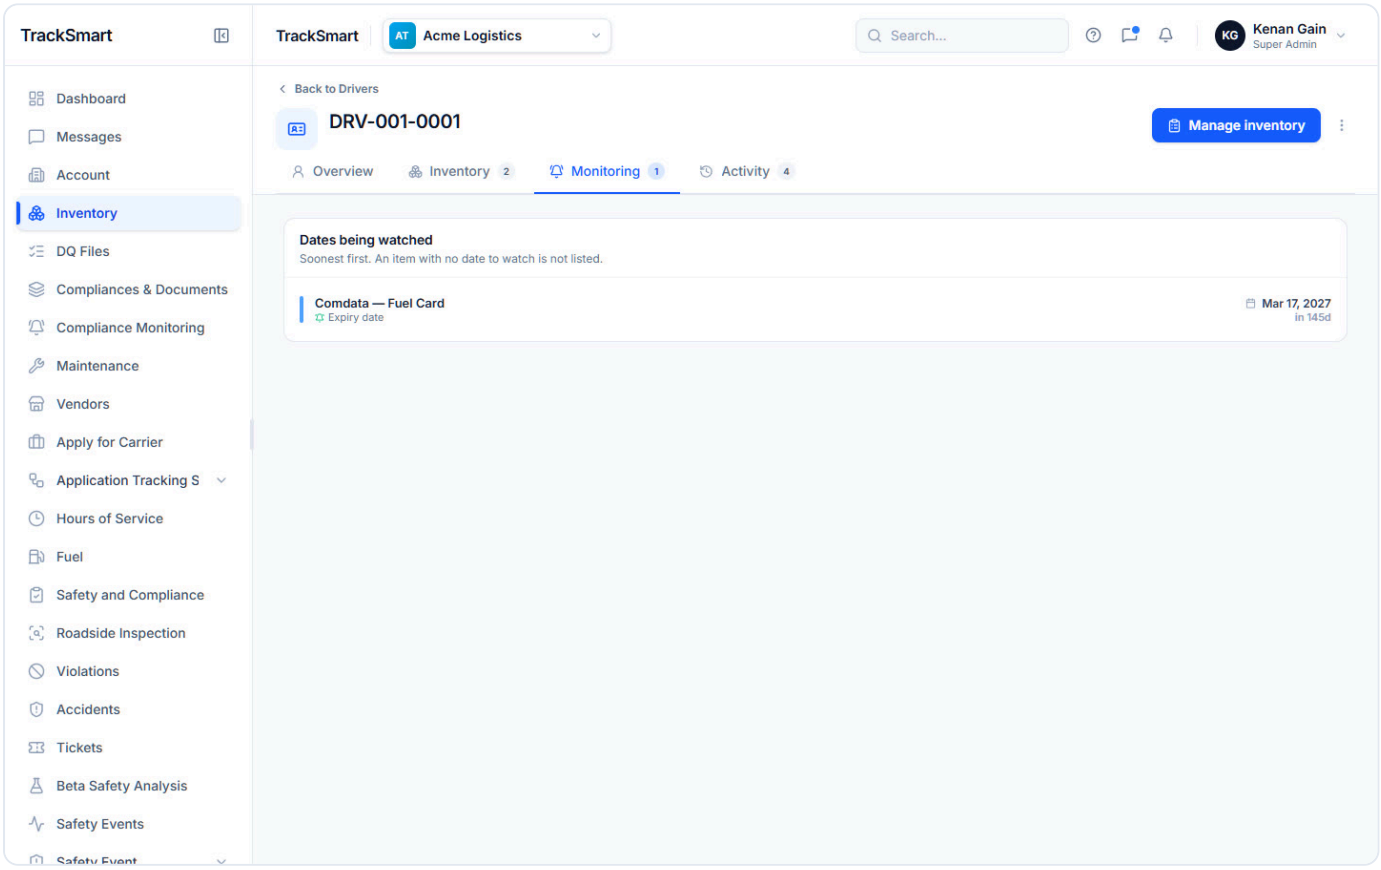

drivers-holder-monitoring-desktop.png — Monitoring tab: "Dates being watched", soonest first, with alert basis and days left.

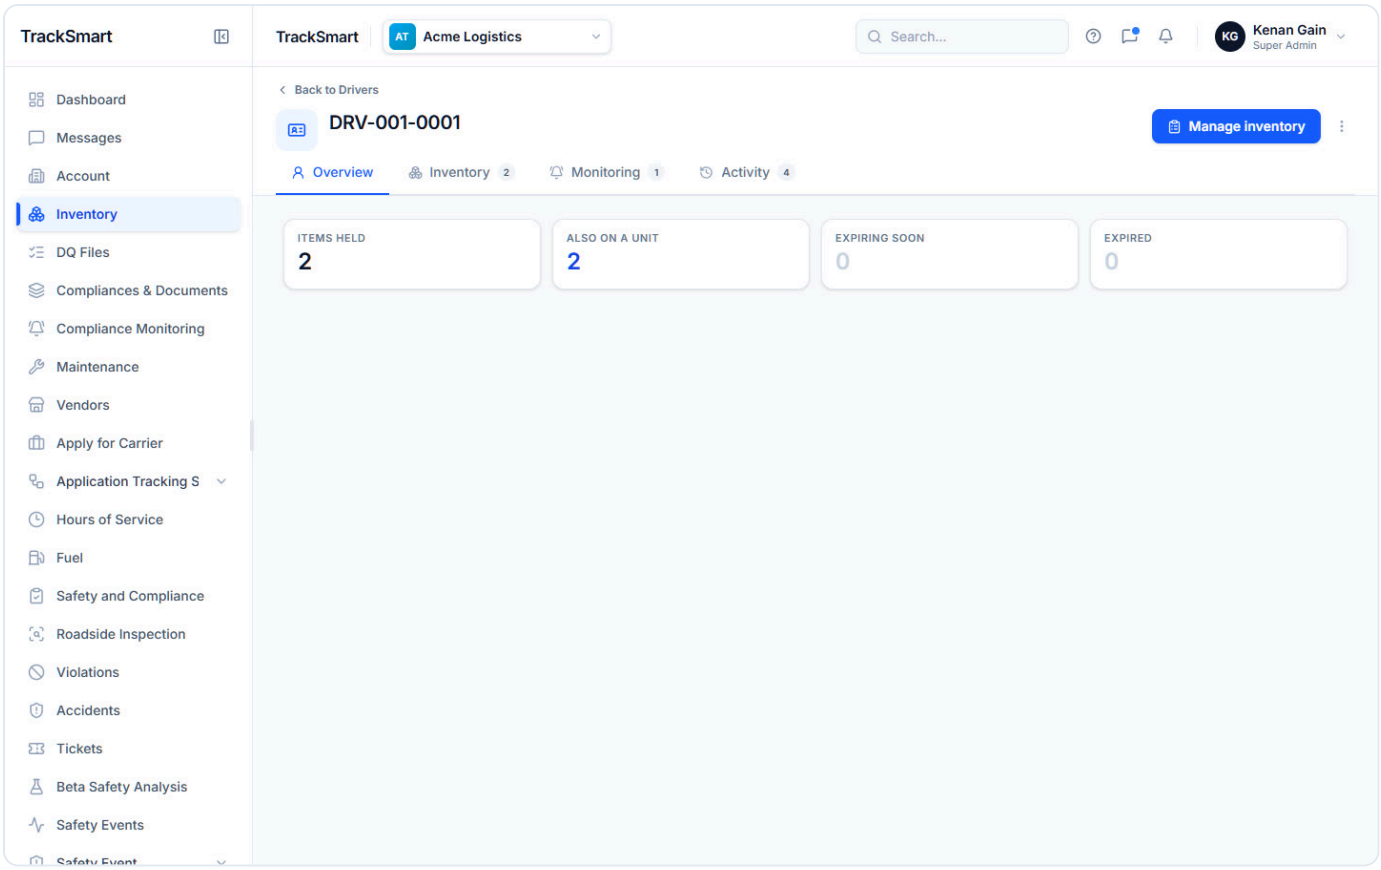

drivers-holder-overview-desktop.png — Driver holder page, Overview: Items held, Also on a unit, Expiring soon, Expired. The title shows the raw driver id (TO CONFIRM).

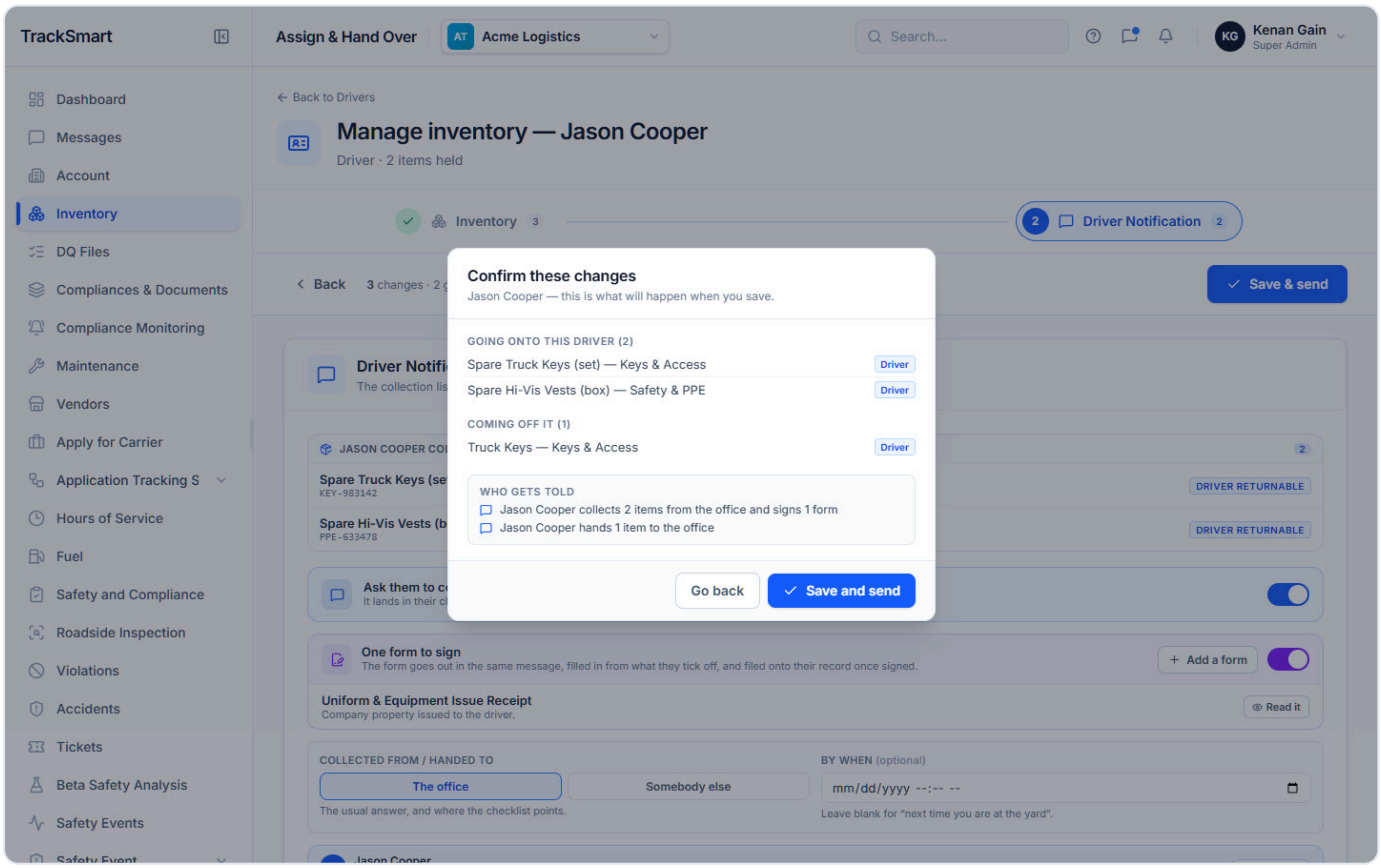

drivers-manage-confirm-desktop.png — "Confirm these changes": going on, coming off, and who gets told.

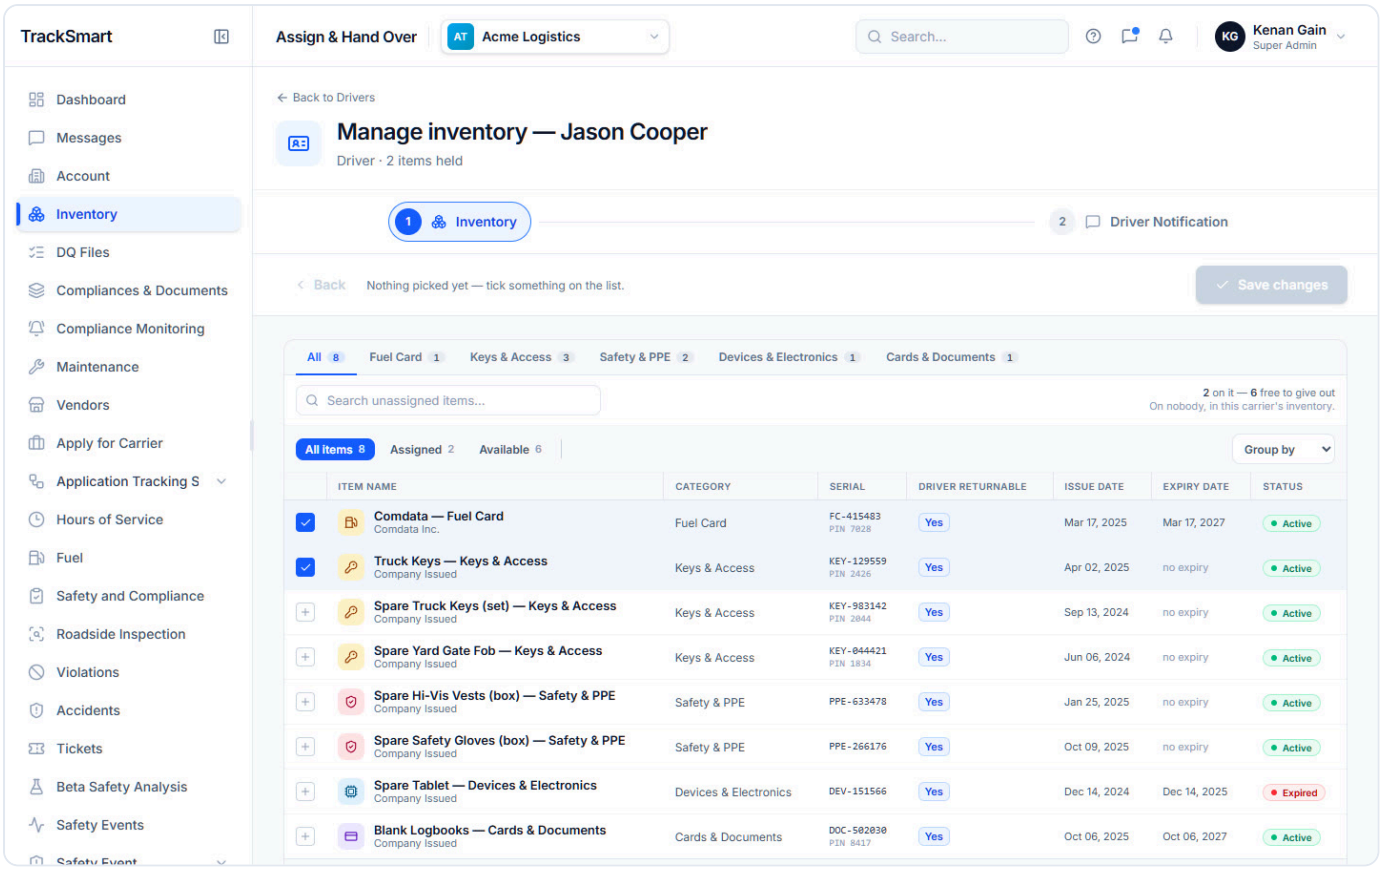

`drivers-manage-default-desktop.png` — Manage inventory — Jason Cooper, step 1: held items ticked, free items to give out; the action bar says nothing is picked yet.

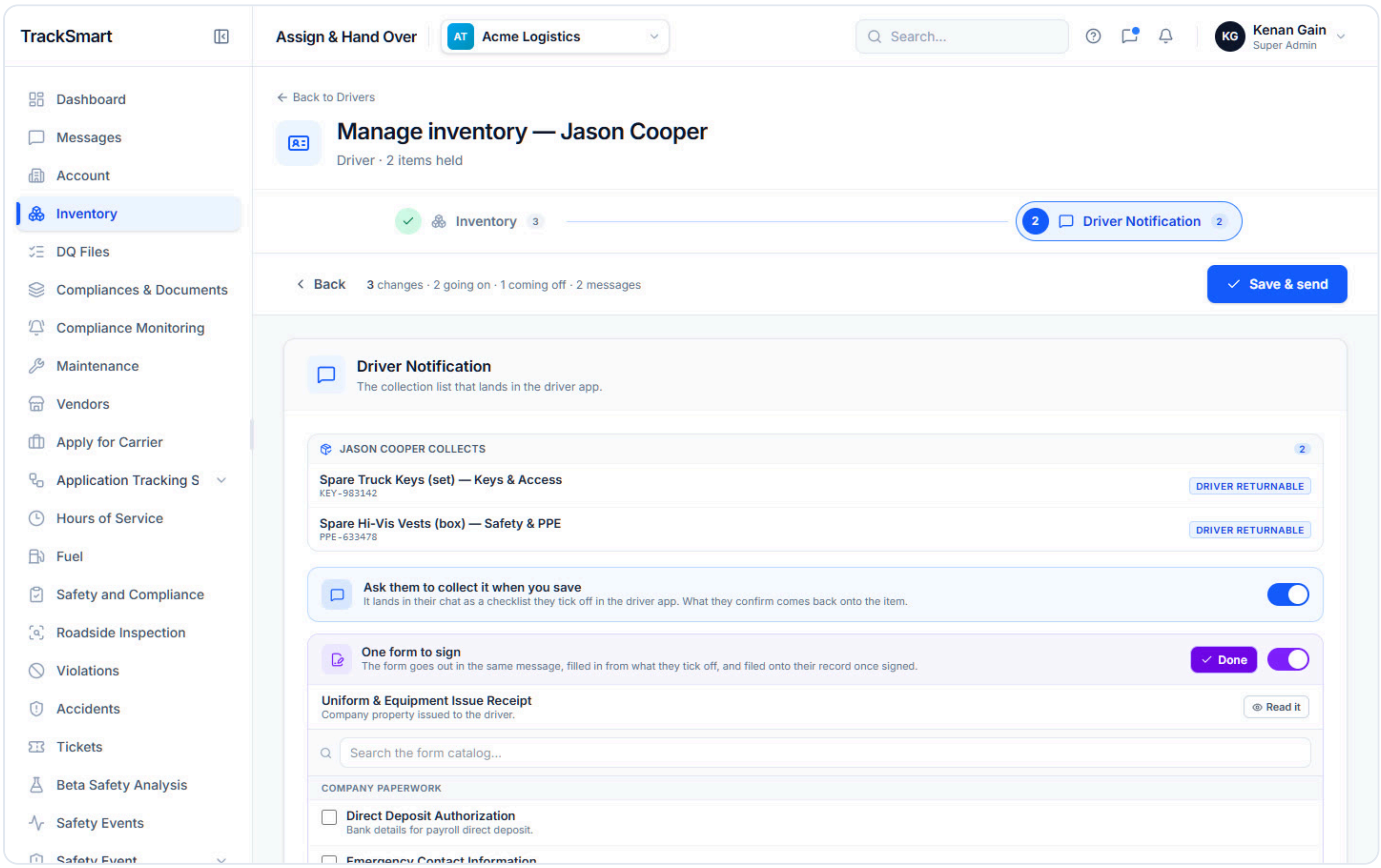

`drivers-manage-forms-picker-desktop.png` — "+ Add a form": the form catalog — company paperwork and policy & consent forms.

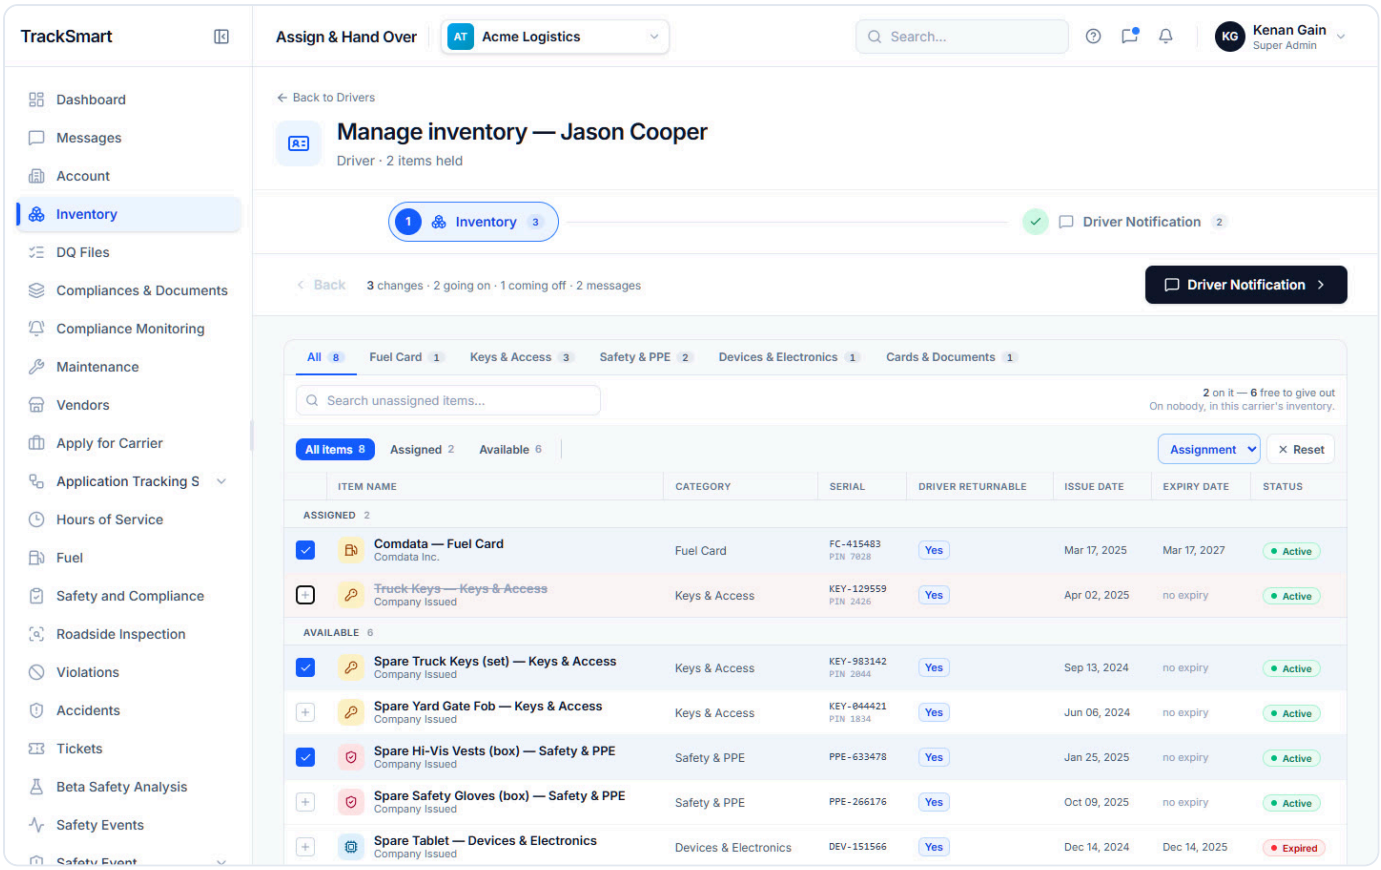

`drivers-manage-grouped-desktop.png` — Pick list grouped by Assignment.

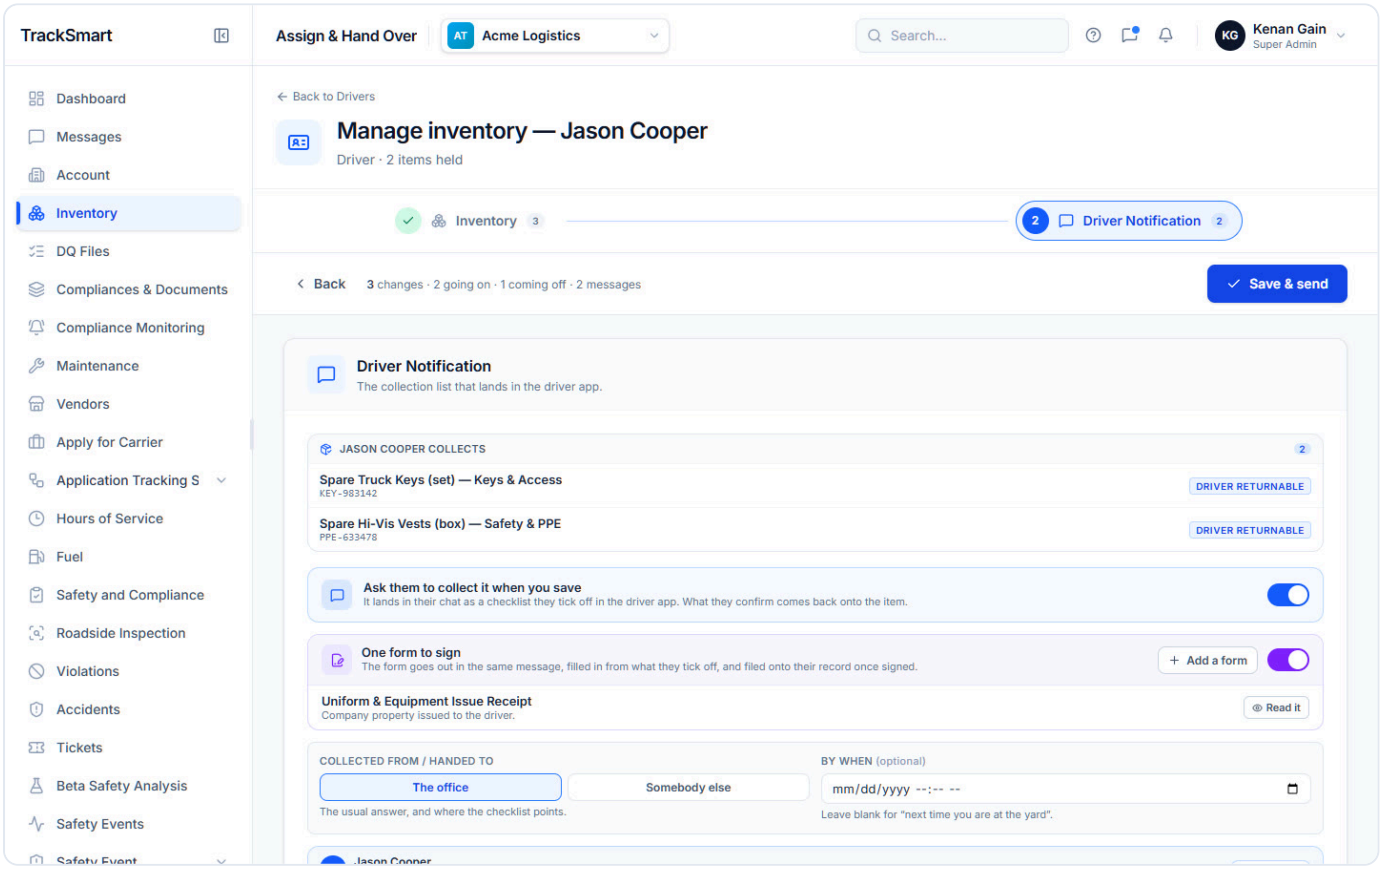

`drivers-manage-notify-desktop.png` — Step 2, Driver Notification: what the driver collects, the collect switch, the receipt to sign, where and when, and the drafted message.

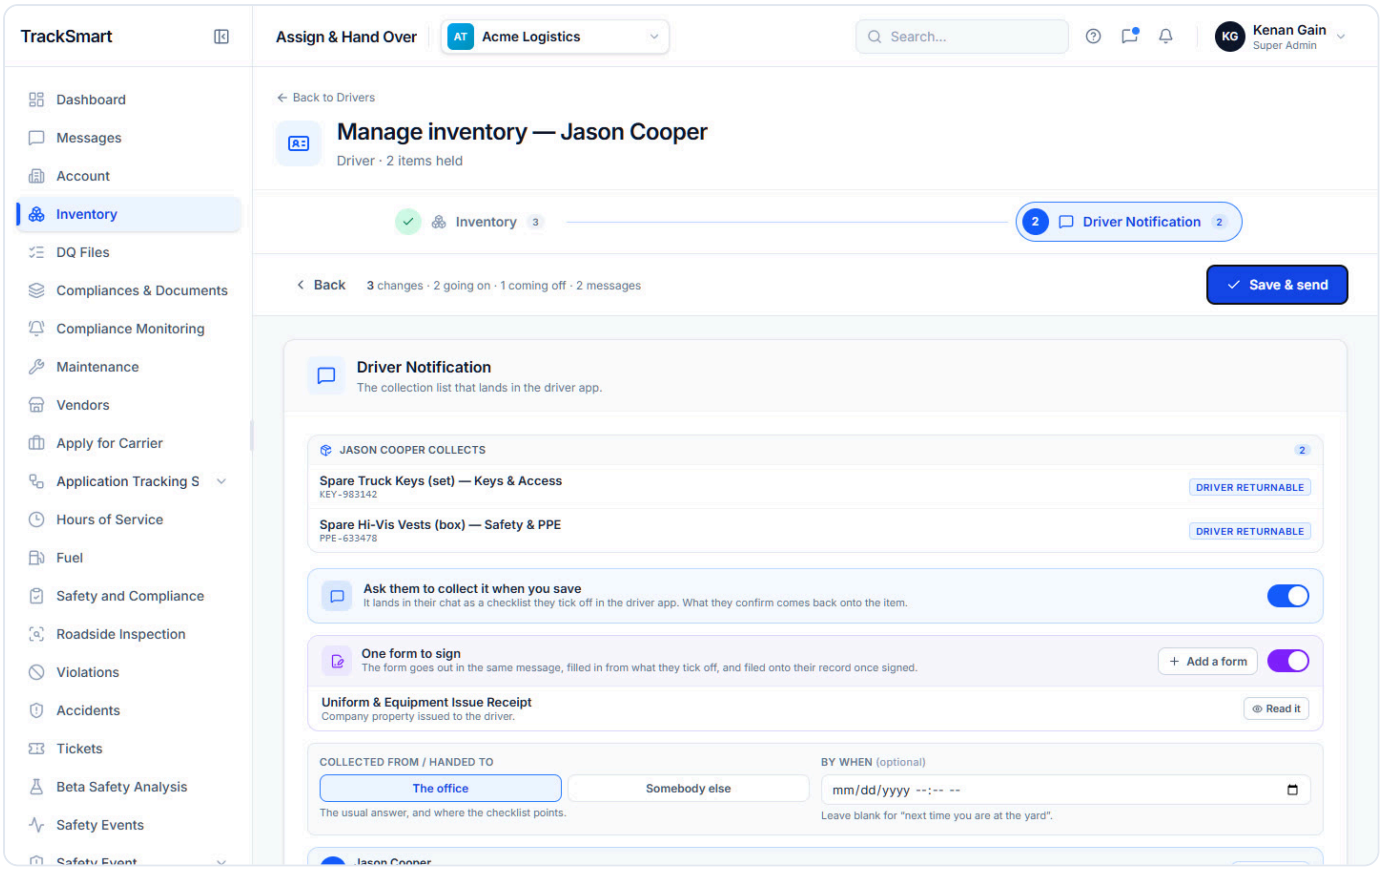

drivers-manage-notify-full-desktop.png — Driver Notification step, whole page (collect and hand-back cards).

drivers-manage-notify-somebody-else-desktop.png — "Somebody else" instead of the office: the name goes into the drafted message.

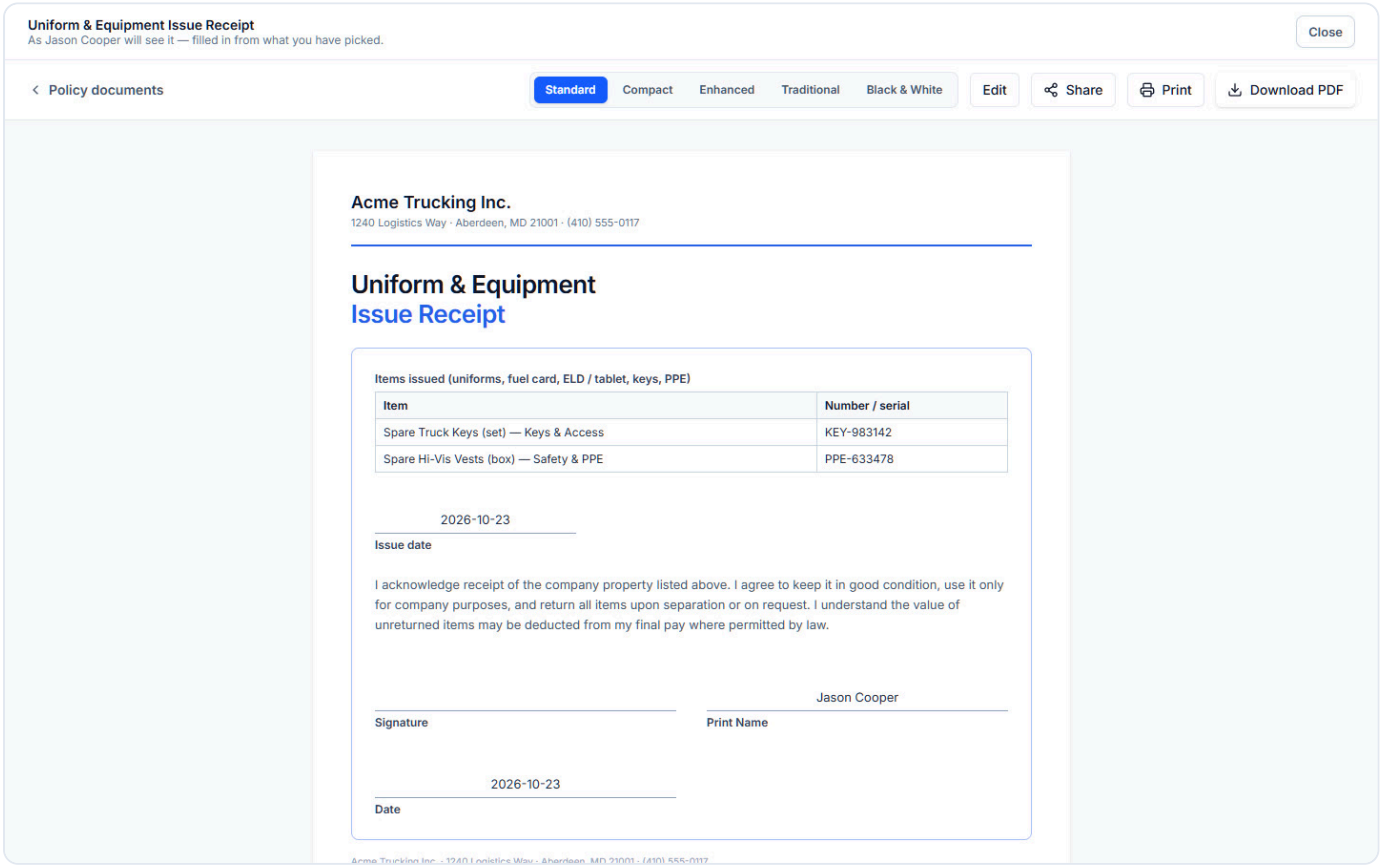

drivers-manage-read-form-desktop.png — "Read it": the receipt exactly as the driver will see it, filled in from what was picked.

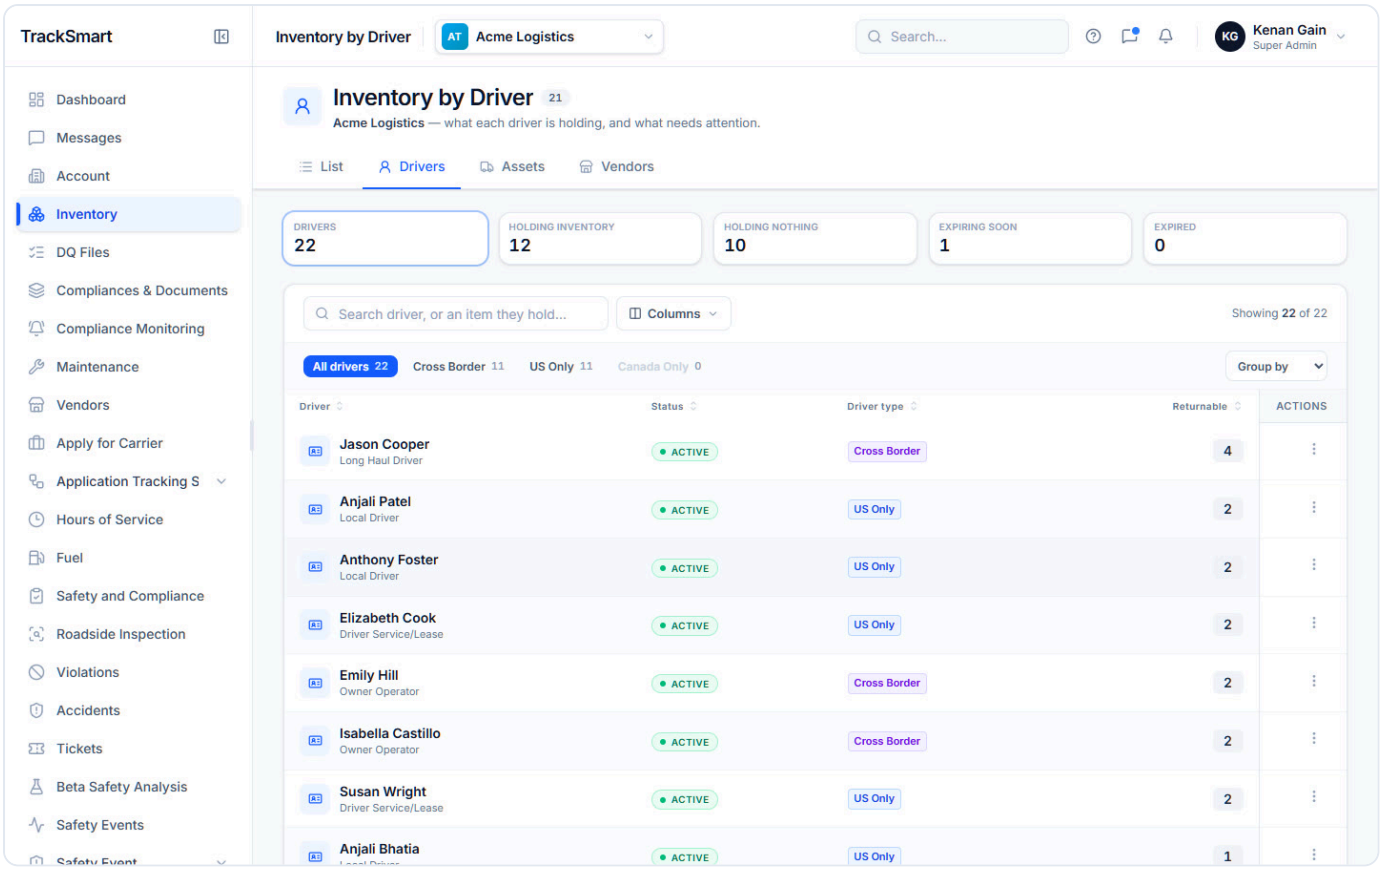

drivers-manage-saved-desktop.png — After Save and send: back on the Drivers tab; Jason Cooper now holds the new items.

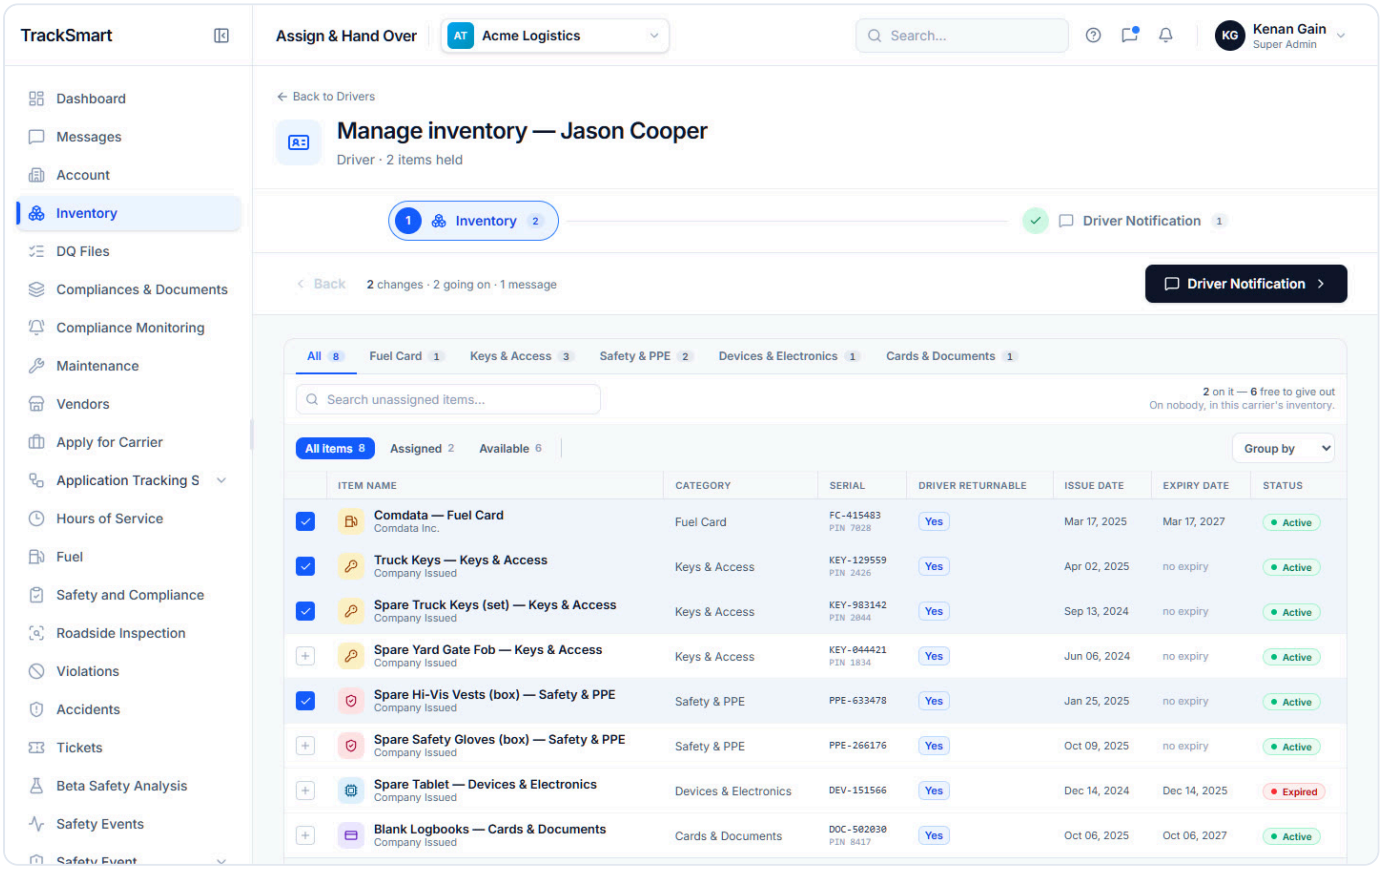

drivers-manage-ticked-desktop.png — Two free items ticked: rows tint blue, the bar counts "2 changes · 2 going on · 1 message" and the button becomes "Driver Notification ›".

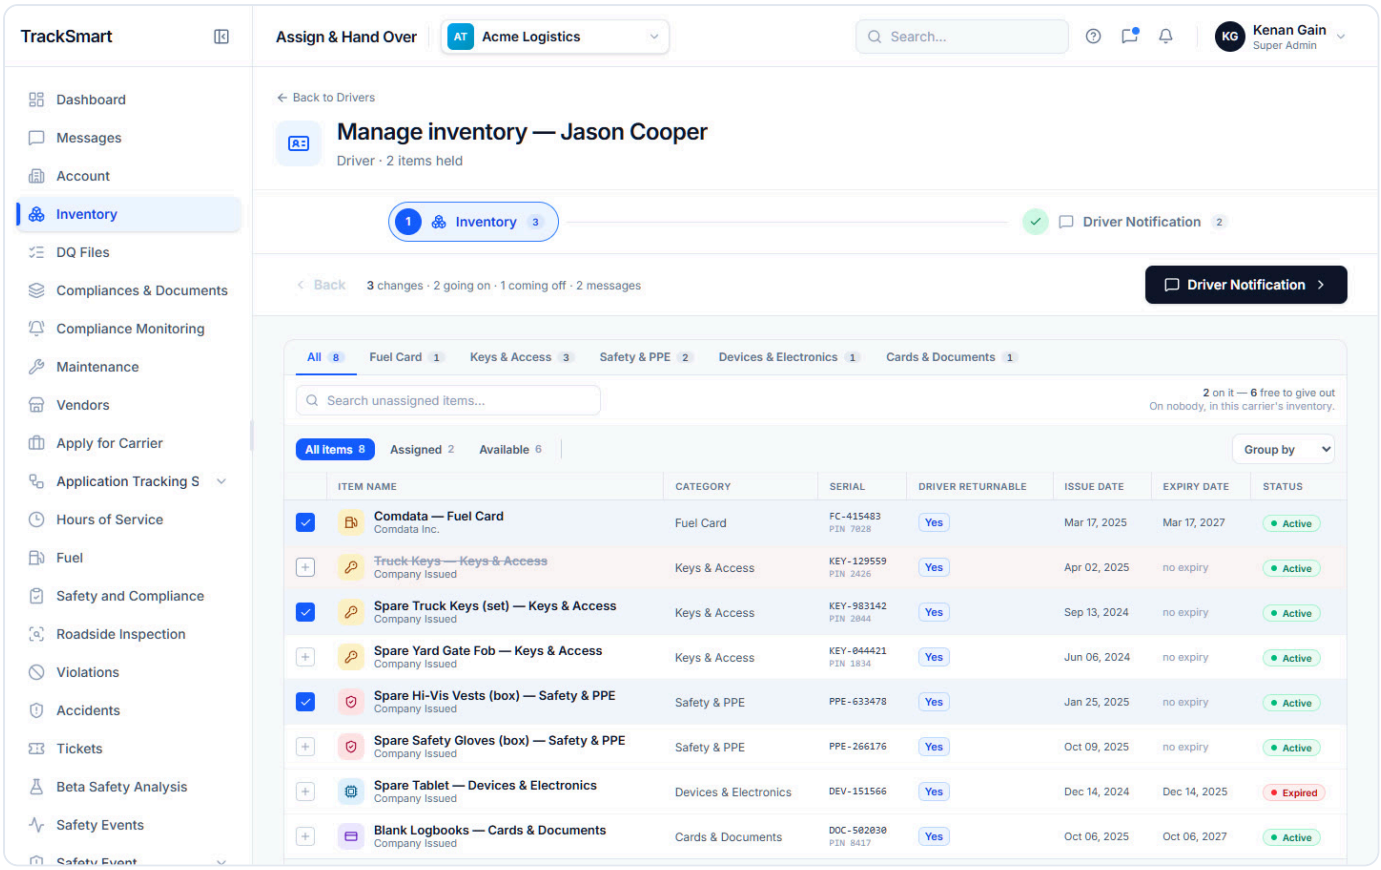

drivers-manage-untick-desktop.png — A held item unticked: the row turns rose and the name is struck through — it will come off.

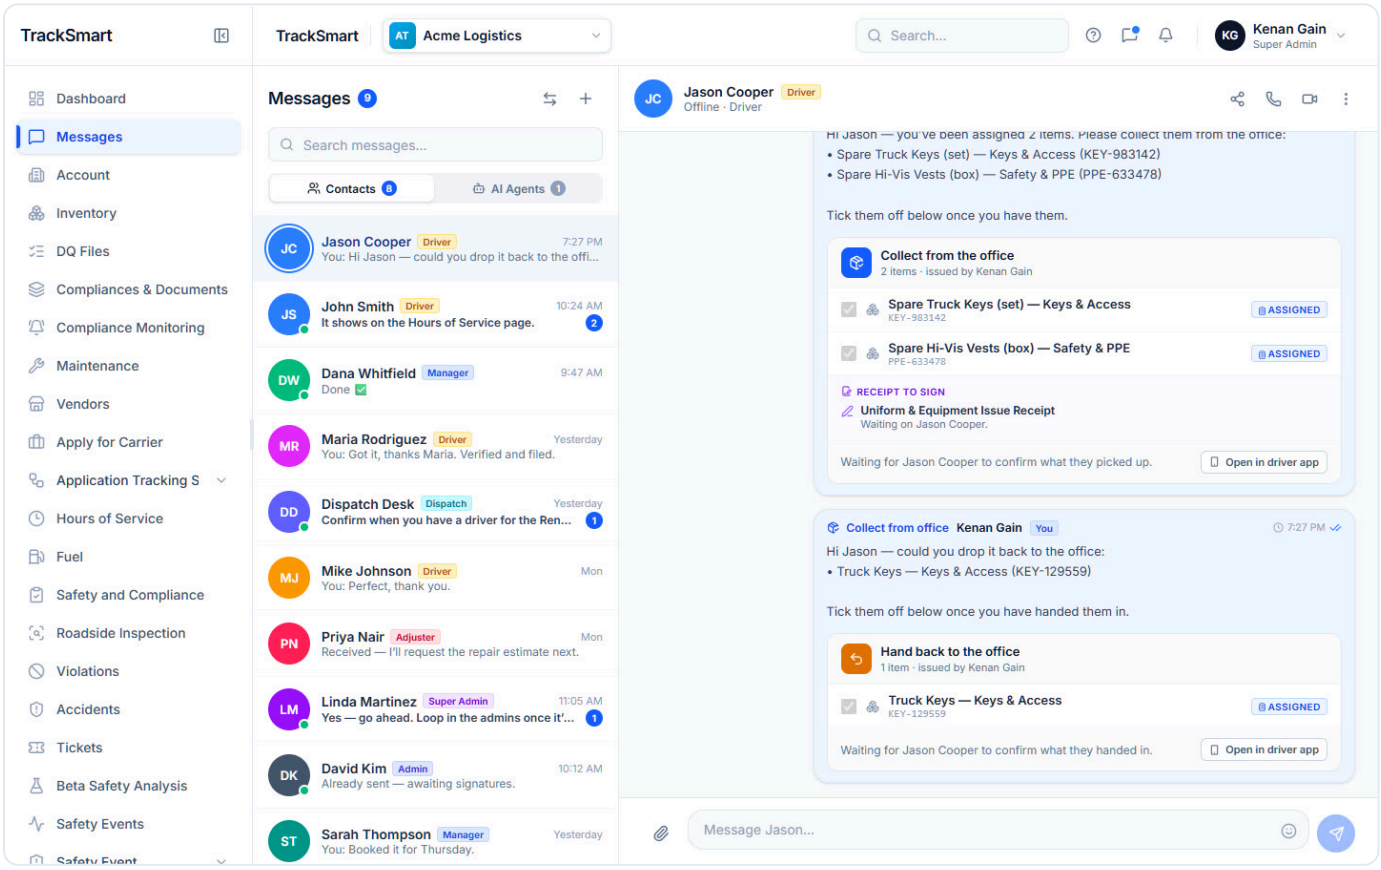

drivers-messages-collection-office-desktop.png — Messages, office seat: the collection card sent to Jason Cooper, read-only — "Waiting for Jason Cooper to confirm...".

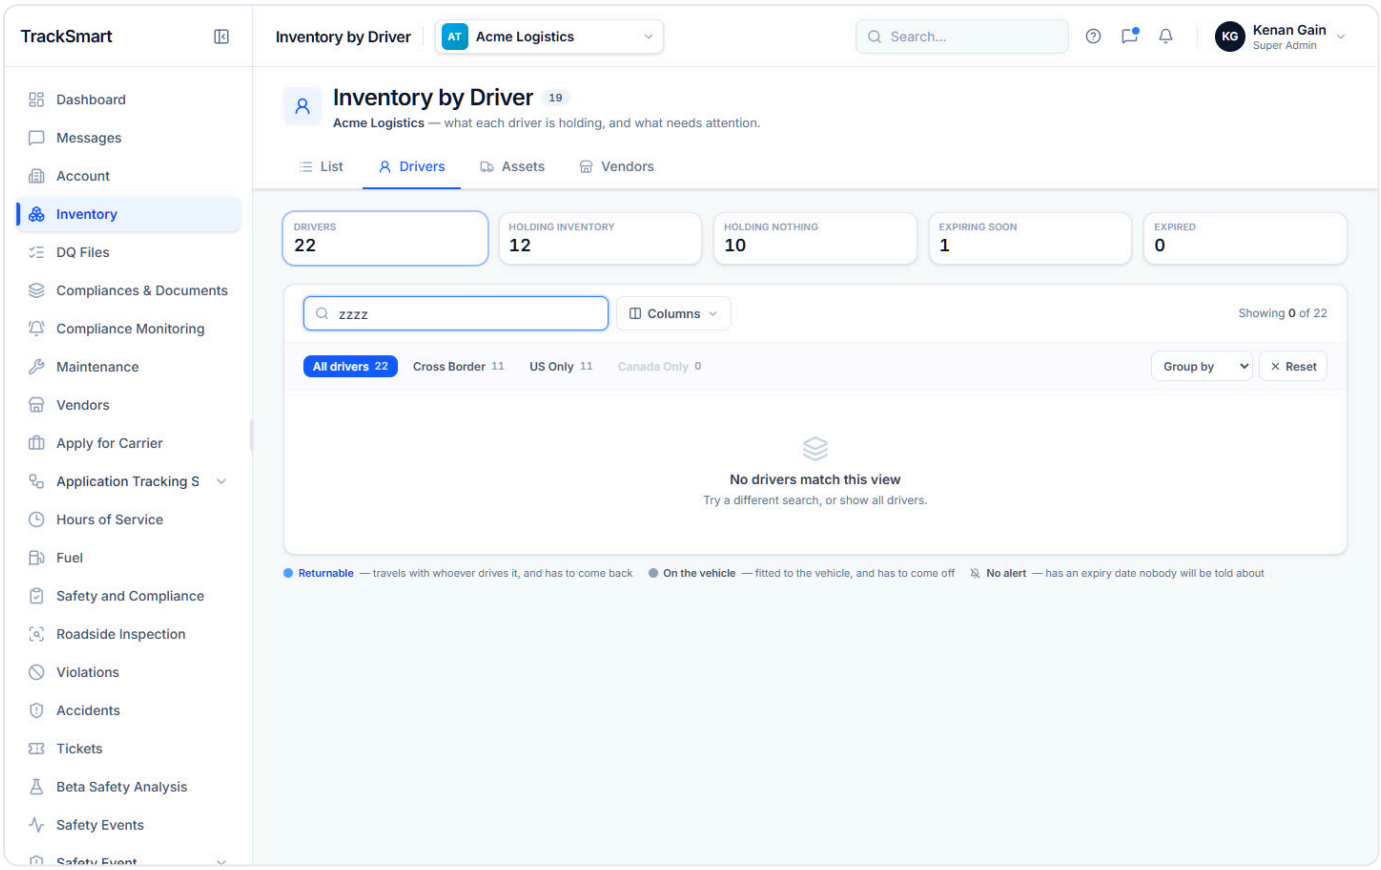

drivers-no-results-desktop.png — No results: "No drivers match this view".

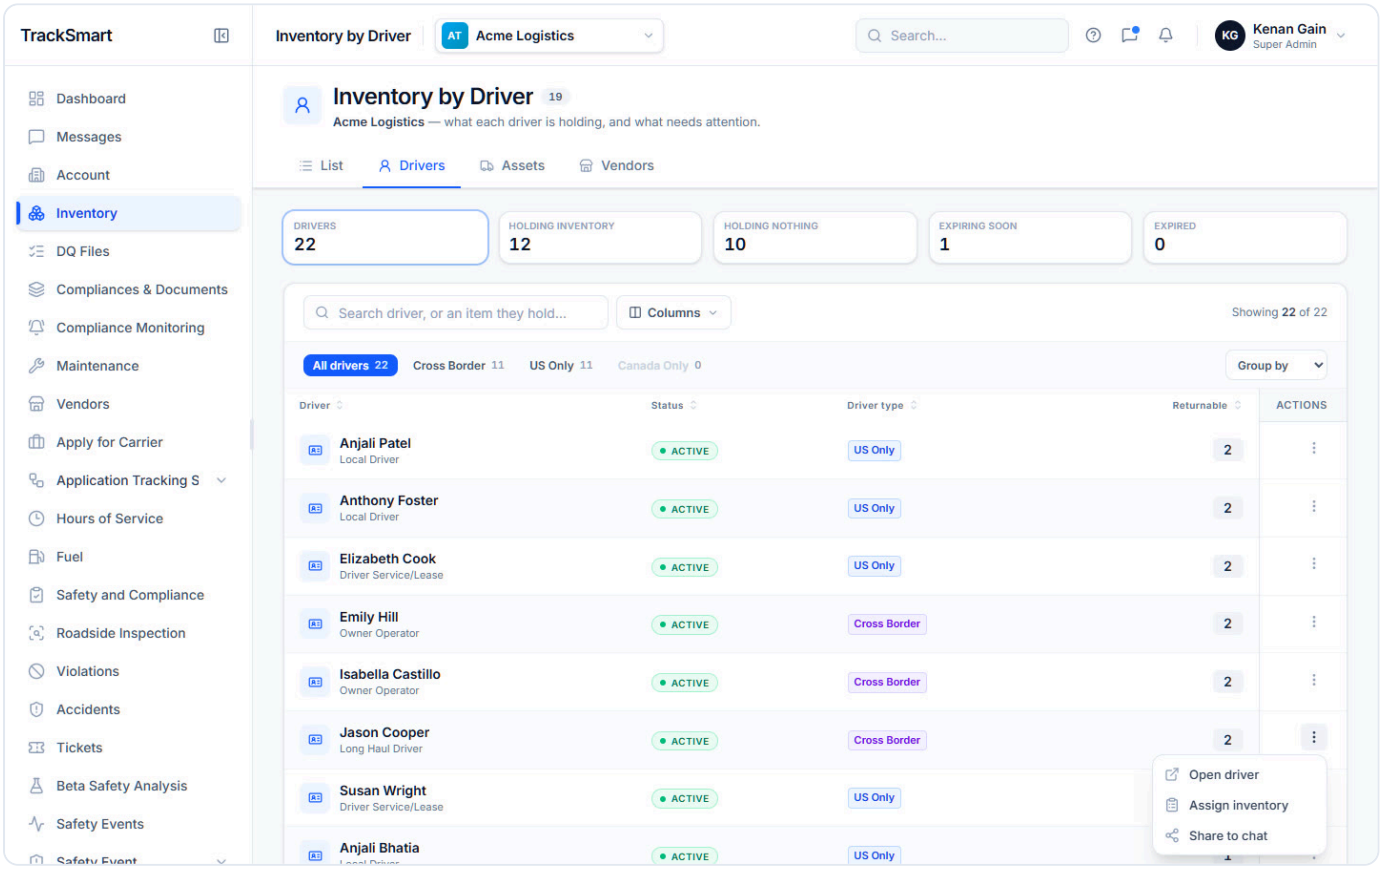

drivers-row-menu-desktop.png — Row ⋮ Open driver, Assign inventory, Share to chat.

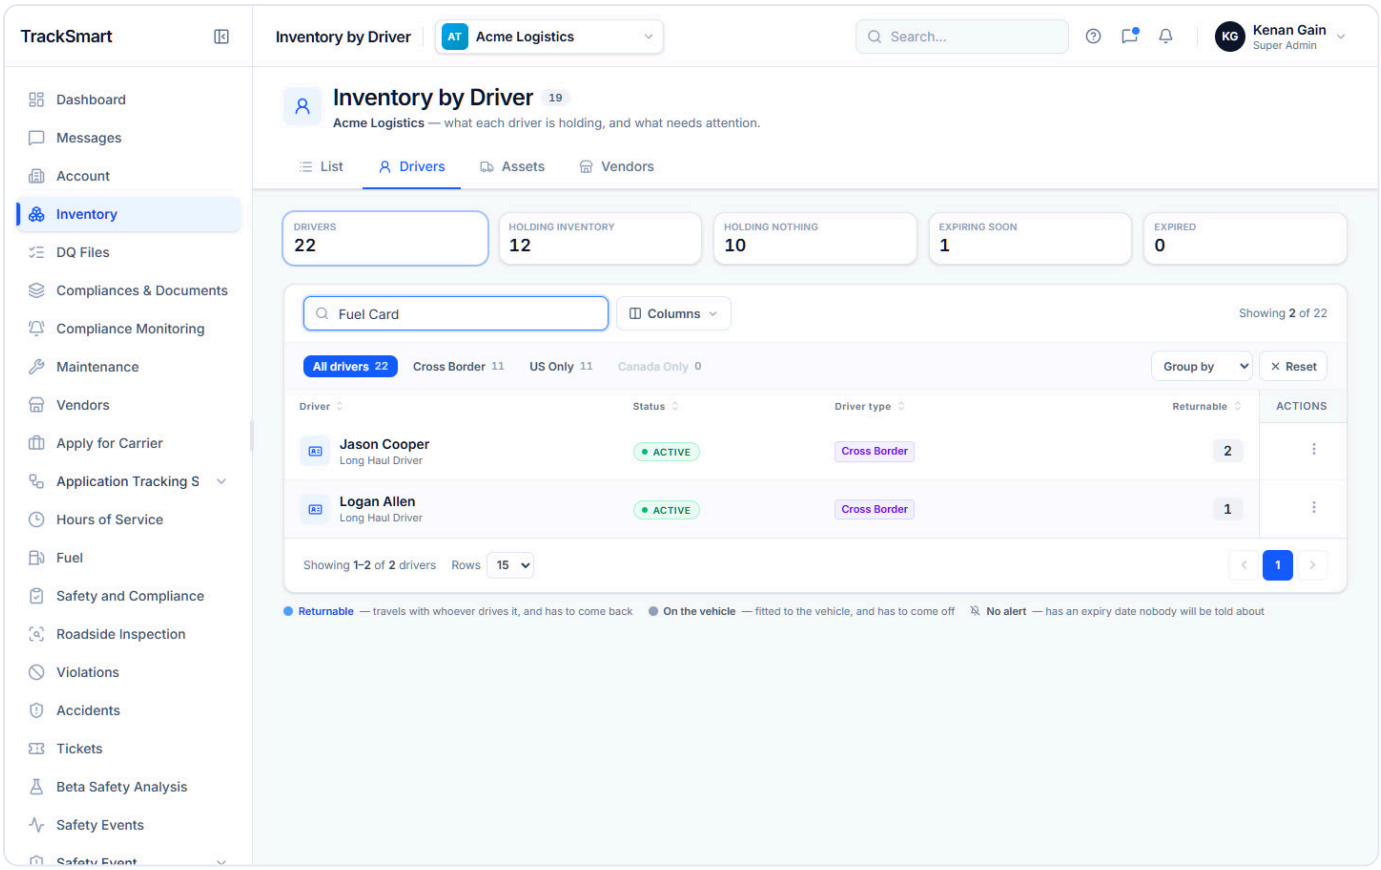

`drivers-search-item-desktop.png` — Search by an item they hold: "Fuel Card" finds the driver carrying it.

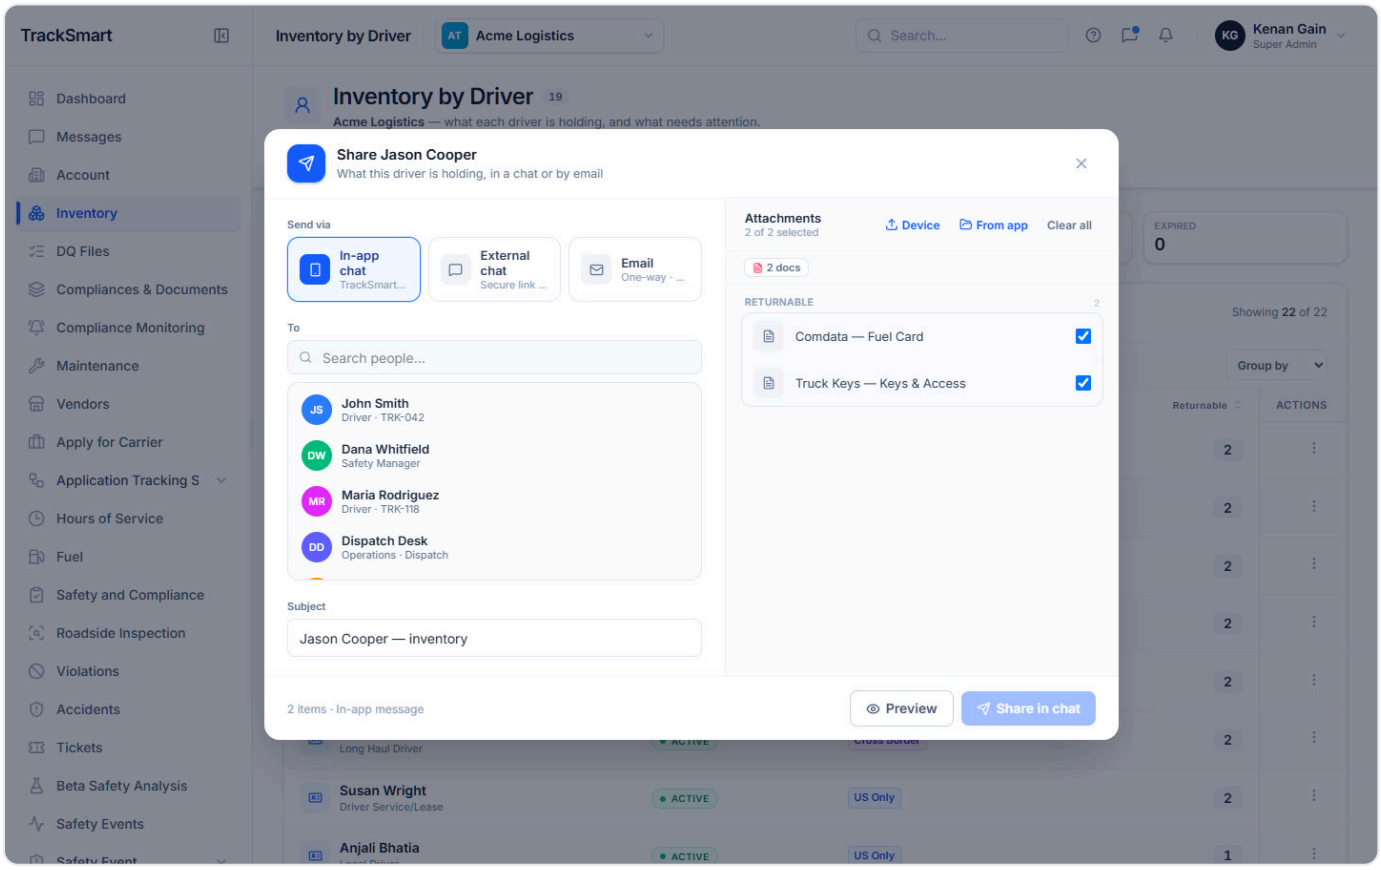

`drivers-share-dialog-desktop.png` — Share a driver's inventory: the held items arrive as the attachments, grouped by how they are held.

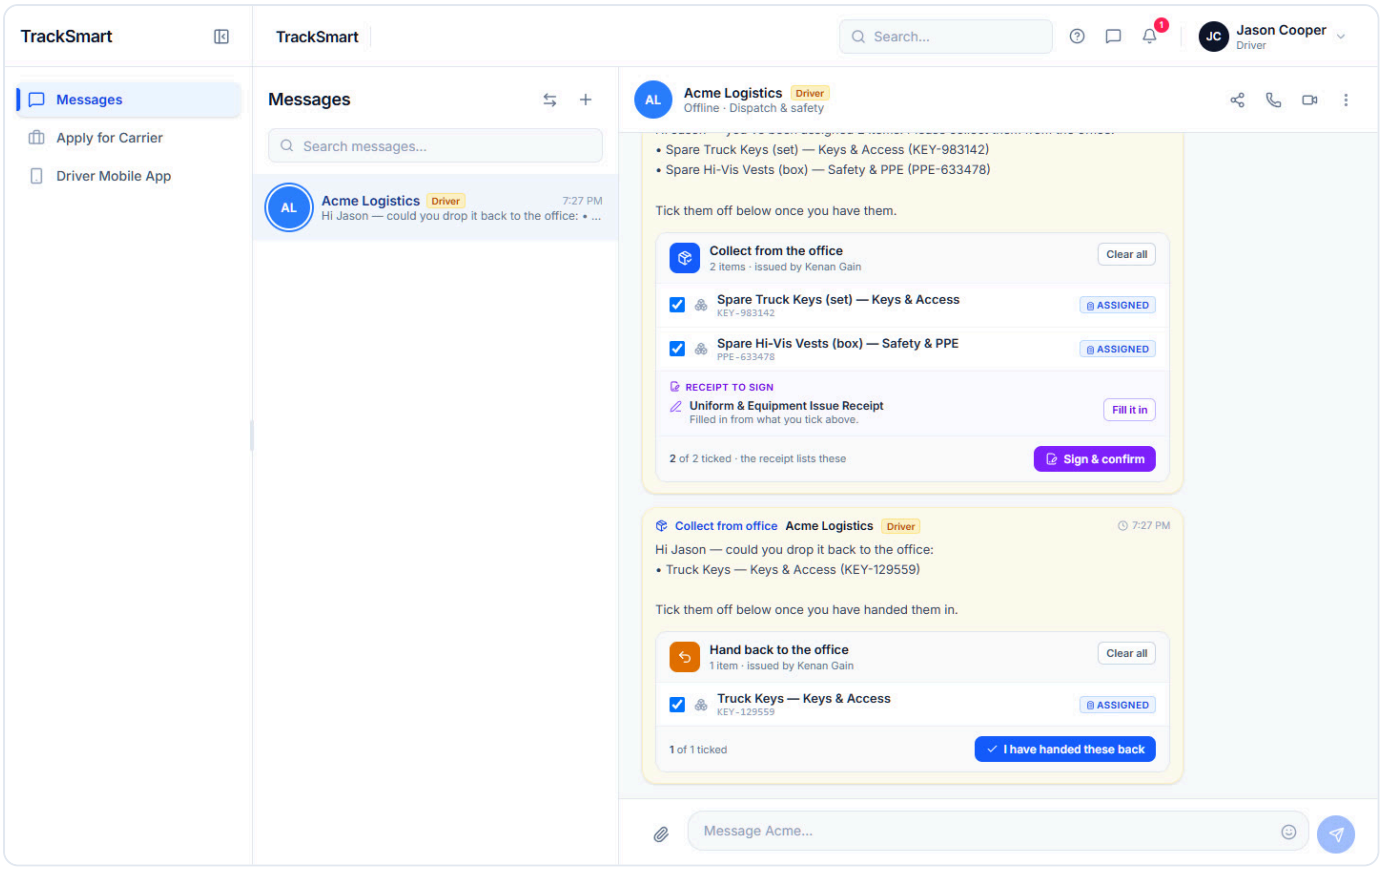

drivers-sign-card-driver-desktop.png — Messages, driver seat: the same card is live — tick what you picked up, Fill it in, Sign & confirm.

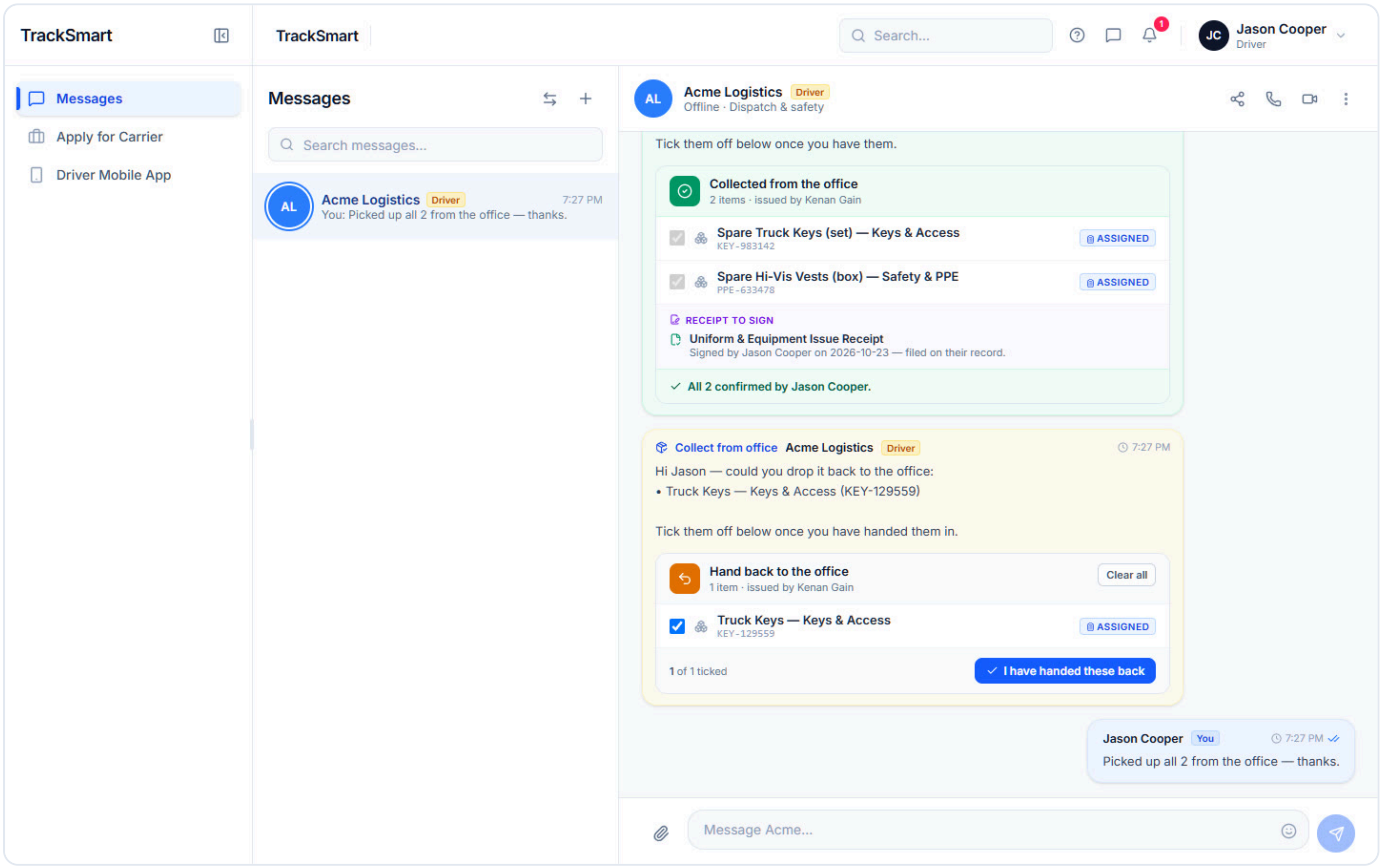

drivers-sign-done-card-desktop.png — Back in Messages: the card is settled — signed by the driver, filed on their record, all items confirmed.

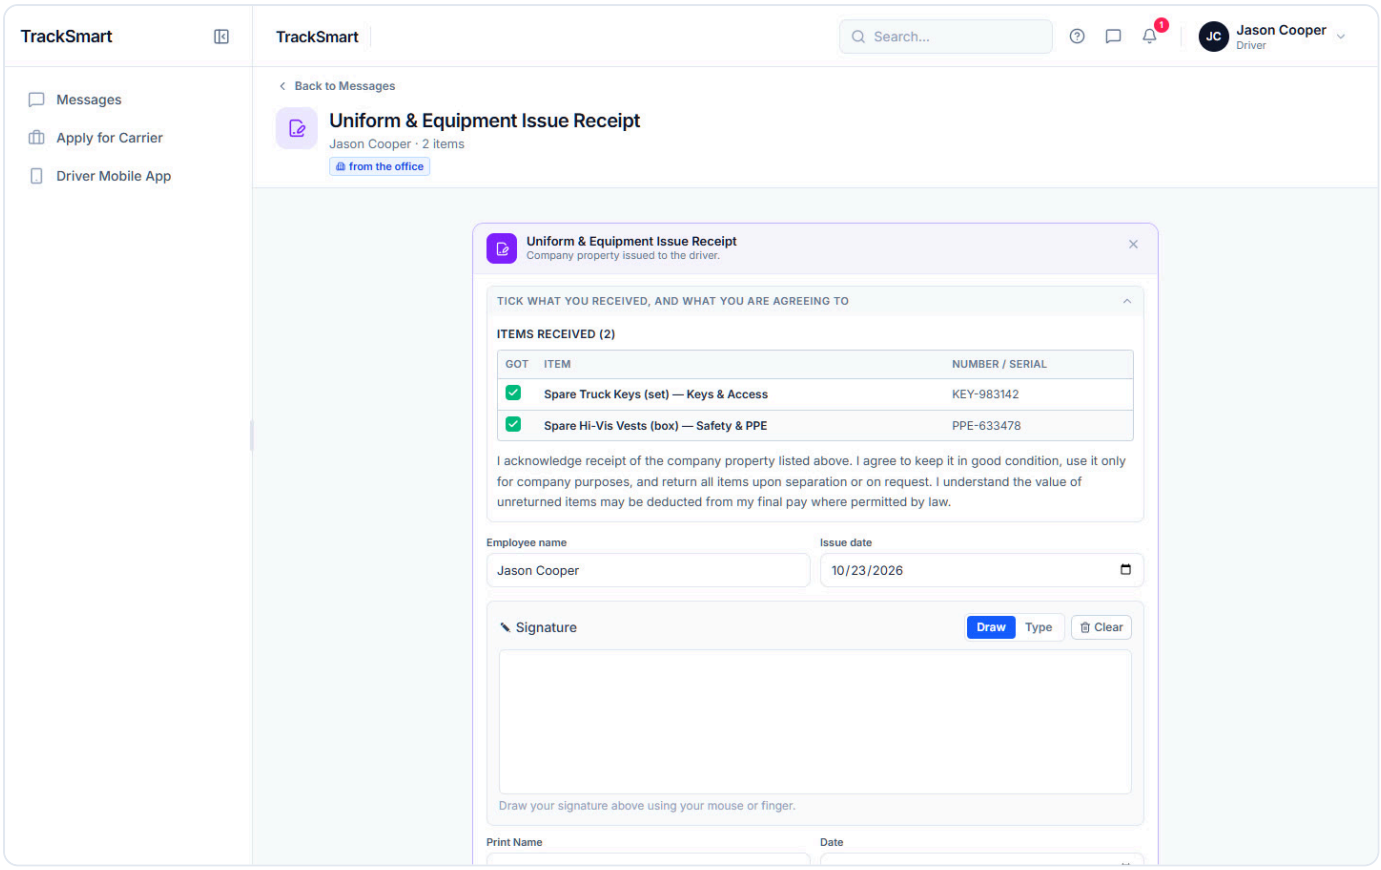

drivers-sign-form-desktop.png — Sign-form page: the receipt with the items received (Got column), the statement, fields and the signature pad.

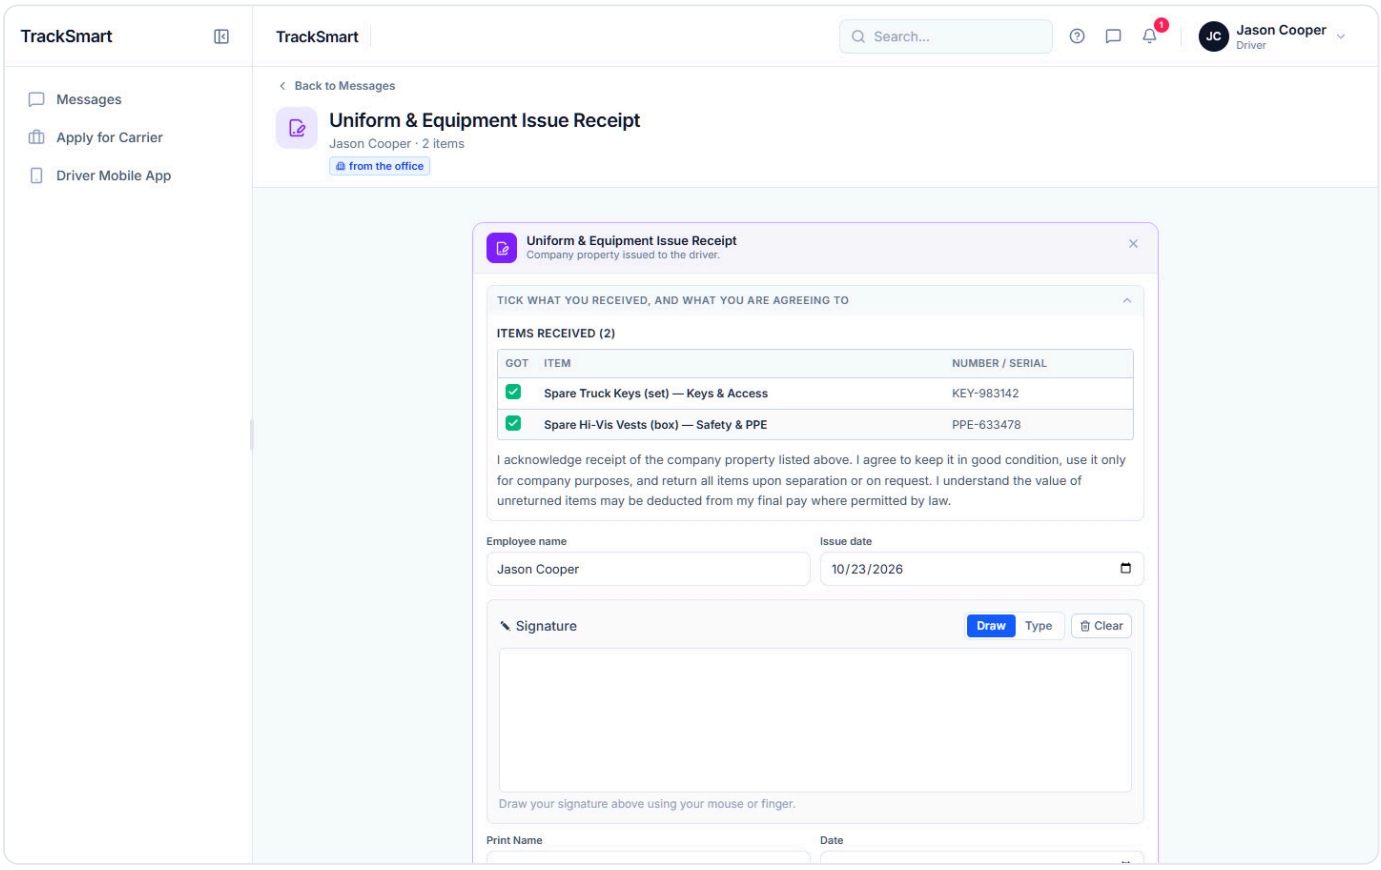

drivers-sign-form-nothing-ticked-desktop.png — Nothing ticked: Sign & confirm stays disabled — "Tick what you received."

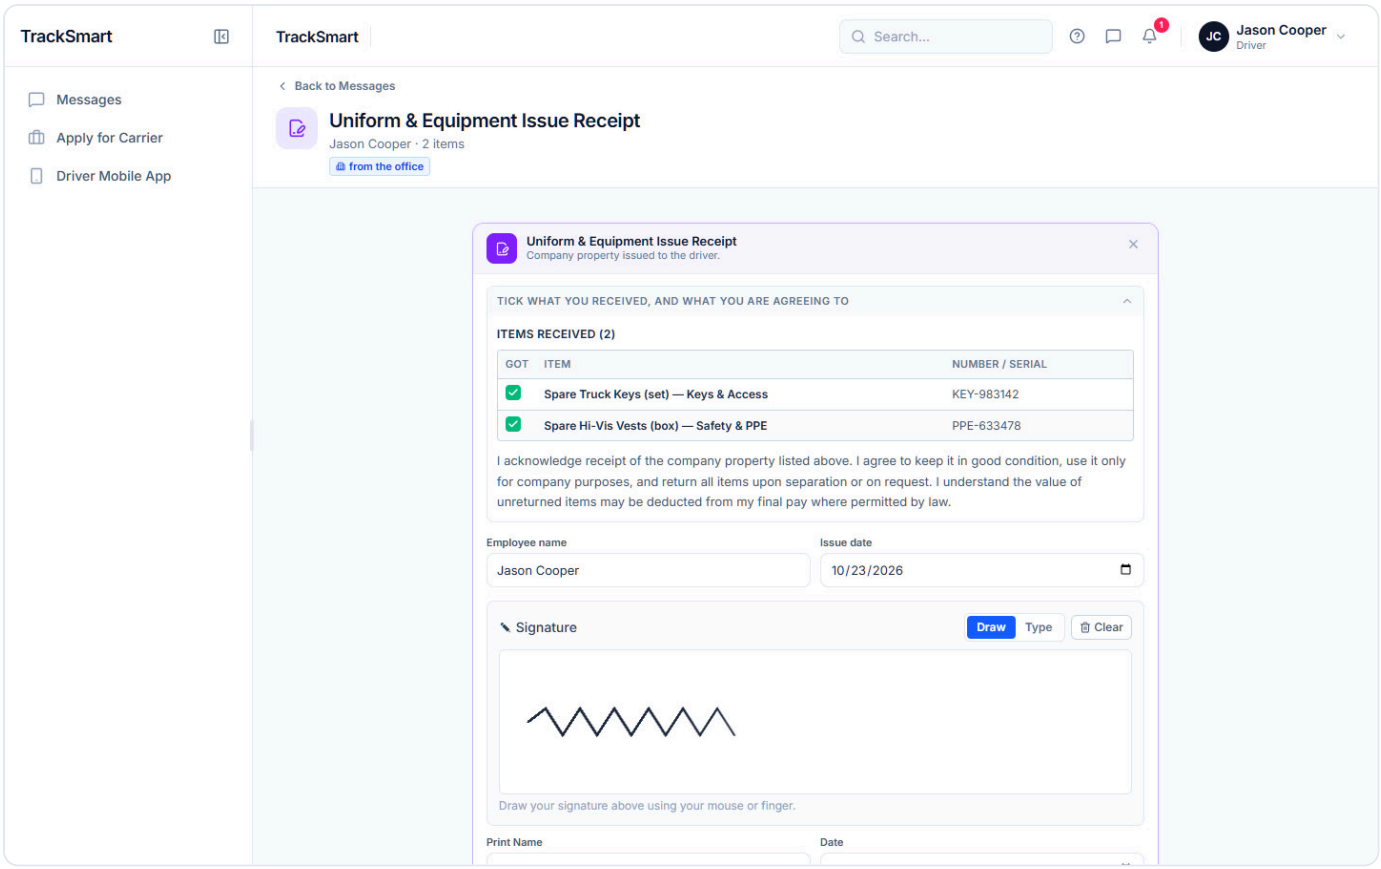

drivers-sign-form-signed-desktop.png — Signed: the footer says the copy will be filed on the driver's record and Sign & confirm is enabled.

Mobile · 390 px

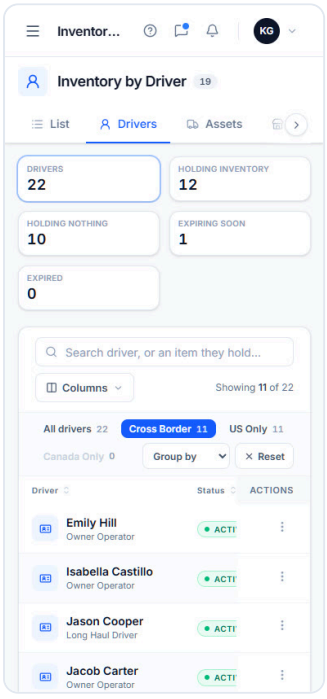

drivers-chip-cross-border-mobile.png
Driver-type chip "Cross Border" (from the DQ files).

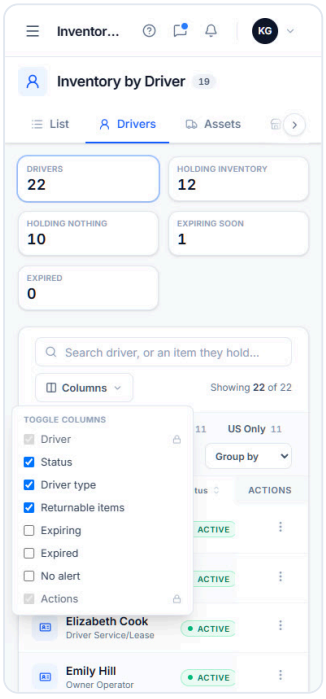

drivers-columns-picker-mobile.png
Columns picker: Expiring, Expired and No alert can be added.

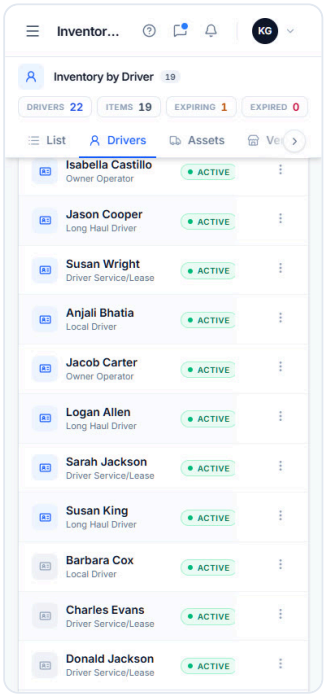

drivers-condensed-header-mobile.png
Drivers tab scrolled: the condensed header with its KPI figures.

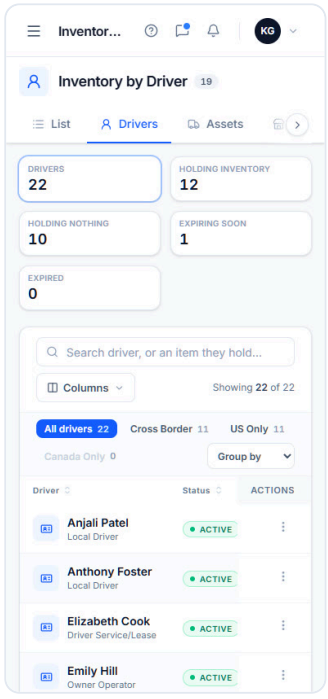

drivers-default-mobile.png
Drivers tab ("Inventory by Driver"): KPI tiles that filter, search, Columns, the driver-type chips, Group by and every roster driver with what they hold.

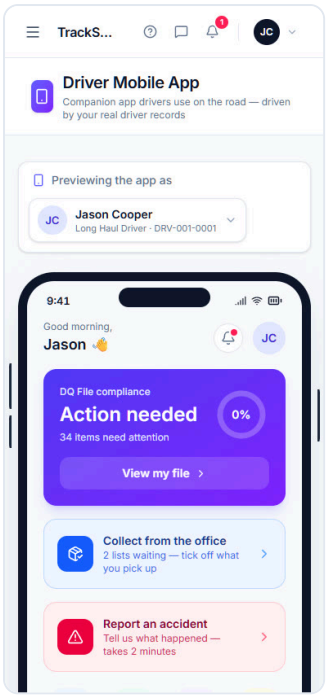

drivers-driver-app-home-mobile.png
Signed in as the driver (Jason Cooper): the Driver Mobile App home with the "Collect from the office" tile.

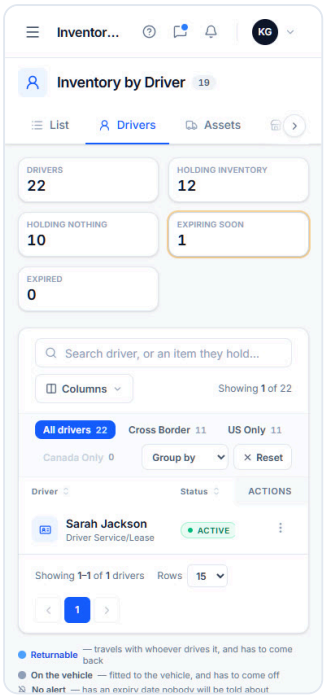

drivers-filter-expiring-mobile.png
KPI tile "Expiring soon": the drivers holding something that runs out within 30 days.

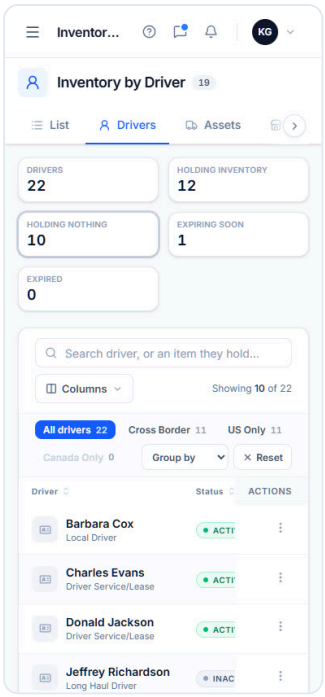

drivers-filter-holding-nothing-mobile.png
KPI tile "Holding nothing" used as a filter: drivers with no inventory, greyed; Reset appears.

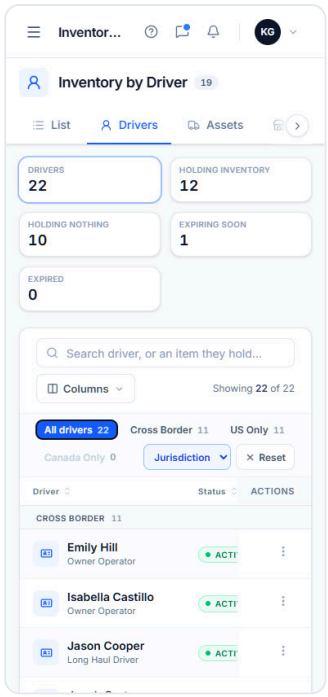

drivers-group-jurisdiction-mobile.png
Group by Jurisdiction: bands per driver type.

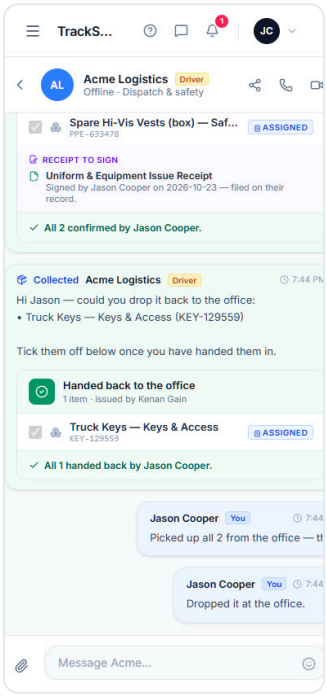

drivers-handback-confirmed-mobile.png
The driver confirms the hand-back: the card reads Handed back to the office and the item comes off the driver.

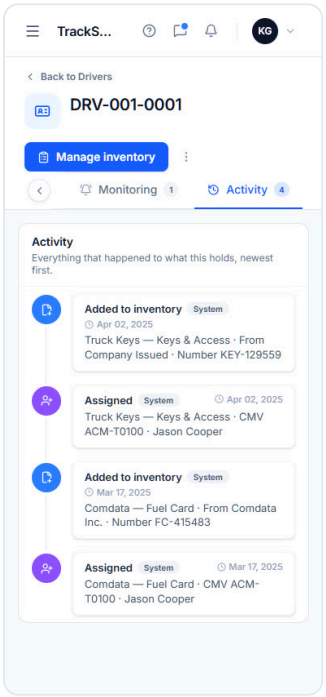

drivers-holder-activity-mobile.png
Activity tab: everything that happened to what this driver holds.

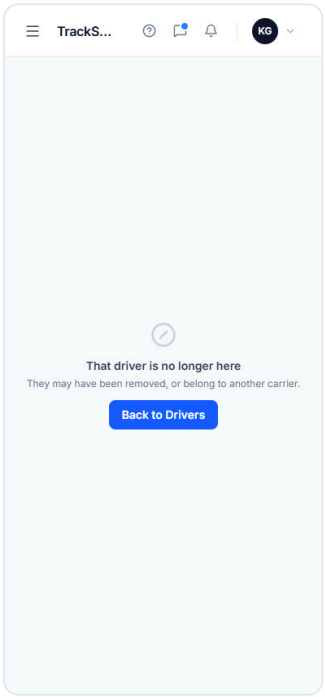

drivers-holder-empty-not-found-mobile.png
A driver holding nothing opens the not-found page ("That driver is no longer here") instead of an empty one (TO CONFIRM — likely a bug).

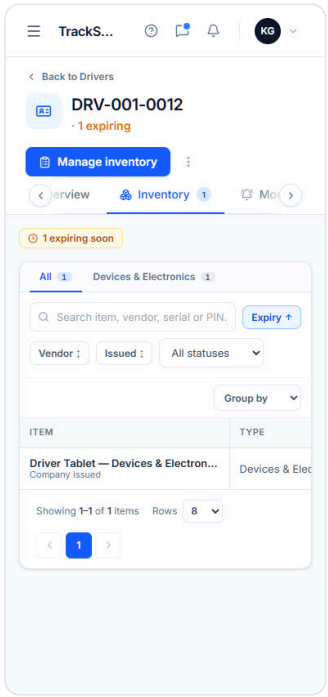

drivers-holder-inventory-expiring-mobile.png
A driver holding an item that runs out soon: amber "1 expiring" in the header and on the tab.

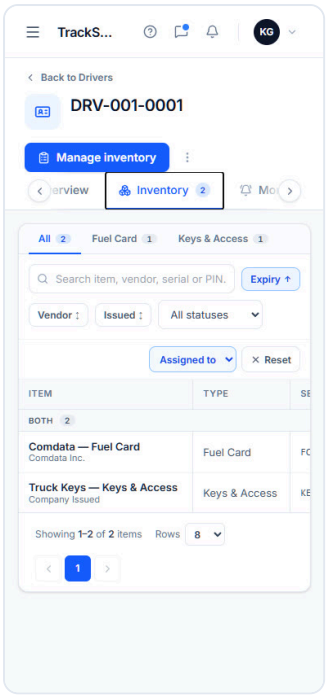

drivers-holder-inventory-grouped-mobile.png
Inventory tab grouped by "Assigned to" (Both / Driver / Asset).

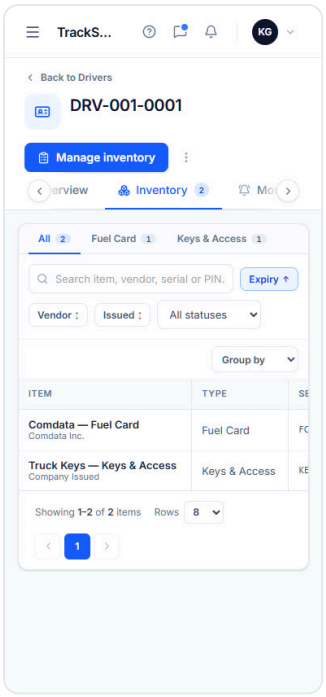

drivers-holder-inventory-mobile.png
Inventory tab: what the driver holds — category strip, search, Expiry / Vendor / Issued sort, status and Group by, the item table.

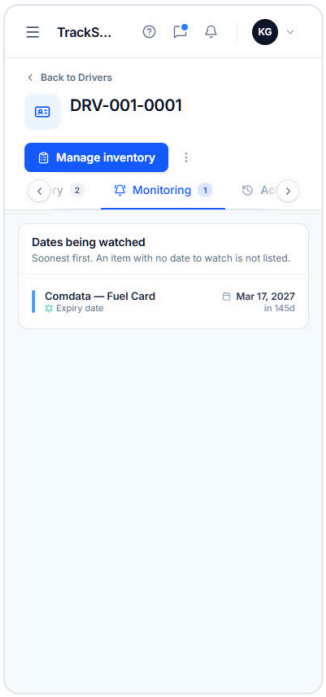

drivers-holder-monitoring-mobile.png
Monitoring tab: "Dates being watched", soonest first, with alert basis and days left.

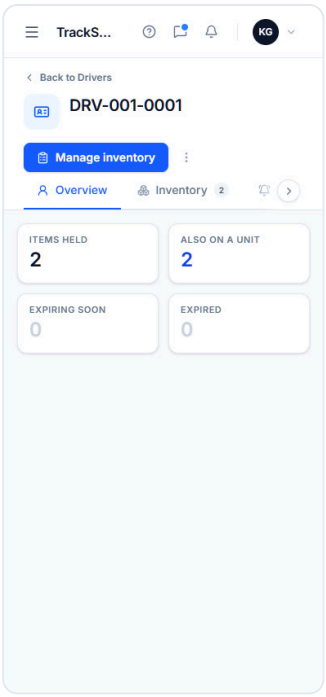

drivers-holder-overview-mobile.png
Driver holder page, Overview: Items held, Also on a unit, Expiring soon, Expired. The title shows the raw driver id (TO CONFIRM).

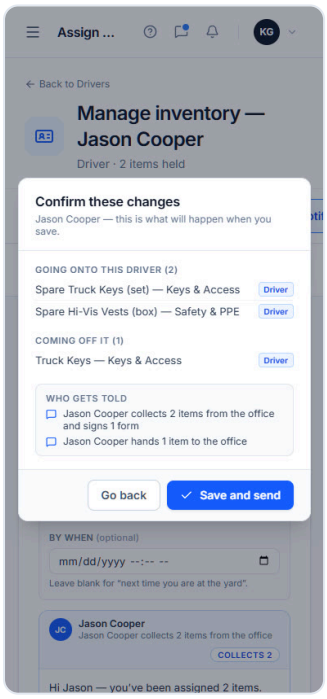

drivers-manage-confirm-mobile.png
"Confirm these changes": going on, coming off, and who gets told.

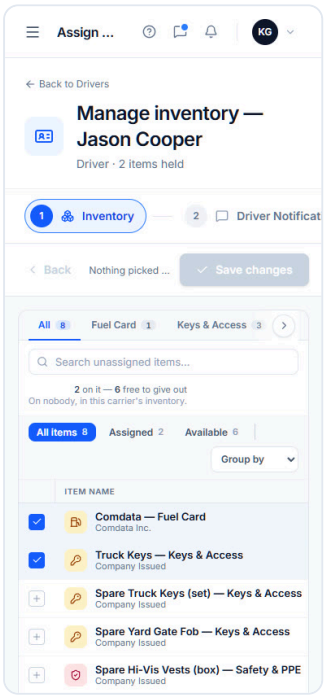

drivers-manage-default-mobile.png
Manage inventory — Jason Cooper, step 1: held items ticked, free items to give out; the action bar says nothing is picked yet.

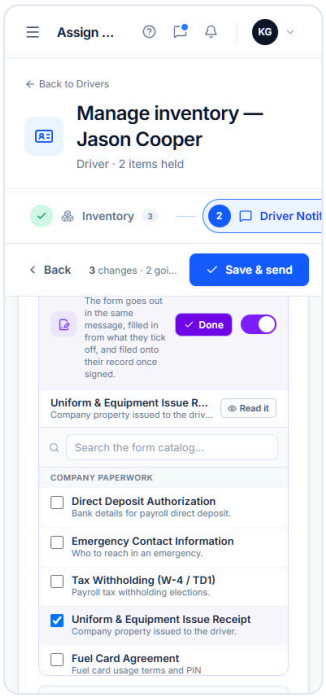

drivers-manage-forms-picker-mobile.png
"+ Add a form": the form catalog — company paperwork and policy & consent forms.

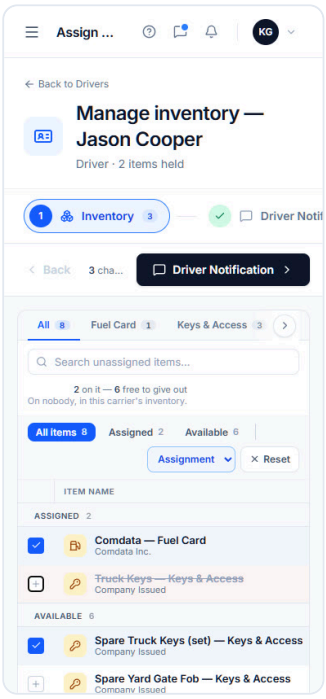

drivers-manage-grouped-mobile.png
Pick list grouped by Assignment.

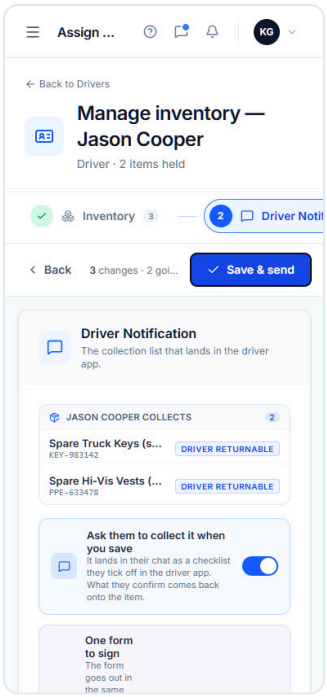

drivers-manage-notify-full-mobile.png
Driver Notification step, whole page (collect and hand-back cards).

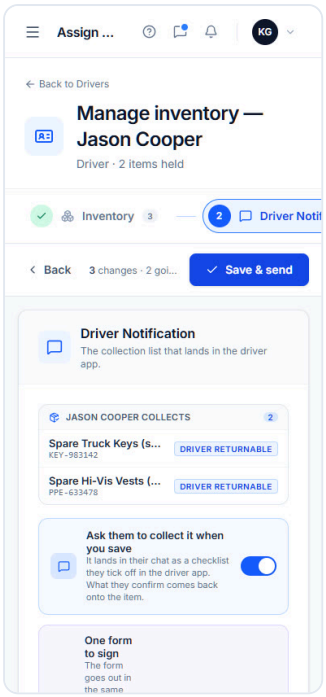

drivers-manage-notify-mobile.png
Step 2, Driver Notification: what the driver collects, the collect switch, the receipt to sign, where and when, and the drafted message.

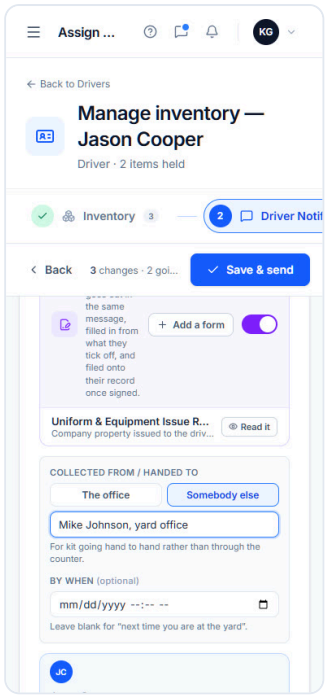

drivers-manage-notify-somebody-else-mobile.png
"Somebody else" instead of the office: the name goes into the drafted message.

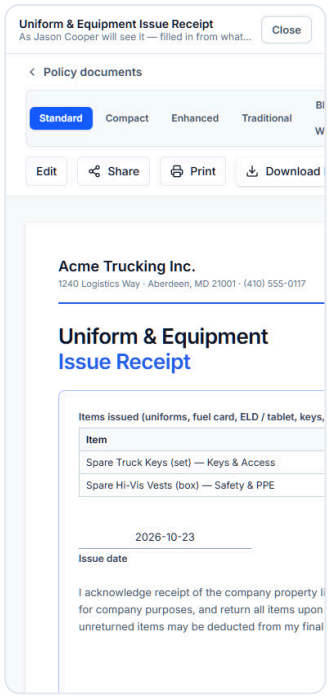

drivers-manage-read-form-mobile.png
"Read it": the receipt exactly as the driver will see it, filled in from what was picked.

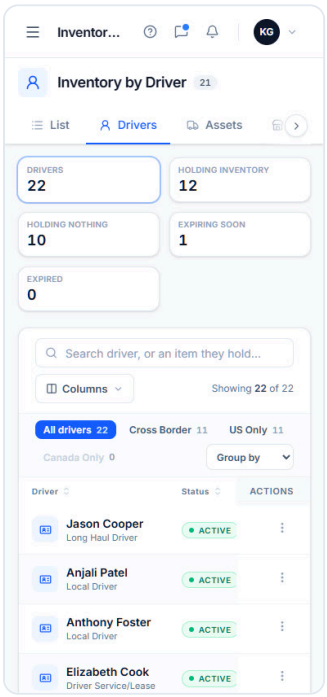

drivers-manage-saved-mobile.png
After Save and send: back on the Drivers tab; Jason Cooper now holds the new items.

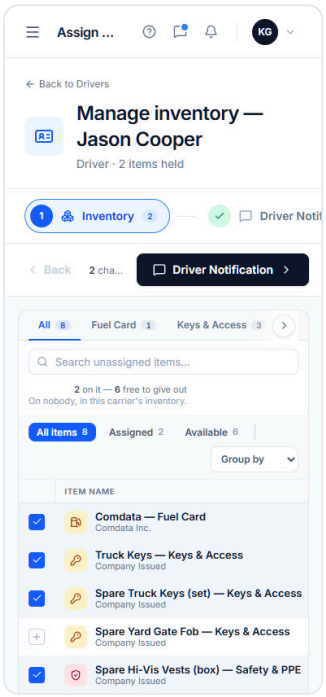

drivers-manage-ticked-mobile.png
Two free items ticked: rows tint blue, the bar counts "2 changes · 2 going on · 1 message" and the button becomes "Driver Notification ›".

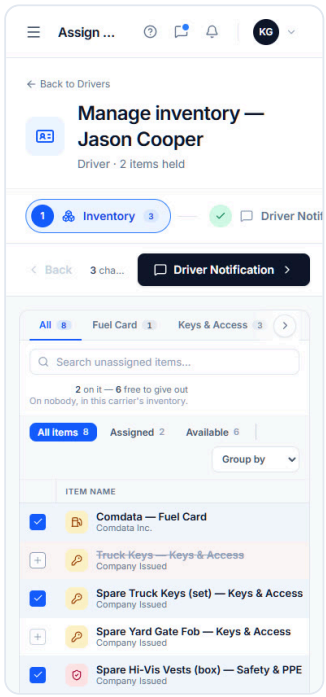

drivers-manage-untick-mobile.png
A held item unticked: the row turns rose and the name is struck through — it will come off.

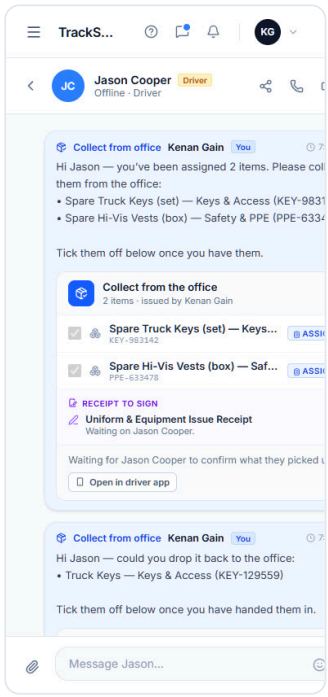

drivers-messages-collection-office-mobile.png
Messages, office seat: the collection card sent to Jason Cooper, read-only — "Waiting for Jason Cooper to confirm...".

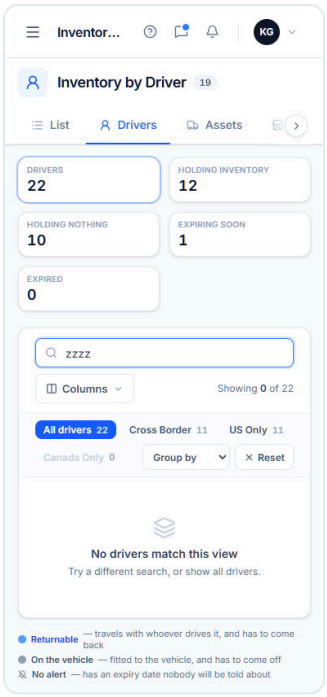

drivers-no-results-mobile.png
No results: "No drivers match this view".

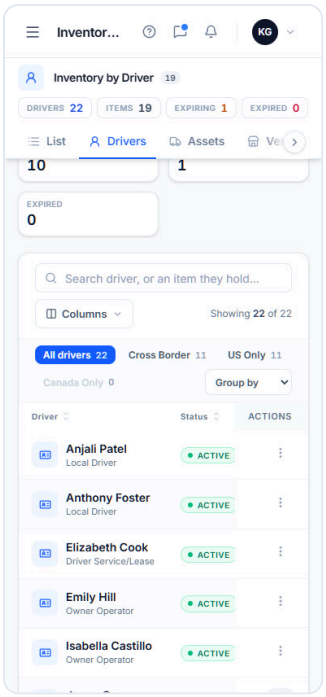

drivers-row-menu-mobile.png
Row ⋮: Open driver, Assign inventory, Share to chat.

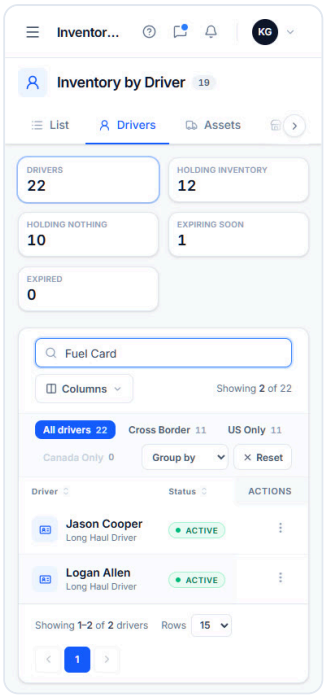

drivers-search-item-mobile.png
Search by an item they hold: "Fuel Card" finds the driver carrying it.

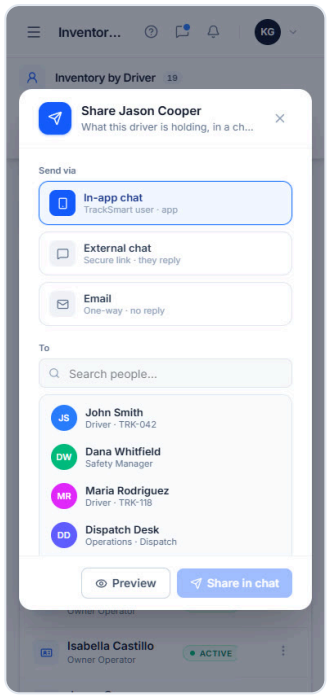

drivers-share-dialog-mobile.png
Share a driver's inventory: the held items arrive as the attachments, grouped by how they are held.

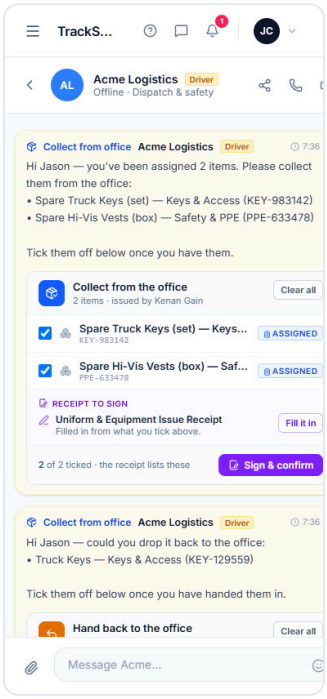

drivers-sign-card-driver-mobile.png
Messages, driver seat: the same card is live — tick what you picked up, Fill it in, Sign & confirm.

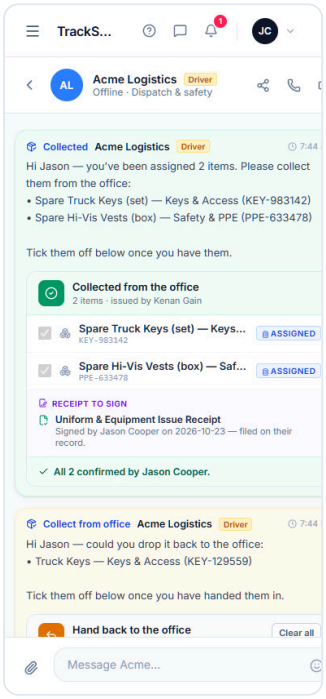

drivers-sign-done-card-mobile.png
Back in Messages: the card is settled — signed by the driver, filed on their record, all items confirmed.

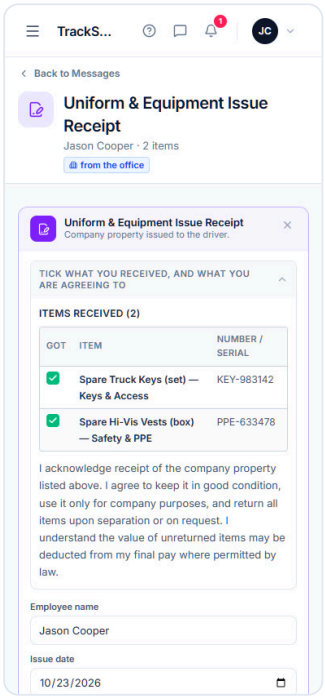

drivers-sign-form-mobile.png
Sign-form page: the receipt with the items received (Got column), the statement, fields and the signature pad.

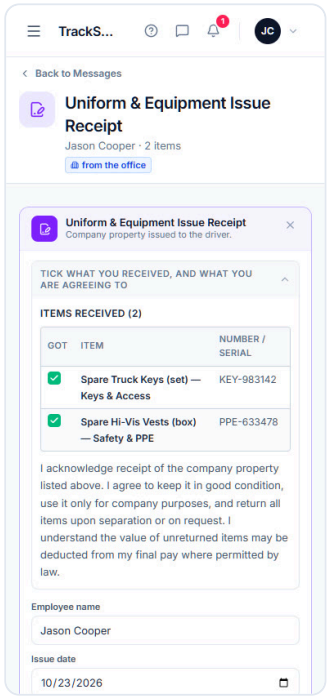

drivers-sign-form-nothing-ticked-mobile.png
Nothing ticked: Sign & confirm stays disabled — "Tick what you received."

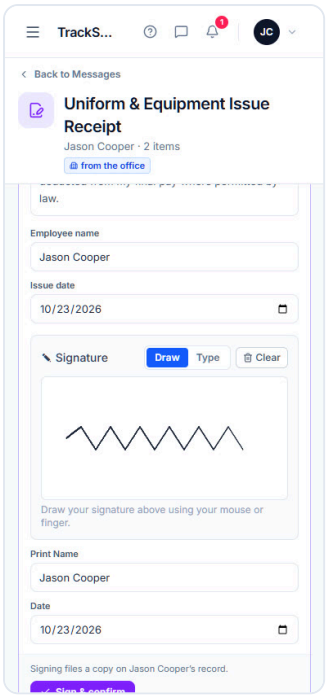

`drivers-sign-form-signed-mobile.png`
Signed: the footer says the copy will be filed on the driver's record and Sign & confirm is enabled.

Assets

Desktop · 1440 px

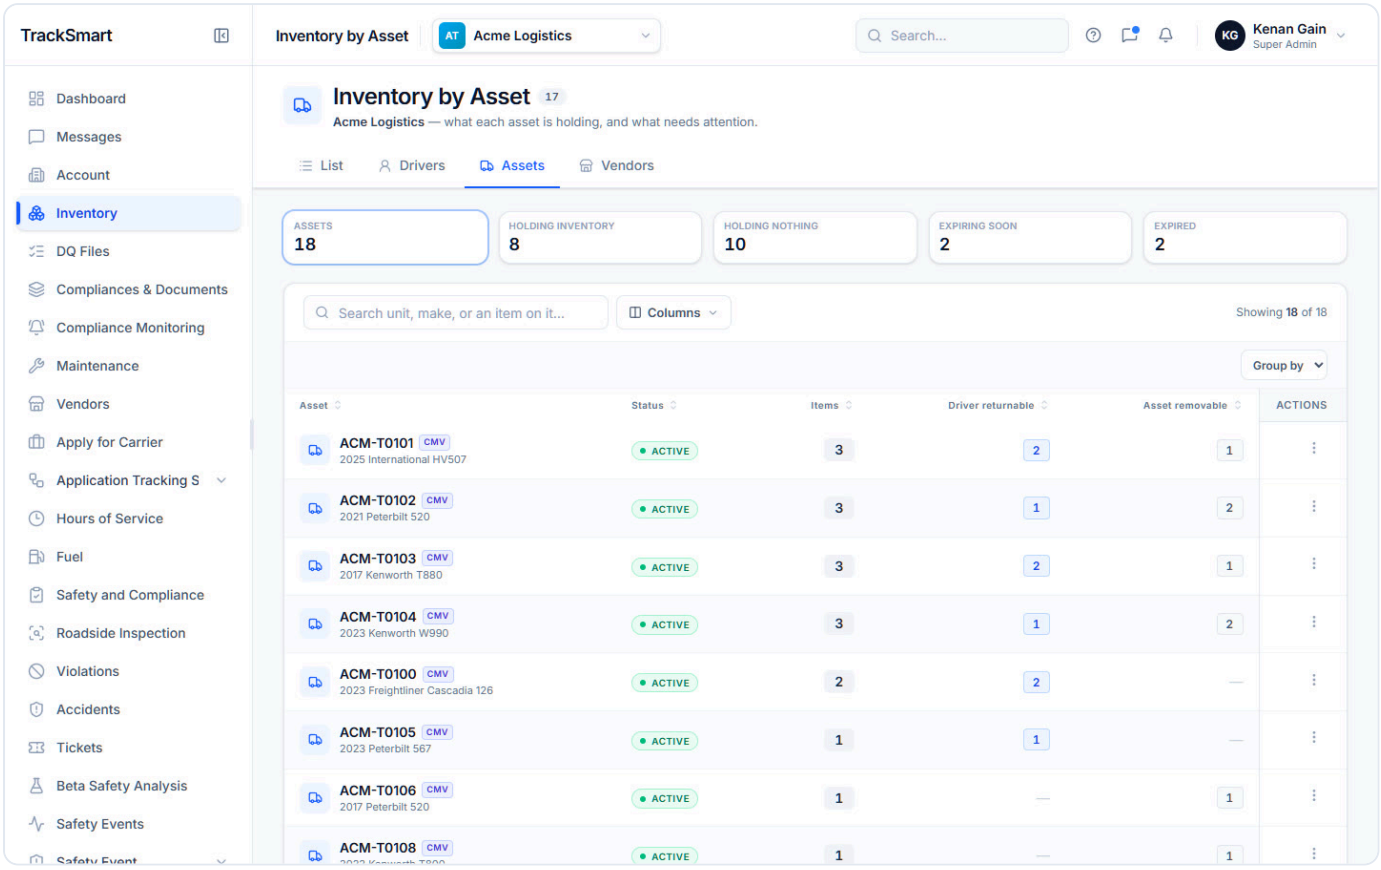

`assets-default-desktop.png` — Assets tab ("Inventory by Asset"): every unit with its items, split into driver-returnable and asset-removable.

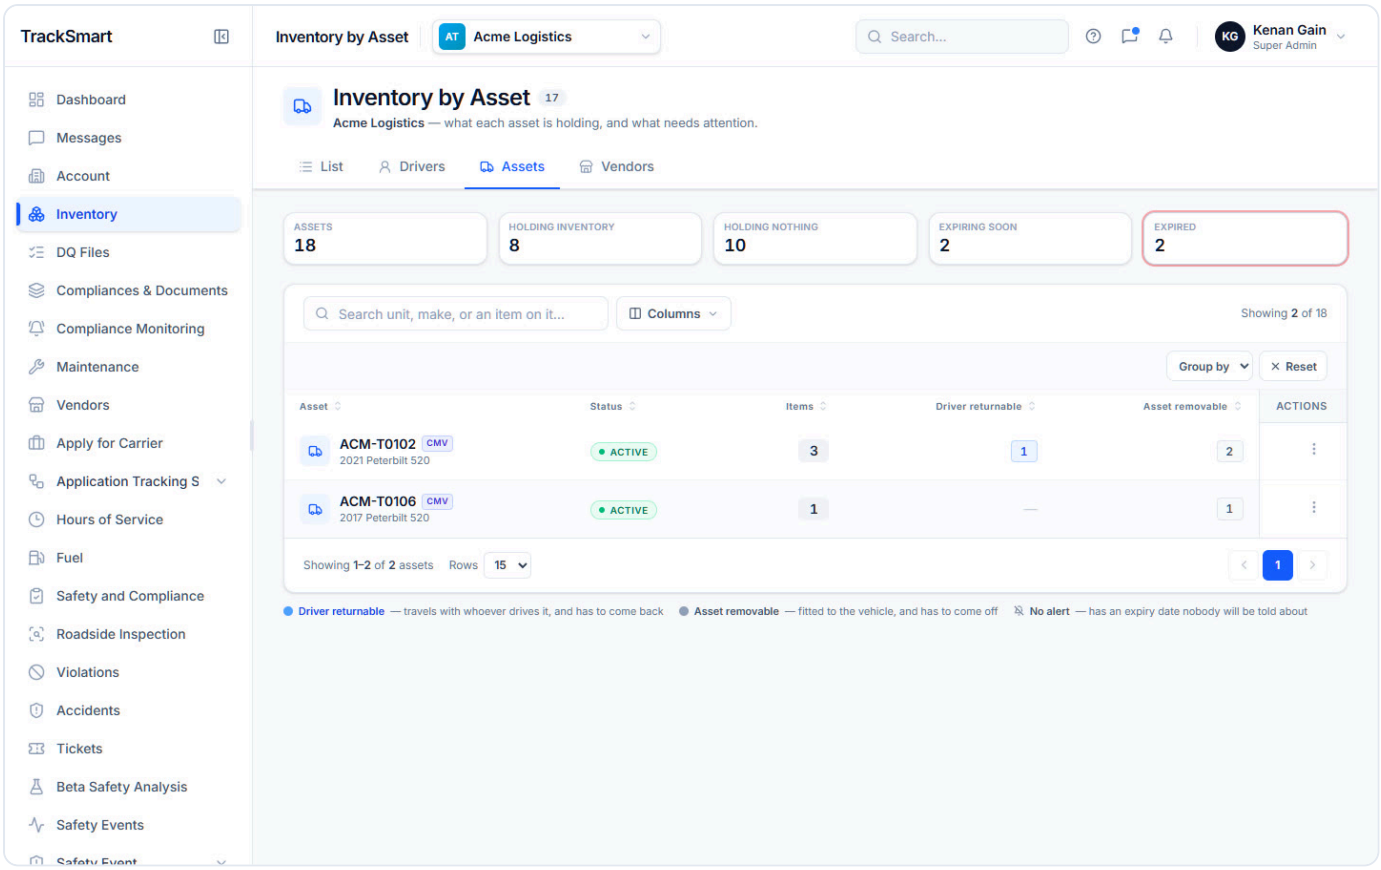

assets-filter-expired-desktop.png — KPI tile "Expired": units carrying something that has run out.

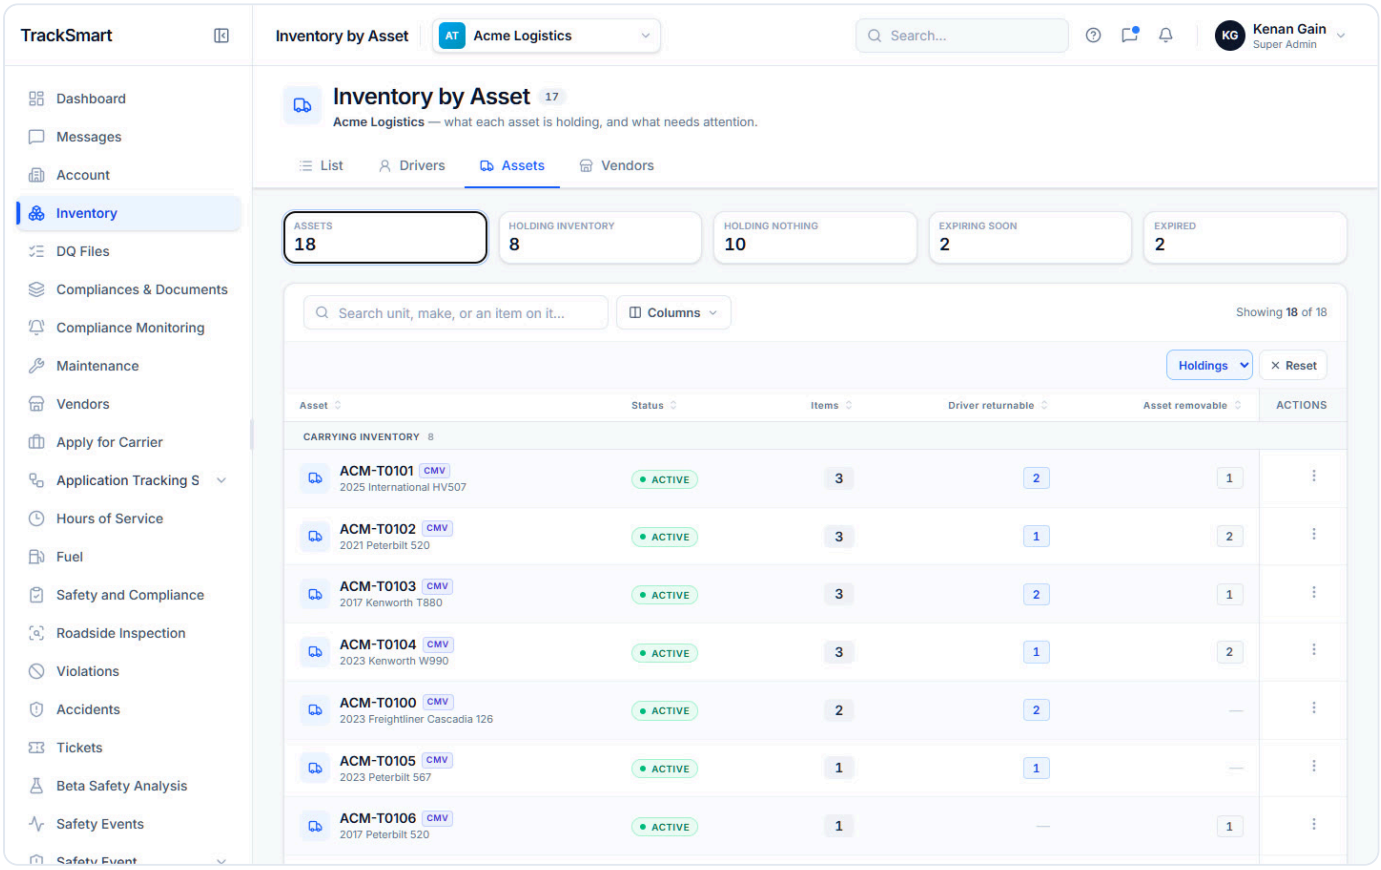

assets-group-holdings-desktop.png — Group by Holdings: "Carrying inventory" and "Holding nothing".

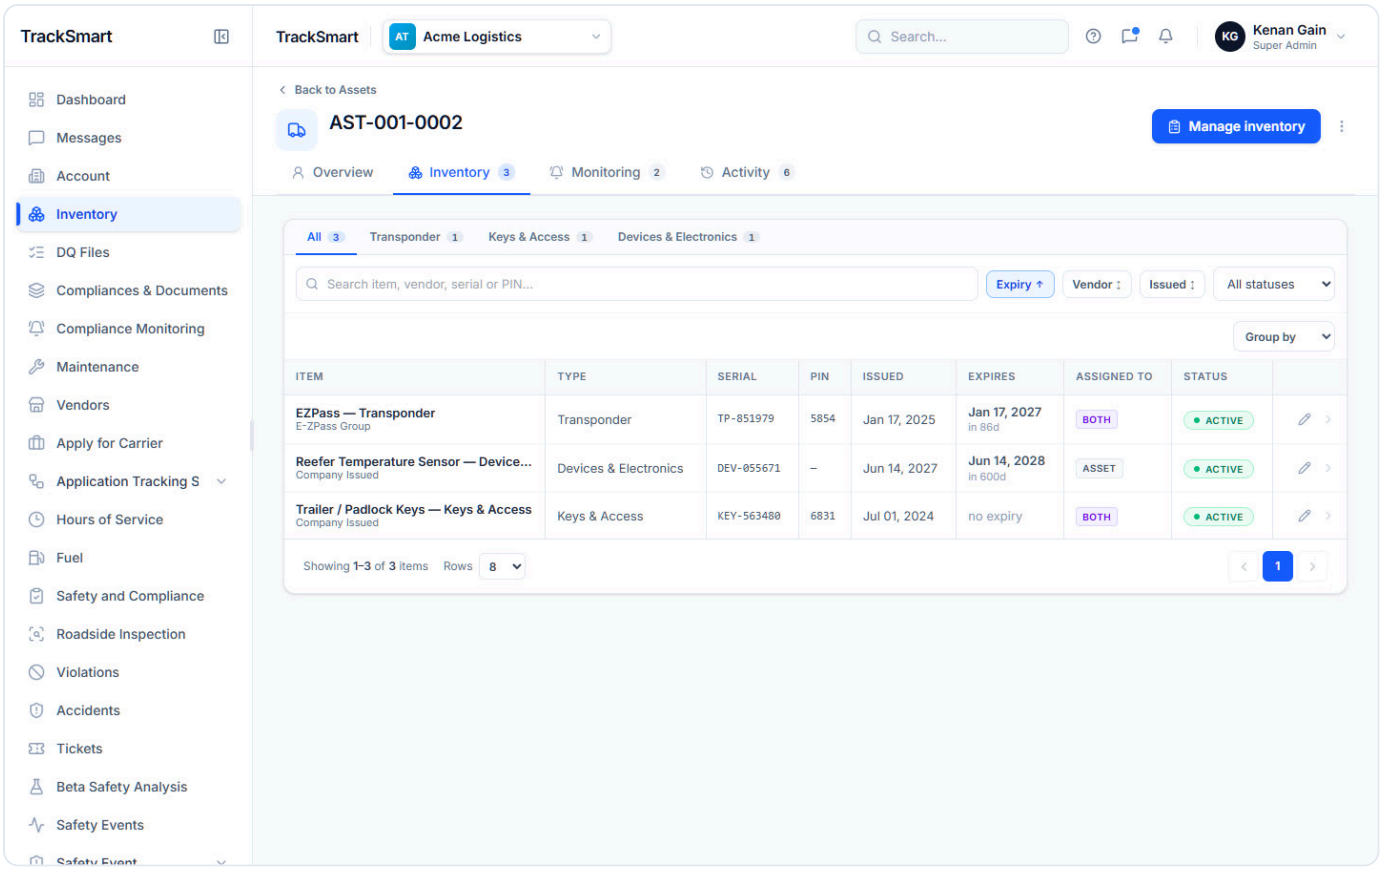

assets-holder-inventory-desktop.png — Asset holder page, Inventory tab: what is fitted to or kept on the unit.

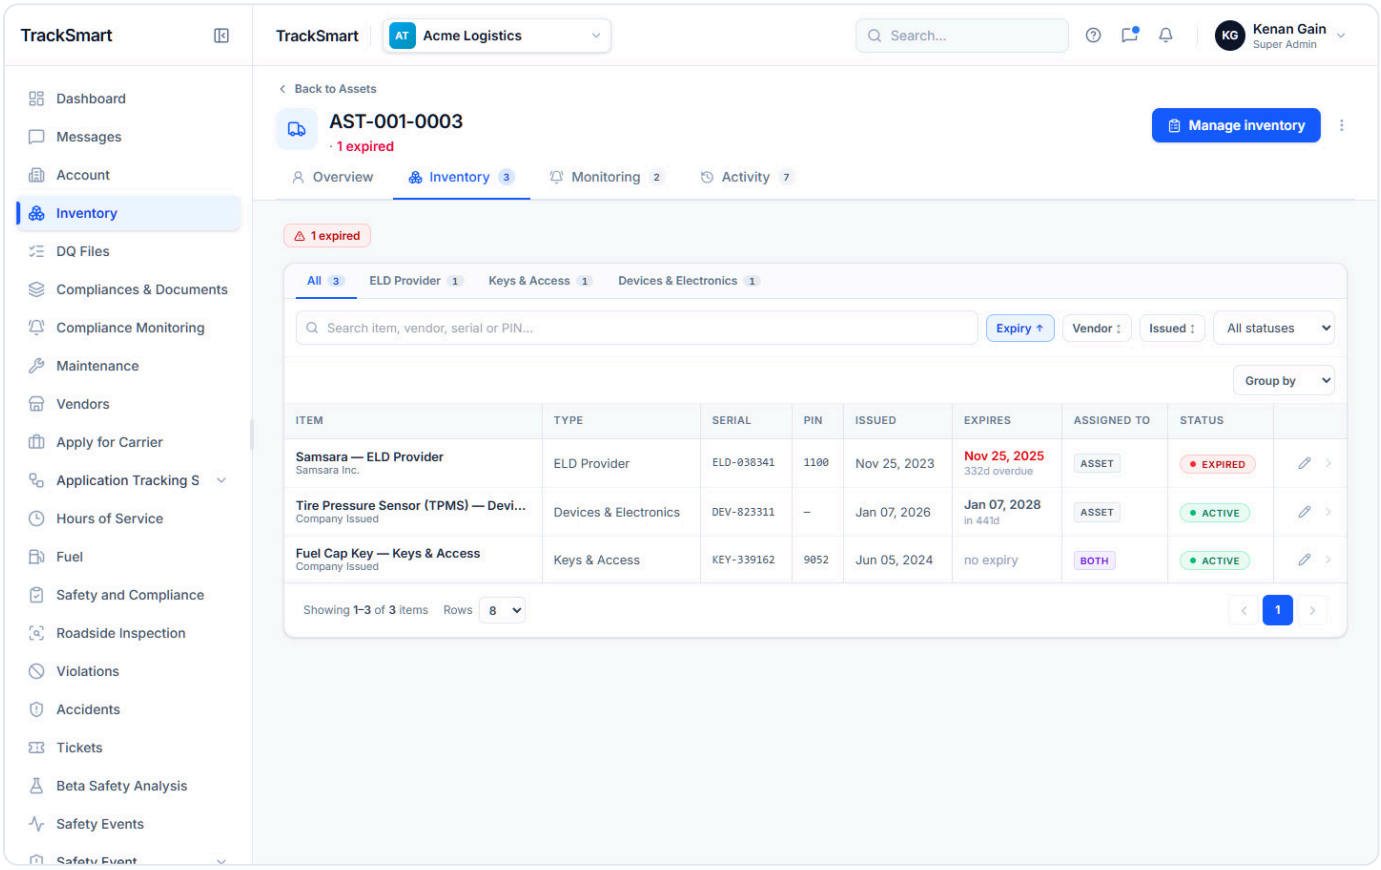

assets-holder-inventory-expired-desktop.png — A unit with an expired item: the red "1 expired" pill and the overdue date.

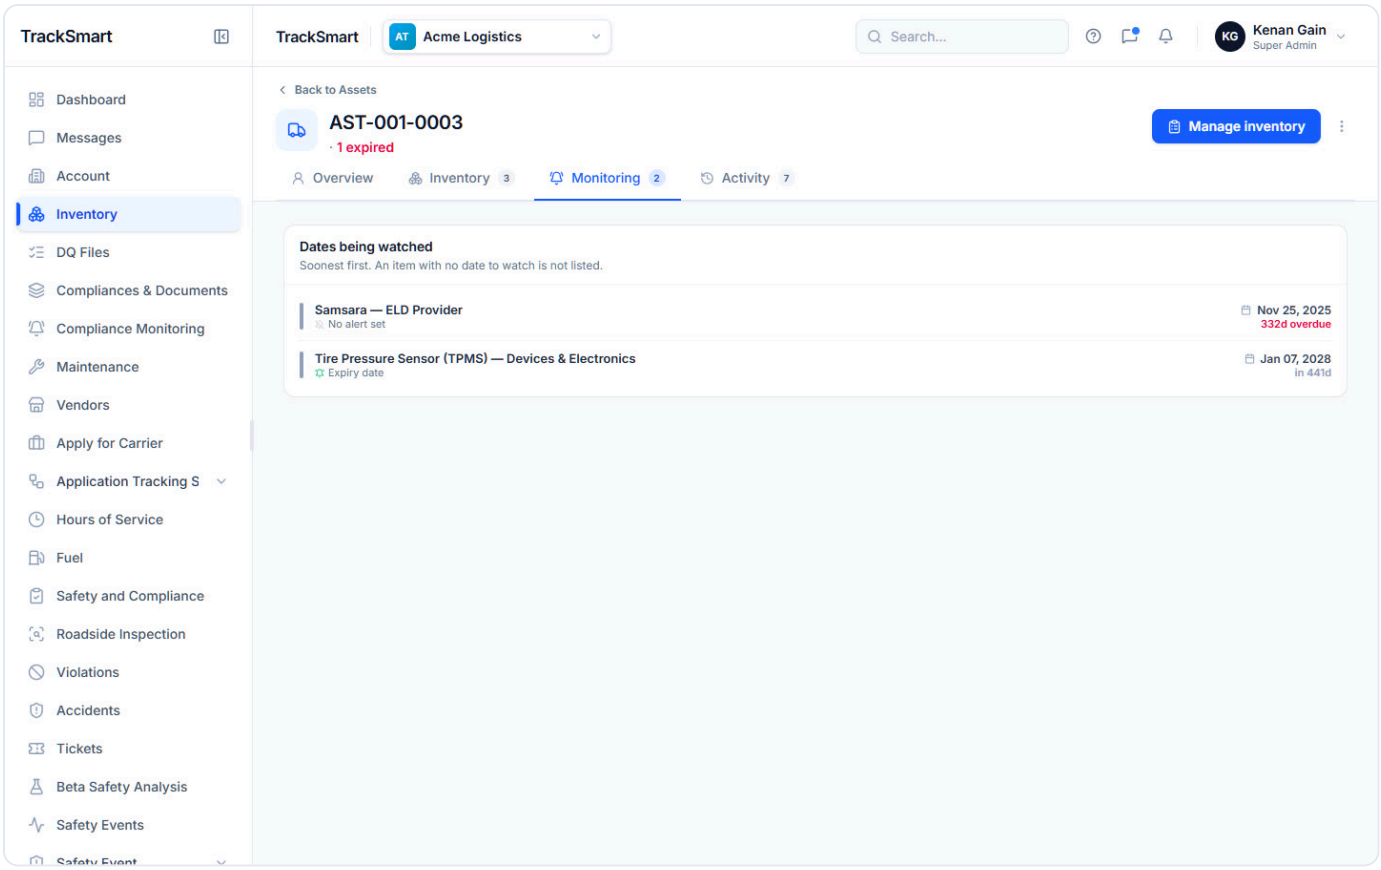

assets-holder-monitoring-desktop.png — Asset Monitoring tab: dates being watched on the unit.

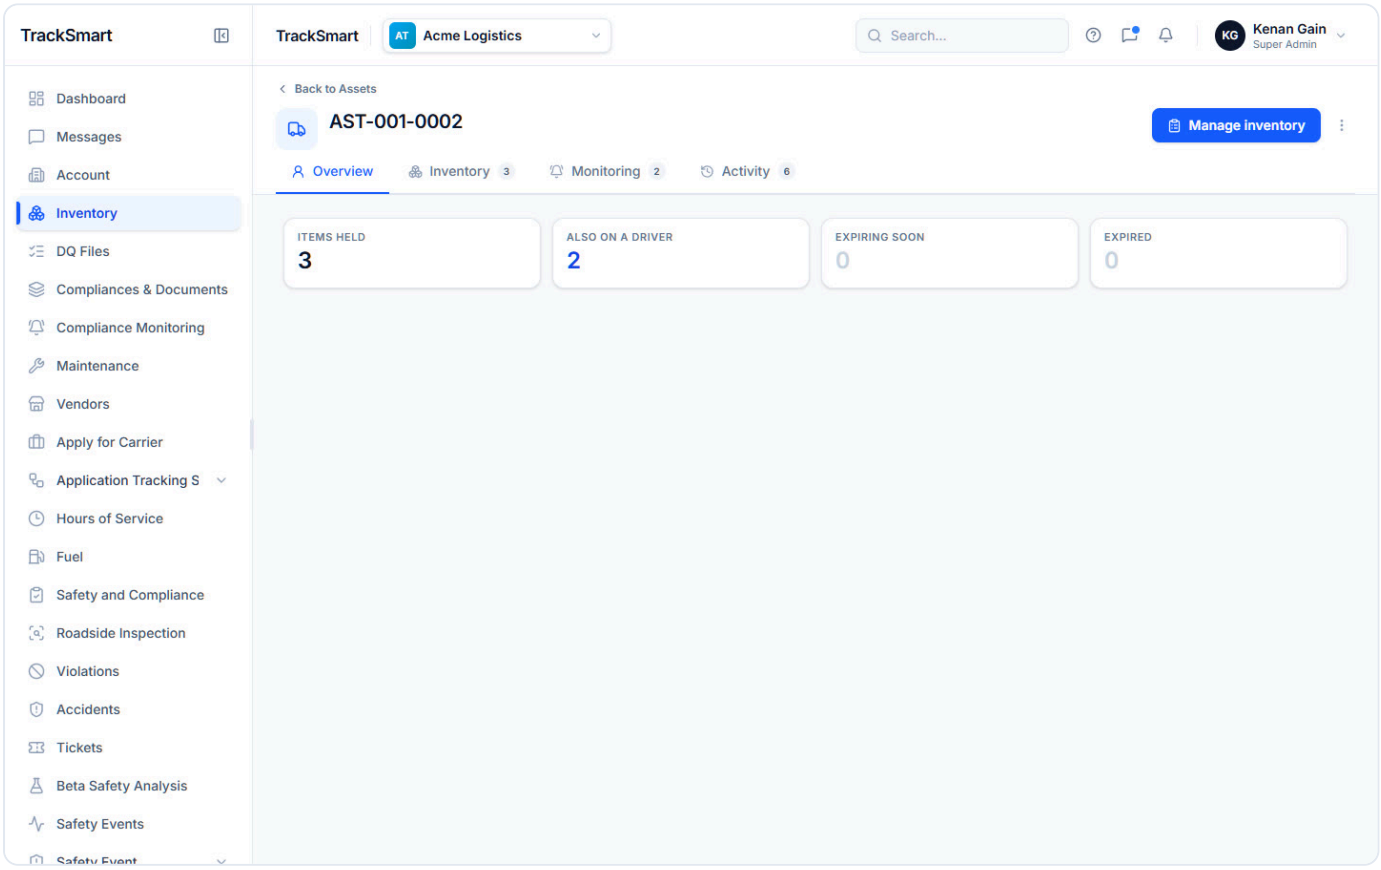

assets-holder-overview-desktop.png — Asset holder page, Overview: Items held, Also on a driver, Expiring soon, Expired.

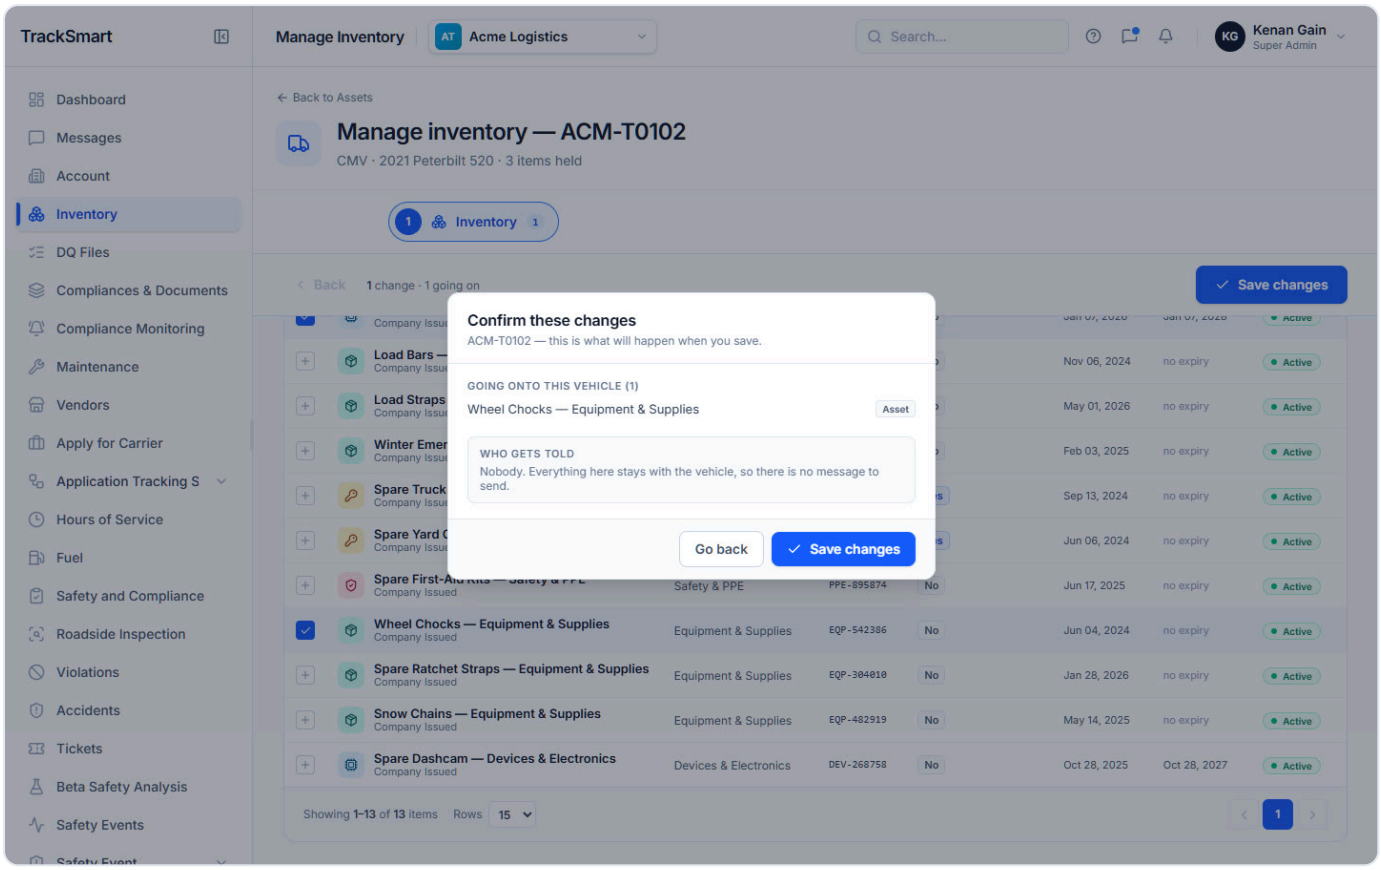

assets-manage-confirm-desktop.png — Confirm for a unit: "Who gets told: Nobody...".

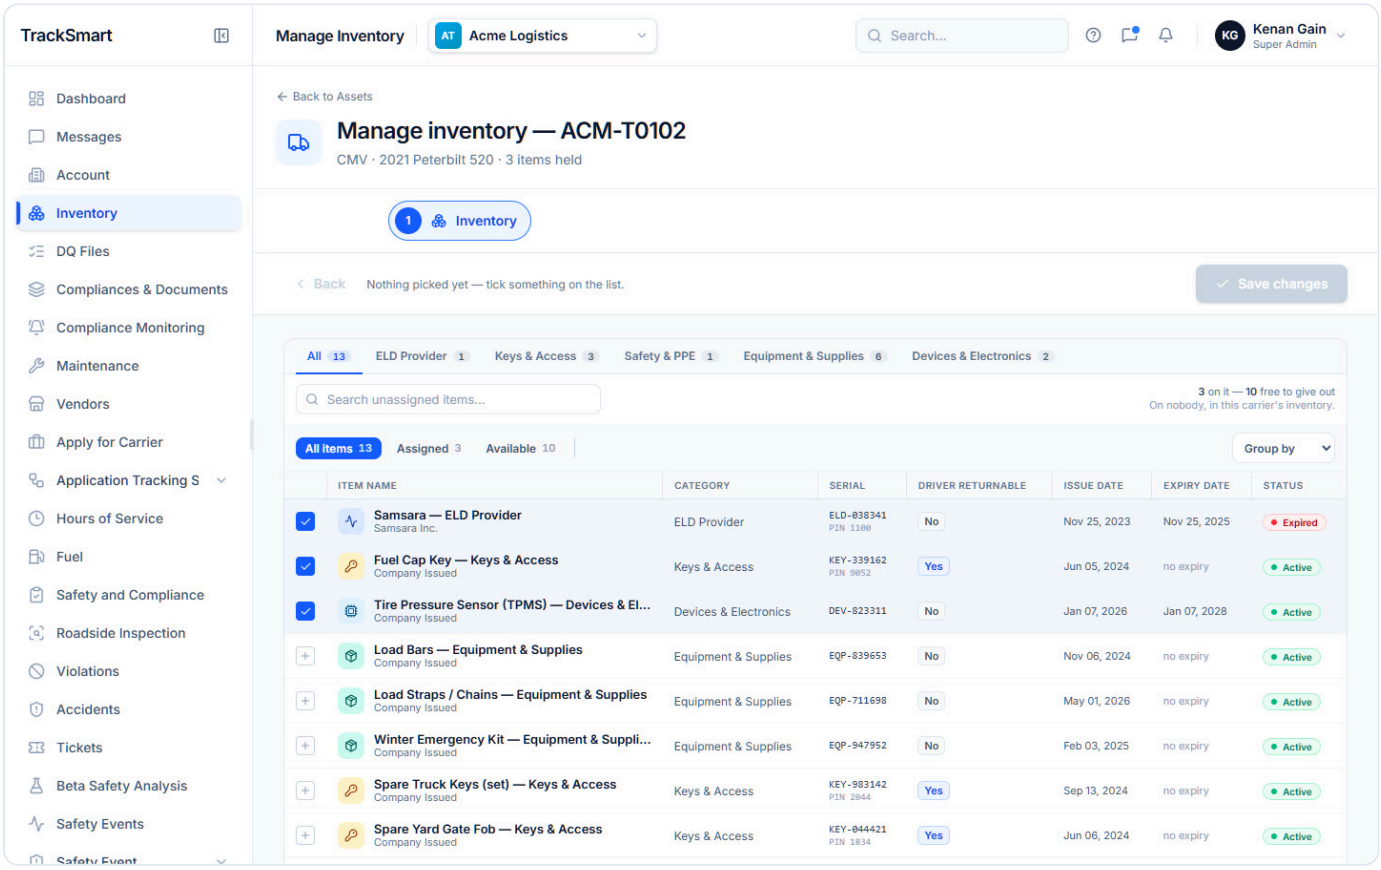

assets-manage-default-desktop.png — Manage inventory for a unit: one step only — units are never messaged.

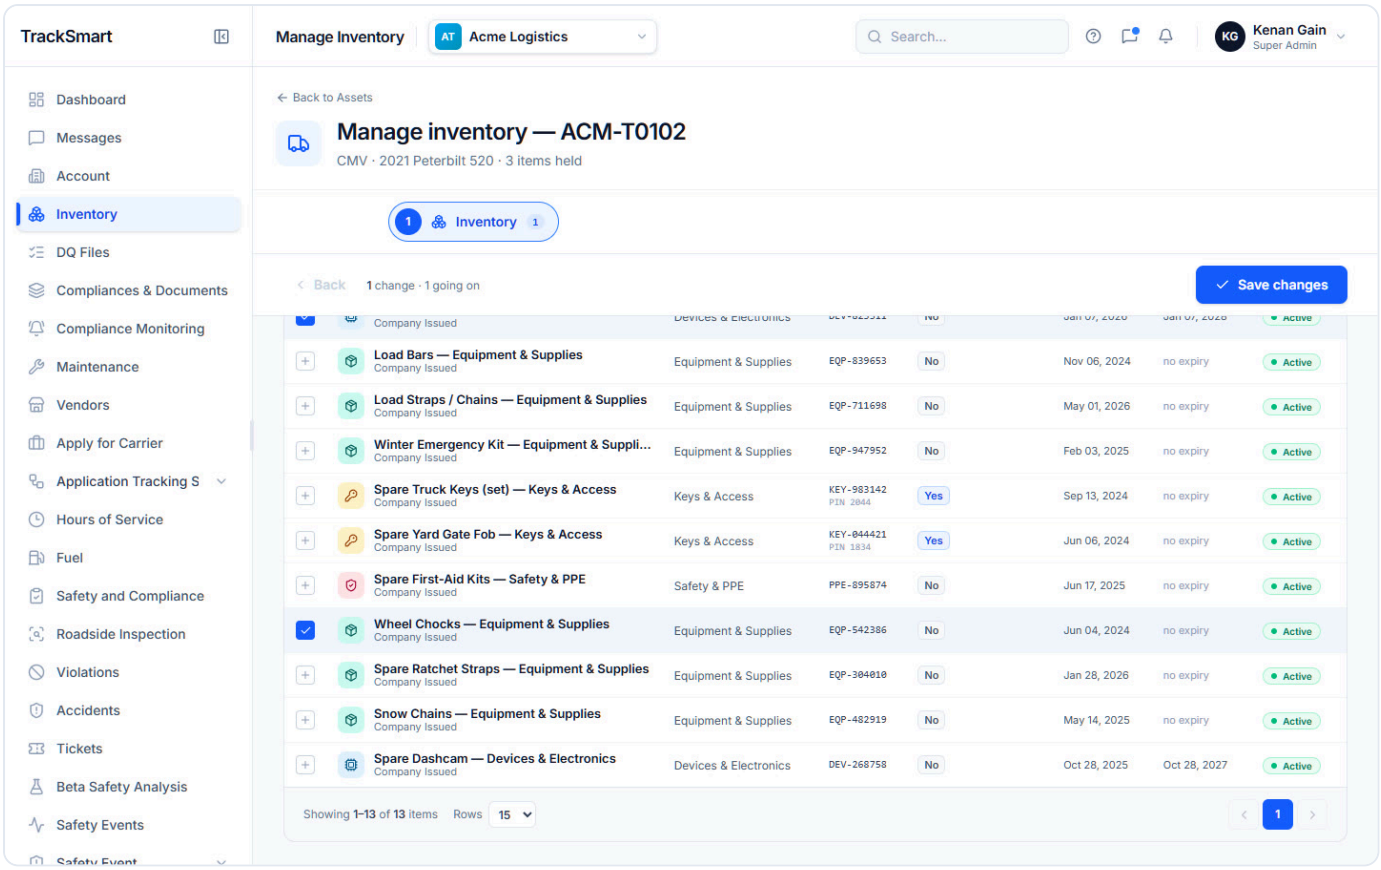

assets-manage-ticked-desktop.png — A free item ticked for the unit; the button reads Save changes.

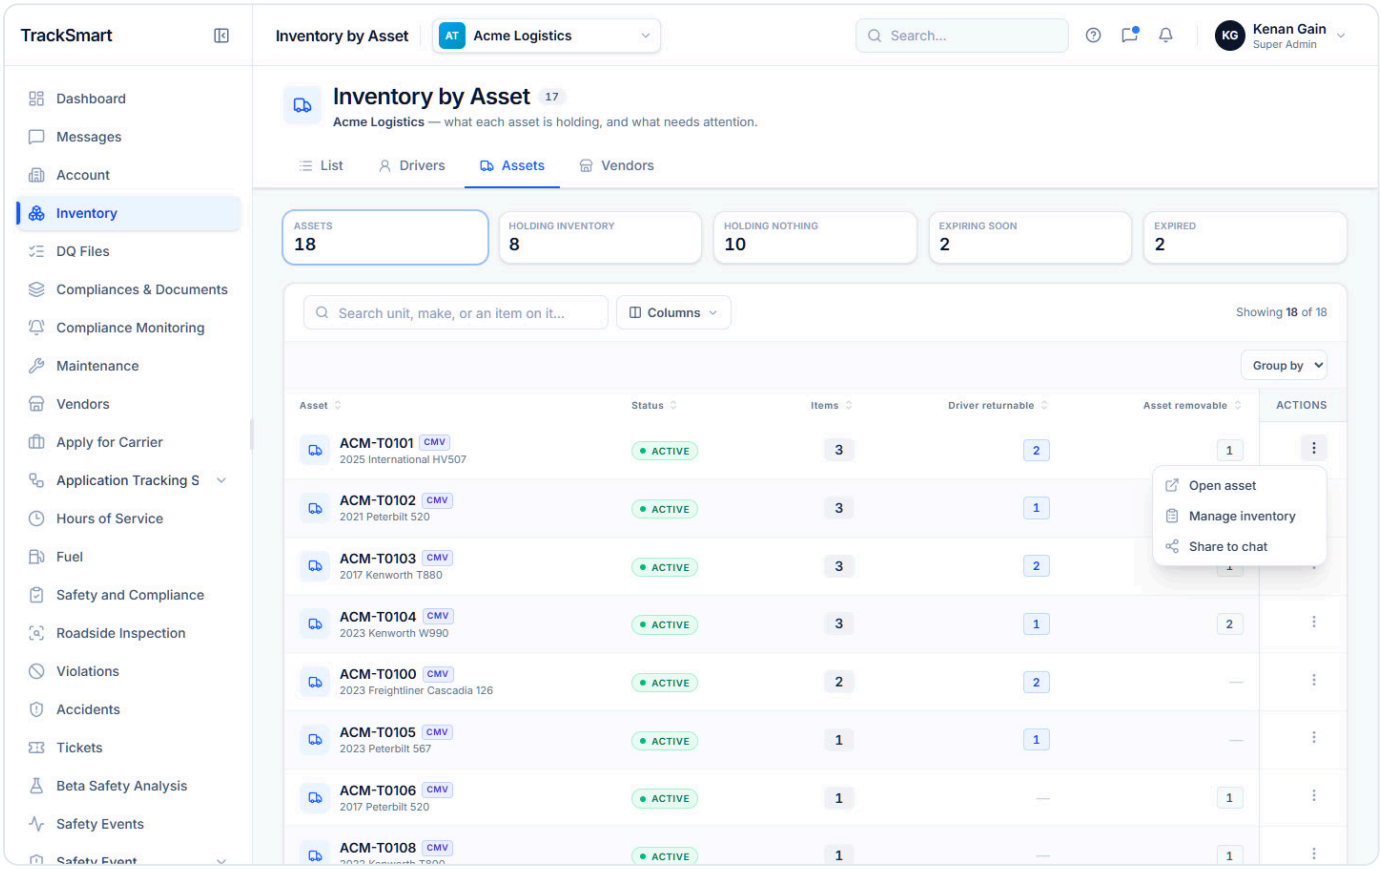

assets-row-menu-desktop.png — Row ⋮ Open asset, Manage inventory, Share to chat.

Mobile · 390 px

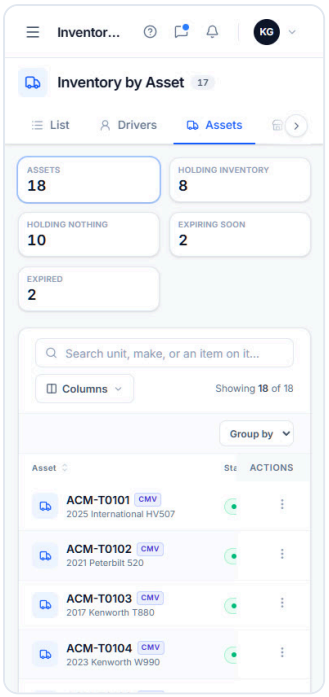

assets-default-mobile.png
Assets tab ("Inventory by Asset"): every unit with its items, split into driver-returnable and asset-removable.

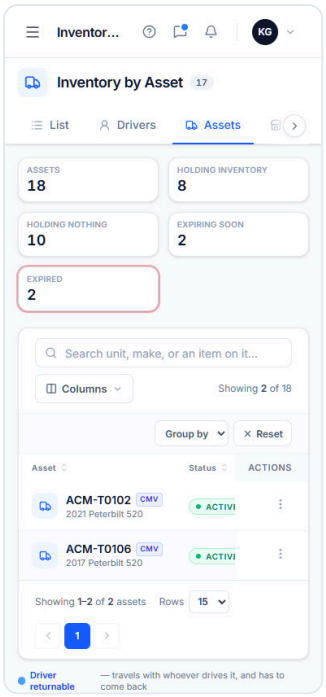

assets-filter-expired-mobile.png
KPI tile "Expired": units carrying something that has run out.

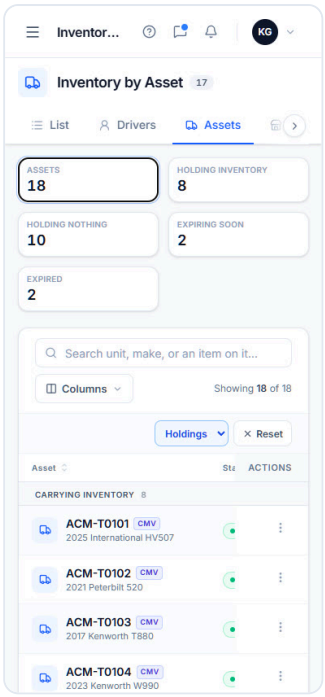

assets-group-holdings-mobile.png
Group by Holdings: "Carrying inventory" and "Holding nothing".

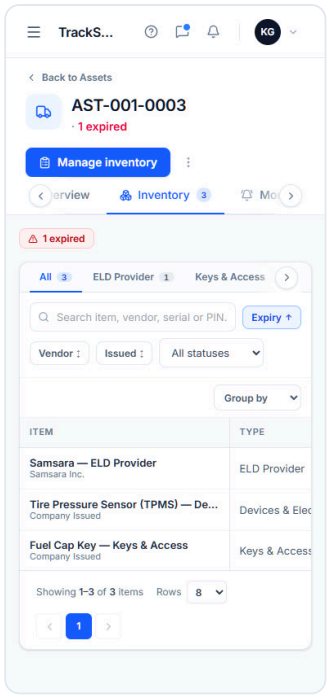

assets-holder-inventory-expired-mobile.png
A unit with an expired item: the red "1 expired" pill and the overdue date.

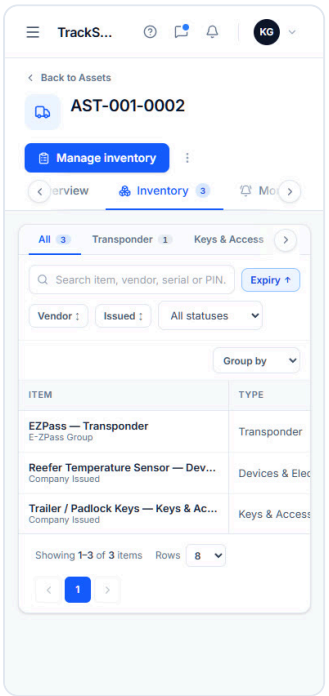

assets-holder-inventory-mobile.png
Asset holder page, Inventory tab: what is fitted to or kept on the unit.

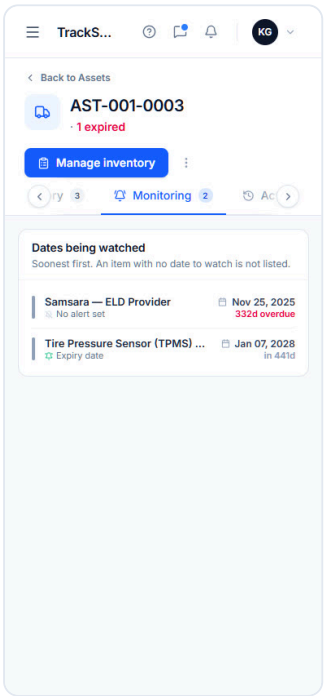

assets-holder-monitoring-mobile.png
Asset Monitoring tab: dates being watched on the unit.

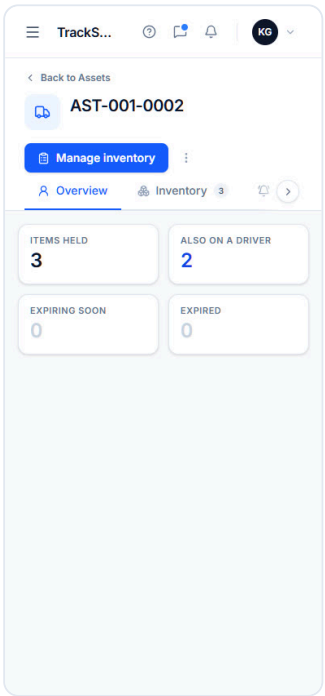

assets-holder-overview-mobile.png
Asset holder page, Overview: Items held, Also on a driver, Expiring soon, Expired.

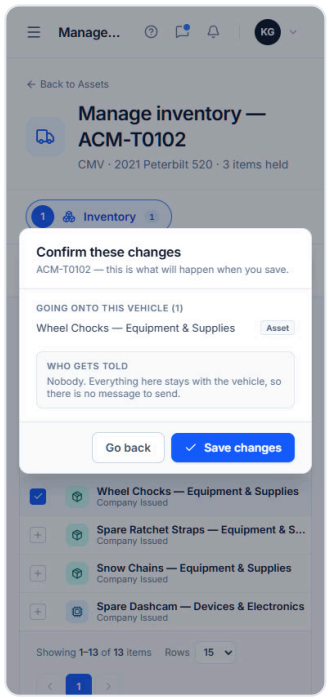

assets-manage-confirm-mobile.png
Confirm for a unit: "Who gets told: Nobody...".

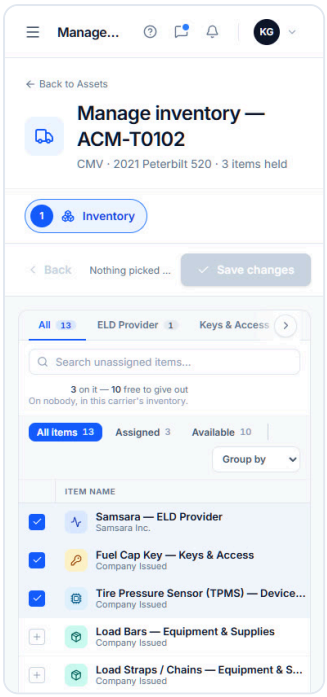

assets-manage-default-mobile.png
Manage inventory for a unit: one step only — units are never messaged.

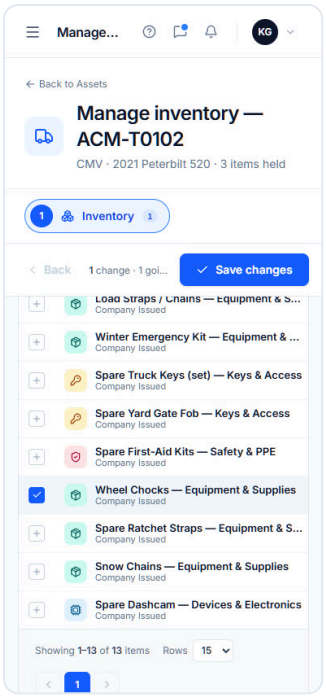

assets-manage-ticked-mobile.png
A free item ticked for the unit; the button reads Save changes.

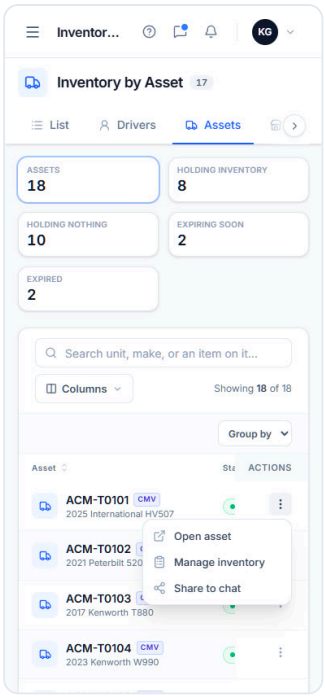

assets-row-menu-mobile.png
Row ⋮: Open asset, Manage inventory, Share to chat.

Vendors

Desktop · 1440 px

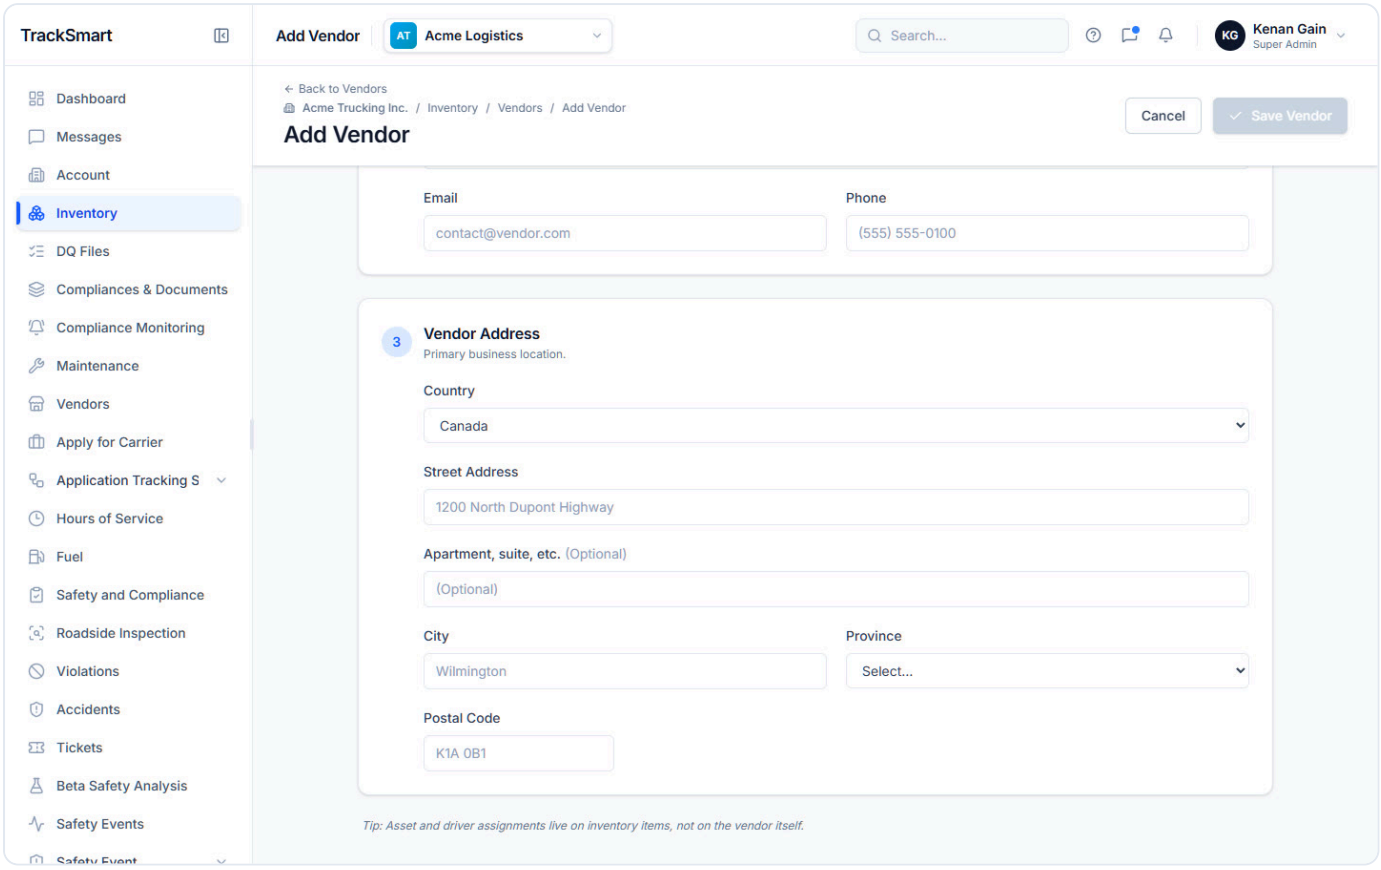

vendors-add-canada-desktop.png — Country Canada: State becomes Province, ZIP becomes Postal Code ("K1A 0B1").

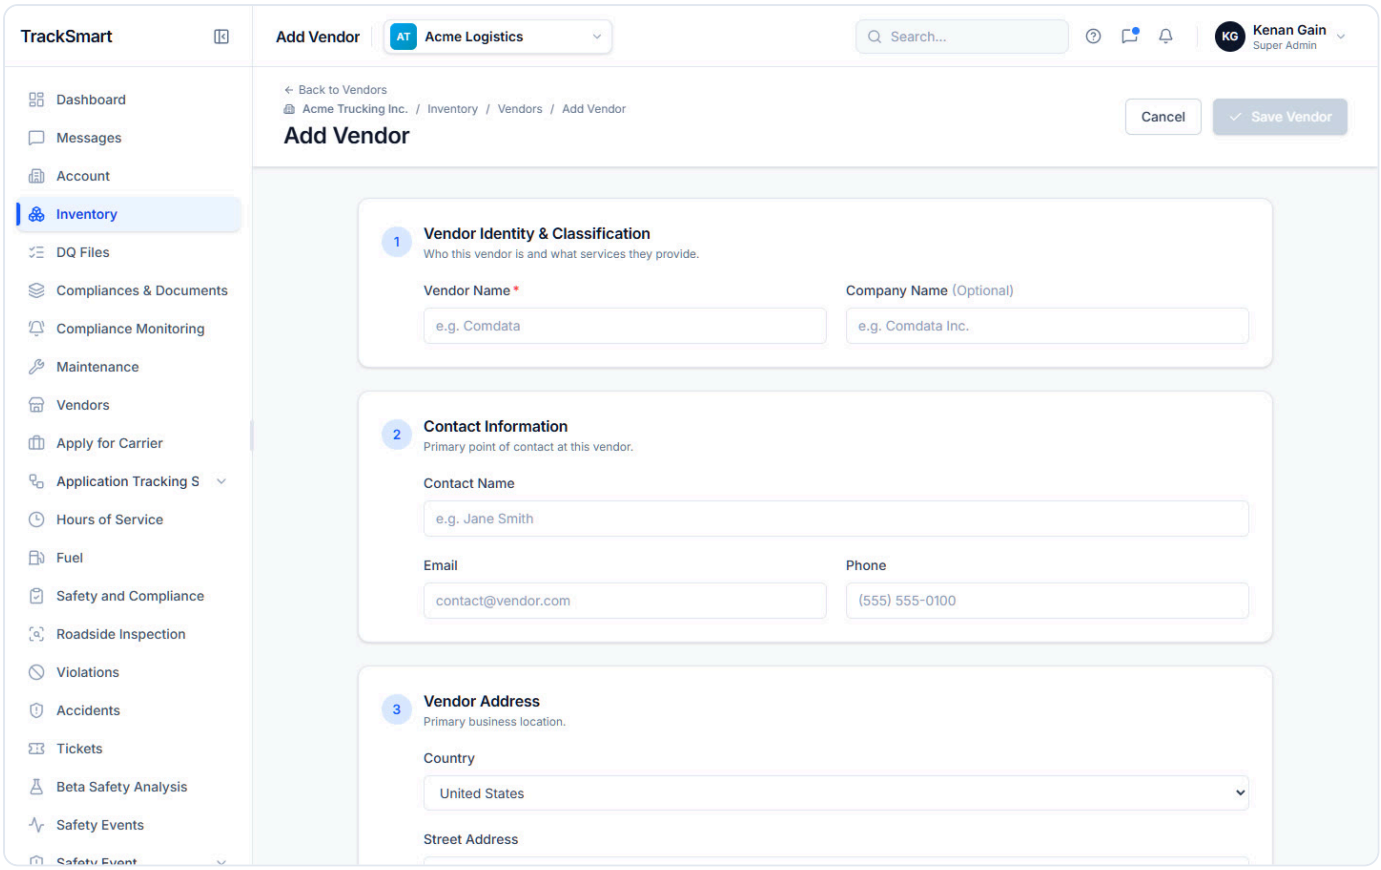

vendors-add-default-desktop.png — Add Vendor: three sections; Save Vendor stays grey until a Vendor Name is typed.

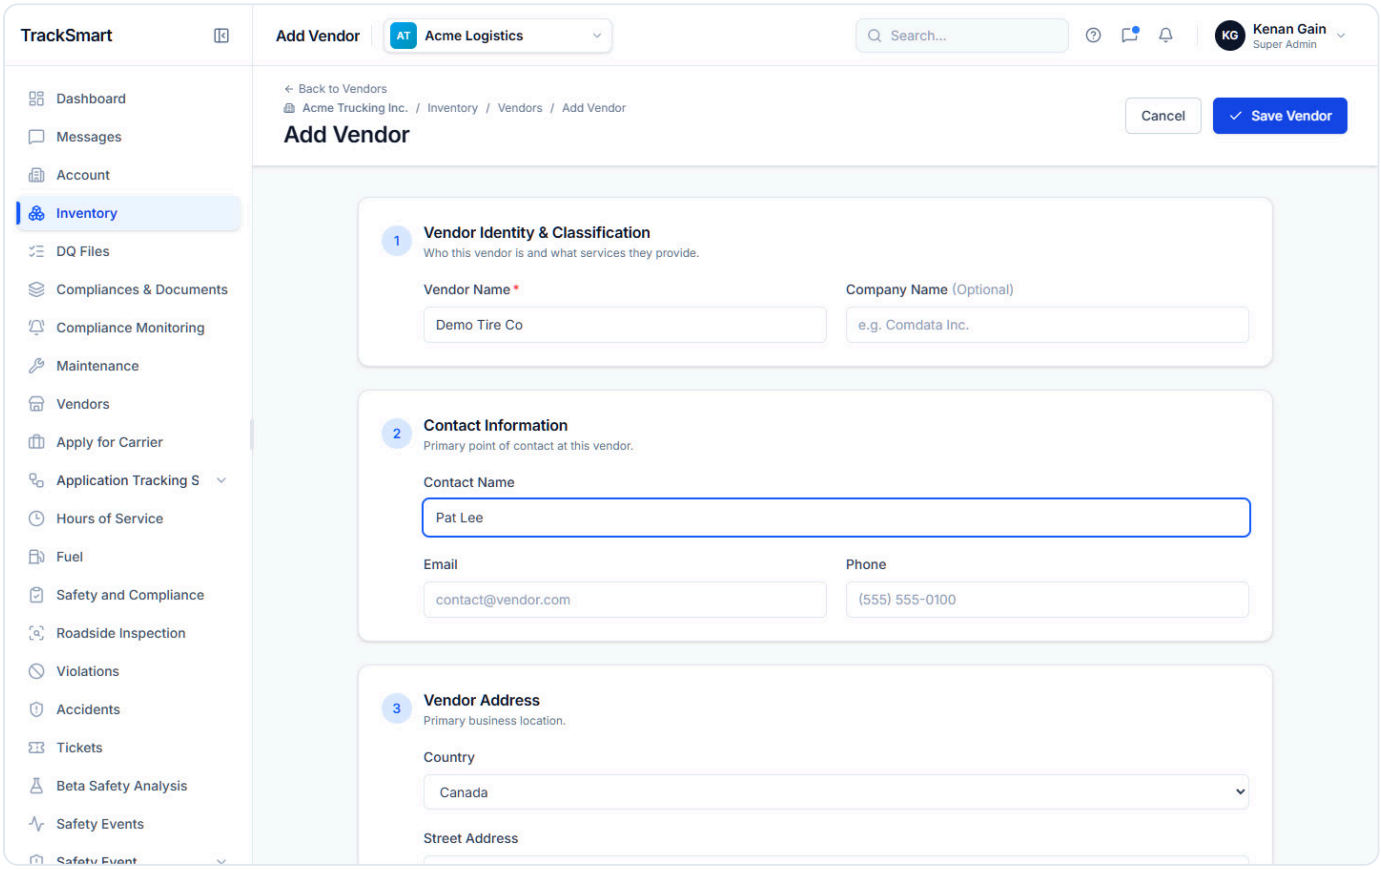

vendors-add-filled-desktop.png — Vendor Name typed: Save Vendor turns blue.

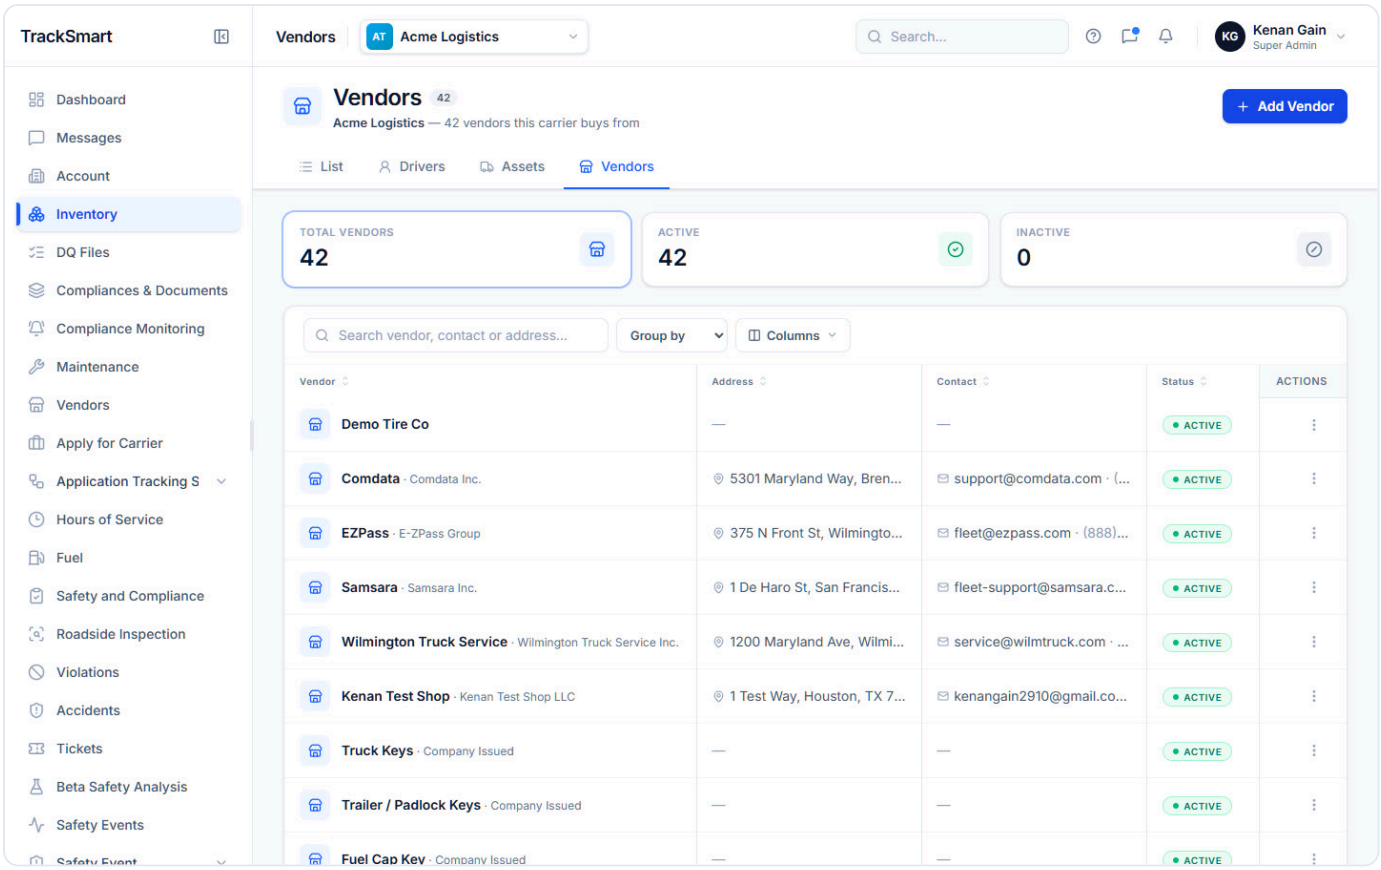

vendors-add-saved-desktop.png — After Save: back on the list with the new vendor first and the count up by one (no toast).

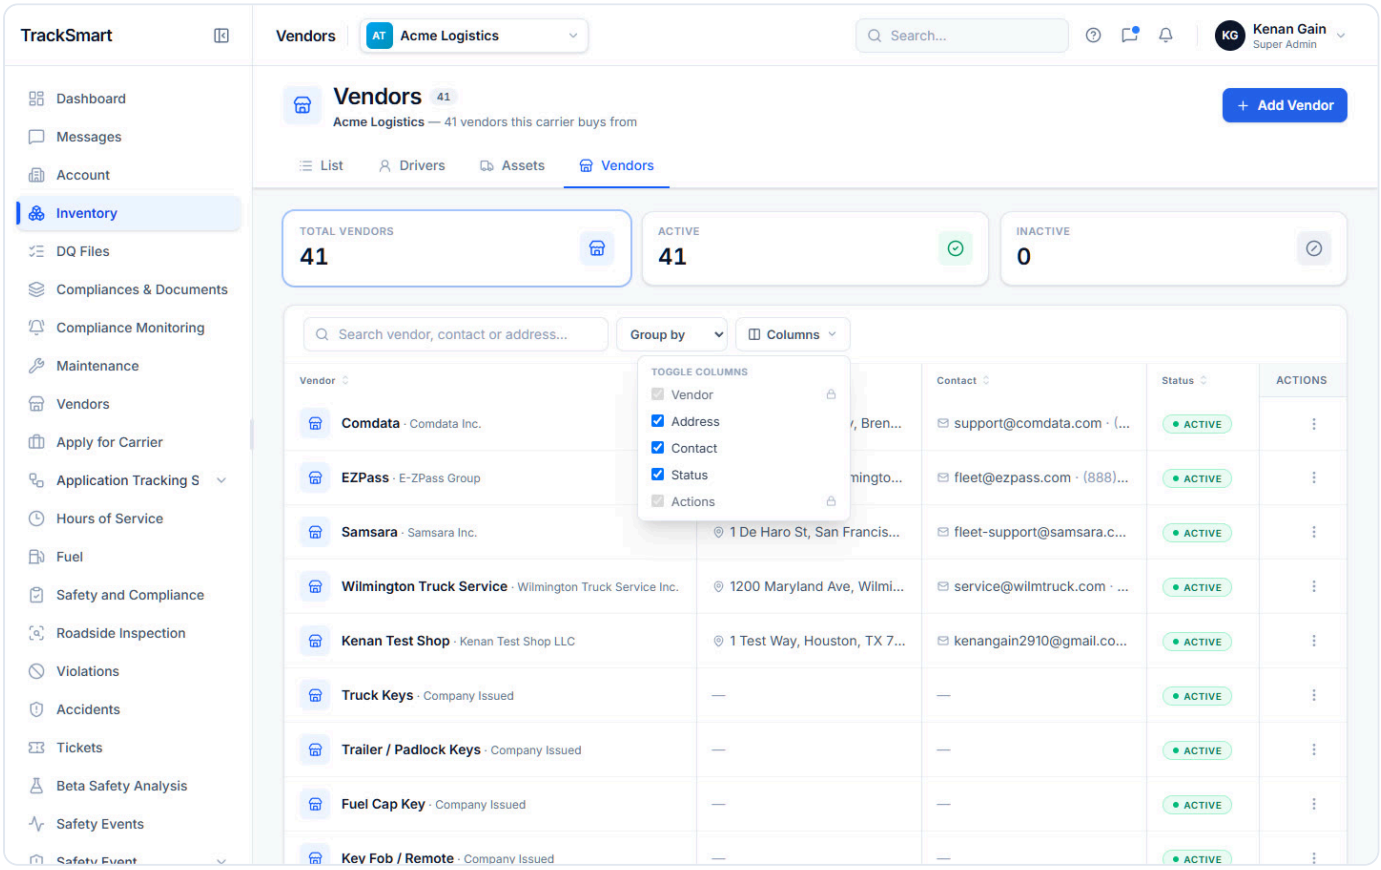

vendors-columns-picker-desktop.png — Columns picker: Vendor and Actions locked; Address, Contact, Status optional.

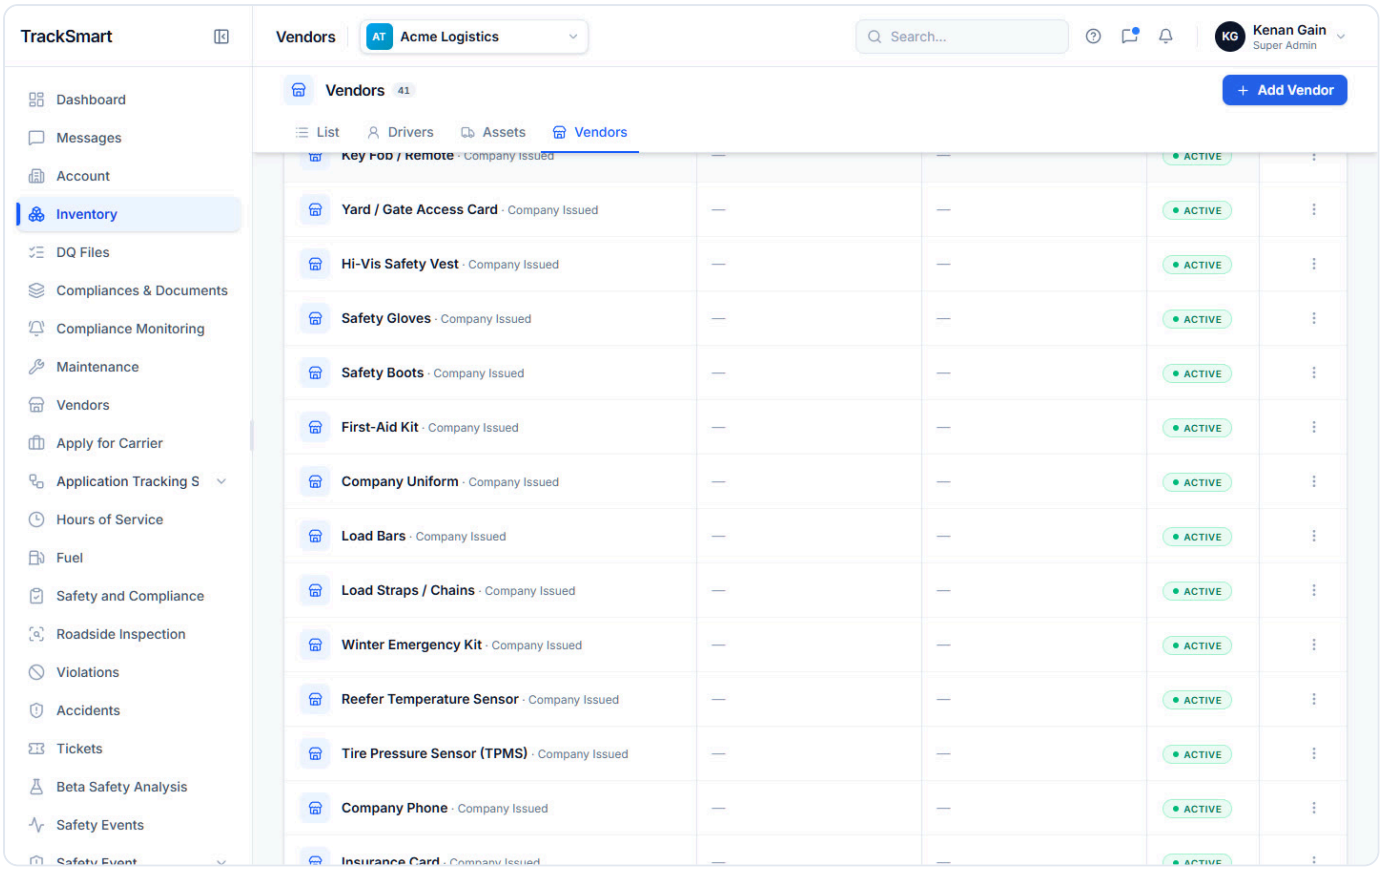

`vendors-company-issued-rows-desktop.png` — The "· Company Issued" placeholder rows (one per accessory, no address or contact) are listed with the real vendors (TO CONFIRM).

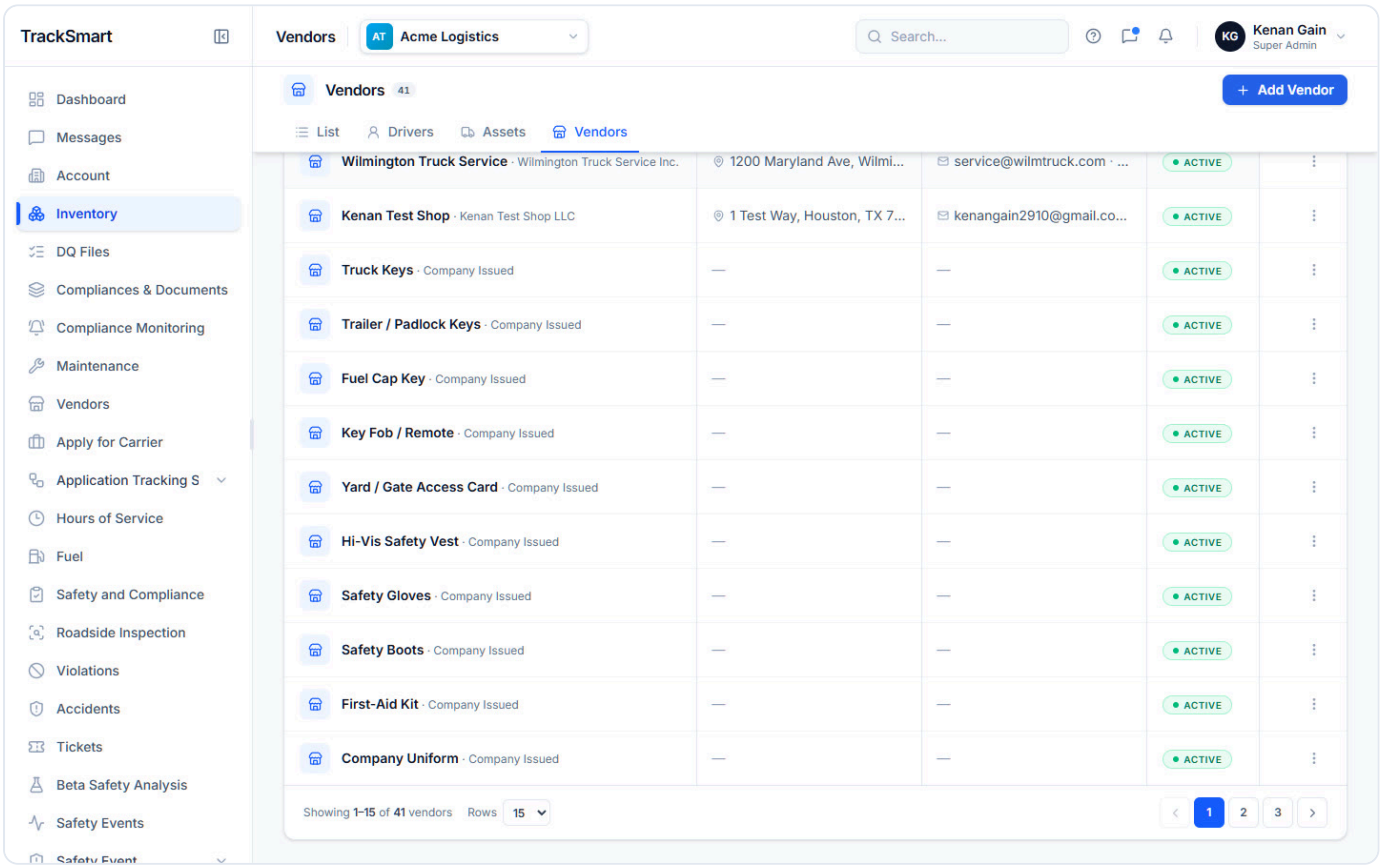

`vendors-condensed-header-desktop.png` — Vendors tab scrolled: the condensed header.

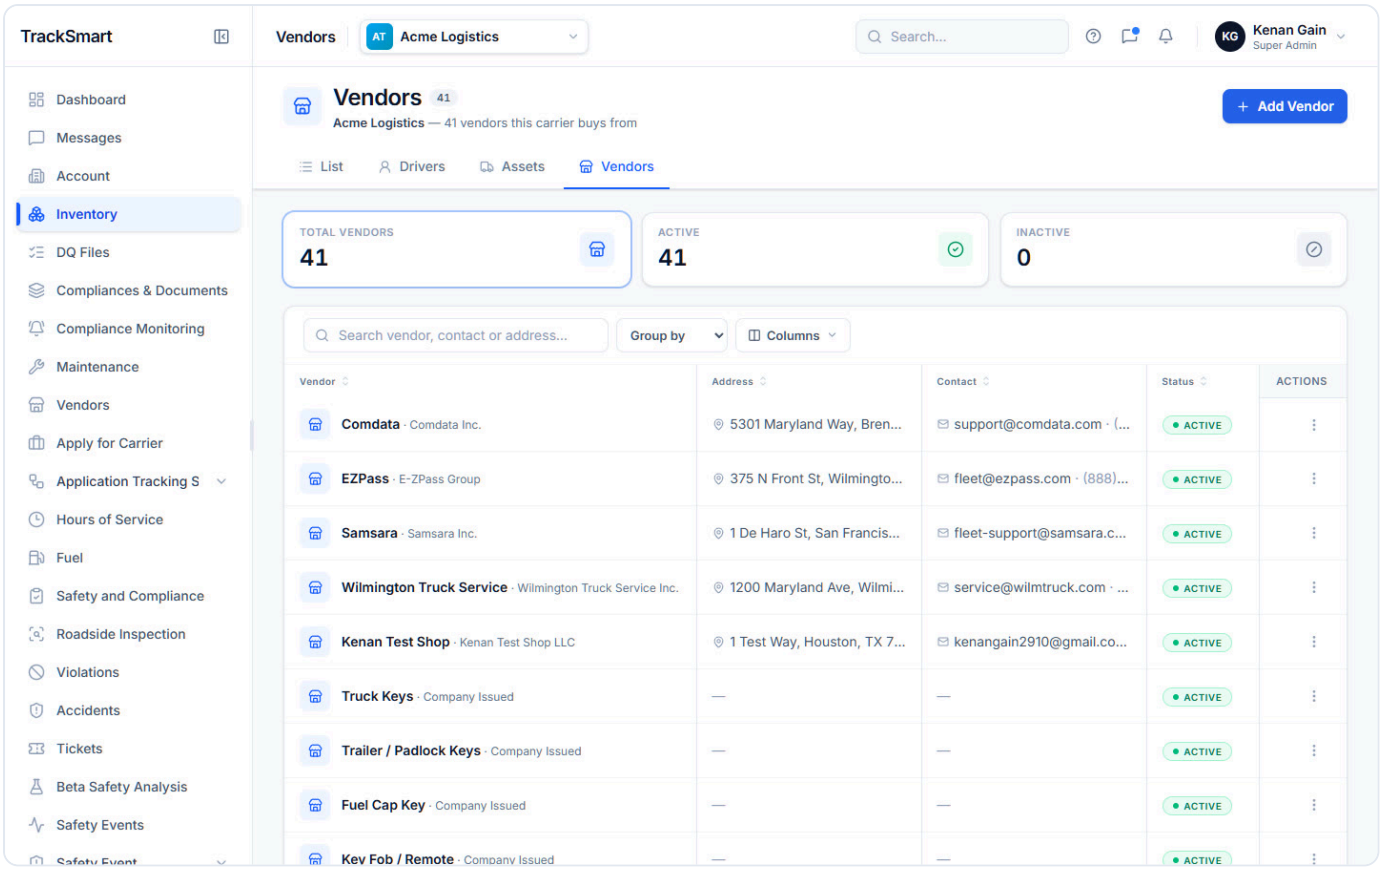

vendors-default-desktop.png — Vendors tab: header with + Add Vendor, the Total / Active / Inactive tiles (filters), search, Group by, Columns and the vendor table.

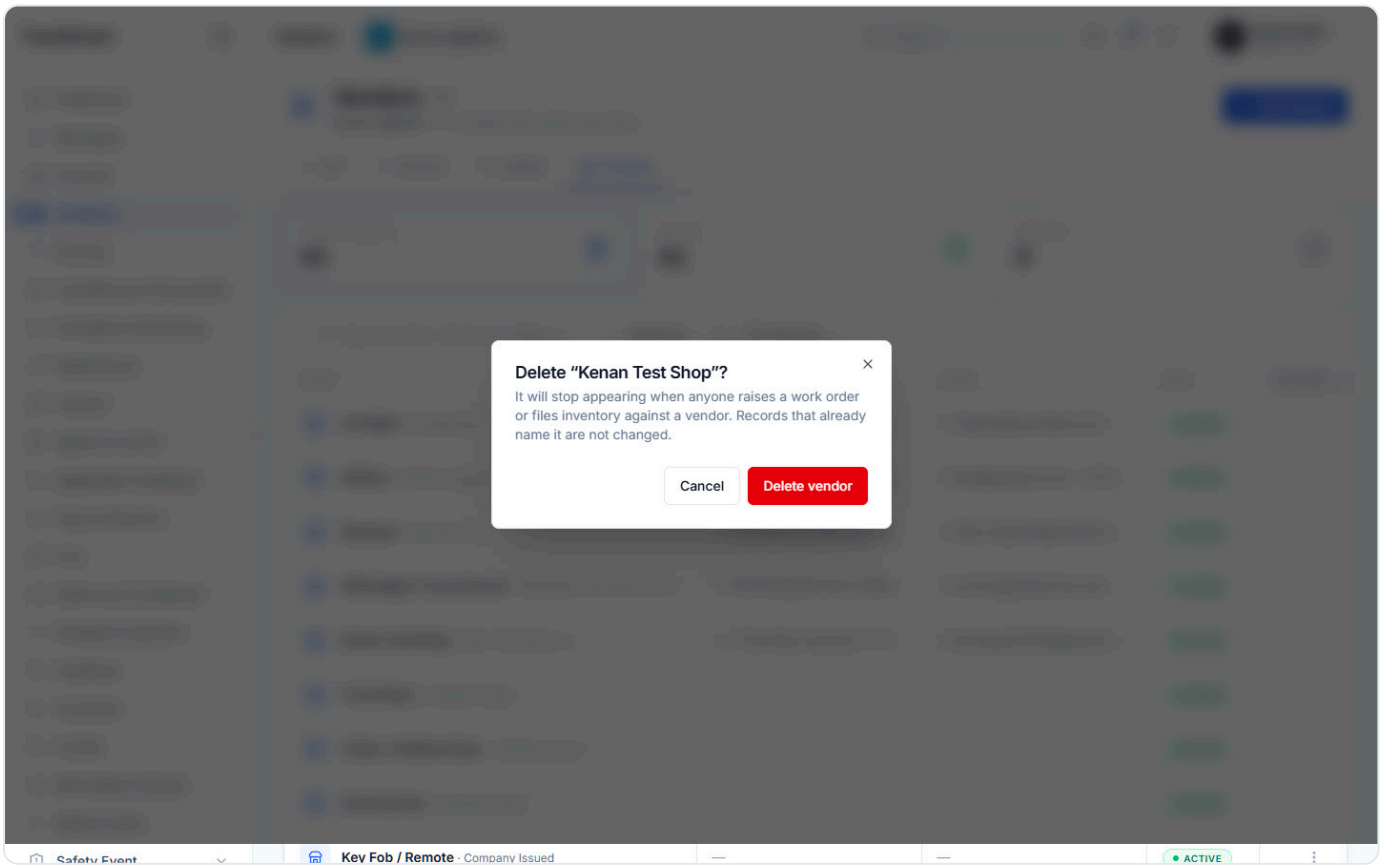

vendors-delete-confirm-desktop.png — Delete asks first: "Delete “Kenan Test Shop”? ... Records that already name it are not changed."

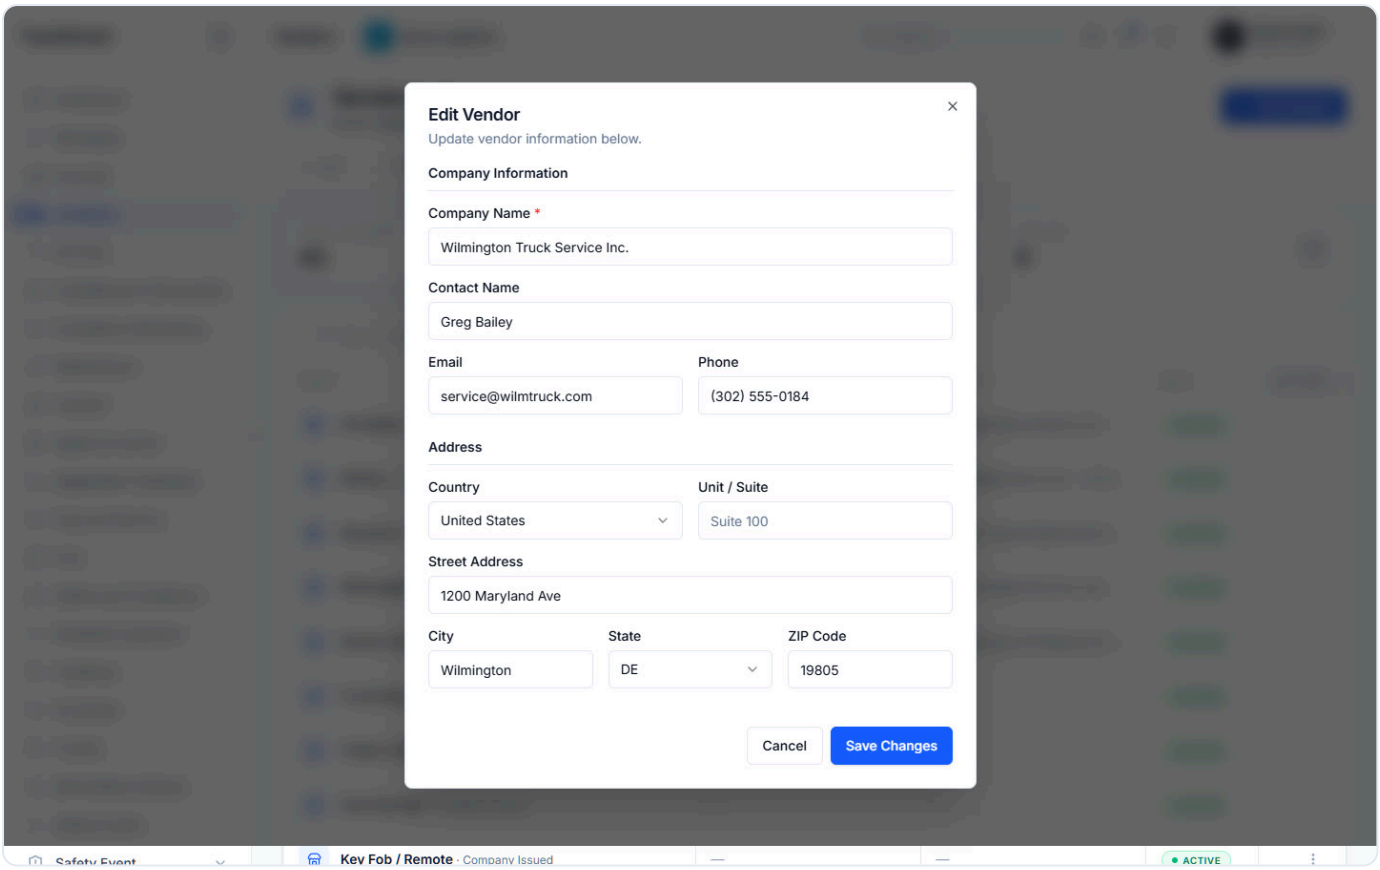

vendors-edit-dialog-desktop.png — Edit Vendor dialog, filled in: company, contact, email, phone and address (name, status and category are not editable here).

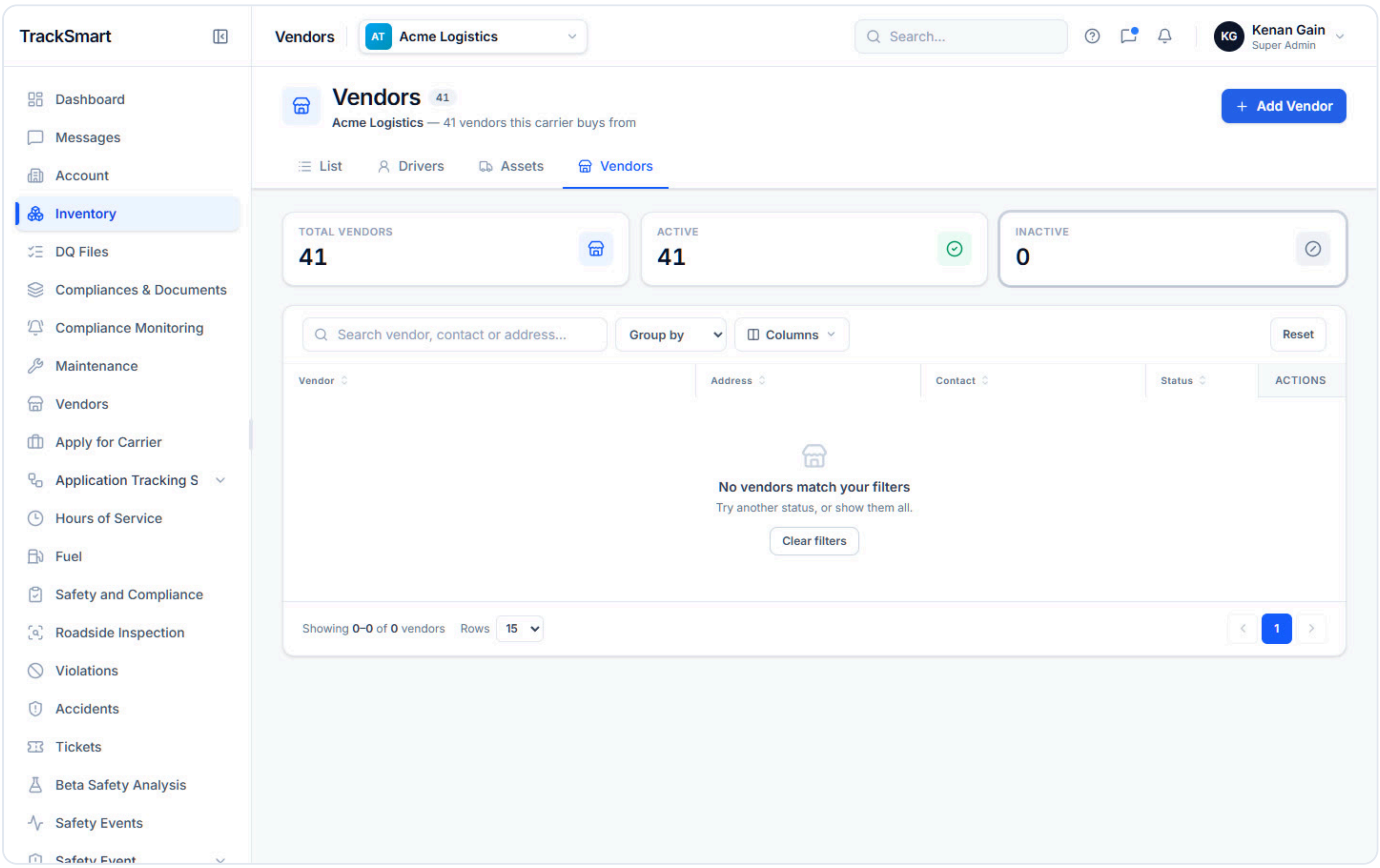

vendors-filter-inactive-empty-desktop.png — Inactive tile as a filter: no inactive vendors exist today, so the empty state shows.

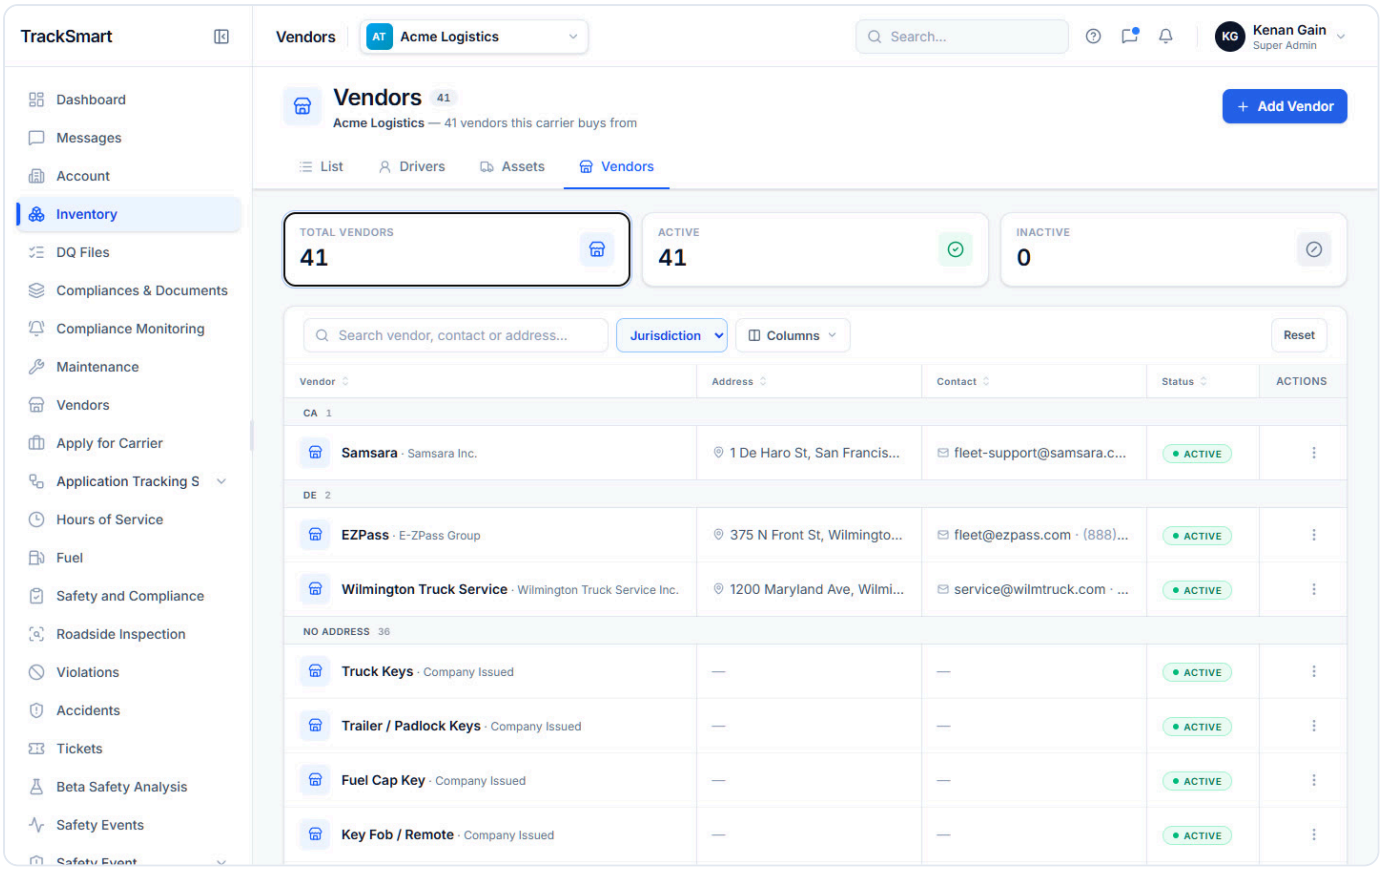

vendors-group-jurisdiction-desktop.png — Group by Jurisdiction: one band per state (or "No address").

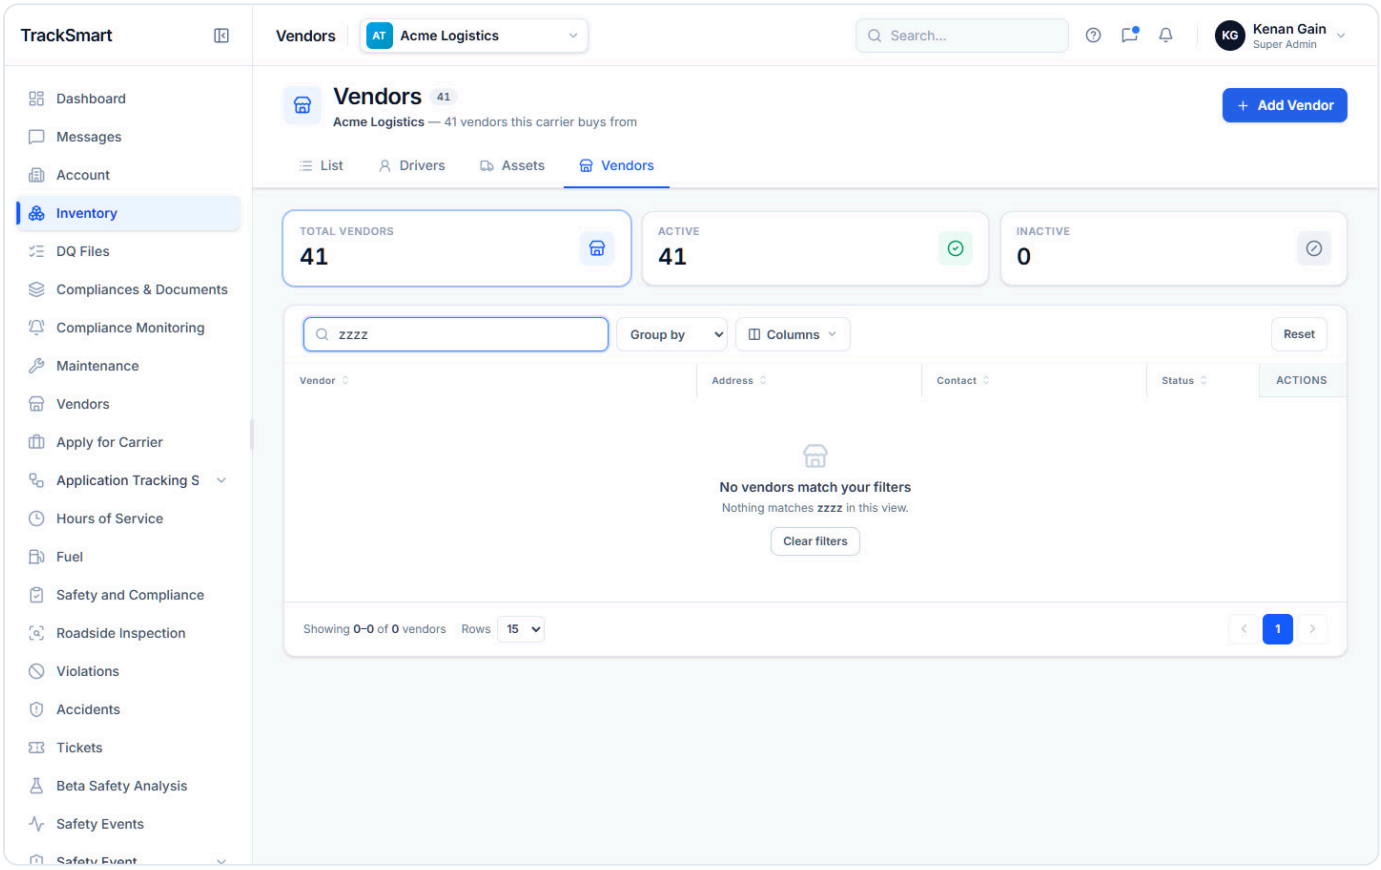

vendors-no-results-desktop.png — No results: "No vendors match your filters" with Clear filters.

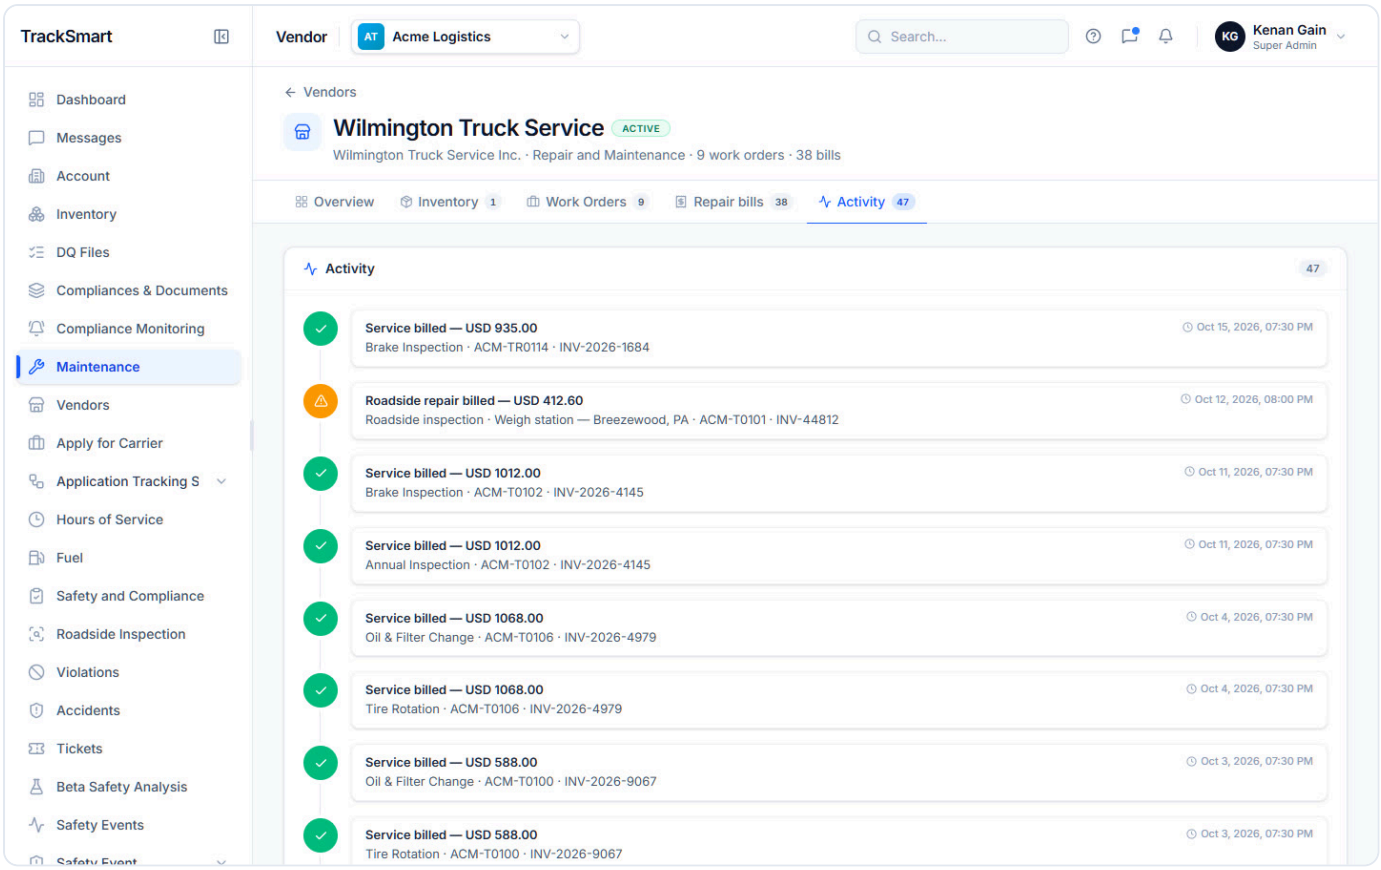

vendors-profile-activity-desktop.png — Vendor profile, Activity: work orders raised and bills filed.

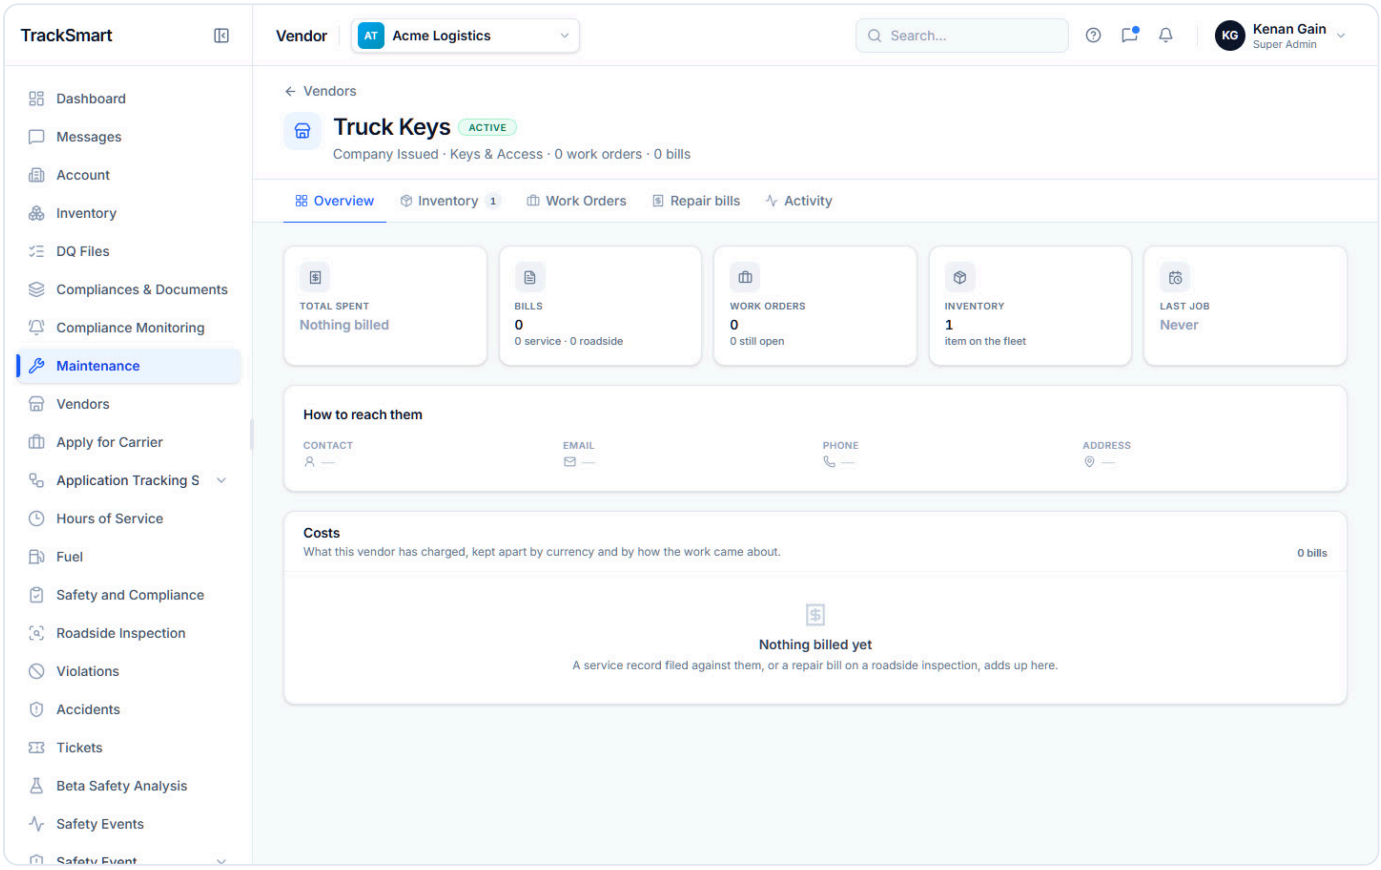

vendors-profile-company-issued-desktop.png — A "Company Issued" placeholder opened as a vendor: nothing billed, every contact field "—".

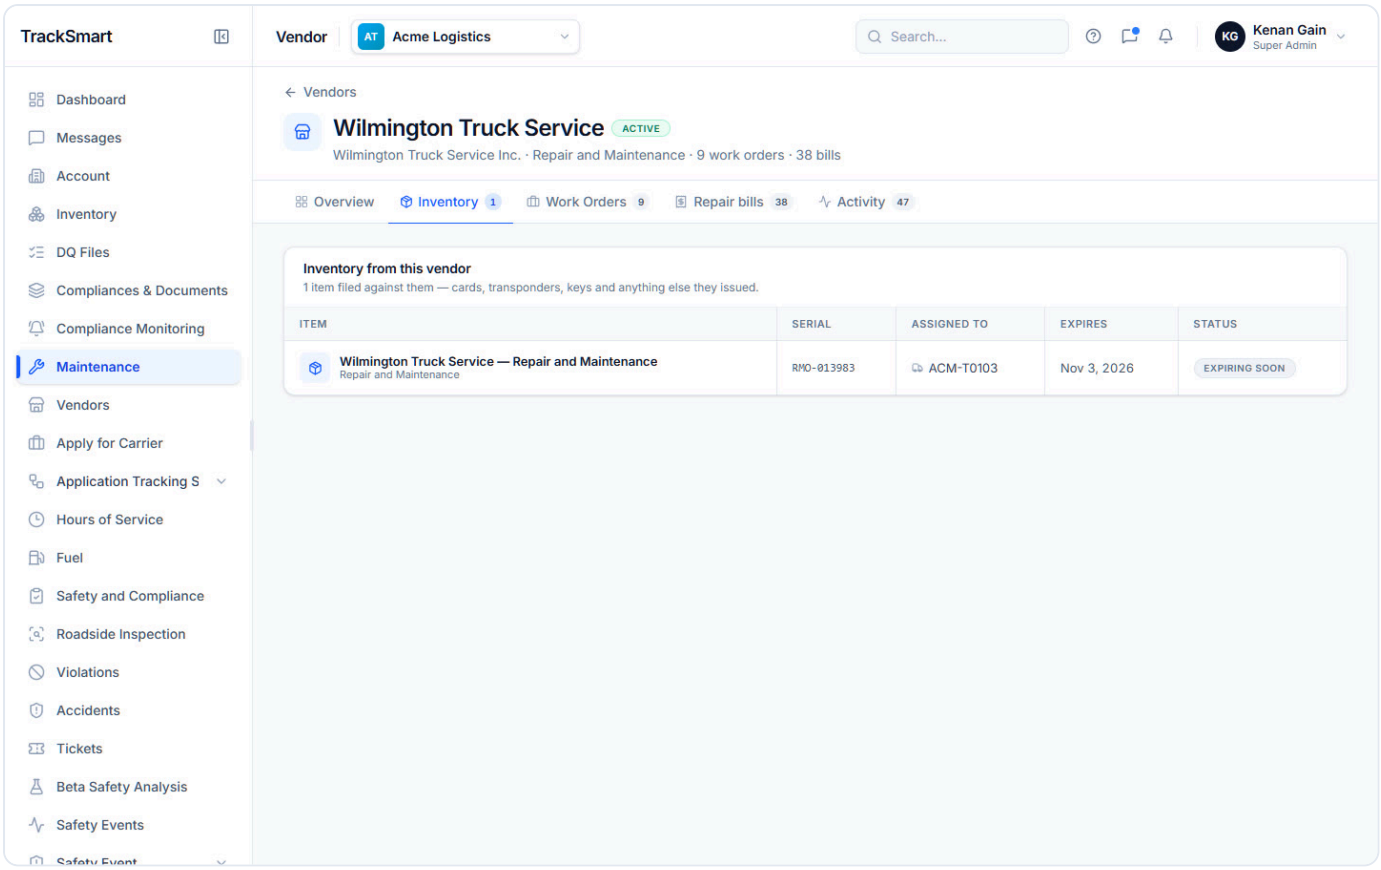

vendors-profile-inventory-desktop.png — Vendor profile, Inventory: the items filed against this vendor.

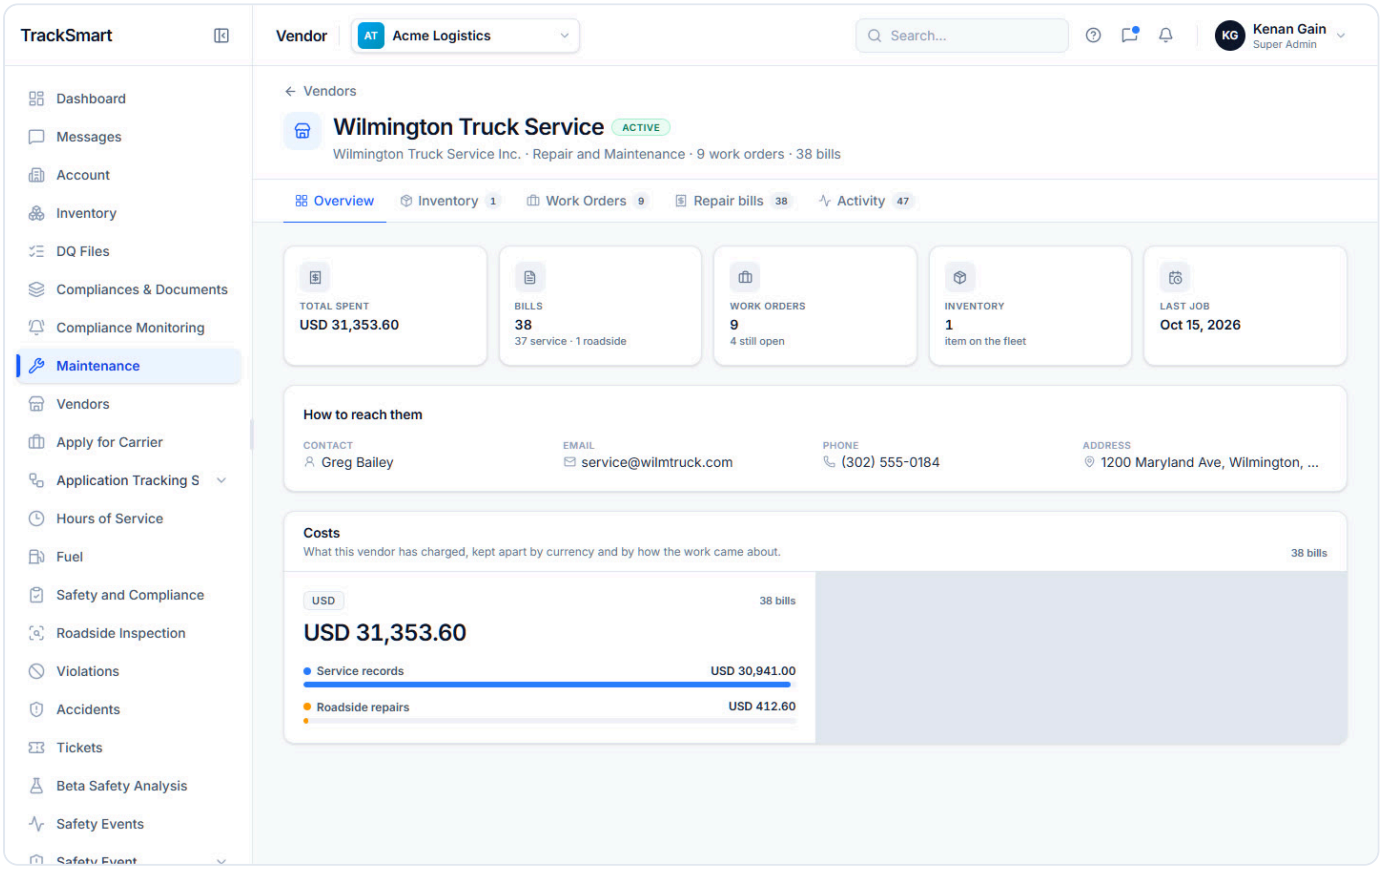

vendors-profile-overview-desktop.png — Vendor profile, Overview: total spent, bills, work orders, inventory, last job; How to reach them; Costs by currency.

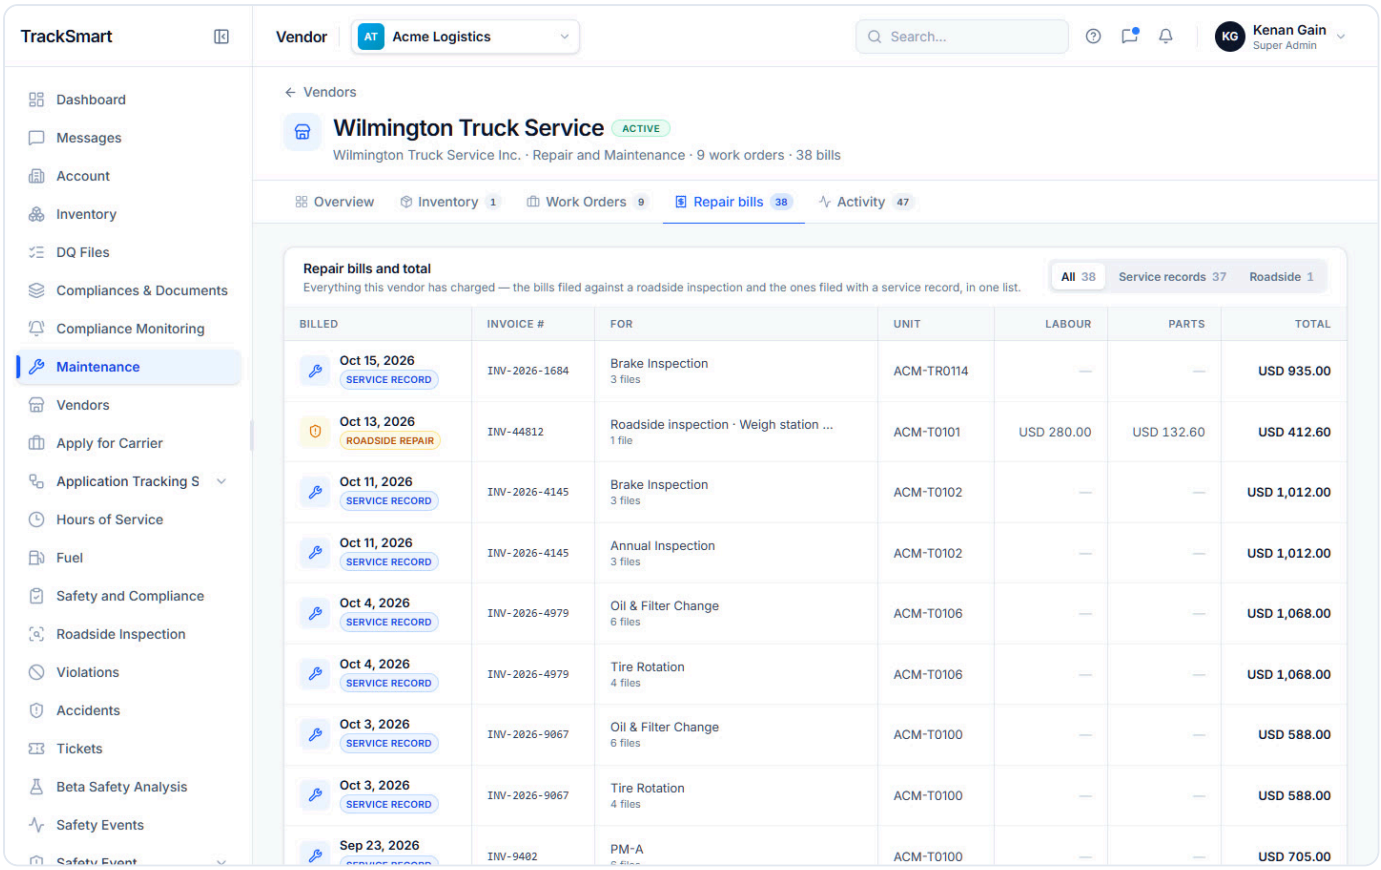

vendors-profile-repair-bills-desktop.png — Vendor profile, Repair bills: service-record and roadside bills in one list with totals.

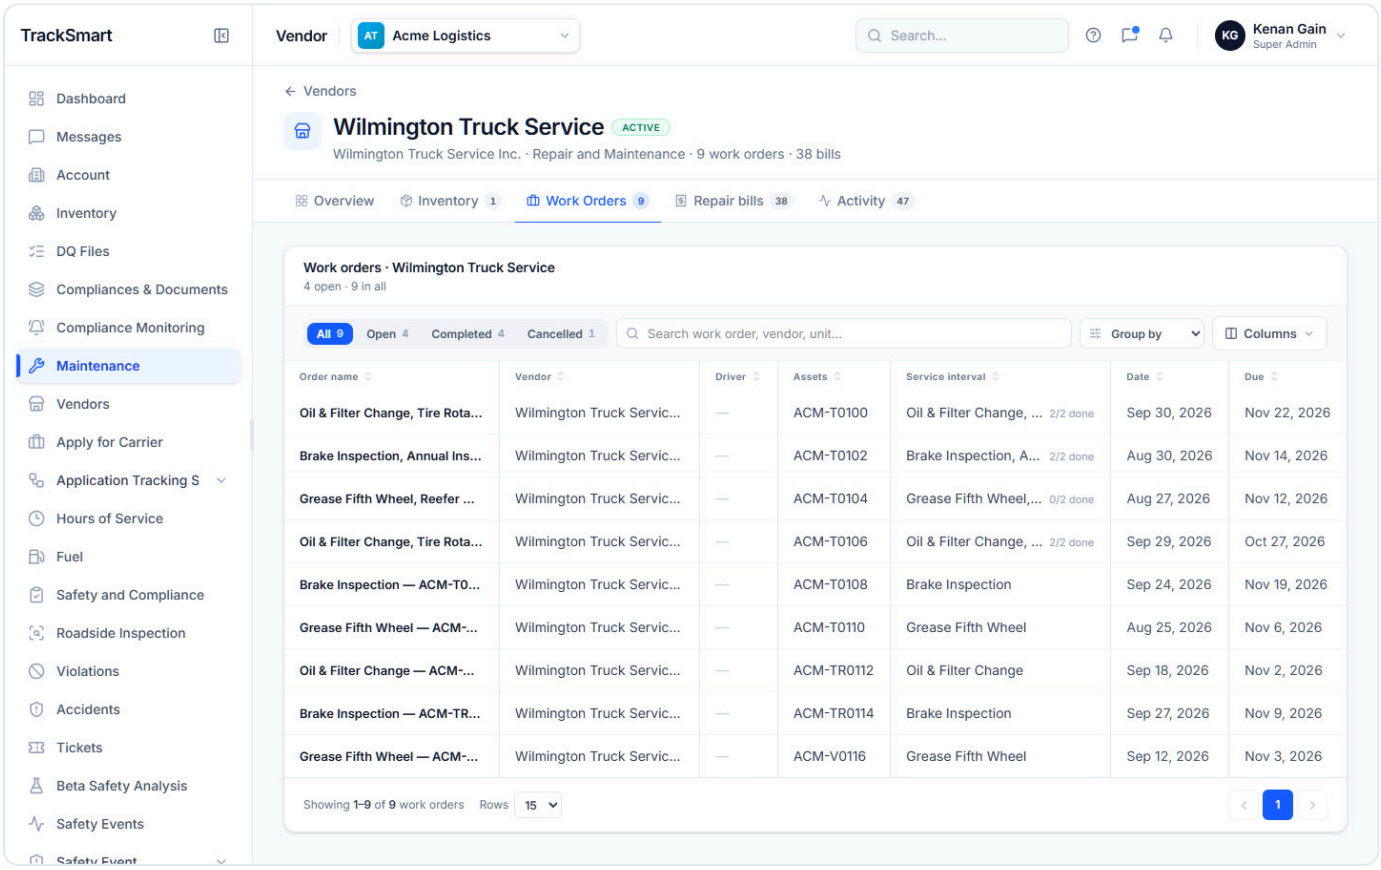

vendors-profile-work-orders-desktop.png — Vendor profile, Work Orders: every order sent to them.

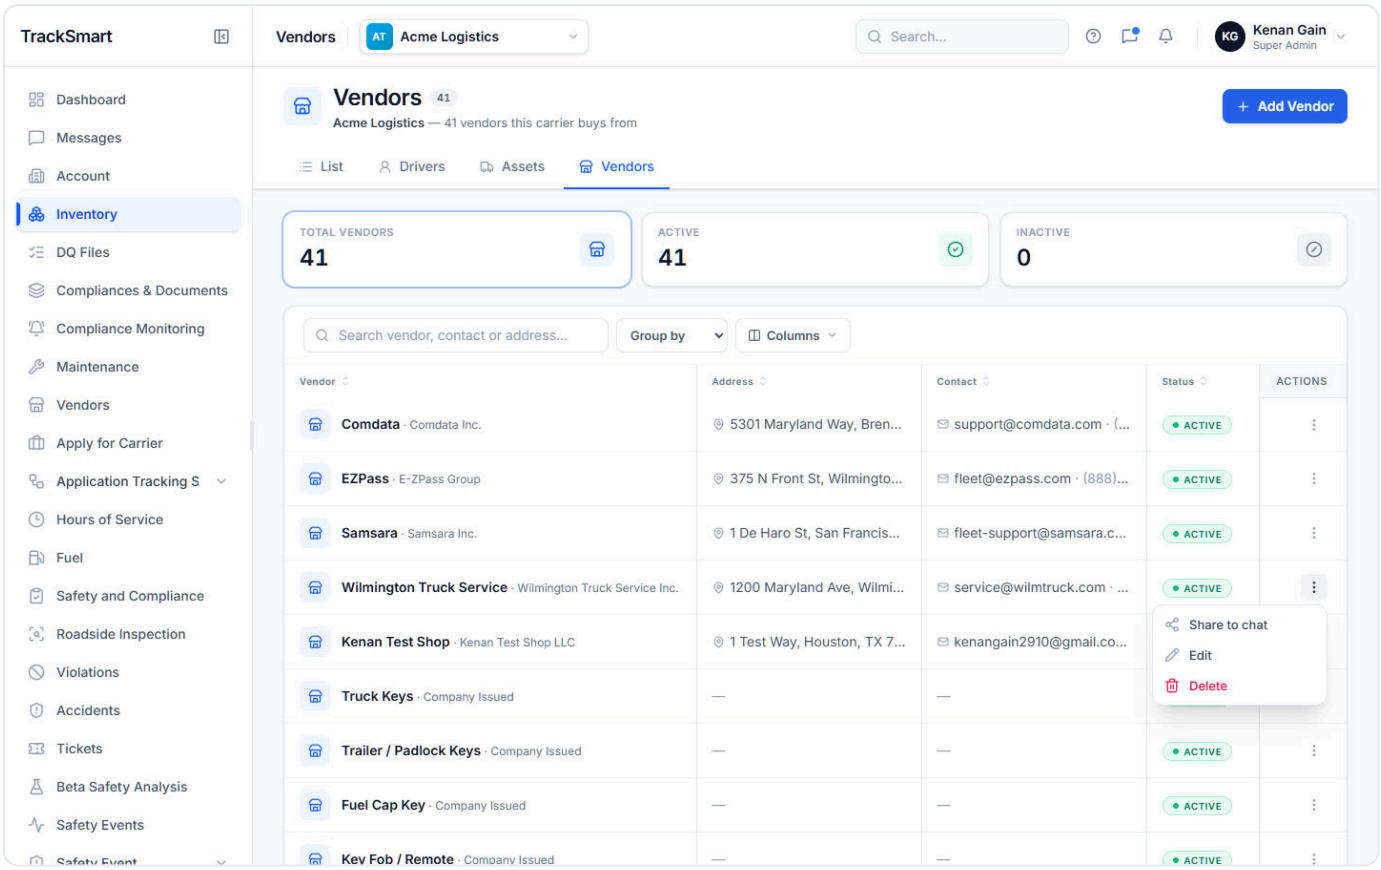

vendors-row-menu-desktop.png — Row ⋮: Share to chat, Edit, Delete.

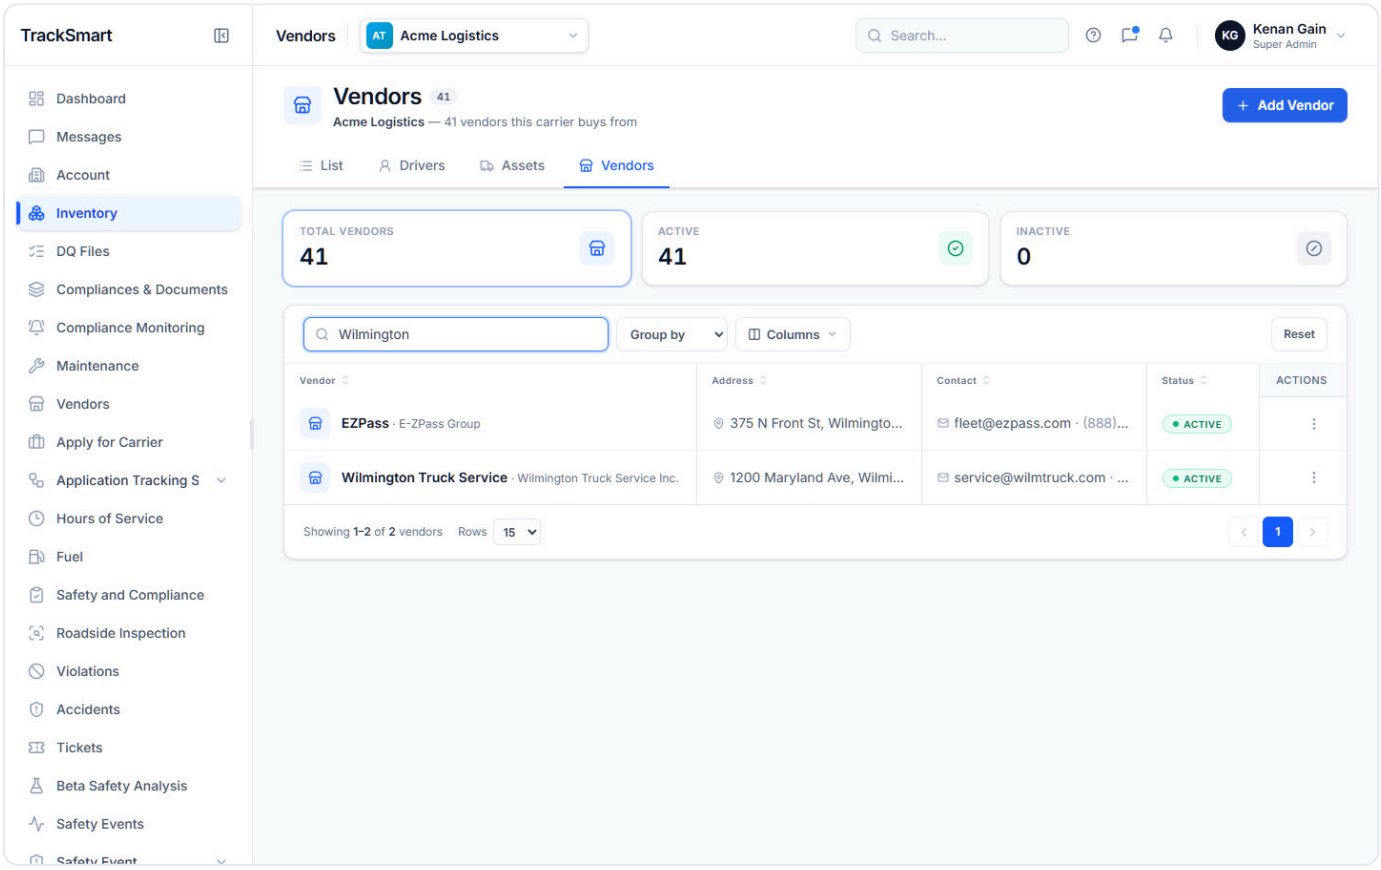

vendors-search-desktop.png — Search "Wilmington": matches on name, company, contact and address.

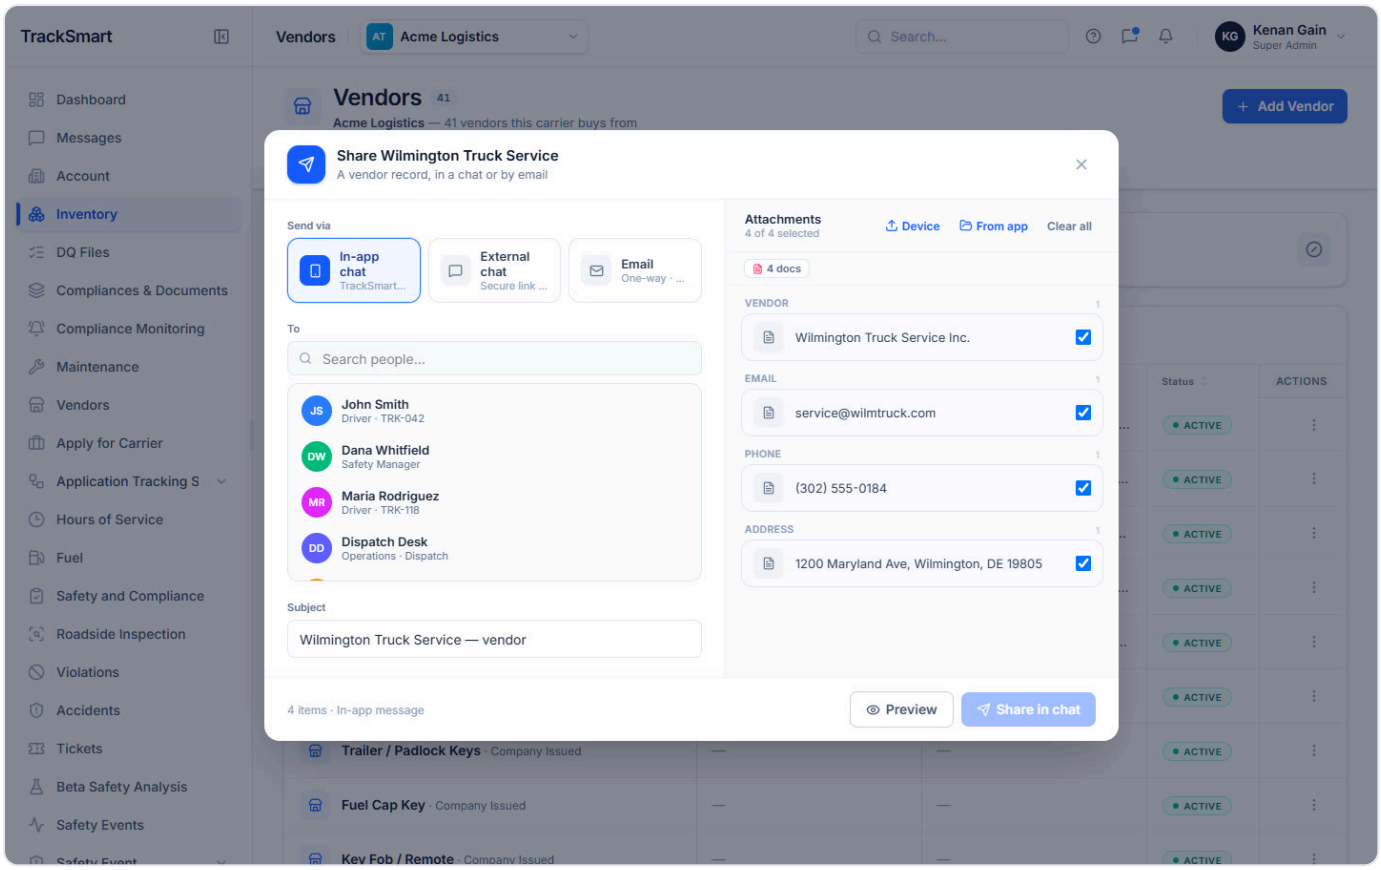

vendors-share-dialog-desktop.png — Share a vendor record: name, email, phone and address go with it.

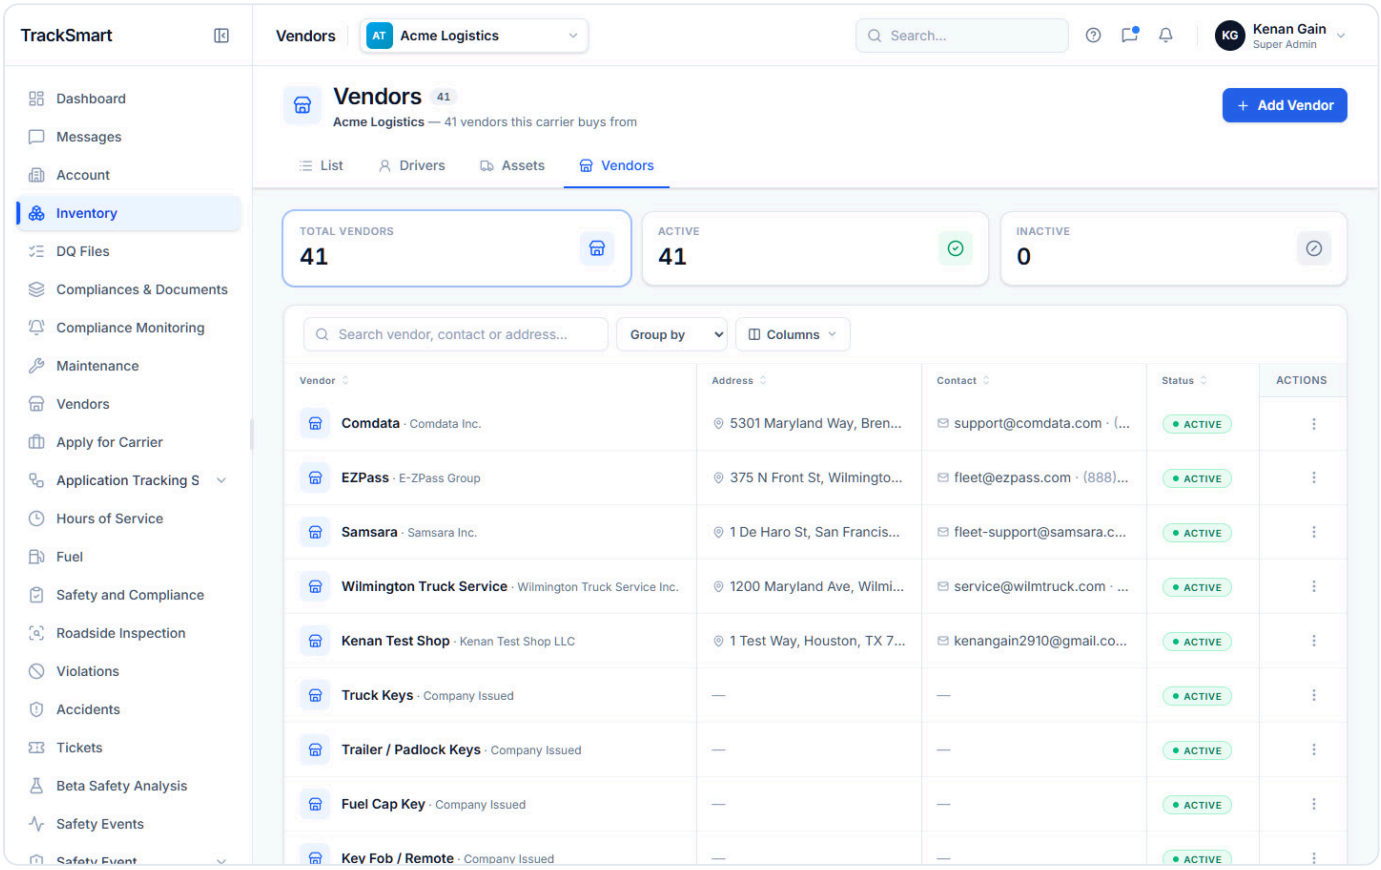

vendors-sort-vendor-desktop.png — Sorted by Vendor name.

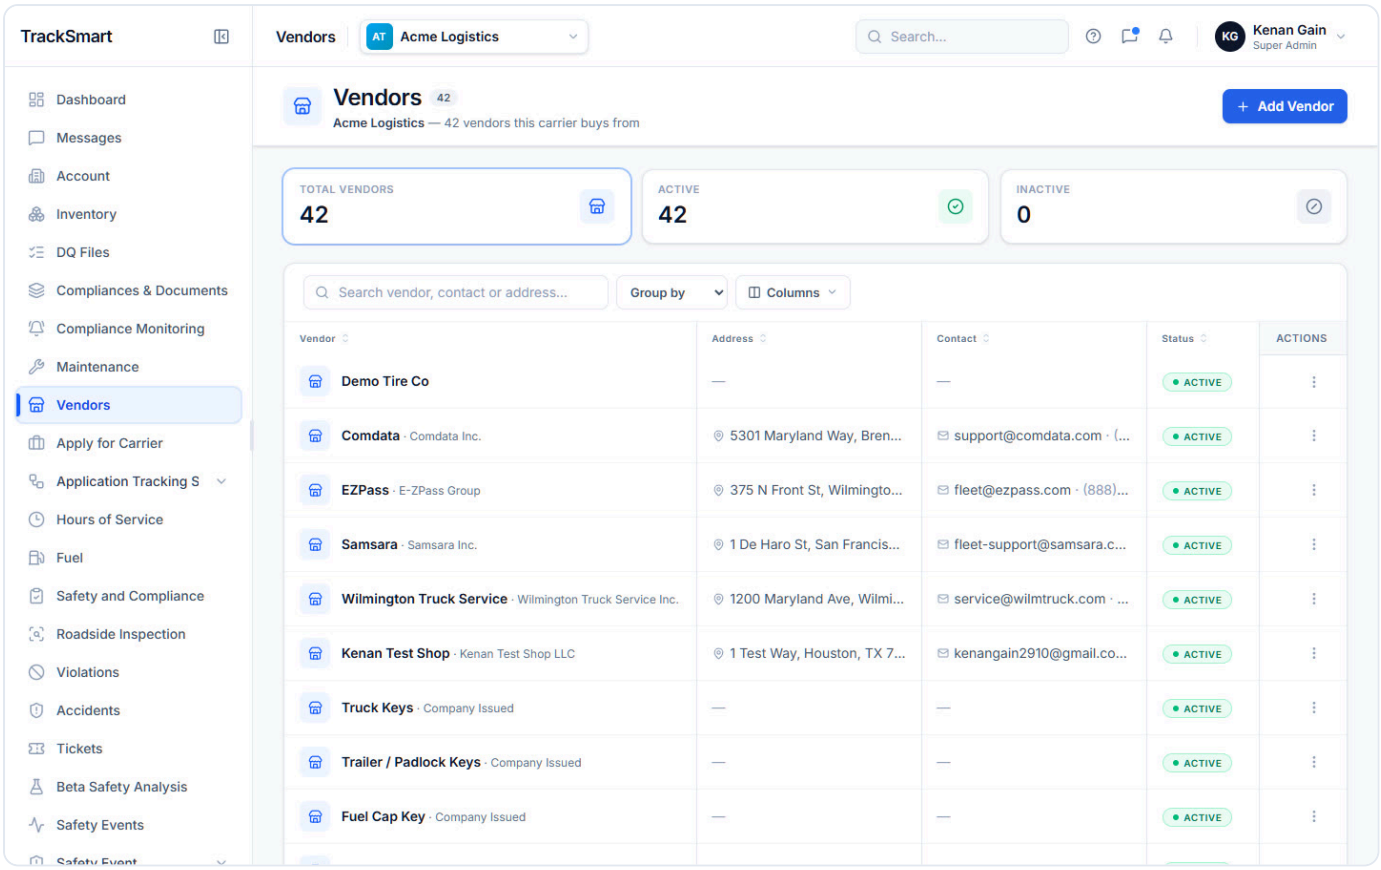

vendors-standalone-menu-desktop.png — The sidebar Vendors menu: the same list without the Inventory section tabs.

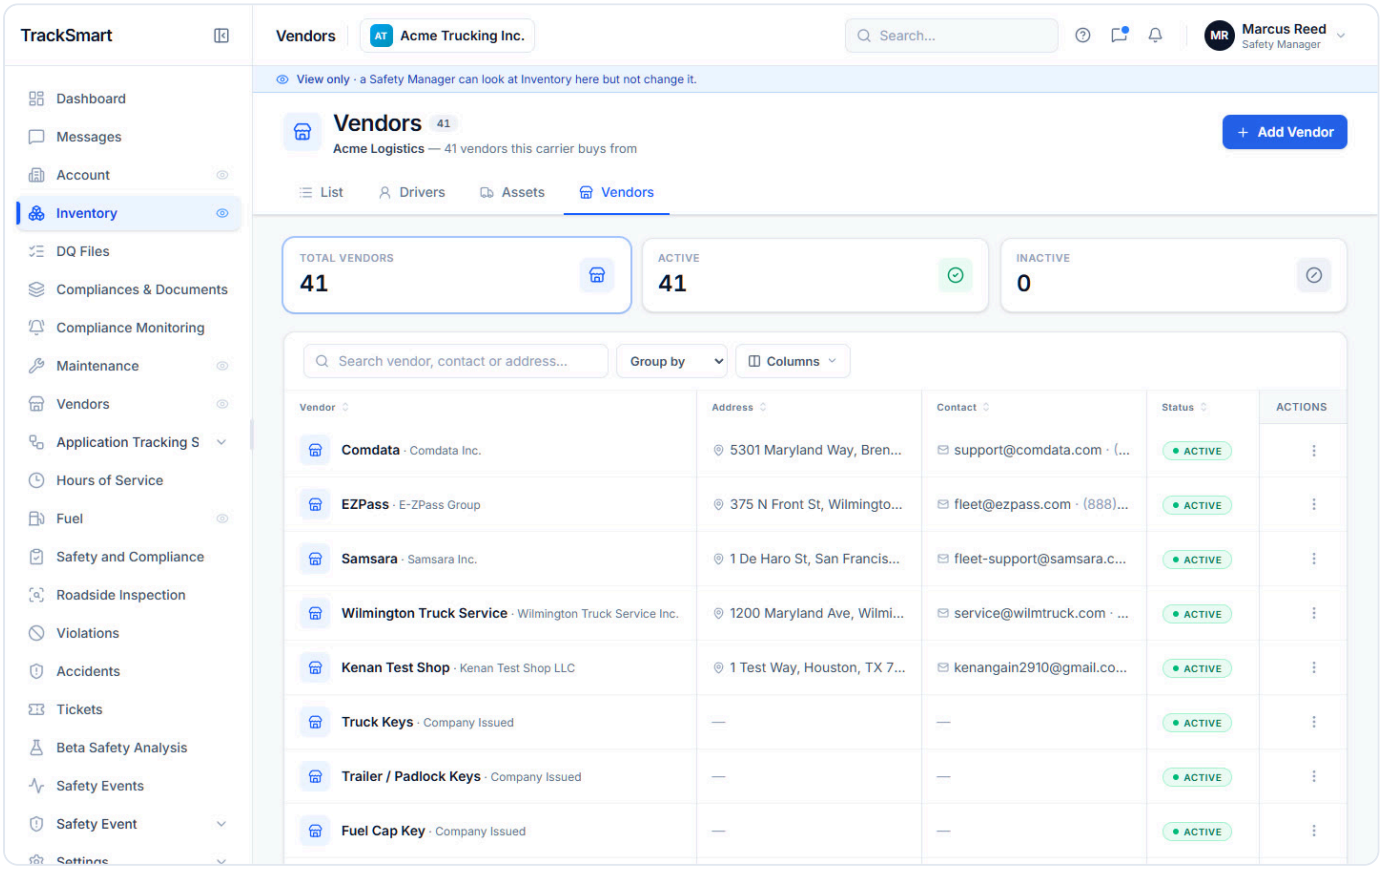

vendors-view-only-desktop.png — Vendors tab as a Safety Manager: the same "View only" strip.

Mobile · 390 px

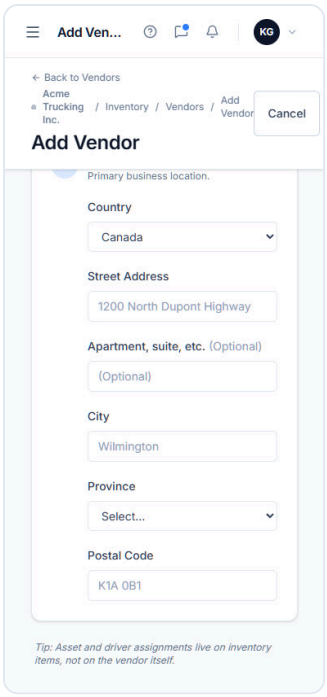

vendors-add-canada-mobile.png
Country Canada: State becomes Province, ZIP becomes Postal Code ("K1A 0B1").

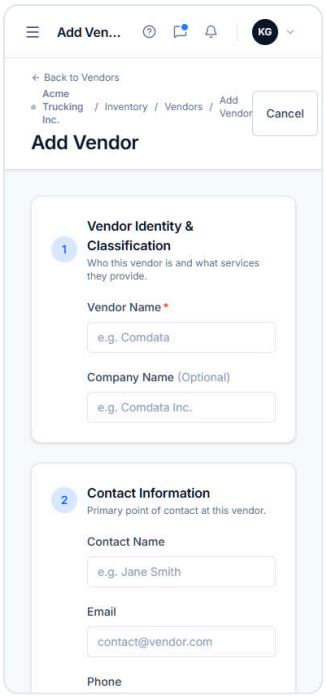

vendors-add-default-mobile.png
Add Vendor: three sections; Save Vendor stays grey until a Vendor Name is typed.

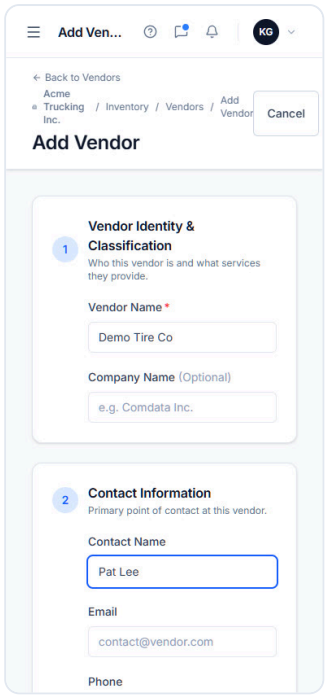

vendors-add-filled-mobile.png
Vendor Name typed: Save Vendor turns blue.

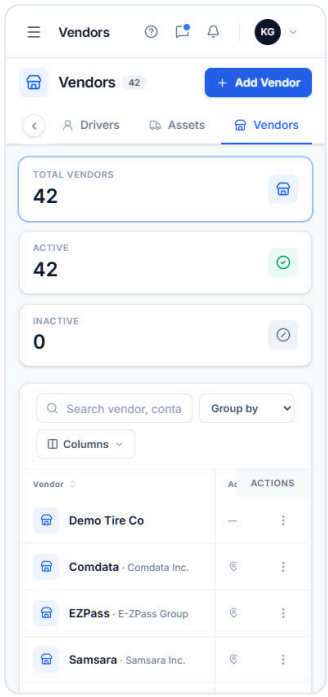

vendors-add-saved-mobile.png
After Save: back on the list with the new vendor first and the count up by one (no toast).

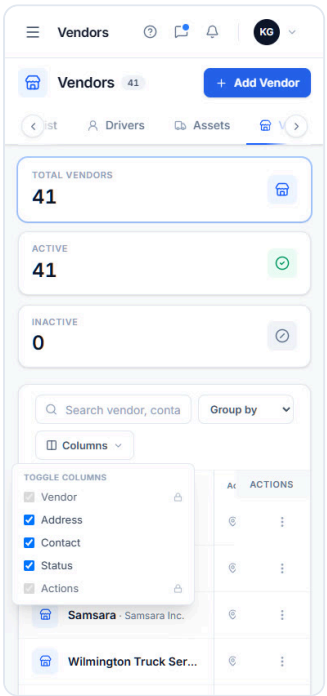

vendors-columns-picker-mobile.png
Columns picker: Vendor and Actions locked; Address, Contact, Status optional.

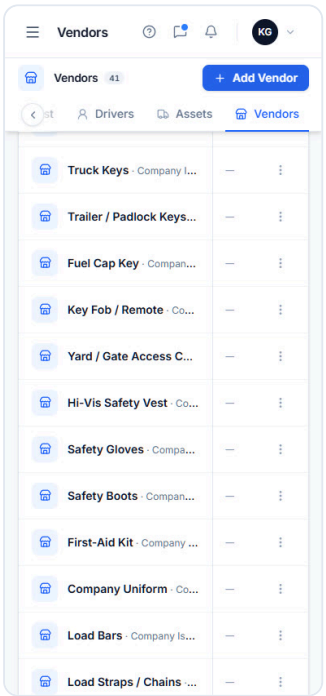

vendors-company-issued-rows-mobile.png
The "· Company Issued" placeholder rows (one per accessory, no address or contact) are listed with the real vendors (TO CONFIRM).

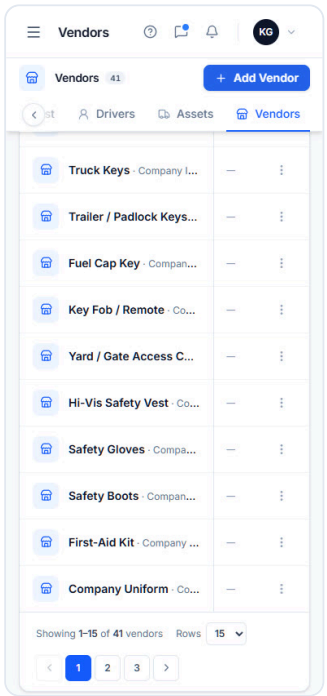

vendors-condensed-header-mobile.png
Vendors tab scrolled: the condensed header.

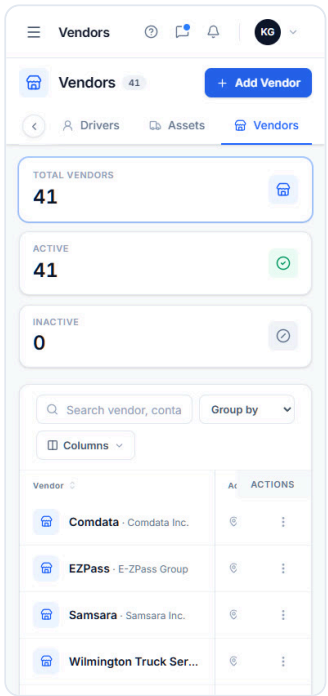

vendors-default-mobile.png
Vendors tab: header with + Add Vendor, the Total / Active / Inactive tiles (filters), search, Group by, Columns and the vendor table.

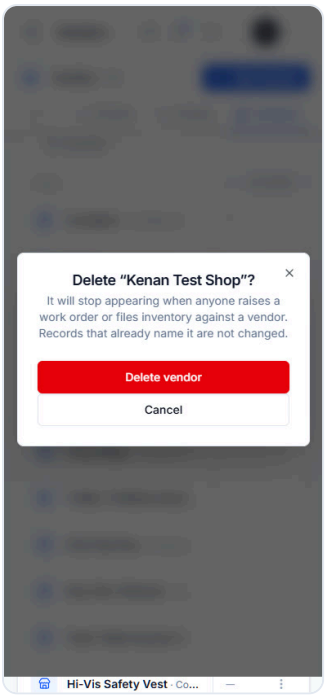

vendors-delete-confirm-mobile.png
Delete asks first: "Delete “Kenan Test Shop”? ... Records that already name it are not changed."

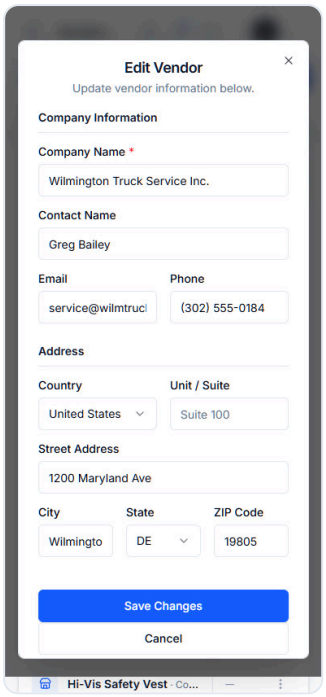

vendors-edit-dialog-mobile.png
Edit Vendor dialog, filled in: company, contact, email, phone and address (name, status and category are not editable here).

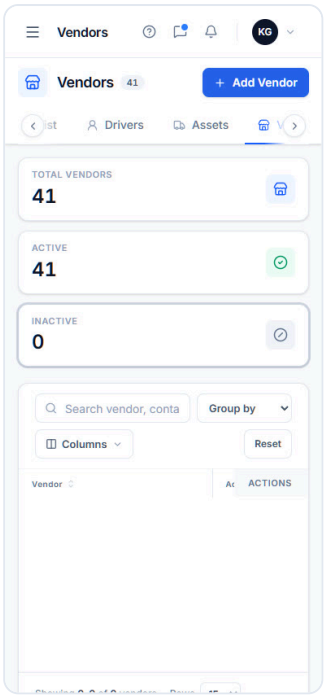

vendors-filter-inactive-empty-mobile.png
Inactive tile as a filter: no inactive vendors exist today, so the empty state shows.

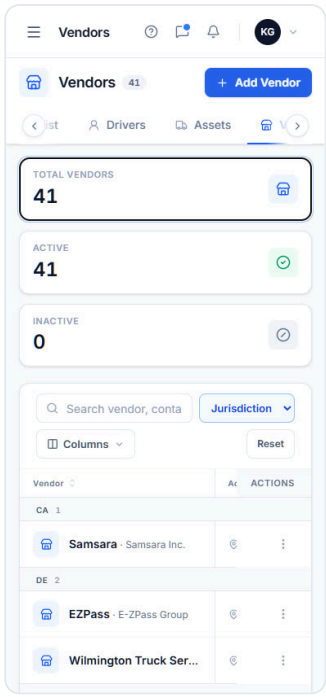

vendors-group-jurisdiction-mobile.png
Group by Jurisdiction: one band per state (or "No address").

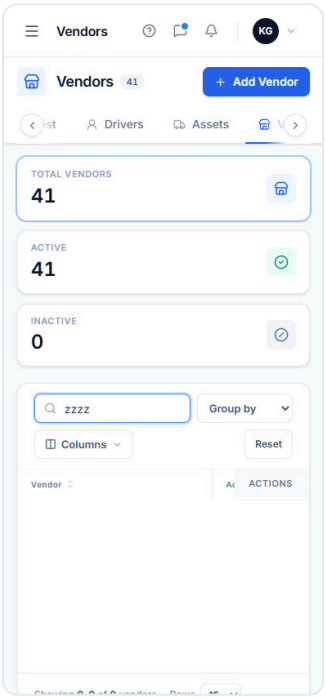

vendors-no-results-mobile.png
No results: "No vendors match your filters" with Clear filters.

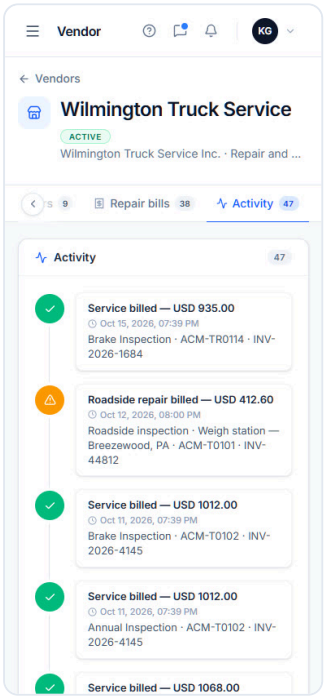

vendors-profile-activity-mobile.png
Vendor profile, Activity: work orders raised and bills filed.

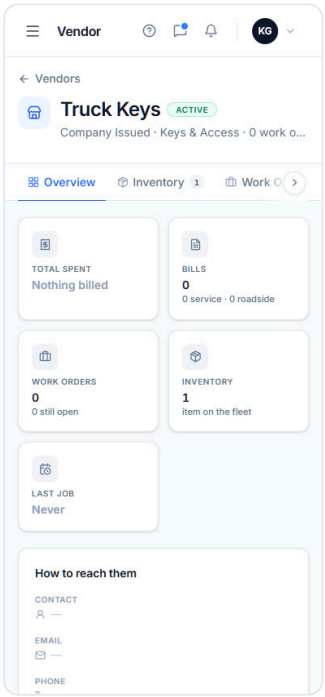

vendors-profile-company-issued-mobile.png
A "Company Issued" placeholder opened as a vendor: nothing billed, every contact field "—".

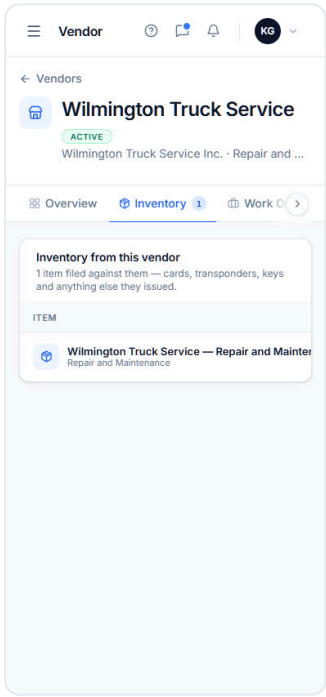

vendors-profile-inventory-mobile.png
Vendor profile, Inventory: the items filed against this vendor.

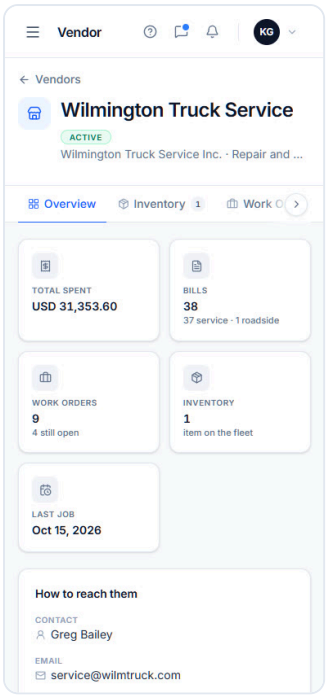

vendors-profile-overview-mobile.png
Vendor profile, Overview: total spent, bills, work orders, inventory, last job; How to reach them; Costs by currency.

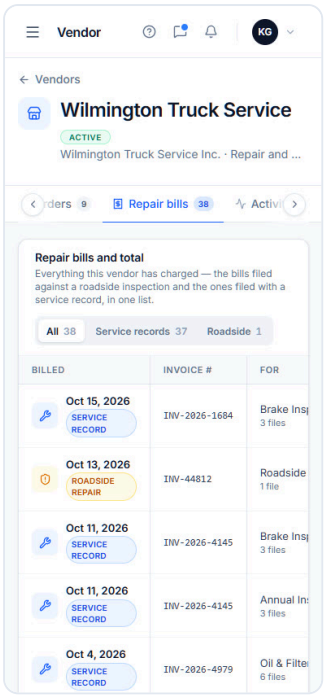

vendors-profile-repair-bills-mobile.png
Vendor profile, Repair bills: service-record and roadside bills in one list with totals.

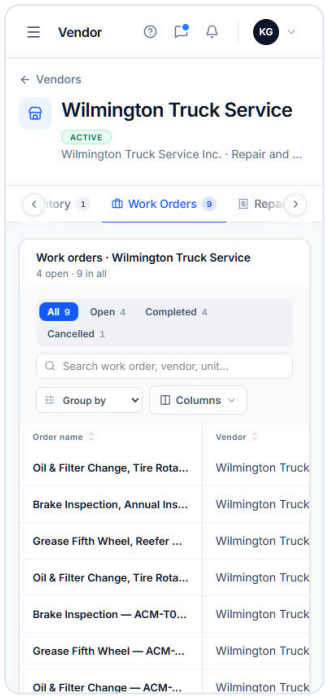

vendors-profile-work-orders-mobile.png
Vendor profile, Work Orders: every order sent to them.

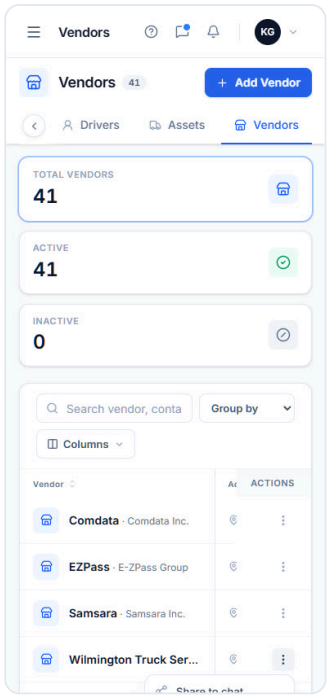

vendors-row-menu-mobile.png
Row ⋮: Share to chat, Edit, Delete.

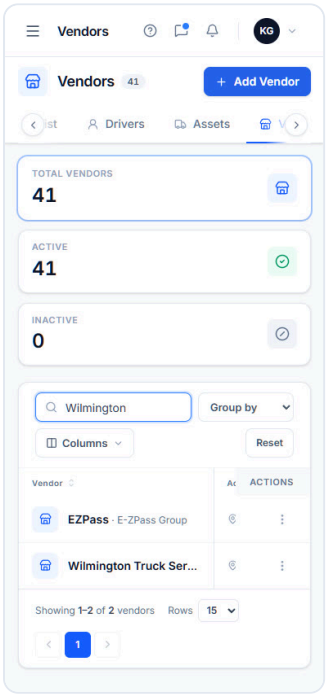

vendors-search-mobile.png
Search "Wilmington": matches on name, company, contact and address.

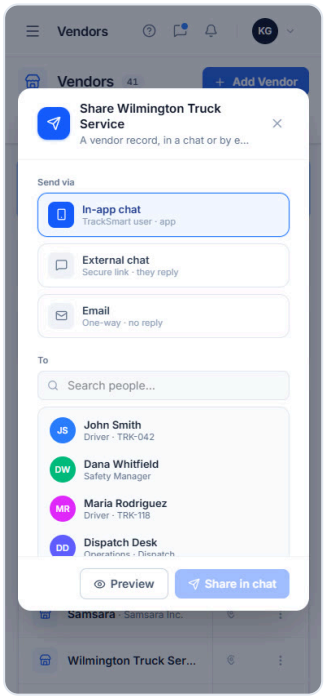

vendors-share-dialog-mobile.png
Share a vendor record: name, email, phone and address go with it.

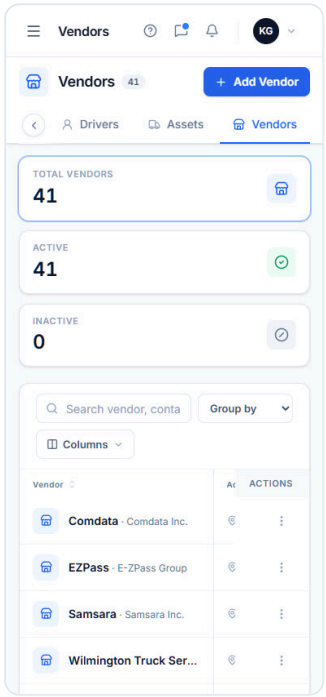

vendors-sort-vendor-mobile.png
Sorted by Vendor name.

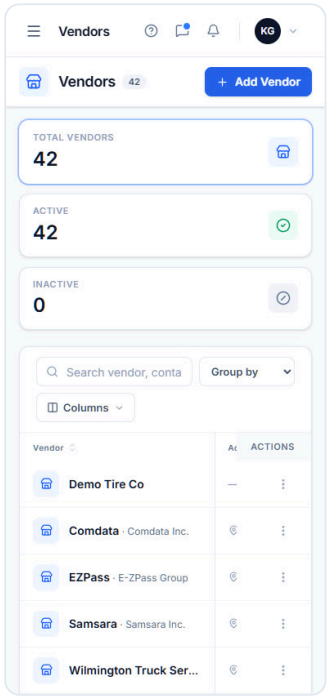

vendors-standalone-menu-mobile.png
The sidebar Vendors menu: the same list without the Inventory section tabs.

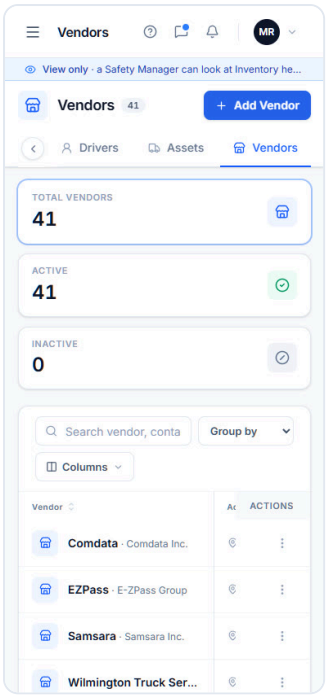

vendors-view-only-mobile.png
Vendors tab as a Safety Manager: the same "View only" strip.

States not captured

- **Native browser dialogs** — none in Inventory (delete confirmations are in-app dialogs and are captured).
- **Opened native `<select>` menus** (Group by, Rows, Status, Country) — they render outside the page; the closed selects and the result of each choice are captured.
- **Loading state** — none exists (local data renders immediately).
- **Empty carrier and no-carrier states** — every demo carrier has inventory; TO CONFIRM (page-overview §12 #26).
- **Item not found / holder not found by stale id** — needs a stale record link; the holder not-found page is captured through the empty-holder defect (`drivers-holder-empty-not-found`).
- **The holder preset add form** (`/inventory/drivers/:id/add`) — nothing links to it.
- **Toasts** — none exist in Inventory.
- **"Hidden" access page** — Inventory is hidden only for drivers, who are routed to the Driver Mobile App instead; the page itself is the app-wide "Not in your menu" page described in page-overview §0.

3 Design specification

How the Inventory section is built visually — layout, type, components, icons, motion and accessibility — as it stands in the app on 2026-10-23. Read from the running UI and the component source (`src/pages/inventory/*`, `src/components/ui/*`, `src/pages/messages/InventoryCollectionCard.tsx`). Screenshot links point into `../screenshots/`.

Stack for the visuals: **Tailwind CSS v4** utilities (default v4 palette, no custom `@theme`), **Inter** from Google Fonts, **lucide-react** icons, the `cn()` helper (`clsx` + `tailwind-merge`). The app shell (sidebar, top bar, carrier switcher) is the same as in 01 – Account and is not repeated in full here.

---

1. Layout

1.1 Page frame

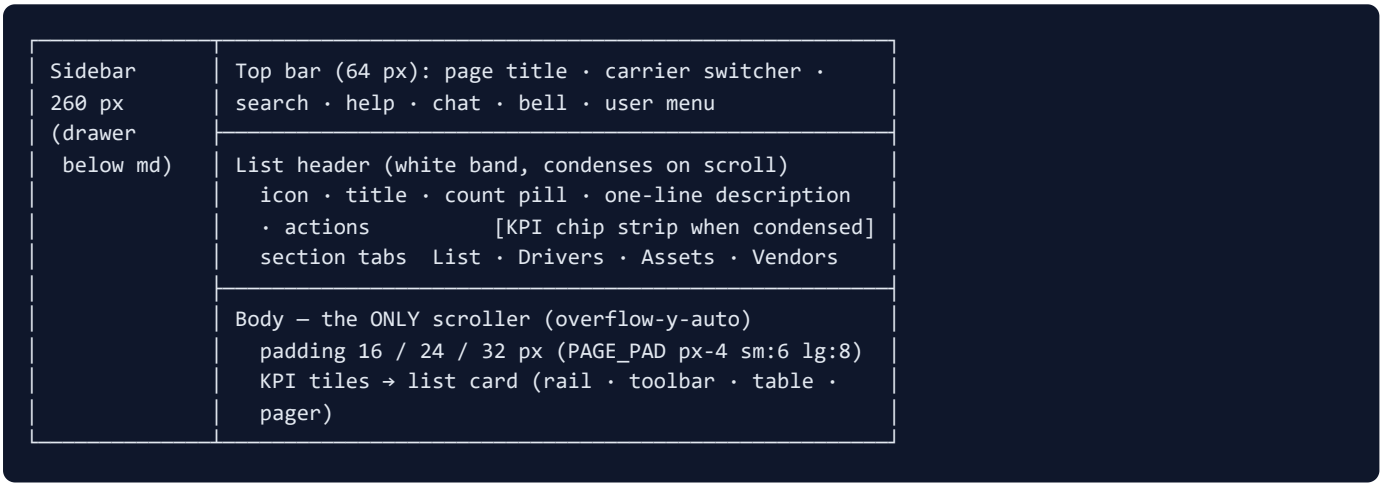

- Every **tab** uses the app's standard list header (`ListPageHeader`): Inventory, Inventory by Driver, Inventory by Asset, Vendors. Scrolling the body past ~140 px folds it (title steps down, description hides, the KPI figures appear as a chip strip); scrolling up 40 px unfolds it. The tab row never scrolls away. list-default vs list-condensed-header.
- **Record pages** (item, holder, vendor profile) use a fixed header band — back link, icon tile, title + status, sub-line, actions, tabs — over their own scroller. list-item-detail-information, drivers-holder-overview, vendors-profile-overview.
- **Full-page forms** use the Wizard chrome (`WizardHeader` + `WizardStepNav` rail or `WizardStepBar` + `WizardSection` cards): Add / Edit item and Manage inventory. Add Vendor is a plain full page with numbered section cards. list-add-item-default, drivers-manage-default, vendors-add-default.
- The **driver's sign-form** is a narrow page (`max-w-3xl`) with one violet form card. drivers-sign-form.

1.2 Grids used inside Inventory

Where	Grid	Screenshot
KPI tiles (List, Drivers, Assets)	`grid-cols-2 md:grid-cols-3 lg:grid-cols-5`, gap 10 px	list-default-mobile shows 2-up
KPI tiles (Vendors)	`grid-cols-1 sm:grid-cols-3`	vendors-default
Item page cards	1 column, `lg:` 2 (Item + Assignment; Alert + Next date), `max-w-5xl`	list-item-detail-monitoring-on

Where	Grid	Screenshot
Holder Overview figures	`grid-cols-2 sm:grid-cols-4`	assets-holder-overview
Vendor profile figures	2 columns, `lg:` 5	vendors-profile-overview
Item form fields	1 column, `sm:` 2; "Assigned to" spans 2; rail 288 px (`w-72`) hidden below `md` ; cards `max-w-4xl`	list-add-item-assigned-both
Manage — where / when	`sm:grid-cols-2`	drivers-manage-notify
Add Vendor fields	1 column, `md:` 2; ZIP max 200 px	vendors-add-canada
Tables	auto layout in `overflow-x-auto` ; holder table `min-w-[980px]` ; vendors `table-fixed min-w-[920px]`	drivers-holder-inventory

1.3 Spacing scale

Tailwind's 4 px scale. Values that occur: 2 (`0.5` , chip padding-y), 4–6 (`1` / `1.5` , icon–label gaps), 8–10 (`2` / `2.5` , row actions, KPI gap), 12–14 (`3` / `3.5` , cell padding-y, button padding-x), 16 (`4` , cell padding-x, phone gutter), 20–24 (`5` / `6` , card padding, body padding ≥ sm), 32 (`8` , body padding ≥ lg).

Fixed heights: buttons and inputs **36 px** (`h-9`), **32 px** when the header is condensed and in toolbars (`h-8`), status pills ~20 px, row kebab 28 px, the alert switch 20 × 36 px.

1.4 Breakpoints

Tailwind defaults (`sm` 640, `md` 768, `lg` 1024). What changes in Inventory:

Width	Behaviour
< 640 (`sm`)	Sidebar becomes a drawer (☰); header descriptions hidden; section tabs scroll with a › chevron; KPI tiles 2-up (Vendors 1-up); button labels shorten.
< 768 (`md`)	Item-form Progress rail hidden; fields single column.
< 1024 (`lg`)	KPI tiles 3-up; item page cards single column.
all widths	**Tables stay tables** — there is no card view; they scroll sideways inside their card with the Actions column pinned right (`sticky right-0`). Holder and vendor tables have a minimum width (980 / 920 px).

Mobile captures: `../screenshots/mobile/` — e.g. drivers-manage-ticked-mobile.

---

2. Typography

Family: Inter (weights 400 / 500 / 600 loaded), fallback `sans-serif` . `tabular-nums` on counts, dates and money; `font-mono` for item numbers, PINs and serials ("FC-415483", "PIN 7028").

> **TO CONFIRM:** `font-bold` (700) is used on titles and labels but Inter 700 is not loaded — browsers synthesise it (same finding as Account).

Role	Size / weight	Where
List page title	24 px bold `tracking-tight` (20 px below `lg`, 14–16 px condensed)	"Inventory", "Inventory by Driver", "Vendors"
Record title	20–24 px bold	item name, "DRV-001-0001", "Wilmington Truck Service"
Wizard title	24 px bold + 14 px subtitle	"Add Inventory", "Manage inventory — Jason Cooper"
Section / card title	14–16 px semibold + 12 px slate-500 subtitle	"Item", "Assignment", "Dates being watched"
Table cell	13–14 px; primary value 14 px semibold slate-900; secondary line 11–12 px slate-500	item name over vendor
Field / fact label	11 px bold uppercase `tracking-wider` slate-500	"RECORD NAME *", "ISSUE DATE"
Micro label	10 px bold uppercase slate-400/500	KPI labels, table headers (`TH_CLS`), pills
Pill / chip	10–11 px bold, uppercase for statuses	ACTIVE, EXPIRING SOON, CMV
Button	14 px semibold; 13 px in toolbars	

Frequency in the Inventory source: `text-sm` 106 × · `text-[11px]` 84 × · `text-xs` 67 × · `text-[12px]` 47 × · `text-[10px]` 44 × · `text-[13px]` 43 ×.

---

3. Components

3.1 Buttons

Variant	Look	Examples
Primary	blue-600 fill, white 14 px semibold, `h-9`, radius 8, `hover:bg-blue-700`	Save Inventory, Save assignment, Edit, Save & send, + Add Vendor
Primary — dark	slate-900 fill	"Driver Notification ›" (until the notify step has been read)
Primary — violet	violet-600	Sign & confirm (driver)
Secondary	white, slate-200 border, slate-700 text	Categories, Columns, Cancel, Manage inventory (outline variant)
Danger	red-600 fill / rose text in menus	Delete category, Delete vendor
Ghost / icon	28–32 px square, slate-400 → slate-700	✎ Edit, ⋮ More actions, × Close
Disabled	slate-200/300 fill, slate-400 text, `cursor-not-allowed`, tooltip says why	Save Inventory before it is valid, Save assignment ("Pick a unit or a driver first")

3.2 Inputs, selects, toggles

- Text / date inputs: `h-9`, slate-200 border, radius 8, 14 px; focus ring `ring-2 ring-blue-500/30` + `border-blue-400`. Search inputs carry a 14 px search icon inside the left edge.
- Native `<select>` for Group by, Rows, Status, Country and the item form's Vendor / Category / Status; turns **blue-tinted** when a grouping is active.
- **Tick cards** (item form "Assigned to"): bordered cards with a checkbox, title and one-line hint; ticked = blue border + blue-50 tint; the last ticked card cannot be unticked.

- **Switch** (alert on/off, collect, forms): 36 × 20 px pill, blue-600 on / slate-300 off, white knob; `aria-pressed`.
- **Radio tiles** (Monitor based on) and **checkbox lists** (reminders, channels) in the Monitoring block.
- **Signature pad** (`SignaturePad`): Draw / Type / Clear, 150 px canvas.

3.3 Cards

White, slate-200 border, radius 12 (`rounded-xl`), `shadow-sm`. List card = rail + toolbar + table + pager in one card with `overflow-hidden` (that is why menus render in a portal). Record cards have a 14 px title row and 16–24 px padding. The violet form card (sign-form) and amber / blue notes use tinted 50-backgrounds with matching 200 borders.

3.4 Tabs

- **Section tabs** (`SubTabs`): icon + label, 2 px blue underline when active, count badge. Horizontal scroll with ‹ › chevrons when they overflow.
- **Category rail** (`CardTabs` in `TabScroller`): "All 41 · Fuel Card 1 · …", blue underline + blue badge for the active tab.
- **Step bar** (Manage inventory): numbered pills, check mark once a step has content.
- **Record tabs** (item / holder / vendor): same underline style, counts on the right.

3.5 Tables

Header row slate-50, 10 px bold uppercase slate-500 labels (`TH_CLS`), sortable headers with ChevronsUpDown → Chevron Up / Down in blue. Rows 52–64 px, zebra (`even:bg-slate-50/40`), hover blue-50/40, focusable (`role="link"`, Enter / Space). Group bands (`TableGroupBand`): a full-width row with an uppercase label and a count, tinted by meaning (Expired rose, Expiring Soon amber, Active emerald, else slate). Pager: "Showing 1–15 of 41 items", Rows select, Prev / Next, windowed page numbers. list-group-status.

3.6 Menus

`KebabMenu` — portal panel 184 px wide, 13 px items with a leading icon, red item last ("Delete"). Opened from a 28 px ⋮ button titled "More actions" / "Actions for {name}". list-row-menu, vendors-row-menu.

3.7 Modals and dialogs

Dialog	Size	Closes with	Screenshot
Assign {item}	`max-w-lg`, z-60	× / Cancel only	list-assign-dialog-both
Item Category	`max-w-2xl`, `max-h-88vh`, header + footer fixed, body scrolls	Esc, backdrop, ×, Done	list-categories-modal
Delete category (alertdialog over the modal)	small	Cancel / Close	list-categories-delete-blocked
Share to chat	`max-w-4xl`, z-80	×, Cancel	list-share-dialog
Confirm these changes	`max-w-lg`, `max-h-85vh`, body scrolls	Go back	drivers-manage-confirm
Read it (form preview)	full screen, white	Close	drivers-manage-read-form
Delete vendor	420 px	Cancel	vendors-delete-confirm
Edit Vendor	600 px, **whole sheet scrolls** (header / footer scroll away)	×, Cancel	vendors-edit-dialog

3.8 Toasts

None in Inventory — a save navigates to the page where the change is visible.

3.9 Chips, pills and badges

Element	Look
Status pill	dot + text: Active emerald-50 / emerald-700, Expiring Soon amber-50 / amber-700, Expired red-50 / red-700
Asset kind	CMV indigo, Non-CMV orange, with a truck icon
Driver chip	emerald "Driver" with an ID-card icon
Assigned to	Both violet, Driver blue, Asset slate, Unassigned grey
Driver type	Cross Border violet, US Only blue, Canada Only rose
Filter chip	text + count; active = blue-600 fill white text; disabled at 0
Route chip (collection card)	"ASSIGNED" blue outline
Count pill	slate-100 rounded-full, 10–11 px bold

3.10 Category visuals (`inventory-visuals.ts`)

Each category has one icon and one palette, used for the item tile and the category bar:

Category	Icon	Palette
Fuel Card	Fuel	amber
Transponder	Radio	violet
ELD Provider	Activity	blue
GPS Tracking	Map	emerald
Dashcam	Camera	cyan
Repair and Maintenance	Wrench	slate
Keys & Access	KeyRound	amber
Safety & PPE	ShieldCheck	rose
Equipment & Supplies	Package	teal
Devices & Electronics	Cpu	sky
Cards & Documents	CreditCard	violet
Others / unknown	Layers	slate

---

4. Icons

lucide-react, 12–20 px, stroke 2, colour inherited (slate-400 in rows, blue-600 when active). 65 distinct icons in the section's files, plus the 12 category icons above:

Activity · AlertCircle · AlertTriangle · ArrowLeft · BadgeCheck · Ban · Bell · BellOff · BellRing · Boxes · Briefcase · Building2 · Calendar · CalendarClock · Check · CheckCircle2 · ChevronDown · ChevronLeft · ChevronRight · CircleCheck · CircleSlash · ClipboardList · Clock · Download · Edit2 · ExternalLink · Eye · FileCheck2 · FileSignature · FileText · Hash · History · IdCard · Info · Layers · LayoutGrid · List · Lock · Mail · MapPin · MessageSquare · Package · PackageCheck · PenLine · Pencil · Phone · Plus · Printer · Receipt · Search · Send · Share2 · ShieldAlert · Smartphone · StickyNote · Store · Table2 · Tag · Trash2 · Truck · Undo2 · UserRound · UserRoundPlus · Wrench · X

Key mappings: **Boxes** = Inventory (sidebar, header, record tiles) · **UserRound / IdCard** = driver · **Truck** = asset · **Store** = vendor · **Tag** = categories · **Bell / BellOff** = alert set / not set · **FileSignature** = receipt to sign · **ClipboardList** = Manage inventory.

---

5. Interactions and micro-animations

Interaction	Behaviour
Header fold	500–700 ms ease (`HEADER_TRANSITION`) on height, padding, font size and opacity; triggered after 140 px of scroll and 40 px of travel in one direction
Row hover / focus	blue tint, item name turns blue
Sort	3-state cycle (asc → desc → off)
Filters	any change resets the pager to page 1; chips at 0 disable instead of hiding
Grouping	bands appear instantly; never split across pages
Tick list (Manage)	free row tinted blue when ticked; held row turns rose with a struck-through name when unticked; the action bar recounts live
Primary button states	grey (nothing to save) → dark "Driver Notification ›" (read the messages first) → blue "Save & send"
Draft message	regenerated as the list changes until the user types in it ("Your wording — it will not be rewritten..."); **Reset to draft** returns to the generated text
Item form	picking a vendor re-fills the category and an auto-named record name; the alert block expands / collapses; the projected schedule sentence updates live
Collection card	every line starts ticked; Select all / Clear all; the confirm button text counts ("Collected 1 of 2")
Switch knob	150 ms slide
Menus / pickers	close on outside click; pickers also on Esc

---

6. Accessibility

6.1 Contrast (WCAG 2.1; normal text ≥ 4.5 : 1, large text / UI ≥ 3 : 1)

Pair	Ratio	Result
slate-900 text on white	17.8 : 1	pass
slate-500 secondary text on white	4.8 : 1	pass
slate-400 micro text on white ("no expiry", empty "—", some 10 px labels)	2.6 : 1	**fail**
white on blue-600 (primary buttons)	5.2 : 1	pass
emerald-700 on emerald-50 (Active)	5.1 : 1	pass
amber-700 on amber-50 (Expiring Soon)	4.9 : 1	pass
red-700 on red-50 (Expired)	5.9 : 1	pass
white on violet-600 (Sign & confirm)	5.9 : 1	pass
slate-400 disabled button text on slate-200	2.1 : 1	fail (disabled controls are exempt, but the reason lives only in a tooltip)

Exact values for every token are computed in Step 8 (`design/color-palette.md`).

6.2 Focus

Inputs and selects show a 2 px blue ring. Custom buttons rely on the browser's default outline; there is no shared `focus-visible` style (TO CONFIRM, as in Account). Table rows are focusable (`tabIndex=0`) and show the hover tint on focus.

6.3 Keyboard

- Rows: Tab to a row, Enter / Space opens it.
- Pickers in the Assign dialog: Esc closes; typing filters.
- Item Category modal: Esc closes; the delete dialog is a `role="alertdialog"`.
- **Assign dialog does not close on Esc** and does not trap focus (TO CONFIRM).
- Kebab menus close on outside click; Esc support depends on the shared `KebabMenu` (TO CONFIRM).
- Signature pad needs a pointer; the **Type** option is the keyboard alternative.

6.4 ARIA and semantics

Named regions and controls in the code: "Inventory sections" (tab strip), "Inventory categories" / "Categories held" (rails), "Inventory item sections", "Driver inventory sections" / "Asset inventory sections", "Vendor sections", "Scroll tabs left / right", "More actions", "Actions for {name}", "Edit", "Close", "Clear assignment", "Clear search", "Previous page" / "Next page", "Send these messages when you save", "Take a signature for this", "Do not send {form}", "Close the form". Custom switches use `aria-pressed`. Dialogs other than the category alertdialog do not set `role="dialog"` / `aria-modal` (TO CONFIRM).

6.5 Other

- Disabled Save buttons explain themselves only in a tooltip (not reachable by touch or screen reader) — the item form shows no error text at all (page-overview §12 #23).
- 10–11 px text is used for labels, pills and table headers (44 + 84 occurrences); it passes contrast where slate-500 or darker but is below the 12 px floor many guidelines recommend.
- Touch targets: the 28 px ⋮ and ✎ buttons are below 44 px on phones.
- Every status is shown by colour **and** text (pill label), never colour alone.

---

7. Screenshot map

Topic	Desktop	Mobile
List frame	list-default	list-default
Condensed header	list-condensed-header	list-condensed-header
Group bands	list-group-status	list-group-status
Columns picker	list-columns-picker	list-columns-picker
Assign dialog + picker	list-assign-dialog-picker-open	list-assign-dialog-picker-open
Modal with fixed chrome	list-categories-modal	list-categories-modal
Inline validation	list-categories-error-duplicate	list-categories-error-duplicate
Record page	list-item-detail-monitoring-on	list-item-detail-monitoring-on
Wizard form	list-add-item-alert-issue-basis	list-add-item-alert-issue-basis
KPI tiles as filters	drivers-filter-holding-nothing	drivers-filter-holding-nothing

Topic	Desktop	Mobile
Tick list states	drivers-manage-untick	drivers-manage-untick
Step 2 + draft message	drivers-manage-notify	drivers-manage-notify
Confirmation dialog	drivers-manage-confirm	drivers-manage-confirm
Collection card (driver)	drivers-sign-card-driver	drivers-sign-card-driver
Sign-form	drivers-sign-form-signed	drivers-sign-form-signed
Holder page	assets-holder-inventory-expired	assets-holder-inventory-expired
Vendor profile	vendors-profile-overview	vendors-profile-overview
Plain full-page form	vendors-add-canada	vendors-add-canada
View-only strip	list-view-only	list-view-only

All images: screenshots/index.md.

Component sheet

02 – Inventory · Components

Reusable parts of the Inventory section with their variants and states. Import with the html.to.design plugin; colours and type match `tokens.json`.

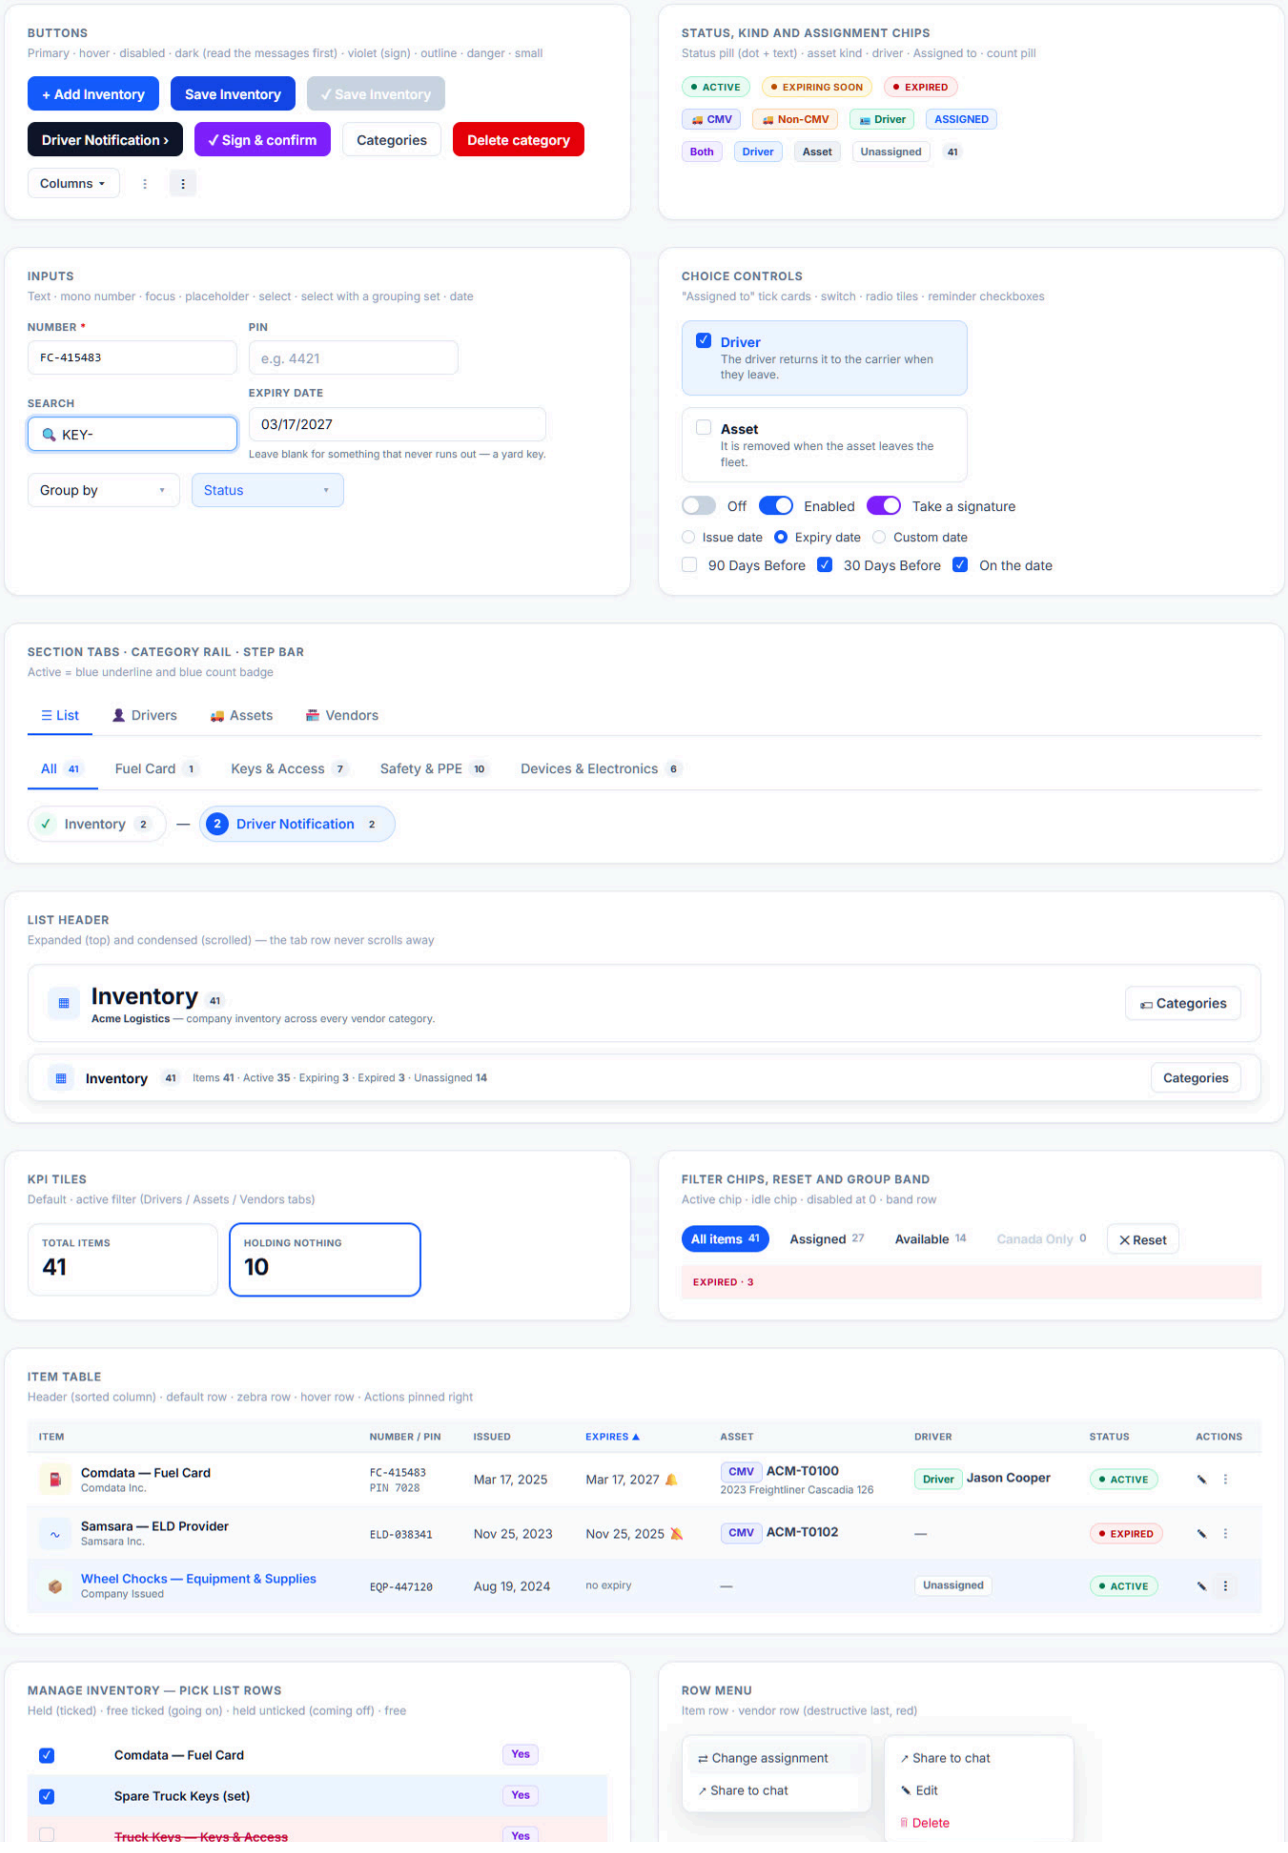

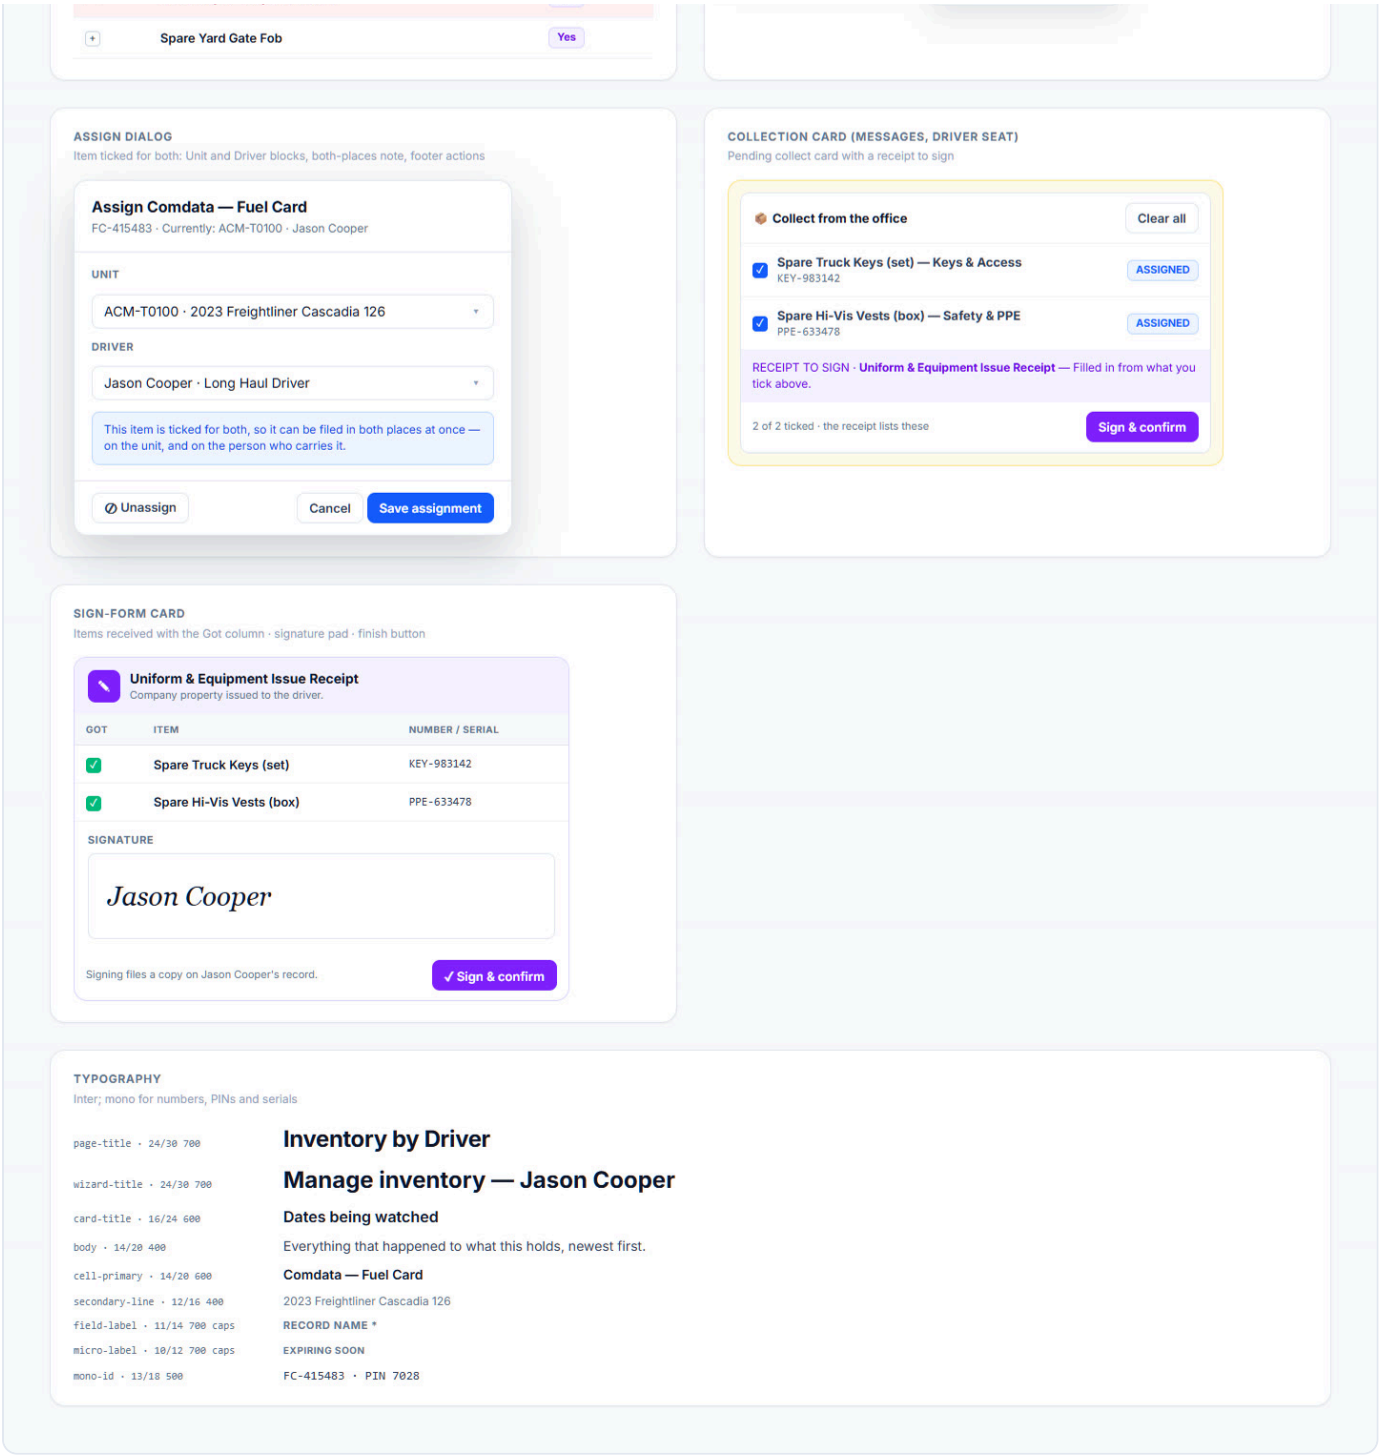

4 Colour palette

primary
#155dfc · blue-600
dark #2b7fff

primary-hover
#1447e6 · blue-700
dark #51a2ff

primary-subtle
#eff6ff · blue-50
dark #162456

primary-border
#bedbff · blue-200
dark #193cb8

secondary
#f1f5f9 · slate-100
dark #1d293d

secondary-foreground
#314158 · slate-700
dark #e2e8f0

background
#f8fafc · slate-50
dark #020618

surface
#ffffff · white
dark #0f172b

text-primary
#0f172b · slate-900
dark #f8fafc

text-body
#314158 · slate-700
dark #cad5e2

text-secondary
#62748e · slate-500
dark #90a1b9

text-muted
#90a1b9 · slate-400
dark #62748e

border
#e2e8f0 · slate-200
dark #1d293d

border-strong
#cad5e2 · slate-300
dark #314158

success
#009966 · emerald-600
dark #00d492

success-text
#007a55 · emerald-700
dark #5ee9b5

success-subtle
#ecfdf5 · emerald-50
dark #002c22

warning
#e17100 · amber-600
dark #ffb900

warning-text
#bb4d00 · amber-700
dark #ffd230

warning-subtle
#fffbeb · amber-50
dark #461901

error
#e7000b · red-600
dark #ff6467

error-text
#c10007 · red-700
dark #ffa2a2

error-subtle
#fef2f2 · red-50
dark #460809

danger
#ec003f · rose-600
dark #ff2056

danger-subtle
#fff1f2 · rose-50
dark #4d0218

accent
#7f22fe · violet-600
dark #a684ff

accent-text
#7008e7 · violet-700
dark #c4b4ff

accent-subtle
#f5f3ff · violet-50
dark #2f0d68

info
#1447e6 · blue-700
dark #8ec5ff

info-subtle
#eff6ff · blue-50
dark #162456

neutral-inverse
#0f172b · slate-900
dark #f1f5f9

Every colour the Inventory section uses, named as tokens. **Light** values are what the app renders today: Tailwind CSS v4's default palette, converted exactly from its OKLCH definitions to sRGB. **Dark** values are a **proposal** — the app has no dark mode (no `dark:` variants, no `prefers-color-scheme` rules).

Machine-readable: color-palette.json · Figma tokens: figma/tokens.json.

Tokens

	Token	Tailwind (light)	Light HEX	Light RGB	Dark HEX (proposed)	Dark RGB	Uses in code	Where it is used
	`primary`	`blue-600`	`#155dfc`	rgb(21, 93, 252)	`#2b7fff`	rgb(43, 127, 255)	57	Primary buttons (Add Inventory, Save Inventory, Save assignment, Save & send, + Add Vendor, Edit), active tab and rail underline, active filter chip, switch "on", sorted header.
	`primary-hover`	`blue-700`	`#1447e6`	rgb(20, 71, 230)	`#51a2ff`	rgb(81, 162, 255)	47	Hover of primary buttons; text on blue chips and the "View only" strip.
	`primary-subtle`	`blue-50`	`#eff6ff`	rgb(239, 246, 255)	`#162456`	rgb(22, 36, 86)	32	Icon tiles in headers, ticked rows in the pick list, ticked "Assigned to" cards, row hover tint, info notes in the Assign dialog.
	`primary-border`	`blue-200`	`#bedbff`	rgb(190, 219, 255)	`#193cb8`	rgb(25, 60, 184)	14	Border of ticked cards, info notes and blue chips.
	`secondary`	`slate-100`	`#f1f5f9`	rgb(241, 245, 249)	`#1d293d`	rgb(29, 41, 61)	78	Count pills, KPI chip strip, segmented controls, icon tiles for empty holders.
	`secondary-foreground`	`slate-700`	`#314158`	rgb(49, 65, 88)	`#e2e8f0`	rgb(226, 232, 240)	63	Text on secondary surfaces; outline-button text (Categories, Columns, Cancel).
	`background`	`slate-50`	`#f8fafc`	rgb(248, 250, 252)	`#020618`	rgb(2, 6, 24)	97	Page body, table header band, zebra rows, tinted card headers.
	`surface`	`white`	`#ffffff`	rgb(255, 255, 255)	`#0f172b`	rgb(15, 23, 43)	146	Cards, list cards, dialogs, header bands, inputs, the collection card body.
	`text-primary`	`slate-900`	`#0f172b`	rgb(15, 23, 43)	`#f8fafc`	rgb(248, 250, 252)	54	Page, record and dialog titles; item names; primary cell values.
	`text-body`	`slate-700`	`#314158`	rgb(49, 65, 88)	`#cad5e2`	rgb(202, 213, 226)	63	Body copy, table cells, form values, draft messages.
	`text-secondary`	`slate-500`	`#62748e`	rgb(98, 116, 142)	`#90a1b9`	rgb(144, 161, 185)	120	Descriptions, field labels, table headers, vendor lines under item names, helper text.
	`text-muted`	`slate-400`	`#90a1b9`	rgb(144, 161, 185)	`#62748e`	rgb(98, 116, 142)	93	"no expiry", empty "—", idle icons, placeholders, some 10 px labels. Fails body-text contrast — see §WCAG.
	`border`	`slate-200`	`#e2e8f0`	rgb(226, 232, 240)	`#1d293d`	rgb(29, 41, 61)	159	Card, table, dialog and input borders; row dividers (slate-100 inside tables).
	`border-strong`	`slate-300`	`#cad5e2`	rgb(202, 213, 226)	`#314158`	rgb(49, 65, 88)	66	Form input borders on Add Vendor and the item form; unticked checkboxes.
	`success`	`emerald-600`	`#009966`	rgb(0, 153, 102)	`#00d492`	rgb(0, 212, 146)	5	Active status dot, "alert set" bell, check marks, "Monitoring is on".

	Token	Tailwind (light)	Light HEX	Light RGB	Dark HEX (proposed)	Dark RGB	Uses in code	Where it is used
	`success-text`	`emerald-700`	`#007a55`	rgb(0, 122, 85)	`#5ee9b5`	rgb(94, 233, 181)	12	Text of Active pills, Driver chips, "Collected from the office".
	`success-subtle`	`emerald-50`	`#ecfdf5`	rgb(236, 253, 245)	`#002c22`	rgb(0, 44, 34)	15	Background of Active pills, Driver chips, settled collection cards.
	`warning`	`amber-600`	`#e17100`	rgb(225, 113, 0)	`#ffb900`	rgb(255, 185, 0)	11	Expiring Soon dot, "in 12d" countdowns, hand-back card icon.
	`warning-text`	`amber-700`	`#bb4d00`	rgb(187, 77, 0)	`#ffd230`	rgb(255, 210, 48)	17	Text of Expiring Soon pills, "1 expiring" header note, the no-expiry warning.
	`warning-subtle`	`amber-50`	`#fffbeb`	rgb(255, 251, 235)	`#461901`	rgb(70, 25, 1)	21	Background of Expiring Soon pills, collection cards in Messages, amber notes.
	`error`	`red-600`	`#e70000b`	rgb(231, 0, 11)	`#ff6467`	rgb(255, 100, 103)	7	Expired dot, "n days overdue", Delete category / Delete vendor buttons.
	`error-text`	`red-700`	`#c10007`	rgb(193, 0, 7)	`#ffa2a2`	rgb(255, 162, 162)	9	Text of Expired pills and the "n expired" attention pill; inline errors in the Categories modal.
	`error-subtle`	`red-50`	`#fef2f2`	rgb(254, 242, 242)	`#460809`	rgb(70, 8, 9)	10	Background of Expired pills and error boxes.
	`danger`	`rose-600`	`#ec003f`	rgb(236, 0, 63)	`#ff2056`	rgb(255, 32, 86)	6	Items marked to come off on the Manage page, Delete items in ⋮ menus, Terminated status.
	`danger-subtle`	`rose-50`	`#fff1f2`	rgb(255, 241, 242)	`#4d0218`	rgb(77, 2, 24)	5	Background of rows coming off and of the delete confirmation icon tile.
	`accent`	`violet-600`	`#7f22fe`	rgb(127, 34, 254)	`#a684ff`	rgb(166, 132, 255)	11	Forms to sign: Sign & confirm button, the receipt block, the form tile; "Both" chips; Cross Border badge.
	`accent-text`	`violet-700`	`#7008e7`	rgb(112, 8, 231)	`#c4b4ff`	rgb(196, 180, 255)	11	Text on violet chips and the "Receipt to sign" label.
	`accent-subtle`	`violet-50`	`#f5f3ff`	rgb(245, 243, 255)	`#2f0d68`	rgb(47, 13, 104)	12	Background of the forms block, the sign-form card header and violet chips.
	`info`	`blue-700`	`#1447e6`	rgb(20, 71, 230)	`#8ec5ff`	rgb(142, 197, 255)	47	Text of the "View only" strip and informational notes (shares the primary hue on purpose).
	`info-subtle`	`blue-50`	`#eff6ff`	rgb(239, 246, 255)	`#162456`	rgb(22, 36, 86)	32	Background of the "View only" strip and info notes.
	`neutral-inverse`	`slate-900`	`#0f172b`	rgb(15, 23, 43)	`#f1f5f9`	rgb(241, 245, 249)	54	The dark "Driver Notification ›" button.

The eleven required roles map as: **primary** = `primary`, **secondary** = `secondary`, **background** = `background`, **surface** = `surface`, **text-primary** = `text-primary`, **text-secondary** = `text-secondary`, **border** = `border`, **success** = `success`, **warning** = `warning`, **error** = `error`, **info** = `info`. The other tokens are the subtle / text / hover companions each role needs to render a pill, chip or banner.

WCAG 2.1 contrast

Normal text needs **4.5 : 1** (AA) or 7 : 1 (AAA); large text (≥ 18.66 px bold / 24 px) and essential UI parts need **3 : 1**.

Foreground	Background	Where	Light ratio	Light result	Dark ratio	Dark result
`text-primary`	`surface`	Titles, item names and primary values on cards	17.83 : 1	AAA	17.04 : 1	AAA
`text-primary`	`background`	Titles on the page body	17.04 : 1	AAA	19.27 : 1	AAA
`text-body`	`surface`	Body copy, table cells, draft messages	10.36 : 1	AAA	12 : 1	AAA
`text-secondary`	`surface`	Descriptions, field labels, table headers	4.76 : 1	AA	6.78 : 1	AA
`text-secondary`	`background`	Labels on zebra rows and tinted header bands	4.55 : 1	AA	7.66 : 1	AAA
`text-muted`	`surface`	"no expiry", empty dashes, placeholders	2.63 : 1	FAIL	3.74 : 1	AA large only — FAIL for body text
`text-muted`	`background`	Muted text on zebra rows	2.51 : 1	FAIL	4.23 : 1	AA large only — FAIL for body text
`surface`	`primary`	Primary button label (white on blue)	5.25 : 1	AA	4.74 : 1	AA
`primary`	`surface`	Active tab, sorted header, links	5.25 : 1	AA	4.74 : 1	AA
`primary-hover`	`primary-subtle`	Blue chips, ticked rows, info notes	6.28 : 1	AA	5.6 : 1	AA
`secondary-foreground`	`secondary`	Count pills, chip strip	9.45 : 1	AAA	11.86 : 1	AAA
`secondary-foreground`	`surface`	Outline button label	10.36 : 1	AAA	14.46 : 1	AAA
`success-text`	`success-subtle`	Active pill, Driver chip	5.09 : 1	AA	9.97 : 1	AAA
`warning-text`	`warning-subtle`	Expiring Soon pill, no-expiry warning	4.85 : 1	AA	10.37 : 1	AAA
`error-text`	`error-subtle`	Expired pill, "n expired" pill, category errors	5.87 : 1	AA	8.42 : 1	AAA
`danger`	`surface`	Delete item in ⋮ menu	4.53 : 1	AA	4.75 : 1	AA
`danger`	`danger-subtle`	Row coming off on the Manage page	4.12 : 1	AA large only — FAIL for body text	4.18 : 1	AA large only — FAIL for body text
`surface`	`error`	Delete category / Delete vendor button	4.77 : 1	AA	6.17 : 1	AA
`surface`	`accent`	Sign & confirm button	5.89 : 1	AA	6.25 : 1	AA

Foreground	Background	Where	Light ratio	Light result	Dark ratio	Dark result
`accent-text`	`accent-subtle`	Receipt to sign label, Both chip	6.65 : 1	AA	8.21 : 1	AAA
`info`	`info-subtle`	"View only" strip	6.28 : 1	AA	8.15 : 1	AAA
`surface`	`neutral-inverse`	"Driver Notification ›" button	17.83 : 1	AAA	16.28 : 1	AAA
`border`	`surface`	Card / table border against the card (non-text; 3:1 only for essential UI)	1.23 : 1	FAIL	1.22 : 1	FAIL
`border-strong`	`surface`	Form input border (non-text UI component, WCAG 1.4.11 asks 3:1)	1.49 : 1	FAIL	1.72 : 1	FAIL

Failing pairs (5): `text-muted` on `surface` ("no expiry", empty dashes, placeholders); `text-muted` on `background` (muted text on zebra rows); `danger` on `danger-subtle` (row coming off on the manage page); `border` on `surface` (card / table border against the card (non-text; 3:1 only for essential ui)); `border-strong` on `surface` (form input border (non-text ui component, wcag 1.4.11 asks 3:1)).

What to do about them:

- `text-muted` (slate-400) is used for **text** on 93 class occurrences ("no expiry", empty dashes, placeholders, some micro labels). Move every *text* use to `text-secondary` (slate-500, 4.76 : 1); keep slate-400 for icons and decorative rules only.
- `danger` text (rose-600) on `danger-subtle` is 4.12 : 1 — set pill text to rose-700 (`#c70036` , 5.49 : 1), as the Terminated pill already does.
- `border` (slate-200) is fine for card outlines, which are not essential to understanding; for **form inputs** use `border-strong` and darken it to slate-400 (`#90a1b9` , 2.63 : 1) if WCAG 1.4.11 compliance is required.

Raw palette in use

All 77 Tailwind colours referenced by the Inventory code, most used first (counts are class occurrences across the section's source files).

	Tailwind	HEX	RGB	Uses
	`slate-200`	`#e2e8f0`	rgb(226, 232, 240)	159
	`white`	`#ffffff`	rgb(255, 255, 255)	146
	`slate-500`	`#62748e`	rgb(98, 116, 142)	120
	`slate-50`	`#f8fafc`	rgb(248, 250, 252)	97
	`slate-400`	`#90a1b9`	rgb(144, 161, 185)	93
	`slate-600`	`#45556c`	rgb(69, 85, 108)	78
	`slate-100`	`#f1f5f9`	rgb(241, 245, 249)	78
	`slate-300`	`#cad5e2`	rgb(202, 213, 226)	66
	`slate-700`	`#314158`	rgb(49, 65, 88)	63
	`blue-600`	`#155dfc`	rgb(21, 93, 252)	57
	`slate-900`	`#0f172b`	rgb(15, 23, 43)	54
	`blue-700`	`#1447e6`	rgb(20, 71, 230)	47

	Tailwind	HEX	RGB	Uses
	`blue-500`	`#2b7fff`	rgb(43, 127, 255)	41
	`slate-800`	`#1d293d`	rgb(29, 41, 61)	35
	`blue-50`	`#eff6ff`	rgb(239, 246, 255)	32
	`amber-50`	`#fffbeb`	rgb(255, 251, 235)	21
	`amber-700`	`#bb4d00`	rgb(187, 77, 0)	17
	`amber-200`	`#fee685`	rgb(254, 230, 133)	17
	`emerald-50`	`#ecfdf5`	rgb(236, 253, 245)	15
	`blue-200`	`#bedbff`	rgb(190, 219, 255)	14
	`violet-50`	`#f5f3ff`	rgb(245, 243, 255)	12
	`emerald-700`	`#007a55`	rgb(0, 122, 85)	12
	`violet-700`	`#7008e7`	rgb(112, 8, 231)	11
	`violet-600`	`#7f22fe`	rgb(127, 34, 254)	11
	`emerald-200`	`#a4f4cf`	rgb(164, 244, 207)	11
	`amber-600`	`#e17100`	rgb(225, 113, 0)	11
	`red-50`	`#fef2f2`	rgb(254, 242, 242)	10
	`emerald-500`	`#00bc7d`	rgb(0, 188, 125)	10
	`violet-500`	`#8e51ff`	rgb(142, 81, 255)	9
	`red-700`	`#c10007`	rgb(193, 0, 7)	9
	`blue-100`	`#dbeafe`	rgb(219, 234, 254)	9
	`red-500`	`#fb2c36`	rgb(251, 44, 54)	8
	`blue-300`	`#8ec5ff`	rgb(142, 197, 255)	8
	`amber-500`	`#fe9a00`	rgb(254, 154, 0)	8
	`red-600`	`#e7000b`	rgb(231, 0, 11)	7
	`red-200`	`#ffc9c9`	rgb(255, 201, 201)	7
	`amber-800`	`#973c00`	rgb(151, 60, 0)	7
	`violet-100`	`#ede9fe`	rgb(237, 233, 254)	6
	`rose-600`	`#ec003f`	rgb(236, 0, 63)	6
	`rose-700`	`#c70036`	rgb(199, 0, 54)	5
	`rose-50`	`#fff1f2`	rgb(255, 241, 242)	5
	`emerald-600`	`#009966`	rgb(0, 153, 102)	5
	`violet-200`	`#ddd6ff`	rgb(221, 214, 255)	4
	`amber-100`	`#fef3c6`	rgb(254, 243, 198)	4
	`violet-300`	`#c4b4ff`	rgb(196, 180, 255)	3
	`emerald-800`	`#006045`	rgb(0, 96, 69)	3
	`emerald-100`	`#d0fae5`	rgb(208, 250, 229)	3
	`blue-800`	`#193cb8`	rgb(25, 60, 184)	3

	Tailwind	HEX	RGB	Uses
	violet-800	#5d0ec0	rgb(93, 14, 192)	2
	rose-500	#ff2056	rgb(255, 32, 86)	2
	rose-200	#ffccd3	rgb(255, 204, 211)	2
	orange-700	#ca3500	rgb(202, 53, 0)	2
	orange-50	#fff7ed	rgb(255, 247, 237)	2
	indigo-700	#432dd7	rgb(67, 45, 215)	2
	indigo-50	#eef2ff	rgb(238, 242, 255)	2
	[#F8FAFC]	#f8fafc	rgb(248, 250, 252)	2
	teal-800	#005f5a	rgb(0, 95, 90)	1
	teal-700	#00786f	rgb(0, 120, 111)	1
	teal-500	#00bba7	rgb(0, 187, 167)	1
	teal-50	#f0fdfa	rgb(240, 253, 250)	1
	teal-100	#cbfbf1	rgb(203, 251, 241)	1
	sky-800	#00598a	rgb(0, 89, 138)	1
	sky-700	#0069a8	rgb(0, 105, 168)	1
	sky-500	#00a6f4	rgb(0, 166, 244)	1
	sky-50	#f0f9ff	rgb(240, 249, 255)	1
	sky-100	#dff2fe	rgb(223, 242, 254)	1
	rose-800	#a50036	rgb(165, 0, 54)	1
	rose-100	#ffe4e6	rgb(255, 228, 230)	1
	orange-200	#ffd6a7	rgb(255, 214, 167)	1
	indigo-200	#c6d2ff	rgb(198, 210, 255)	1
	cyan-800	#005f78	rgb(0, 95, 120)	1
	cyan-700	#007595	rgb(0, 117, 149)	1
	cyan-500	#00b8db	rgb(0, 184, 219)	1
	cyan-50	#ecfeff	rgb(236, 254, 255)	1
	cyan-100	#cefafe	rgb(206, 250, 254)	1
	black	#000000	rgb(0, 0, 0)	1
	[#2563EB]	#2563eb	rgb(37, 99, 235)	1

Notes

- A hard-coded #2563EB (Tailwind v3 blue-600) appears 1 time(s) in the section (AddVendorPage) and #F8FAFC (v3 slate-50) 2 times; the v4 tokens are #155dfc and #f8fafc. TO CONFIRM: replace with bg-blue-600 / bg-slate-50.
- text-muted (slate-400) fails 4.5:1 on white and slate-50; it is used for "no expiry", empty dashes and some 10 px labels. Recommended fix: use slate-500 for any text.

- The section adds a violet accent family for everything to do with signing (forms block, sign-form, Sign & confirm, Both chips); it is not used elsewhere in the app.
- Some components mix the red and rose families for errors/danger, and green with emerald for success; the tokens above pick one family per role.

5 Data model

What the Inventory section stores, collection by collection, with the fields the UI reads and writes, how the collections point at each other and at Account's, and the indexes the list, holder and monitoring screens need. One JSON Schema per collection is in collections/ and 3–5 fictional sample documents per collection in sample-data/. All three are generated from one definition, so they cannot drift.

Conventions: `_id` is a readable string where the app already has one (items, vendors, categories, cards) and an ObjectId otherwise. Calendar days (`issueDate`, `expiryDate`) are `YYYY-MM-DD` strings; timestamps (`createdAt`, `at`, `signedAt`) are ISO date-times. Every document belongs to exactly one `carrierId` (built-in categories excepted) and every query starts with it. Clearing a field is `$unset` or `null`, never `undefined`.

> **ASSUMPTION:** the prototype has no database; this model is derived from the TypeScript types it uses today (`InventoryItem`, `Vendor`, `VendorCategory`, `InventoryEvent`, `InventoryCollection`, the compliance `DocVersion` a receipt is filed as) and from the forms in ../docs/page-overview.md. Where the model improves on the prototype (carrier field on items, derived status, the company-issued flag, receipts as their own documents) it says so and the point is in TO CONFIRM.

Collections at a glance

Collection	One document per	Written by	Read by
`inventory_items`	item of company property	Add / Edit item; Assign dialog; Manage inventory; hand-back confirmation; nightly status job	List, item page, Drivers / Assets tabs, holder pages, vendor profile, Compliance Monitoring, profile insights
`inventory_categories`	kind of item	Item Category modal (custom ones only)	category rail, item form, vendor form, item icon
`vendors`	supplier	Add Vendor, Edit Vendor dialog, Delete	Vendors tab and menu, item form, vendor profile, Maintenance
`inventory_events`	thing that happened to an item	every inventory write (server side)	item Activity, holder Activity
`inventory_collections`	collect or hand-back card	Manage inventory (Save & send); driver confirm / sign	Messages (office + driver), Driver Mobile App "Collect from the office"
`signed_receipts`	signed form	driver signing on a collection card	Compliances & Documents (Form view / PDF), DQ file, driver profile

Relationships

```
carriers (Account) 1 ──< inventory_items          (inventory_items.carrierId)
carriers           1 ──< vendors                  (vendors.carrierId)
carriers           1 ──< inventory_categories     (carrierId; null = built-in for everyone)
vendors            1 ──< inventory_items          (inventory_items.vendorId)
inventory_categories 1 ─< inventory_items / vendors (categoryId; an item falls back to its vendor's)
assets (Account)   1 ──< inventory_items          (assignedAssetId — the unit it is on)
drivers (Account)  1 ──< inventory_items          (assignedDriverId — the person answerable)
inventory_items    1 ──< inventory_events         (inventory_events.itemId)
drivers            1 ──< inventory_collections    (driverId; conversationId → Messages)
inventory_collections 1 ─< signed_receipts        (collectionId; forms[].receiptId points back)
signed_receipts    * ──> compliance record        (complianceRecordId "onbform:<id>" / "consent:<id>" on the
driver)
users (Account)    1 ──< events / collections     (byUserId, issuedByUserId)
```

Rules the relationships imply:

- **An item is on at most one unit and one driver.** `assignedAssetId` only when `handling` contains `asset-removable`; `assignedDriverId` only when it contains `driver-returnable`. Manage inventory refuses an item that already has a holder of that kind (409); the List's Assign dialog moves it.
- **Unit leaves the fleet** (asset deactivated or deleted in Account): clear `assignedAssetId` on its items and log "Unassigned". **Driver leaves**: keep `assignedDriverId` until the hand-back is confirmed — the open hand-back card is what gets the kit back (TO CONFIRM).
- **Deleting a vendor** is a soft delete; refuse it while items or open work orders reference it (TO CONFIRM — the prototype allows it).
- **Deleting a category** is refused while any item or vendor resolves to it.
- **Status** is recomputed from `expiryDate` on every write and by a nightly job; KPIs, chips, holder counts and the Monitoring feed read the same value.
- **Monitoring feed** (not stored): items with `monitoring.enabled` → alert id `inventory:<itemId>`, subject = assigned driver, else unit, else carrier.
- **Confirming a hand-back** clears `assignedDriverId` on the ticked lines; confirming a collection changes no assignment (it was set when the card was sent).

`inventory_items`

Every fuel card, transponder, ELD, key, PPE item, device or document the carrier owns, with where it may go (handling), where it is (unit and / or driver) and its alert. The List tab, item page, holder pages, Manage inventory and the Monitoring feed all read this collection.

Field	Type	Required	Default	Description
`_id`	string	yes	—	Item id, e.g. "inv-001-001" (seed) or "inv-" (new).
`carrierId`	string	yes	—	→ `carriers._id` (Account). Every query starts with it. (The prototype has no carrier field on the item; it is implied by the seed bucket.)
`vendorId`	string	yes	—	→ `vendors._id`; must belong to the same carrier.
`categoryId`	string	no	`null`	→ `inventory_categories._id`. Empty = falls back to the vendor's category.
`name`	string	no	`null`	Record name. Empty = shown as " — ".
`handling`	string[]	yes	`["asset-removable"]`	Where the item MAY go. At least one value. Items: `driver-returnable`, `asset-removable`.

Field	Type	Required	Default	Description
`serial`	string	yes	`—`	The number printed on it ("FC-415483"). Labelled "Number" in the UI. Unique per carrier (TO CONFIRM).
`pin`	string	no	`""`	PIN / access code. Treat as a secret: returned only to full-access roles (TO CONFIRM).
`issueDate`	date	yes	`—`	YYYY-MM-DD.
`expiryDate`	date	no	`null`	YYYY-MM-DD; null = never runs out. Must be ≥ issueDate.
`status`	string	yes	`derived`	Derived from expiryDate on every write and nightly: < 0 days Expired, ≤ 30 days Expiring Soon, else Active (TO CONFIRM — the prototype lets the user pick it). One of: `Active`, `Expiring Soon`, `Expired`.
`monitoring.enabled`	boolean	yes	`false`	Alert on / off.
`monitoring.basis`	string	yes	`"expiry"`	Which date the alert counts back from. One of: `issue`, `expiry`, `custom`.
`monitoring.customDate`	date	no	`null`	YYYY-MM-DD, when basis = custom.
`monitoring.recurrence`	string	yes	`"annually"`	Renewal cycle (display only today). One of: `none`, `monthly`, `quarterly`, `semiannually`, `annually`, `biennially`, `triennially`, `fiveyearly`.
`monitoring.reminders`	int[]	yes	`[30]`	Subset of 90, 60, 45, 30, 15, 7, 0 (0 = on the date).
`monitoring.channels.email`	boolean	yes	`true`	
`monitoring.channels.inApp`	boolean	yes	`true`	
`monitoring.assigneeUserId`	string	no	`null`	→ `users._id`; who acts on the alert (not settable in the UI yet).
`assignedAssetId`	string	no	`null`	The UNIT it is on → `assets._id`. Only when handling includes asset-removable.
`assignedAssetKind`	string	no	`null`	Copied from the asset on assignment. One of: `cmv`, `non-cmv`.
`assignedDriverId`	string	no	`null`	The PERSON answerable for it → `drivers._id`. Only when handling includes driver-returnable.
`assignedAt`	date	no	`null`	When the current assignment was made.
`contactName`	string	no	`""`	Vendor contact copied at creation (kept for the item page).
`contactInfo`	string	no	`""`	Vendor email / phone copied at creation.
`notes`	string	no	`""`	Free text.
`deletedAt`	date	no	`null`	Soft delete (no delete exists today — TO CONFIRM).
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, serial: 1 }`	unique, partial (deletedAt null)	One number per carrier; search by number.
`{ carrierId: 1, categoryId: 1, status: 1 }`	—	Category rail counts, status chips and group bands.
`{ carrierId: 1, assignedDriverId: 1 }`	sparse	Drivers tab, driver holder page, assignable list.
`{ carrierId: 1, assignedAssetId: 1 }`	sparse	Assets tab, asset holder page.
`{ carrierId: 1, vendorId: 1 }`	—	Vendor profile Inventory tab; delete-vendor guard.
`{ carrierId: 1, "monitoring.enabled": 1, expiryDate: 1 }`	—	Monitoring feed and the nightly status job.
`{ name: "text", serial: "text", pin: "text" }`	text	The List search box.

Schema: collections/inventory_items.json · Samples: sample-data/inventory_items.json

`inventory_categories`

The 12 built-in categories plus any the carrier adds in the "Item Category" modal. Drives the category rail, the item form dropdown, the vendor category and the item icon.

Field	Type	Required	Default	Description
`_id`	string	yes	—	"cat-fuel-card" for built-ins; "cat-" for custom.
`carrierId`	string	no	`null`	null = built-in (shared by every carrier); set = this carrier's own.
`name`	string	yes	—	Unique per carrier, case-insensitive ("Category name is required.", "A category named … already exists.").
`nameLower`	string	yes	`derived`	Lower-cased name, written by the server; backs the unique index.
`description`	string	no	`""`	
`builtIn`	boolean	yes	`false`	Built-ins cannot be renamed or deleted (TO CONFIRM — the prototype allows both in memory).
`icon`	string	no	`"Layers"`	lucide icon name ("Fuel", "KeyRound").
`palette`	string	no	`"slate"`	Tailwind hue for the tile ("amber").
`sortOrder`	int	no	`0`	
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, nameLower: 1 }`	unique (store nameLower on write)	Case-insensitive duplicate check.

Schema: collections/inventory_categories.json · Samples: sample-data/inventory_categories.json

`vendors`

Shared by Inventory (an item is filed against a vendor) and Maintenance (work orders and bills). The prototype also keeps one "Company Issued" placeholder vendor per accessory; in the model these are a flag, not rows (TO CONFIRM).

Field	Type	Required	Default	Description
`_id`	string	yes	—	"v-001" style id.
`carrierId`	string	yes	—	→ `carriers._id`.
`name`	string	yes	—	Vendor name ("Comdata"). Required on Add Vendor.
`companyName`	string	no	`""`	Legal company ("Comdata Inc.").
`categoryId`	string	yes	`"cat-other"`	→ `inventory_categories._id`. Add Vendor files new vendors under "Others".
`status`	string	yes	`"Active"`	Not editable in the UI today (TO CONFIRM). One of: `Active`, `Inactive`.
`contactName`	string	no	`""`	
`email`	string	no	`""`	Validated as an email when present.
`phone`	string	no	`""`	
`address.country`	string	no	`"United States"`	Stored as the full name (the edit dialog writes "USA" today). One of: `United States`, `Canada`.
`address.street`	string	no	`""`	
`address.apt`	string	no	`""`	Apartment, suite, etc.
`address.city`	string	no	`""`	
`address.state`	string	no	`""`	US state / DC or Canadian province code.
`address.zip`	string	no	`""`	ZIP or postal code.
`companyIssued`	boolean	yes	`false`	true = not a supplier (company-issued accessories). Hidden from vendor lists and pickers.
`deletedAt`	date	no	`null`	Soft delete; items and orders keep their vendorId.
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, status: 1, name: 1 }`	—	Vendors list, KPI tiles, sort by name.
`{ carrierId: 1, "address.state": 1 }`	—	Group by Jurisdiction.
`{ name: "text", companyName: "text", email: "text", contactName: "text" }`	text	Vendor search.

Schema: collections/vendors.json · Samples: sample-data/vendors.json

`inventory_events`

One row per thing that happened to an item: added, updated (with the change list), assigned, unassigned, asked to collect / hand in, receipt requested / signed, collected / not collected, handed back. "Added", "Assigned" and "Expired" are also derived from the item on read and never stored twice.

Field	Type	Required	Default	Description
`_id`	objectId	yes	—	
`carrierId`	string	yes	—	→ `carriers._id`.
`itemId`	string	yes	—	→ `inventory_items._id`.
`kind`	string	yes	—	Activity vocabulary shared with the rest of the app. One of: `created`, `updated`, `assigned`, `message`, `requested`, `signed`, `verified`, `note`.
`title`	string	no	`null`	Overrides the kind's label ("Assigned to driver", "Receipt signed").
`detail`	string	no	`""`	"Status: Active → Expiring Soon", "Taken back from Jason Cooper".
`changes`	object[]	no	`[]`	For updates: `{ field, from, to }` rows.
`byUserId`	string	no	`null`	→ `users._id` (null for System).
`byName`	string	yes	—	Display name at the time ("Kenan Gain").
`role`	string	yes	`"Office"`	Badge on the timeline. One of: `Office`, `Driver`, `System`.
`collectionId`	string	no	`null`	→ `inventory_collections._id` when the event came from a card.
`at`	date	yes	`now`	ISO timestamp.

Indexes

Index	Options	Why
`{ itemId: 1, at: -1 }`	—	Item Activity tab, newest first.
`{ carrierId: 1, at: -1 }`	—	Holder Activity tabs (filtered by the holder's item ids) and audits.

Schema: collections/inventory_events.json · Samples: sample-data/inventory_events.json

`inventory_collections`

What Manage inventory sends: one card per driver and direction, posted into the driver's conversation (Messages) and confirmed by the driver ticking items and, for a collection with forms, signing.

Field	Type	Required	Default	Description
`_id`	string	yes	—	"col-" — the same id on every copy of the card.
`carrierId`	string	yes	—	→ `carriers._id`.
`direction`	string	yes	`"collect"`	One of: `collect`, `return`.
`driverId`	string	yes	—	→ `drivers._id`.

Field	Type	Required	Default	Description
`driverName`	string	yes	—	At the time of sending.
`conversationId`	string	yes	—	→ the driver's conversation in Messages (outside this section).
`holderLabel`	string	no	`""`	Unit label when the kit is for a vehicle.
`counterparty.kind`	string	yes	`"office"`	Where to collect from / hand to. One of: `office`, `person`.
`counterparty.name`	string	no	`""`	"Mike Johnson, yard office" when kind = person.
`dueAt`	string	no	`null`	"YYYY-MM-DD" or "YYYY-MM-DDTHH:mm".
`lines`	object[]	yes	—	`{ itemId, name, serial, route: "assigned" }` — one per item on the card.
`forms`	object[]	no	`[]`	Collect only: `{ defId, title, recordId, status: pending|signed, signedAt?, signedBy?, receiptId? }`.
`note`	string	no	`""`	The message text (drafted, or the office's own wording).
`issuedByUserId`	string	yes	—	→ `users._id`.
`issuedByName`	string	yes	—	
`status`	string	yes	`"pending"`	One of: `pending`, `collected`.
`collectedItemIds`	string[]	no	`[]`	The lines the driver ticked.
`collectedAt`	date	no	`null`	
`createdAt`	date	yes	`now`	Set by the server on insert.
`updatedAt`	date	yes	`now`	Set by the server on every write.

Indexes

Index	Options	Why
`{ carrierId: 1, driverId: 1, status: 1, createdAt: -1 }`	—	Driver app "Collect from the office" (pending / already collected) and the office view.
`{ "lines.itemId": 1 }`	—	Find open cards for an item (block a second collect).

Schema: collections/inventory_collections.json · Samples: sample-data/inventory_collections.json

`signed_receipts`

The filed copy of a receipt signed from a collection card. In the prototype this is a version on the driver's compliance record (record id `onbform:<defId>` or `consent:<defId>`, tag "Filled in system"); the model keeps it as its own immutable document that the compliance record points at.

Field	Type	Required	Default	Description
`_id`	objectId	yes	—	
`carrierId`	string	yes	—	→ `carriers._id`.

Field	Type	Required	Default	Description
`driverId`	string	yes	—	→ `drivers._id`.
`collectionId`	string	yes	—	→ `inventory_collections._id`.
`formDefId`	string	yes	—	Form definition ("equipment-issue").
`complianceRecordId`	string	yes	—	"onbform:equipment-issue" / "consent:" — where it is filed in Compliance.
`title`	string	yes	—	"Uniform & Equipment Issue Receipt — ACM-T0100".
`lines`	object[]	yes	—	`{ itemId, name, serial }` — only the items ticked.
`values`	object	yes	—	The filled fields (employee name, issue date, ...).
`signatures`	object[]	yes	—	`{ signerId, mode: draw|type, image?, typedName?, signedAt, ip?, userAgent? }`.
`signedByName`	string	yes	—	
`signedAt`	date	yes	`now`	
`pdfFileId`	string	no	`null`	Rendered PDF in file storage (the prototype keeps a 0-byte placeholder).
`tags`	string[]	yes	`["Filled in system"]`	
`createdAt`	date	yes	`now`	Immutable after insert — no updatedAt.

Indexes

Index	Options	Why
`{ carrierId: 1, driverId: 1, signedAt: -1 }`	—	The driver's filed forms (Compliances & Documents, DQ file).
`{ collectionId: 1, formDefId: 1 }`	unique	A form is signed once per card.

Schema: collections/signed_receipts.json · Samples: sample-data/signed_receipts.json

Sample data

Every document in sample-data/ is fictional and lines up with the Account samples (carrier `acct-001` Acme Trucking Inc., driver `DRV-001-0001` Jason Cooper, units `AST-001-0001…`). The items cover every combination of handling and assignment (unit + driver, unit only, nobody), an expired item with no alert, an item with no expiry and yard stock; the vendors cover a US supplier, a repair shop, a Canadian vendor and a new inactive one; the events and cards follow one real hand-out from the walkthrough (two items collected and signed for, one key handed back) plus a pending card collected from a named person. Emails use `.example`, phones are 555 numbers, signature images are truncated on purpose.

TO CONFIRM

1. Add `carrierId` to items (the prototype infers it) — assumed yes.
2. Derive `status` from `expiryDate` instead of letting the user pick it.
3. Unique `serial` per carrier.
4. Store "Company Issued" accessories against a flag (`vendors.companyIssued`) instead of 36 placeholder vendor rows per carrier.
5. Built-in categories read-only; custom categories per carrier.

6. Soft delete for items and vendors, and the guards on delete.
7. Keep receipts as their own immutable documents (`signed_receipts`) with the compliance record pointing at them, rather than only as compliance versions.
8. PIN visibility by role.

6 Agent instructions — summary

Sections 1, 2, 4, 6 and 8 of `docs/agent.md`. The file structure (§3), the full API (§5) and the do's and don'ts (§7) are in the file itself.

1. Purpose

Inventory is the carrier's register of company property — fuel cards, toll transponders, ELDs, GPS units, dashcams, keys and gate cards, PPE, equipment, devices and documents — and of **who holds it**:

- **List** — every item, with its number, dates, status, and the unit and/or driver it is on.
- **Drivers / Assets** — the same inventory counted per person and per vehicle.
- **Manage inventory** — give items to, or take them back from, one driver or unit; for a driver this drafts and sends a collection / hand-back message with any forms to sign.
- **Driver side** — the driver ticks off what they collected (or handed back) and signs the receipt, which is filed on their compliance record.
- **Vendors** — the suppliers an item (or a work order) is filed against.

Every item can carry an **expiry alert** that feeds Compliance Monitoring. Everything is **scoped to one carrier** (the one in the top-bar switcher).

---

2. Tech stack

2.1 Current (the prototype you are maintaining)

Layer	Choice
UI	React 19 + TypeScript 5.9, Vite 7, Tailwind CSS 4.1 (utilities only; `cn()` = clsx + tailwind-merge), lucide-react icons
Routing	A path string held in `App.tsx` state (`handleNavigate`) — not react-router routes. New pages are `if (path === …)` / regex branches in `App.tsx` . The browser URL does not change.
Data	Seed generated per carrier at module load (`inventory.data.ts`) + localStorage overlays (`inventory-store.ts` , `inventory-activity.ts`) + the shared `messages-store` and `compliance-data-store` . Vendors are an **in-memory** store (`src/data/vendorsStore.ts`). No backend.
Auth / roles	`src/data/users.data.ts` ; menu access table `src/pages/users-roles/roles.data.ts` (`inventory` , `vendors` keys); gate in `App.tsx` (hidden → "Not in your menu", light → "View only" strip).
Build / check	`npx tsc -b` **and** `npx vite build` — both must pass (`tsc --noEmit` checks nothing here: the root tsconfig is a solution file).

2.2 Target (what the documentation brief asks the rebuild to use)

ASSUMPTION — TO CONFIRM with the product owner: the React + TypeScript front end as above, a **Node.js (Express or Fastify) REST API**, and **MongoDB** with the collections in ../data/schema.md (Step 7). Keep the store modules (`inventory-store.ts` , `vendorsStore.ts` , `inventory-activity.ts` , `inventory-collection.ts`) as the only code that talks to the API, so the pages do not change.

---

4. Behaviour you must preserve

1. **Carrier scope.** Every read and write is for the active carrier. An item, vendor, category, event and collection belongs to exactly one carrier.
2. **Handling vs assignment.** *Handling* (`driver-returnable`, `asset-removable`; at least one) says where an item **may** go; *assignment* (`assignedTo` = unit, `assignedDriverId` = person) says where it **is**. Both fields are independent: unit only, person only, both, or neither. Pickers only offer what the handling allows.
3. **Reserved items.** Manage inventory offers only items with no holder of that kind; the List's Assign dialog may move an item directly between holders.
4. **Status.** Today it is stored and chosen by hand; the target derives it from the expiry date (TO CONFIRM, page-overview §12 #2). Either way the List KPIs, chips and groups, the holder counts and Monitoring must agree.
5. **Monitoring feed.** An item with an enabled alert appears on Compliance Monitoring: id `inventory:<itemId>`, source "Inventory", subject = assigned driver, else unit, else the carrier; priority from days left and the item's reminders (default 90 / 30 / 7); link back to the item.
6. **Activity trail.** Log every create, update (with a field-by-field change list), assignment, unassignment, message sent, receipt requested, receipt signed, collection confirmed / not collected, hand-back confirmed. "Added", "Assigned" and "Expired" entries are derived from the record and never stored.
7. **Messages.** Assigning to a driver from Manage inventory sends a **collect** card (unless switched off); unassigning sends a **hand-back** card (always). A unit is never messaged. The List's Assign dialog sends nothing. Cards are chat messages in the driver's conversation; every copy of a card settles together.
8. **Receipts.** A collect card may carry forms (default: Uniform & Equipment Issue Receipt). Signing files a version on the driver's compliance record (`onbform:<defId>` or `consent:<defId>`, tag "Filled in system", the item list in the notes and in `formData.lines`). Signing the last form confirms the collection.
9. **Hand-back confirmation** clears `assignedDriverId` for the ticked items (the unit assignment stays).
10. **No item delete** today. If you add one, make it soft (keep the trail and any filed receipts).
11. **Categories.** One list of 12 built-ins; a category in use cannot be deleted.
12. **Vendors.** Deleting asks first; records that already name the vendor keep their reference.
13. **Navigation.** Saving an item returns to the List (add) or the item page (edit); Manage inventory returns to its tab; nothing shows a toast.

---

6. Validation and security rules

- **Auth required** on every route; the session decides the carrier list and the role per carrier (roles are per carrier).
- **Role gate:** `inventory` menu — Admin / Fleet Admin / User full, Safety Manager **light**, Driver hidden; Super Admin always full. **Enforce light on the server** (reject writes with 403) and disable the controls in the UI — today the prototype only shows a banner (page-overview §12 #1).
- **Drivers** may call only `/me/inventory-collections` and the confirm / sign routes for **their own** cards.
- **Item:** `vendorId` must be one of the carrier's vendors; `serial` trimmed, 1–64 chars; `issueDate` required, ISO date; `expiryDate` optional, ≥ `issueDate`; `handling` non-empty subset of the two values; `assignedDriverId` only when `driver-returnable` is in `handling`; `assignedTo` only when `asset-removable` is; `monitoring.reminders` ⊆ {90, 60, 45, 30, 15, 7, 0}; `monitoring.basis = "expiry"` requires an `expiryDate`.
- **PIN** values are secrets for fuel cards and gate cards: return them only to full-access roles, never in share payloads or logs (ASSUMPTION — TO CONFIRM; the prototype shows them to everyone).
- **Vendor:** `name` trimmed, required; `email` valid if present; `state` in the country's list; `country` stored as "United States" / "Canada" (the prototype's edit dialog writes "USA").
- **Category:** `name` required, unique per carrier (case-insensitive); delete blocked while any item resolves to it.
- **Signatures:** store the image or typed name with signer, timestamp and IP / device; the filed version is immutable.
- **Rate limits:** 60 writes / minute / user on inventory routes; 10 sign attempts / minute / driver.
- **Audit:** every write produces an `InventoryEvent` with `by` (user id + name) and `role`.

---

8. Acceptance checklist

The agent may say "done" only when every line is true:

- [ ] `npx tsc -b` and `npx vite build` pass.
- [ ] List: 5 KPIs, category rail with counts, search, All / Assigned / Available chips, Group by (Assignment, Status, Category, Vendor), Columns, Reset, sortable headers, pager 8/15/25/50 — matches list-default.
- [ ] Row click opens the item page; ✎ opens Edit; ⋮ has Assign / Change assignment and Share to chat.
- [ ] Assign dialog shows only the blocks the item's handling allows; Save disabled until something is picked; Unassign only when assigned; **unassigning a seeded item sticks after a reload**.
- [ ] Item page: Information, Monitoring (on / off / no-expiry variants), Activity; **an edit to a seeded item is visible on the item page**.
- [ ] Add / Edit item: required Vendor, Number, Issue date; the alert block with all its options and the no-expiry warning; Save lands on the List (add) / item page (edit) and logs the event.
- [ ] Drivers / Assets tabs: every roster holder listed, KPI tiles filter, driver-type chips, Group by, row menu, legend.
- [ ] Holder page: **title is the driver's name / unit number**; a holder with nothing shows an empty Inventory tab, not "no longer here".
- [ ] Manage inventory: tick / untick; Driver Notification (collect switch, forms, office / somebody else, by when, editable drafts); confirmation lists going on / coming off / who gets told; save writes assignments, events and cards.
- [ ] Driver seat: card is live, sign-form requires a signature and at least one ticked item, signing files the receipt and settles the card; hand-back confirm clears the driver.
- [ ] Vendors: list, KPIs as filters, search, Group by, Columns, Share / Edit / Delete with confirmation, profile tabs, Add Vendor validation.
- [ ] Categories: add / edit / delete with both error messages and the in-use block.
- [ ] Light role cannot change anything (UI disabled **and** server 403); hidden role gets "Not in your menu".
- [ ] Inventory alerts appear on Compliance Monitoring with source "Inventory" and link back to the item.
- [ ] Mobile 390 px: no page-level horizontal scroll; tables scroll inside their card with Actions pinned — matches list-default-mobile.

7 Links

Figma file	**TO CONFIRM — not created.** No Figma access in the documenting session. Build guide, tokens (`design/figma/tokens.json`) and components (`design/figma/components.html`) are ready: see `design/figma-link.md` .
Video	`video/inventory-walkthrough.mp4` — 3 min 21 s, 1920 × 1080, H.264, captions burned in; script with timestamps in `video/script.md` .
Hosted docs	Not hosted — by decision. The documentation is this folder and this PDF.
App (local)	`http://localhost:5173/` → sign in with a demo test account → sidebar **Inventory** (`/inventory`).

Files in this folder

CHECKLIST.md — the Step 12 final check: what was verified, and the open decisions (TO CONFIRM) that need an answer.

docs/

File	What it is	Status
docs/page-overview.md	Every tab, page, field, button, toggle, dialog, state and role difference, as a tree + tables; 27 open questions (Step 1)	✅ done
docs/design.md	Layout, typography, components, icons, interactions, accessibility, linked to screenshots (Step 5)	✅ done
docs/agent.md	Build / maintain instructions for an AI coding agent: stack, structure, behaviour to preserve, API, validation and security, acceptance checklist (Step 6)	✅ done

data/

File	What it is	Status
data/schema.md	MongoDB data model: 6 collections, every field with type / required / default, relationships to Account, indexes (Step 7)	✅ done
data/collections/	One JSON Schema (draft-07) per collection, generated from the same definition as schema.md (Step 7)	✅ done
data/sample-data/	3–5 fictional documents per collection (25 in all), validated against the schemas (Step 7)	✅ done

design/

File	What it is	Status
design/color-palette.json	31 colour tokens with HEX/RGB, usage, light + proposed dark values, 24 WCAG contrast pairs, the 77 raw Tailwind colours in use (Step 8)	✅ done
design/color-palette.md	The same palette, readable, with swatches and fixes for the 5 failing pairs (Step 8)	✅ done
design/figma-link.md	Figma build guide: what to import, page / frame / component structure. **The Figma file itself is TO CONFIRM** — no Figma access in the documenting session (Step 9)	⚠️ link pending
design/figma/	`tokens.json` (DTCG variables, Light + Dark, 15 text styles) and `components.html` (15 component sets, importable with html.to.design) (Step 9)	✅ done

File	What it is	Status
design/exports/	Component sheet + 15 component PNGs, vector `color-tokens.svg`, 18 labelled desktop + mobile key frames (Step 9)	✅ done

screenshots/

Folder	Contents	Status
screenshots/index.md	One line per image with a caption, plus the states that cannot be captured (Step 3)	✅ done
screenshots/hosted-docs.png	Screenshot of a hosted docs site (Step 11)	➖ not needed — the folder is not hosted
screenshots/desktop/list/ · drivers/ · assets/ · vendors/	119 captures at 1440 px, `[tab]-[state]-desktop.png` (Step 3)	✅ done
screenshots/mobile/list/ · drivers/ · assets/ · vendors/	119 captures at 390 px, `[tab]-[state]-mobile.png` (Step 3)	✅ done

video/

File	What it is	Status
video/inventory-walkthrough.mp4	1080p H.264 walkthrough (3 min 21 s) of every tab and the main actions, office and driver side, captions burned in, nothing masked (Step 4)	✅ done
video/script.md	The caption / voice-over script with timestamps (Step 4)	✅ done

pdf/

File	What it is	Status
pdf/inventory-section.pdf	Everything above in one A4 document: cover, contents, overview, all 238 screenshots with captions, design spec, colour palette, data model, agent summary, links (Step 10)	✅ done