

# SOLASRworksheet#4C

Brian Kenneth Solas

2023-12-22

```
#1. Use the dataset mpg
#A data frame with 234 rows and 11 variables:
#' \describe{
#'   \item{manufacturer}{manufacturer name}
#'   \item{model}{model name}
#'   \item{displ}{engine displacement, in litres}
#'   \item{year}{year of manufacture}
#'   \item{cyl}{number of cylinders}
#'   \item{trans}{type of transmission}
#'   \item{drv}{the type of drive train, where f = front-wheel drive, r = rear wheel drive, 4 = 4wd}
#'   \item{cty}{city miles per gallon}
#'   \item{hwy}{highway miles per gallon}
#'   \item{fl}{fuel type}
#'   \item{class}{"type" of car}
#' }
"mpg"
```

```
## [1] "mpg"
```

```
#A.
#1st download the mpg.csv file
#2nd upload the mpg file in the posit cloud or r studio by clicking the upload in the file/plot tab
#3rd click the mpg.csv file in the files/plot tab and click import data set
```

```
library(openxlsx)
library(readr)
mpg <- read_csv("mpg.csv", show_col_types = FALSE)
```

```
## New names:
## * `` -> `...1`
```

```
spec(mpg)
```

```
## cols(
##   ...1 = col_double(),
##   manufacturer = col_character(),
##   model = col_character(),
##   displ = col_double(),
##   year = col_double(),
##   cyl = col_double(),
##   trans = col_character(),
##   drv = col_character(),
##   cty = col_double(),
##   hwy = col_double(),
```

```
## fl = col_character(),
## class = col_character()
## )
```

```
head(mpg)
```

```
## # A tibble: 6 x 12
##   ...1 manufacturer model displ year   cyl trans drv   cty   hwy fl   class
##   <dbl> <chr>         <chr> <dbl> <dbl> <dbl> <chr> <chr> <dbl> <dbl> <chr> <chr>
## 1     1 audi         a4     1.8 1999     4 auto~ f     18    29 p   comp~
## 2     2 audi         a4     1.8 1999     4 manu~ f     21    29 p   comp~
## 3     3 audi         a4     2    2008     4 manu~ f     20    31 p   comp~
## 4     4 audi         a4     2    2008     4 auto~ f     21    30 p   comp~
## 5     5 audi         a4     2.8 1999     6 auto~ f     16    26 p   comp~
## 6     6 audi         a4     2.8 1999     6 manu~ f     18    26 p   comp~
```

```
#View(mpg)
```

```
#B.
```

```
str(mpg)
```

```
## spc_tbl_ [234 x 12] (S3: spec_tbl_df/tbl_df/tbl/data.frame)
## $ ...1      : num [1:234] 1 2 3 4 5 6 7 8 9 10 ...
## $ manufacturer: chr [1:234] "audi" "audi" "audi" "audi" ...
## $ model      : chr [1:234] "a4" "a4" "a4" "a4" ...
## $ displ      : num [1:234] 1.8 1.8 2 2 2.8 2.8 3.1 1.8 1.8 2 ...
## $ year       : num [1:234] 1999 1999 2008 2008 1999 ...
## $ cyl        : num [1:234] 4 4 4 4 6 6 6 4 4 4 ...
## $ trans      : chr [1:234] "auto(l5)" "manual(m5)" "manual(m6)" "auto(av)" ...
## $ drv        : chr [1:234] "f" "f" "f" "f" ...
## $ cty        : num [1:234] 18 21 20 21 16 18 18 18 16 20 ...
## $ hwy        : num [1:234] 29 29 31 30 26 26 27 26 25 28 ...
## $ fl         : chr [1:234] "p" "p" "p" "p" ...
## $ class      : chr [1:234] "compact" "compact" "compact" "compact" ...
## - attr(*, "spec")=
## .. cols(
## ..   ...1 = col_double(),
## ..   manufacturer = col_character(),
## ..   model = col_character(),
## ..   displ = col_double(),
## ..   year = col_double(),
## ..   cyl = col_double(),
## ..   trans = col_character(),
## ..   drv = col_character(),
## ..   cty = col_double(),
## ..   hwy = col_double(),
## ..   fl = col_character(),
## ..   class = col_character()
## .. )
## - attr(*, "problems")=<externalptr>
```

```
#spc_tbl_ [234 x 12] (S3: spec_tbl_df/tbl_df/tbl/data.frame)
#$ ...1      : num [1:234] 1 2 3 4 5 6 7 8 9 10 ...
#$ manufacturer: chr [1:234] "audi" "audi" "audi" "audi" ...
#$ model      : chr [1:234] "a4" "a4" "a4" "a4" ...
#$ displ      : num [1:234] 1.8 1.8 2 2 2.8 2.8 3.1 1.8 1.8 2 ...
```

```

## year      : num [1:234] 1999 1999 2008 2008 1999 ...
## cyl       : num [1:234] 4 4 4 4 6 6 6 4 4 4 ...
## trans     : chr [1:234] "auto(l5)" "manual(m5)" "manual(m6)" "auto(av)" ...
## drv       : chr [1:234] "f" "f" "f" "f" ...
## cty       : num [1:234] 18 21 20 21 16 18 18 18 16 20 ...
## hwy       : num [1:234] 29 29 31 30 26 26 27 26 25 28 ...
## fl        : chr [1:234] "p" "p" "p" "p" ...
## class     : chr [1:234] "compact" "compact" "compact" "compact" ...

```

```

#C.
#the continuous variables are displ, year, cyl, cty, hwy

```

```

#2.

```

```

manufacturers <- table(mpg$manufacturer)
manufacturers

```

```

##
##      audi  chevrolet      dodge      ford      honda  hyundai    jeep
##      18      19      37      25      9      14      8
## land rover  lincoln  mercury  nissan  pontiac  subaru    toyota
##      4      3      4      13      5      14      34
## volkswagen
##      27

```

```

#dodge

```

```

library(dplyr)

```

```

##
## Attaching package: 'dplyr'

## The following objects are masked from 'package:stats':
##
##      filter, lag

## The following objects are masked from 'package:base':
##
##      intersect, setdiff, setequal, union

```

```

models <- mpg%>%count(mpg$model)
models

```

```

## # A tibble: 38 x 2
##   `mpg$model`      n
##   <chr>          <int>
## 1 4runner 4wd      6
## 2 a4              7
## 3 a4 quattro      8
## 4 a6 quattro      3
## 5 altima          6
## 6 c1500 suburban 2wd 5
## 7 camry           7
## 8 camry solara     7
## 9 caravan 2wd     11
## 10 civic           9
## # i 28 more rows

```

```
#caravan 2wd
```

```
#2
```

```
#A.
```

```
unique_mdls <- mpg %>%group_by(manufacturer)%>%distinct(model)
unique_mdls
```

```
## # A tibble: 38 x 2
## # Groups:   manufacturer [15]
##   manufacturer model
##   <chr>         <chr>
## 1 audi          a4
## 2 audi          a4 quattro
## 3 audi          a6 quattro
## 4 chevrolet    c1500 suburban 2wd
## 5 chevrolet    corvette
## 6 chevrolet    k1500 tahoe 4wd
## 7 chevrolet    malibu
## 8 dodge        caravan 2wd
## 9 dodge        dakota pickup 4wd
## 10 dodge       durango 4wd
## # i 28 more rows
```


```
#B.
```

```
library(ggplot2)
```

```
##
## Attaching package: 'ggplot2'
## The following object is masked _by_ '.GlobalEnv':
##
##   mpg
```

```
qplot(manufacturer, data = mpg,
geom = "bar", fill = manufacturer)
```


```
## Warning: `qplot()` was deprecated in ggplot2 3.4.0.
## This warning is displayed once every 8 hours.
## Call `lifecycle::last_lifecycle_warnings()` to see where this warning was
## generated.
```

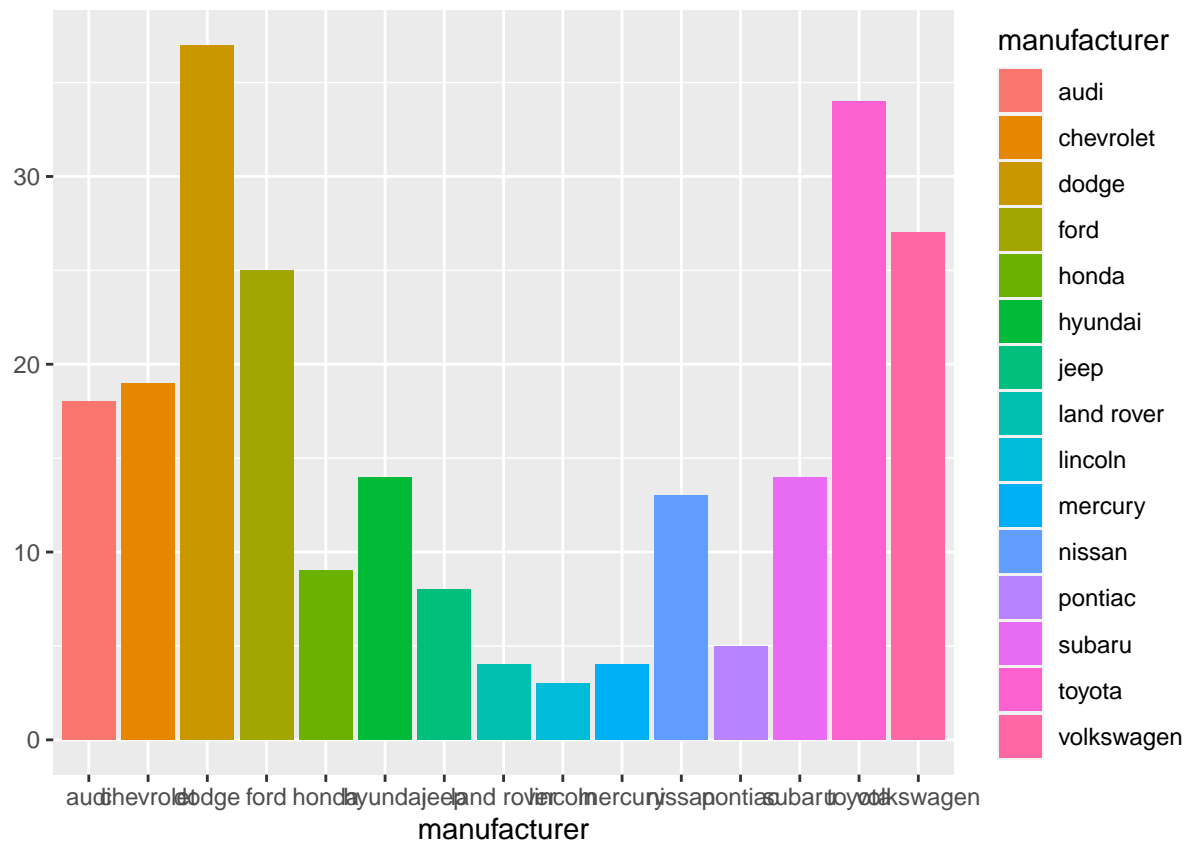

*#2. part 2*

*#4*

```
ggplot(mpg, aes(model, manufacturer)) + geom_point()
```

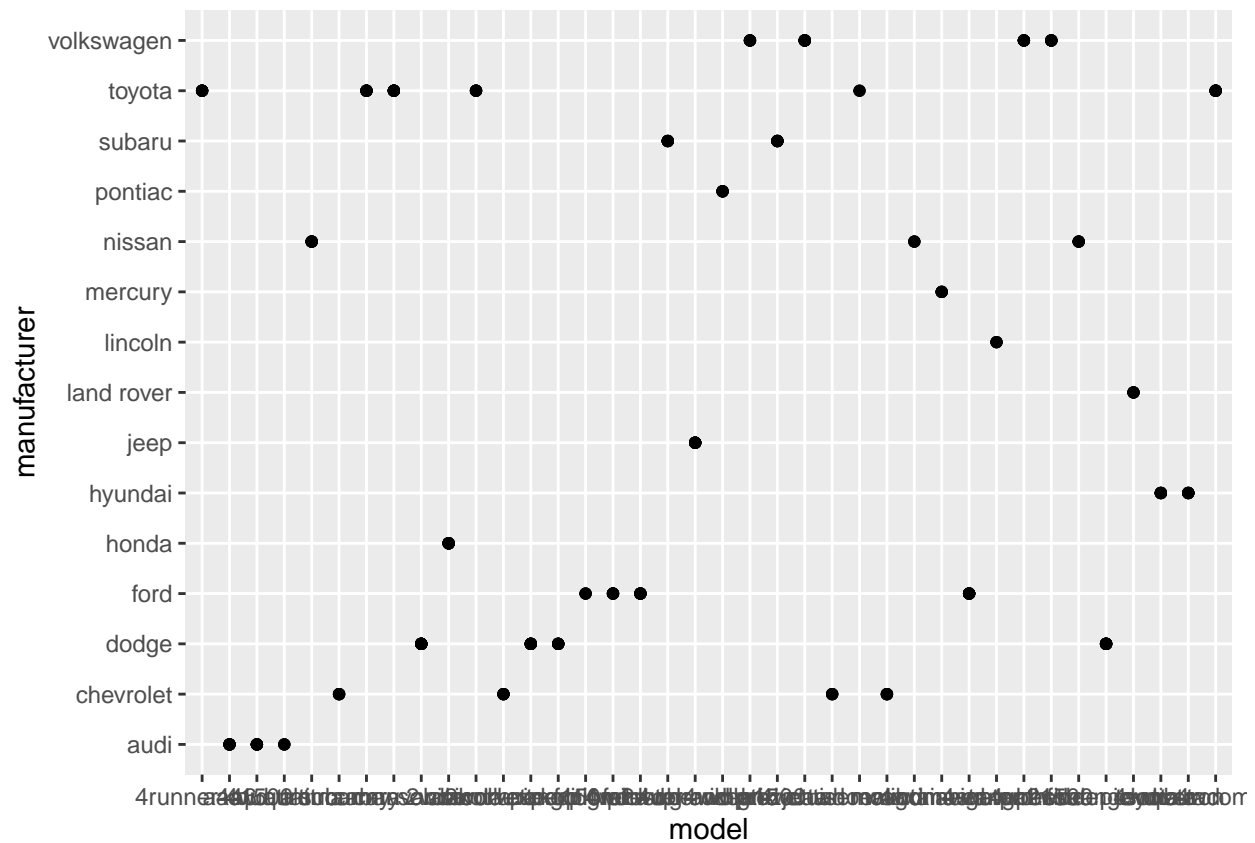

*#B.*


*#rates a scatter plot illustrating the relationship between car models and their respective manufacture*

*#The current plot may lack usefulness due to potential overlap of data points, making it challenging to*

*#we can add Jitter the Points along the x-axis to alleviate overlap and improve visual clarity.*

*#aggregate the data to present summaries.*

```
top_20 <- head(mpg, 20)
ggplot(top_20, aes(x = model, y = year),
  labs(title = "Scatter Plot of Model and Year (Top 20 Observations)",
    x = "Car Model",
    y = "Year"))
```

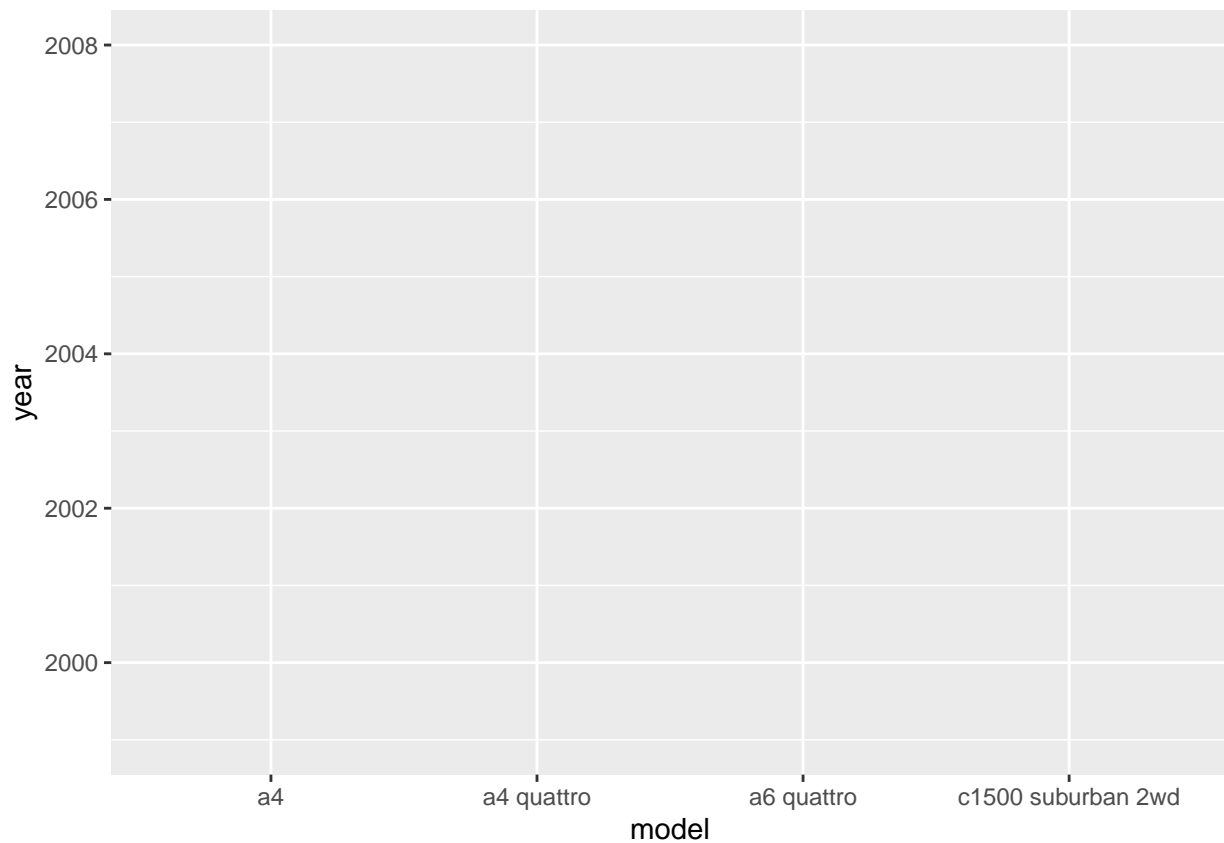


```
#4.
library(dplyr)
models_group <- mpg %>%
  group_by(model)%>%
  summarise(number_of_cars = n())
models_group
```

```
## # A tibble: 38 x 2
##   model          number_of_cars
##   <chr>          <int>
## 1 4runner 4wd           6
## 2 a4                 7
## 3 a4 quattro          8
## 4 a6 quattro          3
## 5 altima              6
## 6 c1500 suburban 2wd   5
## 7 camry              7
## 8 camry solara        7
## 9 caravan 2wd        11
## 10 civic              9
## # i 28 more rows
```


```
#A
ggplot(top_20, aes(x = model)) +
  geom_bar(fill = "red", alpha = 0.5) +
  labs(title = "Top 20 Observations",
       x = "Car Model",
       y = "Numbers of Car") +
```

```
theme_minimal()
```

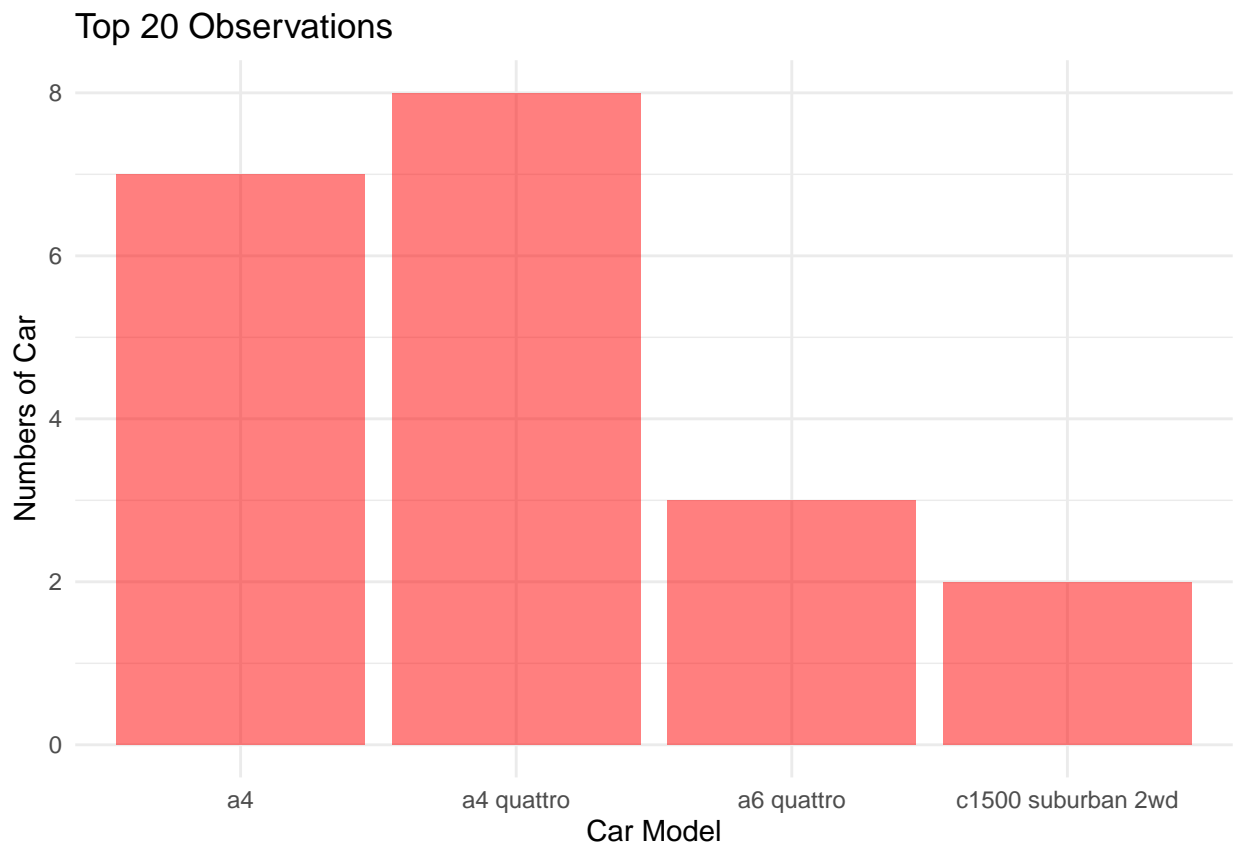


```
#B  
ggplot(top_20, aes(x = model)) +  
  geom_bar(fill = "yellow", alpha = 0.7) +  
  labs(title = "Top 20 Observations",  
        x = "Car Model",  
        y = "Numbers of Car") +  
  theme_minimal() +  
  coord_flip()
```



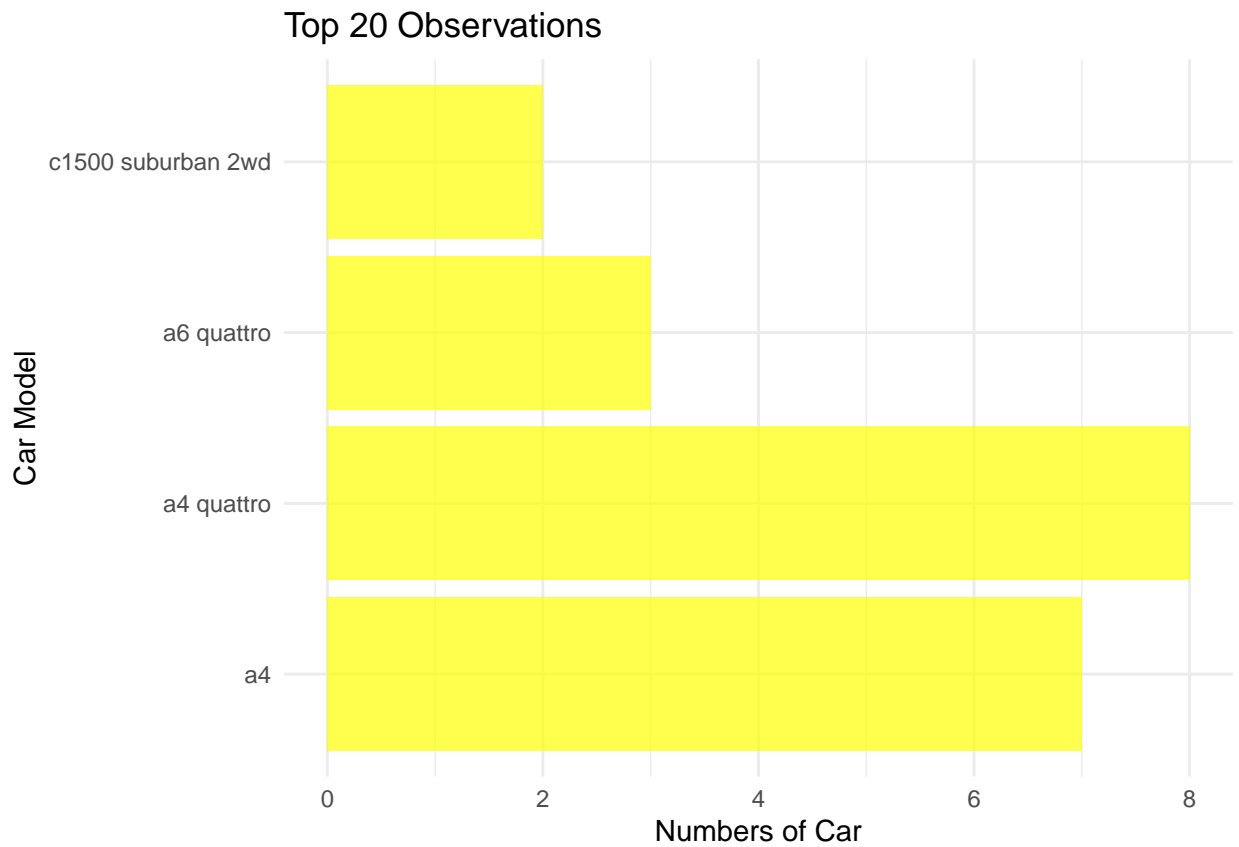

```
#5.  
ggplot(mpg, aes(x = cyl, y = displ, color = displ)) +  
  geom_point() +  
  labs(title = "Relationship between No. of Cylinders and Engine Displacement",  
        x = "Number of cyl",  
        y = "Number of displ") +  
  scale_color_continuous(name = "Engine Displacement") +  
  theme_minimal()
```

Relationship between No. of Cylinders and Engine Displacement

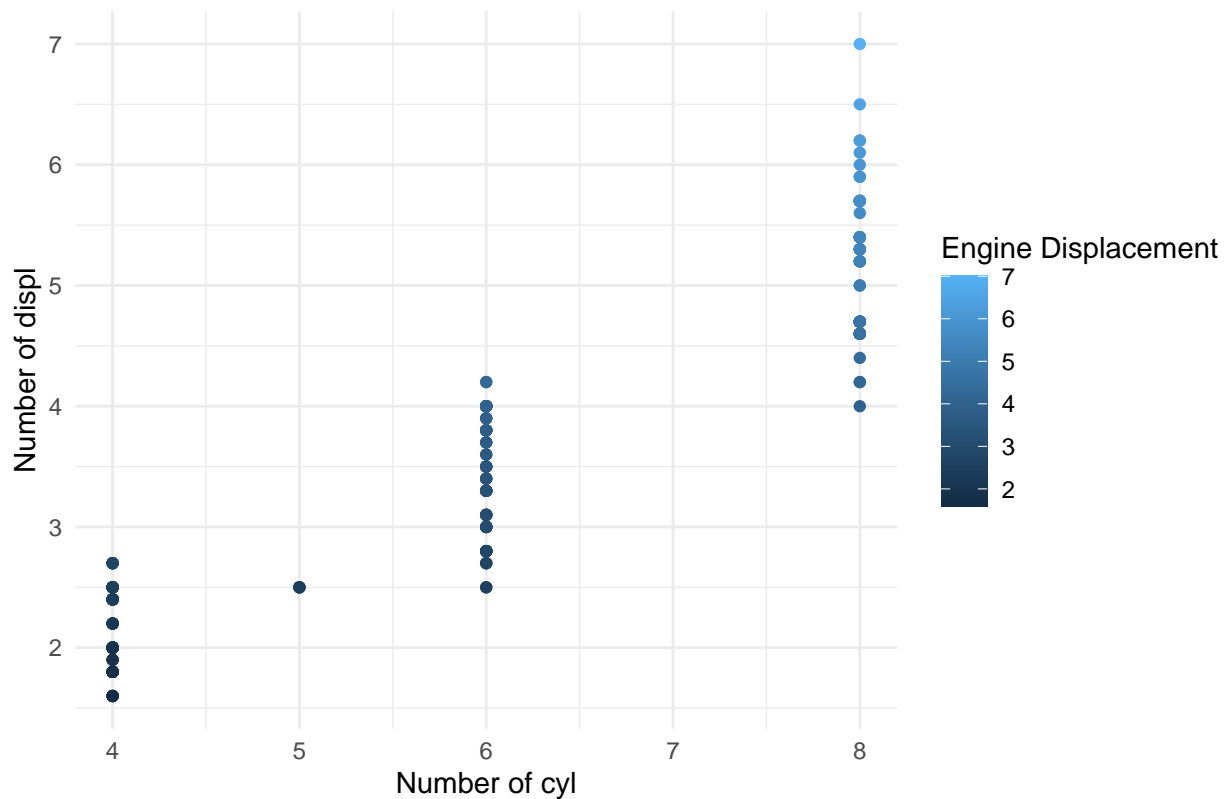

*#This scatter plot illustrates the dispersion of car models among various manufacturers. Each data point*

*#6*

*#A*

```
traffic_data <- read.csv("traffic.csv")
```

```
#View(traffic_data)
```

```
num_traffic_obs <- nrow(traffic_data)
```

```
num_traffic_obs
```

```
## [1] 48120
```

```
str(traffic_data)
```

```
## 'data.frame': 48120 obs. of 4 variables:
```

```
## $ DateTime: chr "2015-11-01 00:00:00" "2015-11-01 01:00:00" "2015-11-01 02:00:00" "2015-11-01 03:00:00" ...
```

```
## $ Junction: int 1 1 1 1 1 1 1 1 1 1 ...
```

```
## $ Vehicles: int 15 13 10 7 9 6 9 8 11 12 ...
```

```
## $ ID : num 2.02e+10 2.02e+10 2.02e+10 2.02e+10 2.02e+10 ...
```

*#The variables of traffic dataset is DateTime, Junction, Vehicles, and ID.*

*#B.*

```
junctions_subset <- traffic_data %>%
```

```
select(DateTime, Junction, Vehicles)
```

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
```


```
## v forcats 1.0.0 v stringr 1.5.1
```

```
## v lubridate 1.9.3 v tibble 3.2.1
```

```
## v purrr      1.0.2      v tidyr      1.3.0
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()    masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors

ggplot(junctions_subset, aes(x = DateTime, y = Vehicles, color = as.factor(Junction), group = Junction)) +
  geom_line() +
  labs(title = "Traffic Data by Junctions",
       x = "DateTime",
       y = "Number of Vehicles") +
  theme_minimal()
```

Traffic Data by Junctions

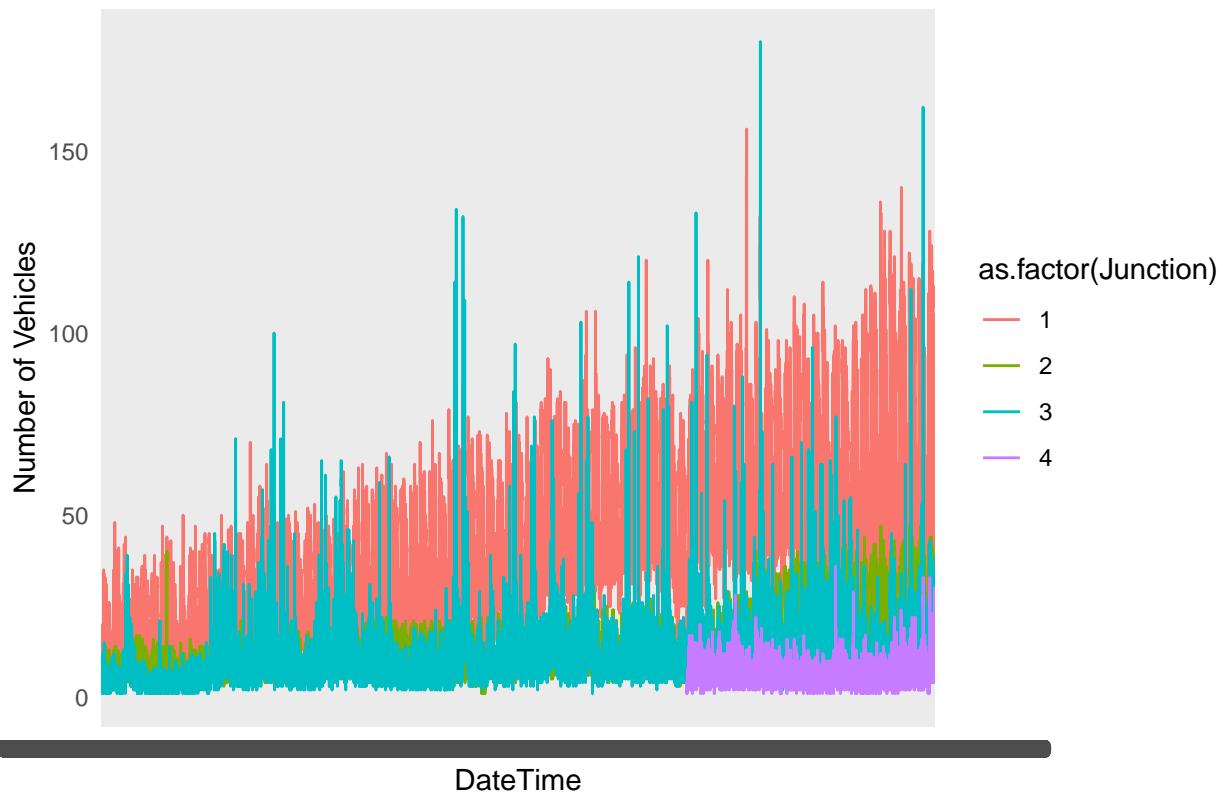

```
#7.
library(readxl)
alexa_file <- read_excel("/cloud/project/alexa_file.xlsx")
#View(alexa_file)

#A.
nrow(alexa_file)

## [1] 3150

ncol(alexa_file)

## [1] 5


#B.
alexa_data <- alexa_file %>%
  group_by(variation) %>%
```

```

summarise(Frequency = n())
#View(alexa_data)

#C
library(dplyr)
ggplot(alexa_data, aes(x = variation, y = Frequency )) +
  geom_bar(stat = "identity") +
  labs(
    title = "Variations of Alexa Devices",
    x = "Variation",
    y = "Frequency")

```

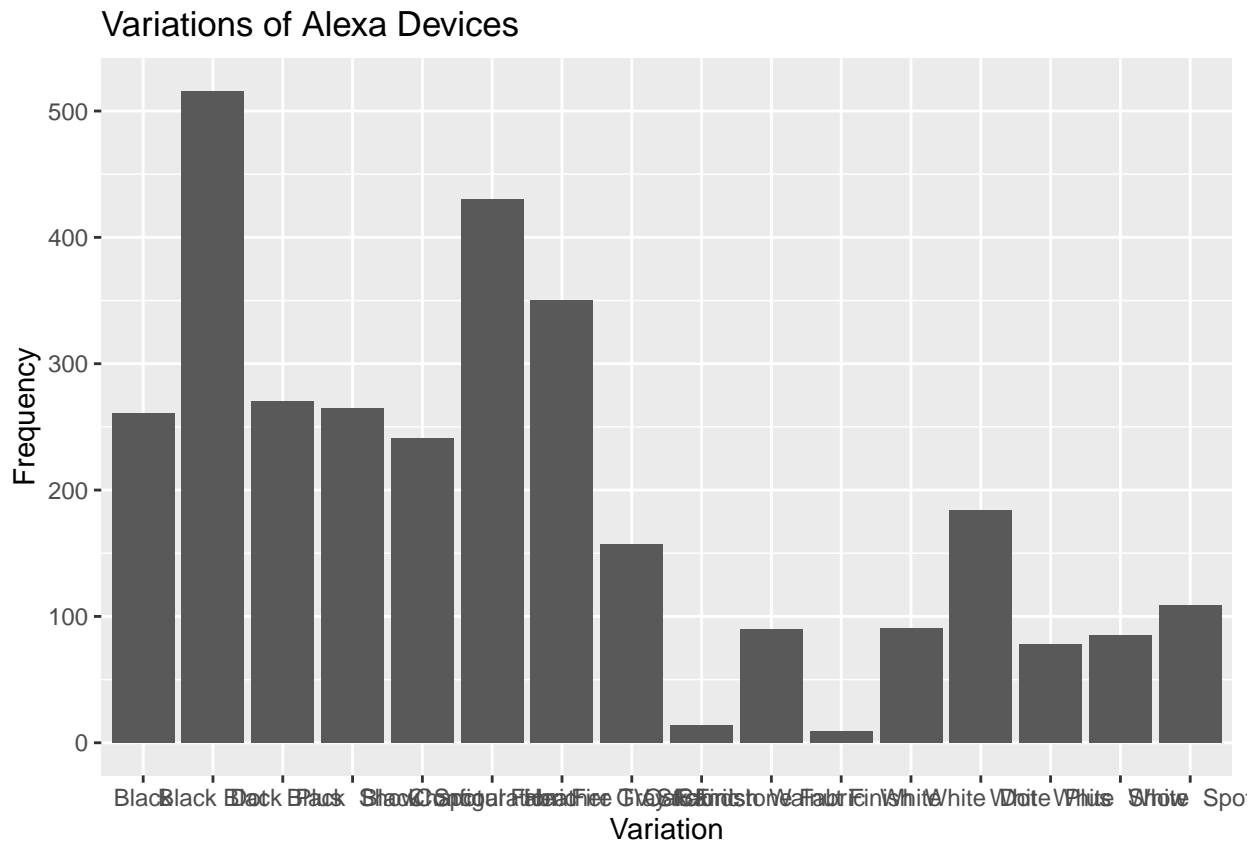

*#Each bar represents a variation, and its height indicates how frequently it appears in the data.*


```

#D.

summary_reviews <- alexa_file %>%
  group_by(date) %>%
  summarize(NumVerifiedReviews = n())


ggplot(summary_reviews, aes(x = date, y = NumVerifiedReviews )) +
  geom_line(color = "blue") +
  labs(
    title = "Verified Reviews Over Time",
    x = "Date",
    y = "Number of Verified Reviews"
  ) +
  theme_minimal()

```

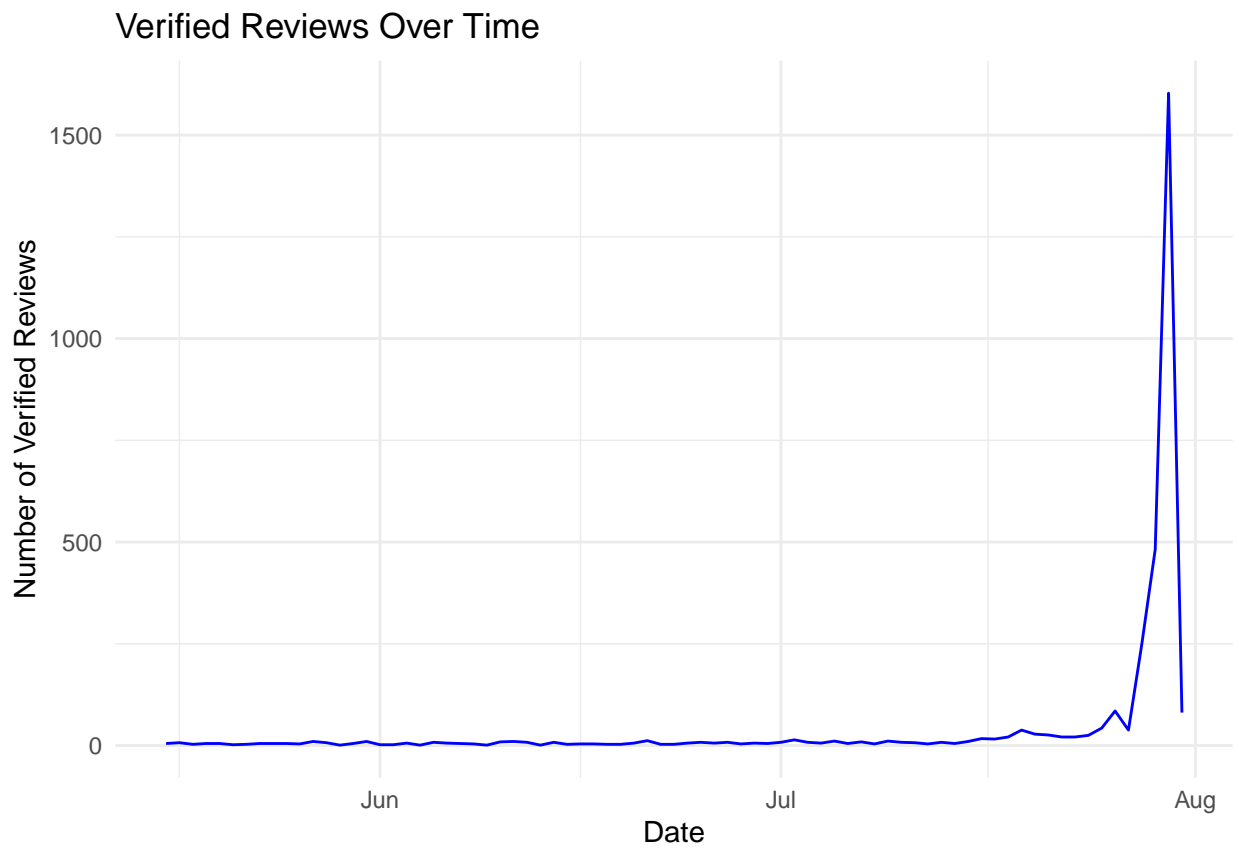

```
#E.  
ggplot(alexa_file, aes(x = rating, y = variation)) +  
  geom_point() +  
  labs(  
    title = "Relationship Between Variations and Ratings",  
    x = "Variation",  
    y = "Rating"  
  ) +  
  theme_minimal()
```

## Relationship Between Variations and Ratings

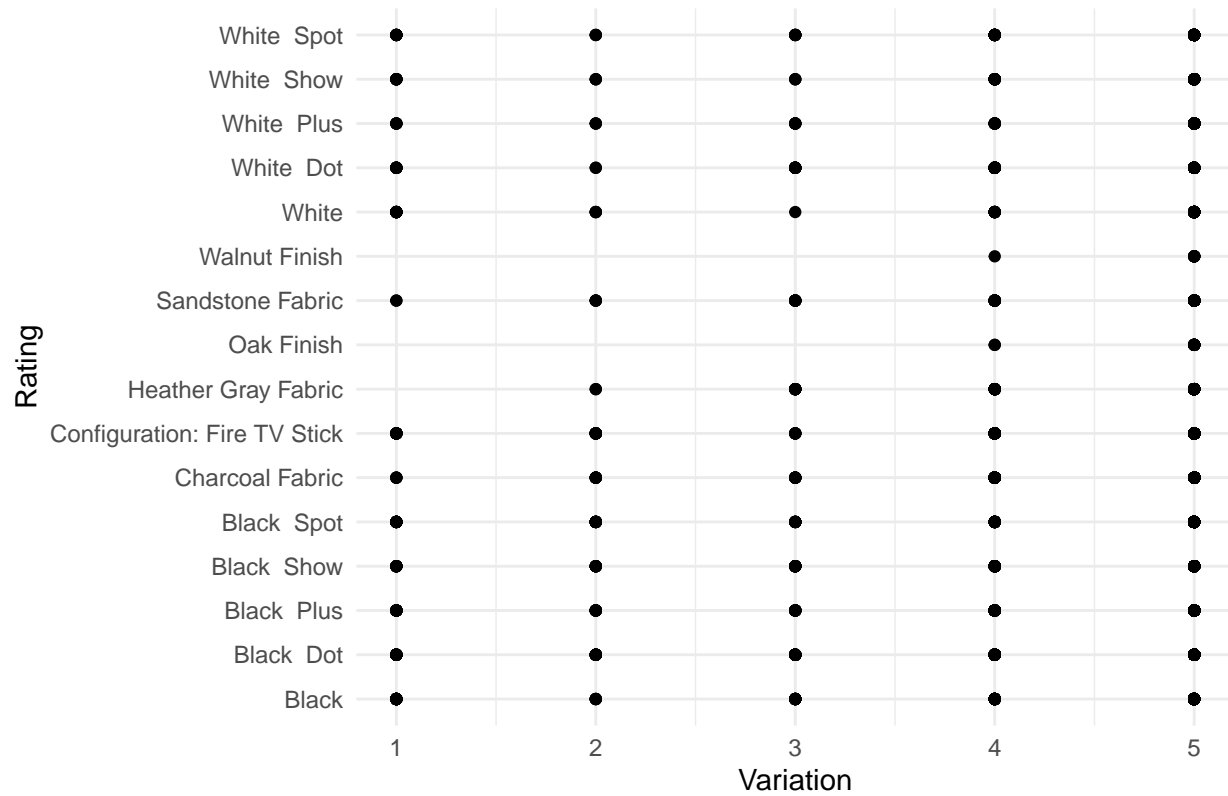

*#the highest variations rating is Walnut Finish and Oak Finish*