


MA-ABE-FU protocol surface and UCAP evidence fields

Control plane authorization and learning-plane unlearning repair are separated, then transcript-bound for audit.

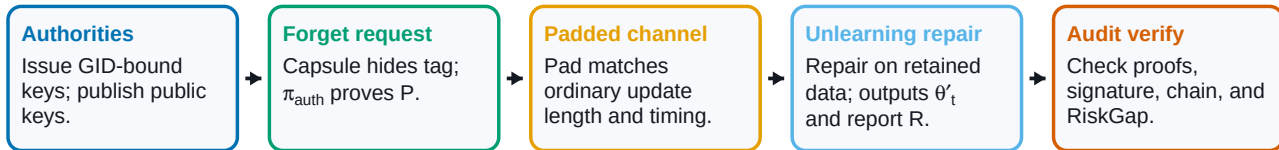

UCAP evidence object O_F

$c_p = H(P)$

policy commitment

$H(ch)$

channel hash

$H(\theta'_t)$

post-repair model commitment

π_{auth}

authorization proof

σ_{AS}

AS signature

$c_s = H(\text{scope})$

scope commitment

$H(\theta_t)$

pre-repair model commitment

$H(R)$

risk-report commitment

π_{rep}

repair proof

h_{prev}

UCAP chain pointer

The server sees commitments and proof handles; RiskGap reports model residue.