


MA-ABE-FU protocol surface and UCAP evidence fields

Control plane authorization and learning-plane unlearning repair are separated, then transcript-bound for audit.

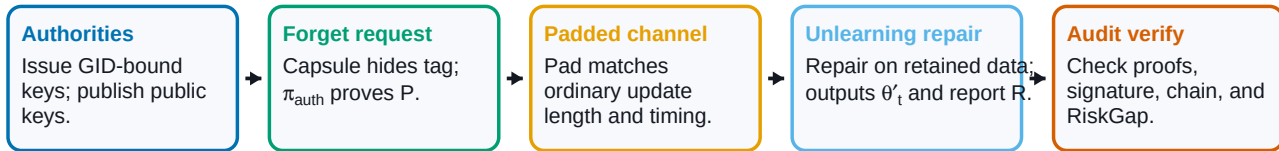

UCAP evidence object O_F

$c_p = H(P)$	policy commitment	$c_s = H(\text{scope})$	scope commitment
$H(\text{ch})$	channel hash	$H(\theta_i)$	pre-repair model commitment
$H(\theta'_i)$	post-repair model commitment	$H(R)$	risk-report commitment
π_{auth}	authorization proof	π_{rep}	repair proof
σ_{AS}	AS signature	h_{prev}	UCAP chain pointer

The server sees commitments and proof handles; RiskGap reports model residue.