


MA-ABE-FU protocol surface and UCAP evidence fields

Control plane authorization and learning-plane unlearning repair are separated, then transcript-bound for audit.

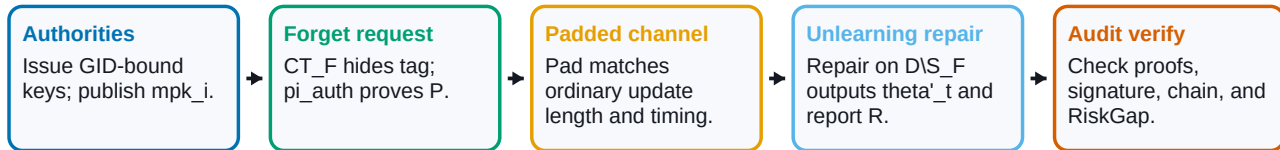

UCAP evidence object O_F

c_P=H(P)	policy commitment	c_s=H(scope)	scope commitment
H(ch)	channel hash	H(theta_t)	pre-repair model commitment
H(theta'_t)	post-repair model commitment	H(R)	risk-report commitment
pi_{auth}	authorization proof	pi_{rep}	repair proof
sigma_{AS}	AS signature	h_{prev}	UCAP chain pointer

The server sees commitments and proof handles; RiskGap reports model residue.