

Class 6







Overview

In-Class Starter Activity

CSS Box Model Video + Review (30 min)

CSS Basics 2 (15 min)

Responsive Markup (30 min)

Break (10 min)

Responsive Markup Hands-On (1 hour)

Fonts & Media Queries Assignment (15 min)



CSS Box Model Video



Every element on the page is a box.



Border/Padding/Margin



BORDER MARGIN PADDING



Important Image CSS

img { max-width: 100%; }

I recommend adding this to every stylesheet.



Important Box-Sizing CSS

Take padding and borders into account when calculating box size

* {box-sizing: border-box}

I recommend adding this to every stylesheet.



DIV and SPAN

Generic ways of grouping elements or words together to relate them or apply style.



HTML 5 Elements

header footer nav (use ul) article

aside section hgroup figure



Targeting Elements with CSS



Use Element Type Selector

```
In HTML
 Hello
      In CSS
p {
   font-weight: bold;
```



Descendant Selector

```
In HTML
<a href="#">Hello</a>
            In CSS
      pa{
         font-weight: bold;
```



ID and Class

Ways to identify elements so that you can make changes to just those elements.



ID: unique element

Water and air. So very commonplace are
these substances, they hardly attraction
attention and yet they vouchsafe our very
existence.

Every time I view
the sea I feel a sense of calming
security, as if visiting my ancestral
home; I embark of a voyage of seeing.

Mystery of mysteries, water and air are
right there before us in the sea.



Class: Multiple Elements

```
For a one-year period from November
2010, the Marugame Genichiro-Inokuma Museum of
Contemporary Art (MIMOCA) will host...
Each will showcase works by the artist thematically
contextualised under the headings...
Hours: 10:00 - 18:00 (No
admittance after 17:30)
```



Use a Class

In HTML

```
<pcle><pcle>class="hello">Hello
```

```
In CSS
.hello {
   font-weight: bold;
}
```



Mix Elements and Classes

In HTML

```
<pclass="hello">Hello
```

```
p.hello {
    font-weight: bold;
}
```



But There's More!

You'll use these much less frequently, but know that they're available.



Additional CSS Selectors

```
ID Selector: #introduction { }
```

```
Direct Child Selector: li > a { }
```

```
Adjacent Selector: h1+p { }
```

General Sibling Selector: h1~p { }




In Class Activity: Starbucks Email

https://codepen.io/challahan/pen/xywvwR



CSS Basics 2 Review



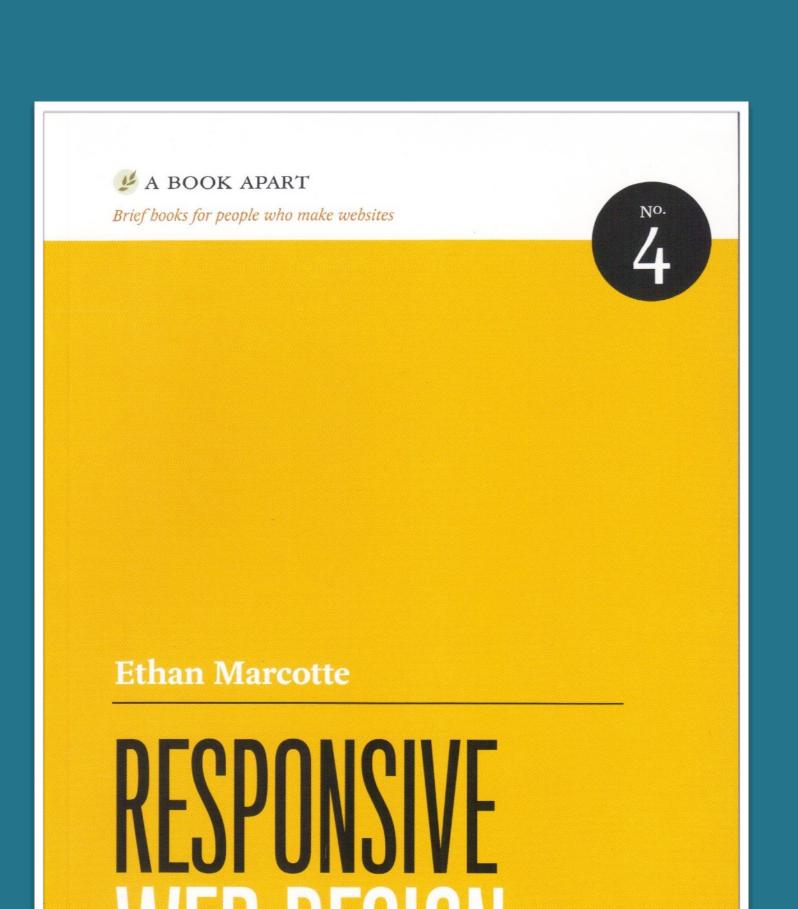

FOREWORD BY Jeremy Keith

RWD Book



Why does the concept of the canvas, used in print design, not translate well to the web?



What challenges do separate mobile/tablet experiences present vs. using responsive design?



Responsive Web Design

Percentage-Based Grids
Flexible Images
Media Queries



Percentage-Based Grids

target / context = result

http://codepen.io/challahan/professor/EVEGMv

http://codepen.io/challahan/professor/WQzPbQ/?editors=1100



Fluid Images

http://codepen.io/challahan/professor/yYKZbb/

```
img {
    max-width: 100%;
}
```



Media Query

```
@media screen and (min-width: 600px) {
    /* CSS Styles That Apply Go Here */
}
@media screen and (max-width: 1200px) {
    /* CSS Styles That Apply Go Here */
}
```



Media Query

```
@media screen and (min-width: 600px) and (max-width: 1200px) {
    /* CSS Styles That Apply Go Here */
}
@media screen and (min-height: 600px) {
    /* CSS Styles That Apply Go Here */
}
```




Breakpoint


Size at which the page layout or design "breaks"

Can have multiple breakpoints per layout

Let design (not device) dictate breakpoints



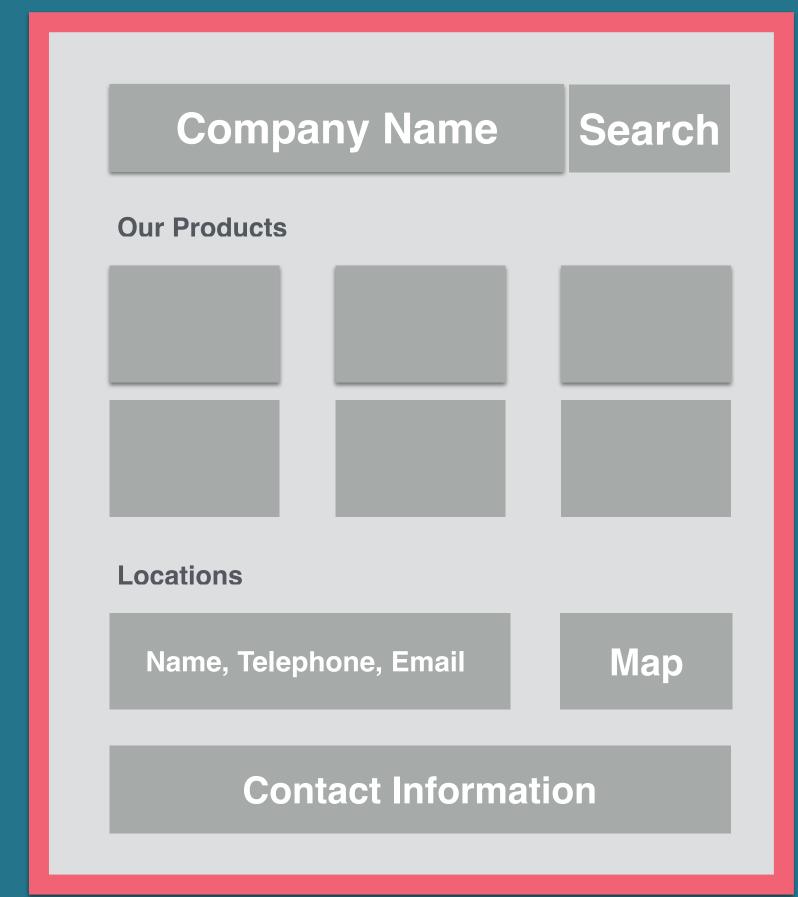

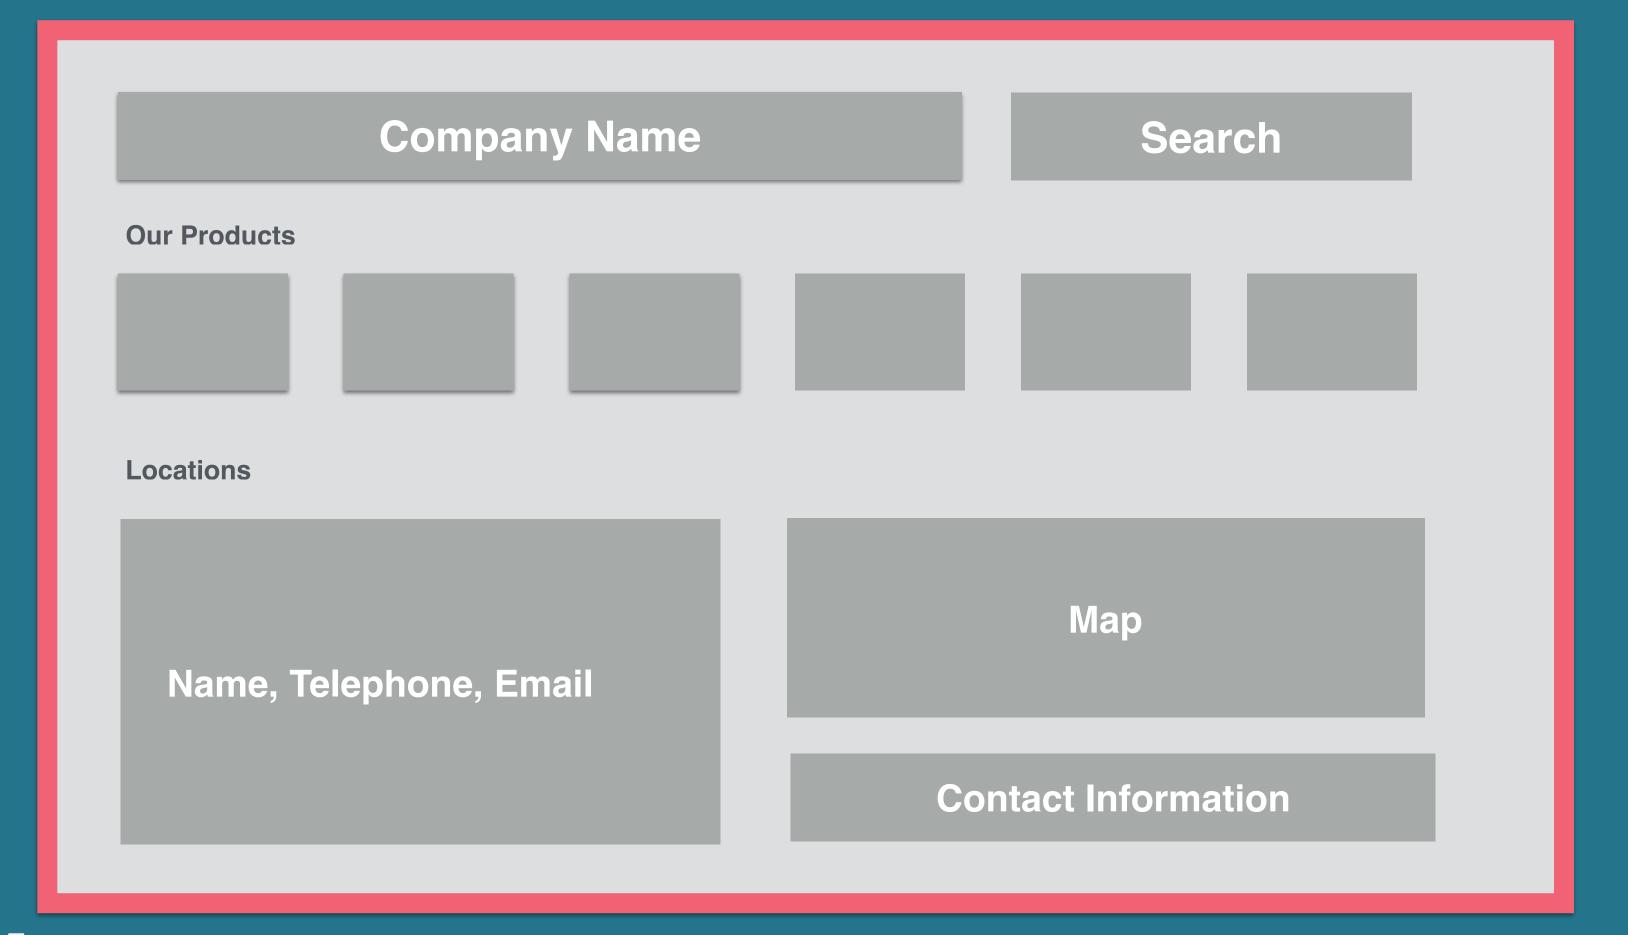

A Breakpoint: 1000px wide



Media Query

width
height
device-width
device-height
orientation
aspect-ratio

device-aspect ratio color color-index monochrome resolution scan



Magic Meta Tag

<meta name="viewport" content="initial-scale=1.0, width=device-width" />

Example: http://codepen.io/challahan/professor/yYKZbb/



Magic Meta Tag

<meta name="viewport" content="initial-scale=1.0, width=device-width" />



Default HTML Code

```
Raw
       <!DOCTYPE html>
      <html lang="en-us">
        <head>
          <meta charset="utf-8">
          <meta http-equiv="X-UA-Compatible" content="IE=edge">
          <meta name="viewport" content="width=device-width, initial-scale=1">
          <title>Page Title Goes Here</title>
          <meta name="description" content="Page Description Goes Here">
        </head>
        <body>
             <!-- The page content goes here -->
            <link href="style.css" rel="stylesheet" type="text/css" media="screen" /> <!-- Add your stylesheet here, before the closi</pre>
        </body>
       </html>
```

https://gist.github.com/challahan/08eddc8da7152f483f99



Default CSS (Reset)

```
    ormalize-with-responsive.css

    /* Additional Default Styles for Responsive */
  3 html {
  4 box-sizing: border-box;
  7 *,
 8 *::before,
 9 *::after {
 10 box-sizing: inherit; }
 12 img, object, video, iframe {
 13 max-width: 100%:
 15 -ms-interpolation-mode: bicubic;
 16 display: inline-block;
 17 vertical-align: middle;
 /*! normalize.css v4.0.0 | MIT License | github.com/necolas/normalize.css */
 * 1. Change the default font family in all browsers (opinionated).
 * 2. Prevent adjustments of font size after orientation changes in IE and iOS.
 27
 28 html {
 29 font-family: sans-serif; /* 1 */
 30 -ms-text-size-adjust: 100%; /* 2 */
 31 -webkit-text-size-adjust: 100%; /* 2 */
```

https://gist.github.com/challahan/33beaed4647a8e1f077c90085545c383



No Media Query

0 Infinity




@media screen and (max-width: 600px) { }






@media screen and (min-width: 1200px) { }

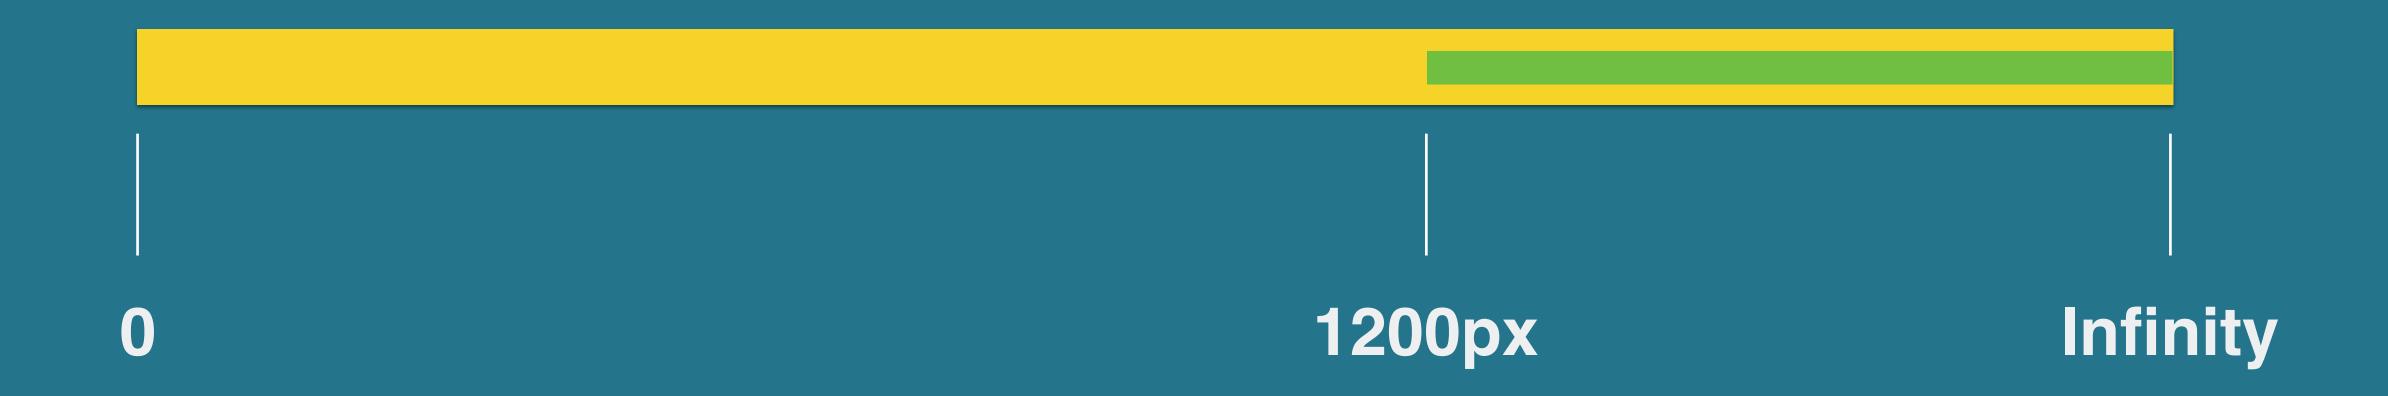



@media screen and (min-width: 800px) and (max-width: 1000px) { }

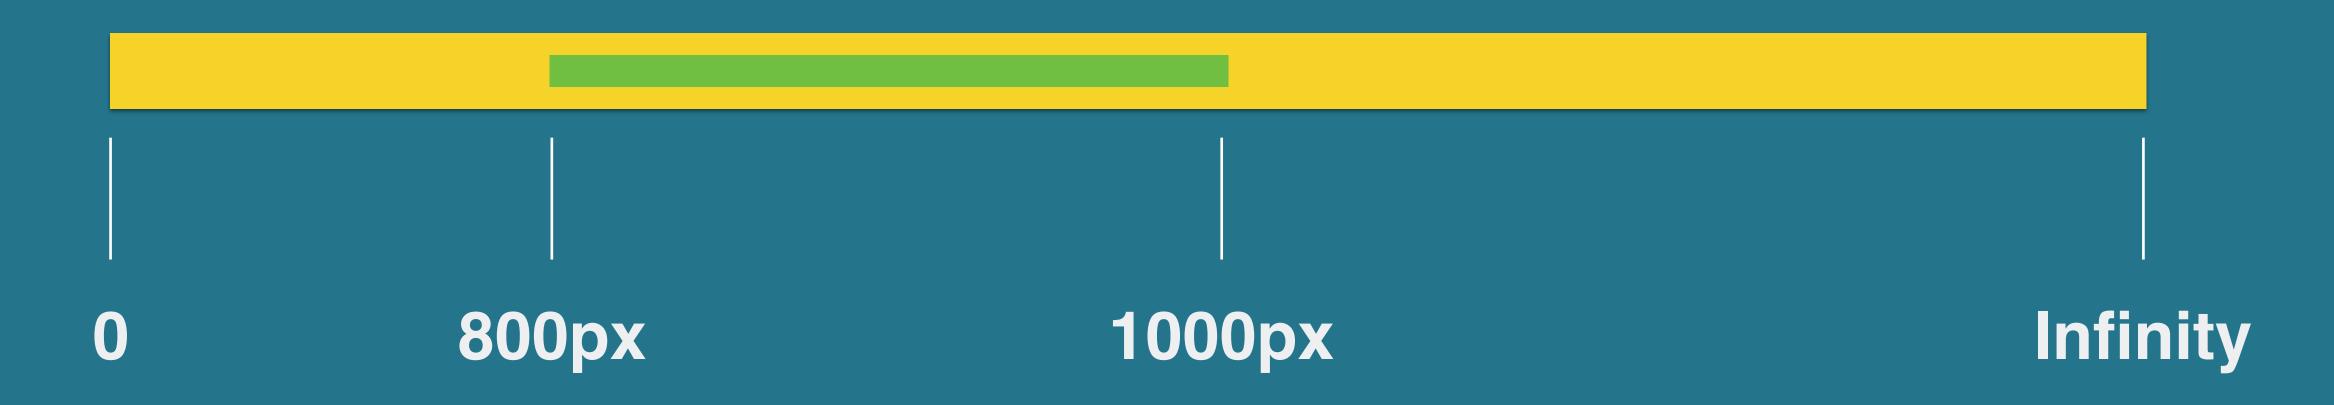



@media screen and (min-height: 500px){}

Infinity ——

500px —

0 -



@media screen and (max-height: 1100px){}

```
Infinity ——
```

1100px—

0 –



Media Query

```
@media screen and (min-width: 600px) {
    /* CSS Styles Inside Here Only Apply at
    600px and higher*/
@media screen and (max-width: 1200px) {
   /* CSS Styles Inside Here Only Apply at
   1200px and lower*/
```



Media Query

```
@media screen and (min-width: 600px) {
       color: purple;
@media screen and (max-width: 1200px) {
      color: purple;
```



Media Query Examples

http://codepen.io/challahan/professor/yawgyZ/




Creating Layouts



Fixed-Width (Pixel) Layouts

```
body {
  width: 960px;
  margin: 0 auto;}

.column1, .column2, .column3 {
  background-color: #efefef;
  width: 300px;
  float: left;
  margin: 10px;}
```

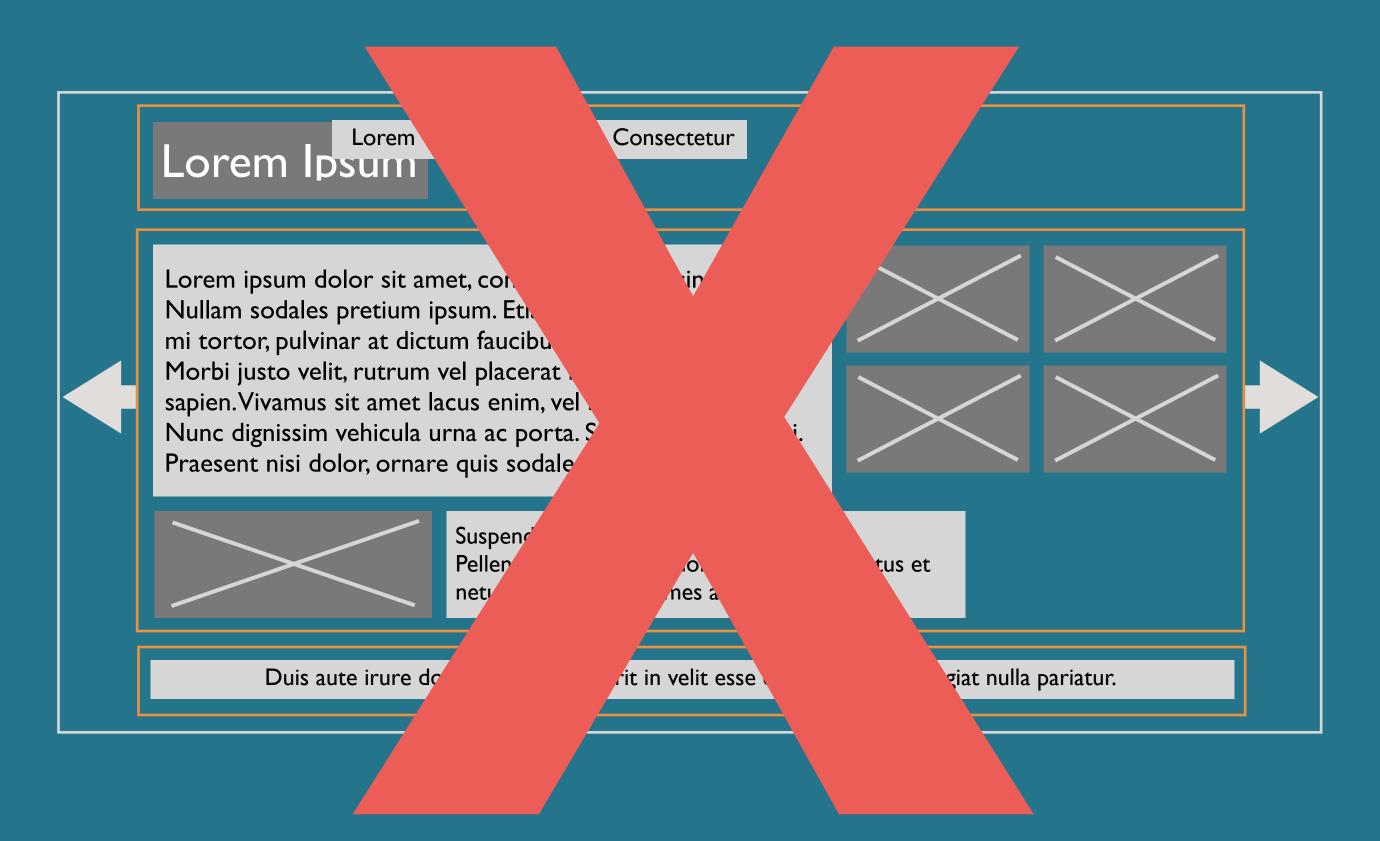




Liquid (Percentage) Layouts


```
body {
  width: 90%;
  margin: 0 auto;}


.column1, .column2, .column3 {
  width: 31.3%;
  float: left;
  margin: 1%;}
.column3 {
  margin-right: 0%;}
```

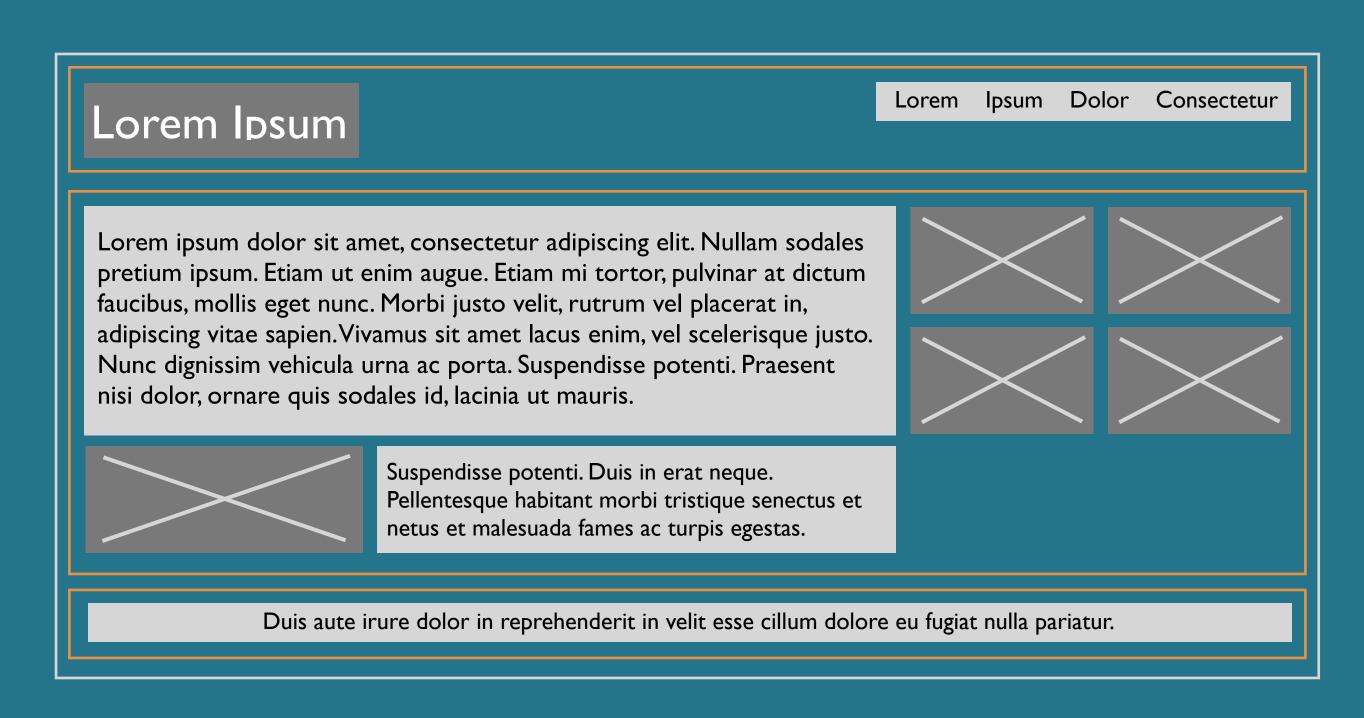



Responsive Layouts

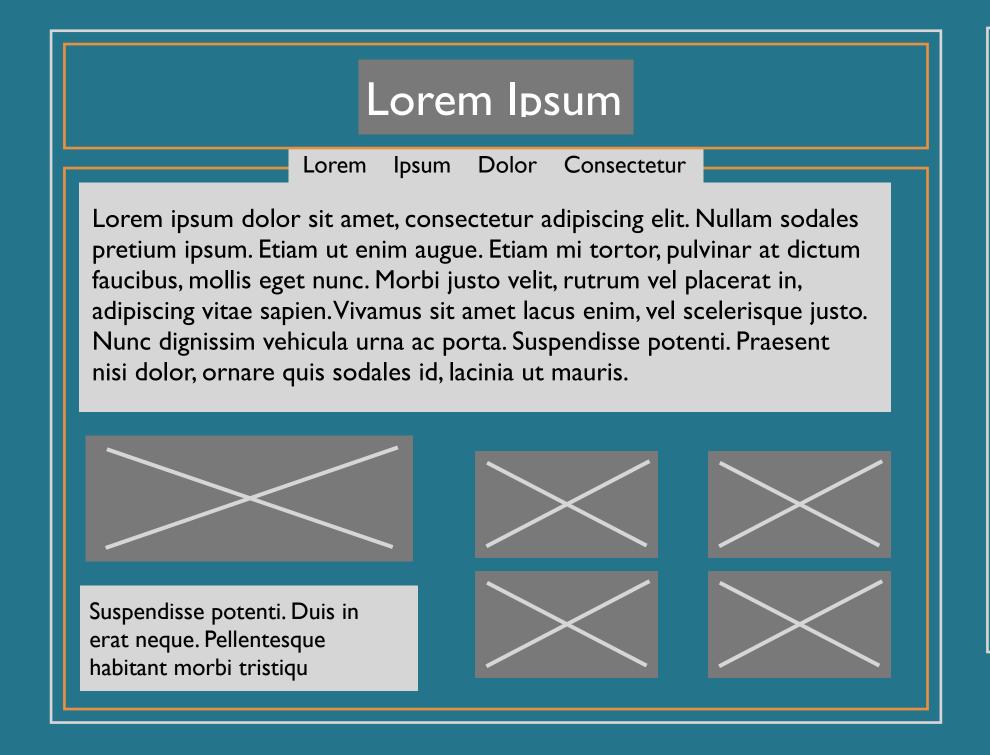

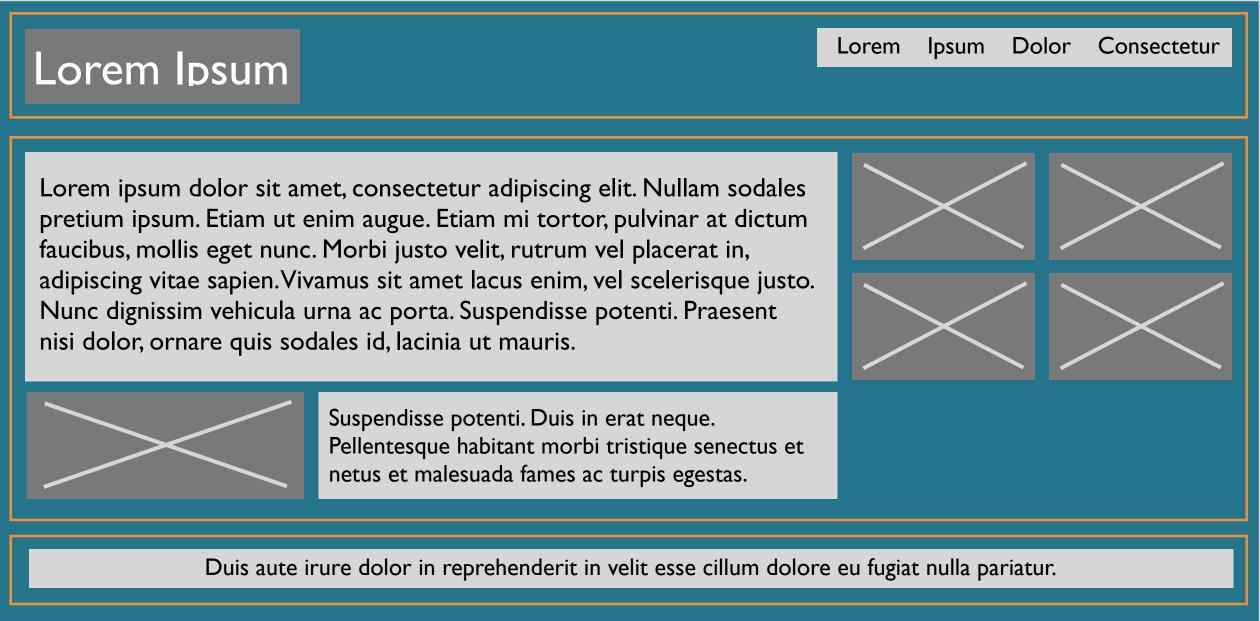



Fonts & Media Queries

Due Next Week



For Next Class

READ: Flexbox Articles, Responsive Web Design Ch. 5

DUE: Fonts & Media Queries Assignment

