



**NOIDA INSTITUTE OF ENGINEERING AND TECHNOLOGY
GREATER NOIDA-201306**

(An Autonomous Institute)

School of Computer Sciences & Engineering in Emerging Technologies

Department of CSE

Session (2022 – 2023)

LAB FILE

ON

Web Technology Lab

(ACSE-0555)

(5th Semester)

Submitted To:

Mr. Ajeet Kumar

Submitted By:

Name: Aman Maurya

Roll No: 2001330100041



Affiliated to Dr. A.P.J Abdul Kalam Technical University, Uttar Pradesh, Lucknow.



NOIDA INSTITUTE OF ENGINEERING AND TECHNOLOGY GREATER NOIDA-201306

(An Autonomous Institute)

School of Computer Sciences & Engineering in Emerging Technologies

Web Technology Lab (ACSE-0555)

INDEX

S.NO	PRACTICAL CONDUCTED	DATE	PAGE NO	GRADE	SIGN
1	Write HTML program to display your CV in navigator, your institute website, Department Website and Tutorial website for specific subject.				
2	Write a program in XML for creation of DTD, which specifies set of rules. Create a style sheet in CSS/ XSL & display the document in internet explorer.				
3	Write a program to show the use of XML schema.				
4	Write a CSS program to show use of Inline, Internal and External CSS				
5	Write a program for CSS Box Model				
6	Write a program to show the use of Bootstrap components and Grid System.				
7	Write HTML program to design Registration form and validate it using JavaScript.				
8	Write JavaScript program to show the use of Dialogue Boxes i.e. Alert, Confirm and Prompt.				
9	Write a program to show various types of JavaScript events.				
10	Write a program in PHP to find the factorial of given number.				
11	Write a program in PHP to perform file handling.				
12	Write a PHP program to show the use of Session and Cookies.				

Program-01

Aim-Write HTML program to display your CV in navigator, your institute website, Department Website and Tutorial website for specific subject.

Source Code-

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>My Resume</title>
```

```
</head>
```

```
<body style="background-color:rgb(192, 188, 139);">
```

```
<pre style="background-color:rgb(147, 143, 138);border:double;font-size:400%;color:black;"> Aman Maurya
```

```
<pre style="font-style:italic;font-size:40%;color:black;"> 0201cse049@niet.co.in    +91- 9554022978    Bela  
Pipraich Gorakhpur,UP(INDIA)</pre></pre>
```

```
</body>
```

```
<h2 style="color:brown;"> <u> OBJECTIVE </u></h2>
```

<p>To associate myself with an organisation that provides a challenging job and and an opportunity to prove innovative skills

and diligent work.

</p>

<p>To be involved in providing software solutions to enhance network security.</p>

<u> PROFESSIONAL EXPERIENCE </u></h2>

Software developer intern,<i>fastfindfirm</i>

introduction to Software development virtual experience,<i>Cisco</i>

<u> PROJECT DETAILS </u></h2>

<h3>Description :</h3>

Portfolio

Electronics Ecommerce

Weather site

Blog site

<h3>Databases,tech. and Languages used :</h3>

<p>HTML , CSS , Javascript, React, Bootstrap , Git , Github , MySQL & JAVA</p>

<h2 style="color:brown;"> <u> COURSES DONE </u></h2>

Java Programming

DATA Structures and Algorithm

Algorithmic toolbox

introduction to Html,Css and Javascript

<style>

table, th, td {

border: 4px solid black; border-collapse: collapse;
}

</style>

<h2 style="color:brown;"> <u> EDUCATIONAL BACKGROUND </u></h2>

<table>

<tr>

<th>Degree of Examination</th>

<th>Name of Institution</th>

<th>Year</th>

<th>Division</th>

</tr>

<tr>

<td>B.Tech(hons),Computer Science and Engg.</td>

<td>Noida Institute of Engg. and Technology,Greater Noida</td>

<td>2020-2024</td>

<td>-</td>

</tr>

<tr>

<td>Senior School Examination(12th)</td>

<td>Co-operative Inter College, Pipraich, Gorakhpur</td>

<td>2018-2020</td>

<td>First Division with 75%</td>

</tr>

<tr>

<td>High School(10th)</td>

<td>Co-operative Inter College, Pipraich, Gorakhpur</td>

<td>2016-2018</td>

<td>First Division with 83.17% </td>

</tr>

</table>

<h2 style="color:brown;"> <u>SOFTWARE SKILLS </u></h2>

<h3>Programming languages : </h3><p>C , C++ , JAVA , Assembly Language , Pyhon , MySQL</p>

<h3>Technologies : </h3><p>HTML , CSS , PHP and JavaScript</p>

<h2 style="color:brown;"> <u>PERSONAL DETAILS </u></h2>

<h3>Date of Birth : </h3><p>03 March,2003</p>

<h3>Marital Status : </h3><p>Single</p>

<h3>Gender : </h3><p>Male</p>

<h3>Permanent Address : </h3><p>Bela Pipraich Gorakhpur,UP(INDIA)</p>

<h2 style="color:brown;"> <u> REFERENCES </u></h2>

Mr. Karan Gupta , Web Developer (NIET Gr.Noida)

W3Schools , HTML Blog pages

Google

<h2 style="color:brown;"> <u>WEBSITE & SOCIAL LINKS </u></h2>

<p><h3>For more information , following are my personal portfolio link :</h3>

</p>

Visit My Portfolio

</html>

OUTPUT:

Aman Maurya



0201cse049@niet.co.in +91- 9554022978 Bela Pipraich Gorakhpur,UP(INDIA)

OBJECTIVE

To associate myself with an organisation that provides a challenging job and and an opportunity to prove innovative skills and diligent work.

To be involved in providing software solutions to enhance network security.

PROFESSIONAL EXPERIENCE

- Software developer intern,*fastfindfirm*
- introduction to Software development virtual experience,*Cisco*

PROJECT DETAILS

Description :

- Portfolio
- Electronics Ecommerce
- Weather site
- Blog site

Databases,tech. and Languages used :

HTML , CSS , Javascript, React, Bootstrap , Git , Github , MySQL & JAVA

COURSES DONE

- Java Programming
- DATA Structures and Algorithm
- Algorithmic toolbox
- introduction to Html,Css and Javascript

EDUCATIONAL BACKGROUND

Degree of Examination	Name of Institution	Year	Division
B.Tech(hons),Computer Science and Engg.	Noida Institute of Engg. and Technology,Greater Noida	2020-2024	-
Senior School Examination(12th)	Co-operative Inter College, Pipraich, Gorakhpur	2018-2020	First Division with 75%
High School(10th)	Co-operative Inter College, Pipraich, Gorakhpur	2016-2018	First Division with 83.17%

SOFTWARE SKILLS

- **Technologies :**

HTML , CSS , PHP and JavaScript

PERSONAL DETAILS

- **Date of Birth :**

03 March,2003

- **Marital Status :**

Single

- **Gender :**

Male

- **Permanent Address :**

Bela Pipraich Gorakhpur,UP(INDIA)

REFERENCES

- Mr. Karan Gupta , Web Developer (NIET Gr.Noida)
- W3Schools , HTML Blog pages
- Google

WEBSITE & SOCIAL LINKS

For more information , following are my personal portfolio link :

- [Visit My Portfolio](#)

Program-02

Aim-Write a program in XML for creation of DTD, which specifies set of rules. Create a style sheet in CSS/ XSL & display the document in internet explorer.

Theory:

XML Document Type Declaration, commonly known as DTD, is a way to describe precisely the XML language. DTD check the validity of structure and vocabulary of an XML document against the grammatical rules of appropriate XML language.

DTD can be classified on the basis in the XML declaration:

- ✓ Internal DTD
- ✓ External DTD

Internal DTD:

A DTD is referred to as an internal DTD if elements are declared within the XML files. To reference it as internal DTD, standalone attribute in XML declaration must be set to yes. This means the declaration works independent of external source.

Syntax

The syntax of internal DTD is as shown:

```
<!DOCTYPE root-element [element-declarations]>
```

where root-element is the name of root element and element-declarations is where you declare the elements.

Example

Internal DTD file:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes" ?>
<!DOCTYPE address [
<!ELEMENT address (name,company,phone)>
<!ELEMENT name (#PCDATA)>
<!ELEMENT company (#PCDATA)>
<!ELEMENT phone (#PCDATA)>
]>
<address>
<name>HARSH GUPTA </name>
<company>NIET</company>
<phone>+91 7983897588</phone>
</address>
```



External DTD:

In external DTD elements are declared outside the XML file. They are accessed by specifying the system attributes which may be either the legal .dtd file or a valid URL. To reference it as external DTD, standalone attribute in the XML declaration must be set as no. This means, declaration includes information from the external source.

Syntax:

Following is the syntax for external DTD:

```
<!DOCTYPE root-element  
SYSTEM "file-name">where  
file-name is the file with .dtd  
extension.
```

Example:

external DTD file:

```
<?xml version="1.0" encoding="UTF-8" standalone="no" ?>  
<!DOCTYPE address SYSTEM "address.dtd">  
<address>  
<name>HARSH GUPTA</name>  
<company>NIET</company>  
<phone>+91 7983897588</phone>  
</address>
```



Student.xml

```
<?xml version = "1.0"?>  
<?xml-stylesheet type = "text/xsl" href = "student.xsl"?>  
<class>  
<student rollno = "0017">  
<firstname>Aman </firstname>  
<lastname> Agarwal </lastname>  
<marks>90</marks>  
</student>  
<student rollno = "0042">  
<firstname>Ashish</firstname>  
<lastname>Mishra </lastname>  
<marks>92</marks>  
</student>  
<student rollno = "0046">  
<firstname>Atul </firstname>
```

```

<lastname>Agnihotri </lastname>
<marks>95</marks>
</student>
</class>

```

Student.xsl

```

<?xml version = "1.0" encoding = "UTF-8"?>
<xsl:stylesheet version = "1.0"
xmlns:xsl = "http://www.w3.org/1999/XSL/Transform">
  <xsl:template match = "/">
    <html>
      <body>
        <h2>Students</h2>
        <table border = "1">
          <tr bgcolor = "#9acd32">
            <th>Roll No</th>
            <th>First Name</th>
            <th>Last Name</th>
            <th>Marks</th>
          </tr>
          <xsl:for-each select="class/student">
            <tr>
              <td>
                <xsl:value-of select = "@rollno"/>
              </td>
              <td><xsl:value-of select = "firstname"/></td>
              <td><xsl:value-of select = "lastname"/></td>
              <td><xsl:value-of select = "marks"/></td>
            </tr>
          </xsl:for-each>
        </table>
      </body>
    </html>
  </xsl:template>
</xsl:stylesheet>

```

Output

Students


Roll No	First Name	Last Name	Marks
0046	Atul	Agnihotri	85
0123	Kapil	Agnihotri	90
0017	Aman	Agarwal	95

Program-03

Aim-Write a program to show the use of XML schema.

Source Code-

```
<?xml version = "1.0" encoding = "UTF-8"?>
<xs:schema xmlns:xs = "http://www.w3.org/2001/XMLSchema">
  <xs:element name = "Address1">
<xs:complexType
  pe>
<xs:sequence>
  <xs:element name = "address" type = "AddressType" />
  <xs:element name = "phone1" type = "xs:int" />
</xs:sequence>
</xs:complexType
  pe>
</xs:el
ement>
  <xs:element name =
    "Address2">
<xs:complexType
  pe>
<xs:sequence>
  <xs:element name = "address" type = "AddressType" />
  <xs:element name = "phone2" type = "xs:int" />
</xs:sequence>
</xs:complexType
  pe>
</xs:el
ement>
</xs:sc
hema>
```

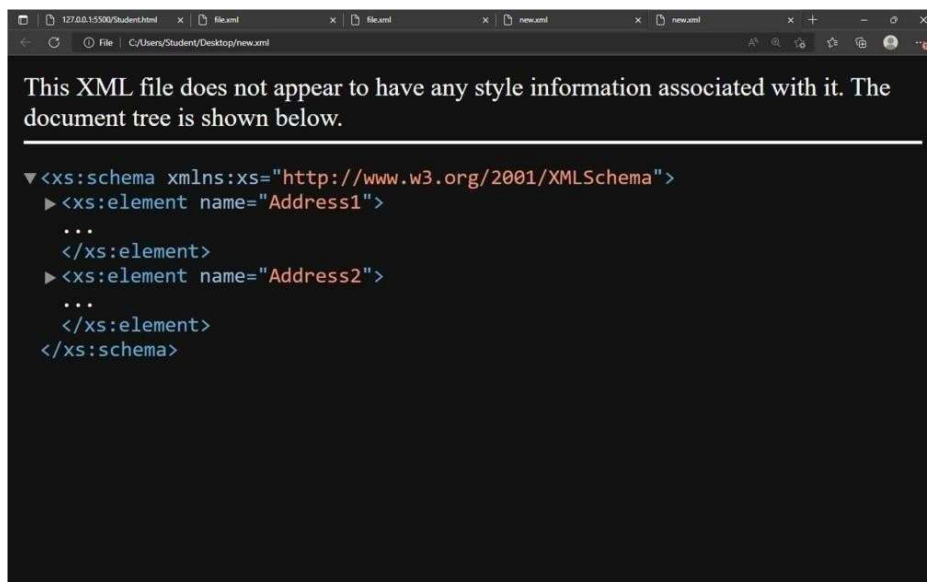

Program-04

Aim-Write a CSS program to show use of Inline, Internal and External CSS

Inline CSS:

```
<h1 style="color:blue;">This is Inline CSS.</h1>
```



Internal CSS:

Source Code-

```
<!DOCTYPE html>
<html>
<head>
<style>
body {background-
color: powderblue;}h1
{color: blue;}
p {color: red;}
</style>
</head>
<body>

<h1>This is Internal CSS.</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

Output of Internal CSS:



External CSS:

Source Code-

```
<!DOCTYPE html>
<html>
<head>
  <link rel="stylesheet" href="style.css">
</head>
<body>

<h1>This is External CSS.</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

Style.css

```
body {
  background-color: powderblue;
}
h1 {
  color: blue;
}
p {
  color: red;
}
```

Output of External CSS:



Program-05

Aim-Write a program for CSS Box Model

Source

Code-

```
<style>
div {
    background-color: lightgray;
    width: 300px;
    border: 30px solid green;
    padding: 30px;
    margin: 30px;
    text-align: center;
    margin: auto;
}
h2 {
    color: green;
    text-align: center;
}
p {
    color: red;
    text-align: center;
}
</style>
<h2>Demonstrating the CSS Box Model</h2>
```

<p>The CSS box model is essentially a box that wraps around every HTML element. It consists of: borders, padding, margins, and the actual content.


</p>

<div>This text is the actual content of the box.

We have added a 25px padding, 25px margin and a 25px green border.

</div>

Output of Program 5:

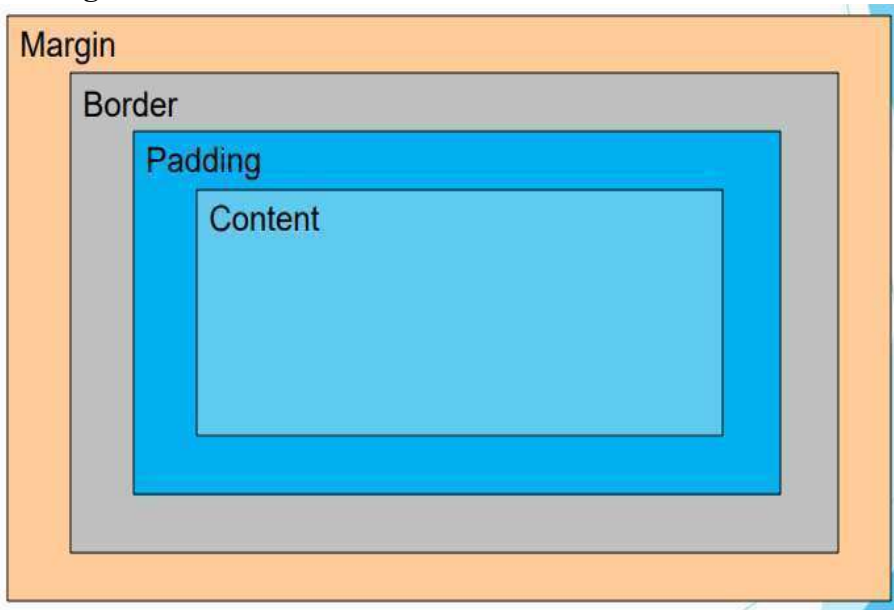

Program-06

Aim-Write a program to show the use of Bootstrap components and Grid System

Some of the Bootstrap components are:

- Jumbotron
- Alerts
- Buttons
- Button group
- Badge
- Progress Bar
- DropDown
- Nav
- Navbar
- Forms

And many more.

Some of them are implemented below:

1. Button

Source Code-

```
<!DOCTYPE html>
<html>
<head>
    <title>Components of BootStrap 4</title>

    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1"/>

    <link rel="stylesheet" href=
"https://maxcdn.bootstrapcdn.com/bootstrap/4.3.1/css/bootstrap.min.css"/>

    <script src=
"https://ajax.googleapis.com/ajax/libs/jquery/3.3.1/jquery.min.js">
    </script>
    <script src=
"https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.7/umd/popper.min.js">
    </script>
    <script src=
"https://maxcdn.bootstrapcdn.com/bootstrap/4.3.1/js/bootstrap.min.js">
    </script>
</head>

<!-- A nav code-->
<br />
```

```

<h3>Nav:</h3>
<ul class="nav">
  <li class="nav-item">
    <a class="nav-link active"
      href="#">Active link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link"
      href="#provide link url here">
      First link
    </a>
  </li>
  <li class="nav-item">
    <a class="nav-link"
      href="#provide link url here">
      second link
    </a>
  </li>
  <li class="nav-item">
    <a
      class="nav-link disabled"
      href="#provide link url here"
      tabindex="-1"
      aria-disabled="true"
      >Disabled</a>
  </li>
</ul>

```

```

<!-- A nav code-->

```

```

<!-- A small alert code-->
<h3>Alert:</h3>
<div class="alert alert-info"
  role="alert">
  A simple alert!
</div>

```

```

<!-- A small alert code-->
<h3>Modal:</h3>

```

```

<button
  type="button"
  class="btn btn-success"
  data-toggle="modal"
  data-target="#exampleModal">
  Ambiguous Model

```

```

</button>



<!-- Modal -->
<div
    class="modal fade"
    id="exampleModal"
    tabindex="-1"
    aria-labelledby="exampleModalLabel"
    aria-hidden="true">
    <div class="modal-dialog">
    <div class="modal-content">
        <div class="modal-header">
        <h5 class="modal-title"
            id="exampleModalLabel">
            geeksforgeeks
        </h5>
        <button
            type="button"
            class="close"
            data-dismiss="modal"
            aria-label="Close">
            <span aria-hidden="true">×</span>
        </button>
        </div>
        <div class="modal-body">
        Hello, thanks for checking
        out my Ambiguous Model!
        </div>
        <div class="modal-footer">
        <button type="button"
            class="btn btn-secondary"
            data-dismiss="modal">
            Close
        </button>
        <button type="button"
            class="btn btn-primary">
            Save
        </button>
        </div>
    </div>
</div>

</div>

</html>

```

OUTPUT:

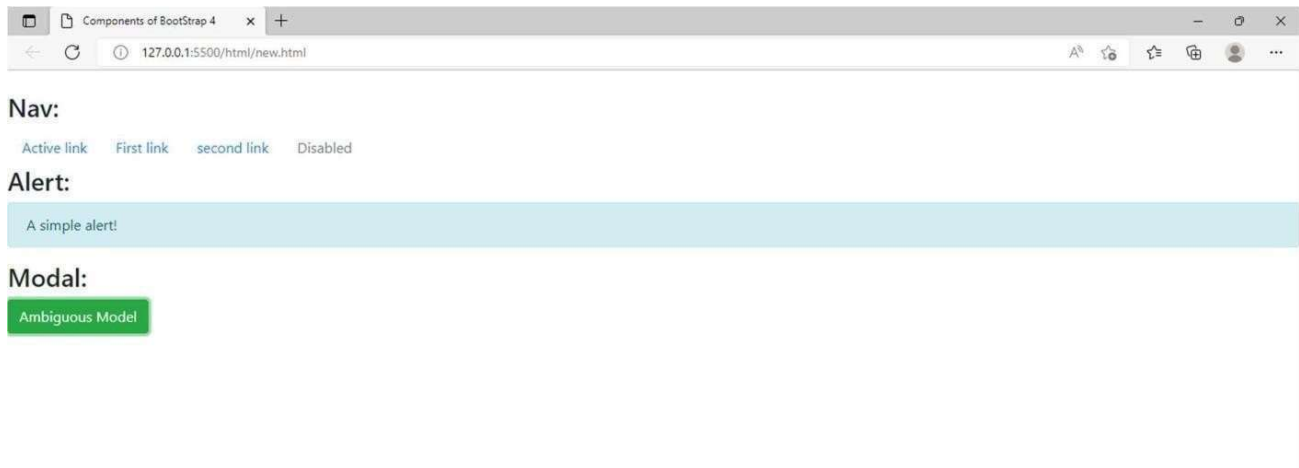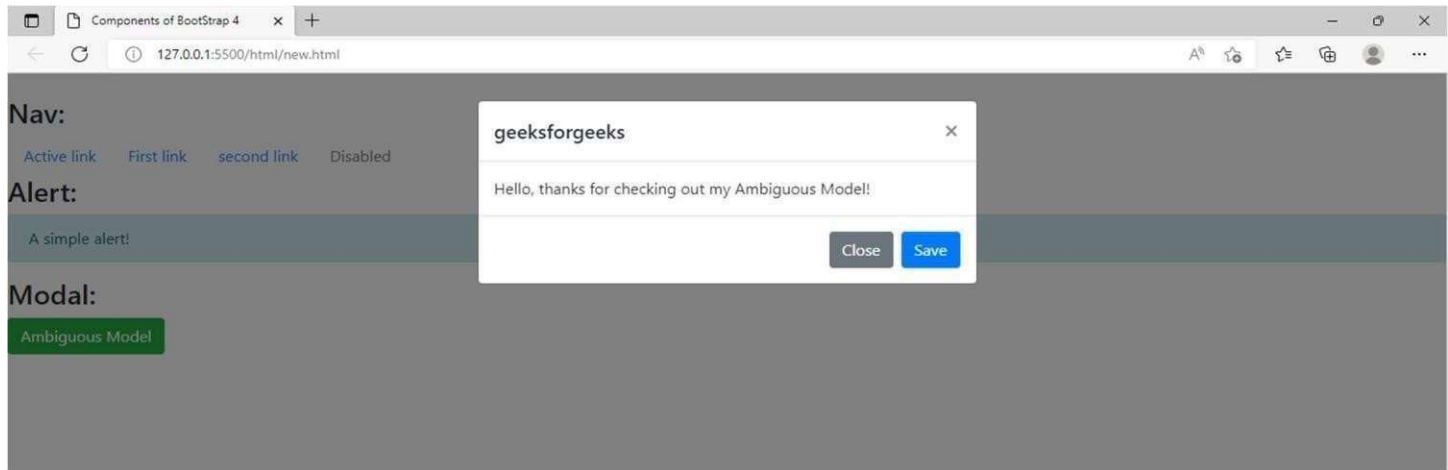

2. Bootstrap Toast

Source Code-

```
<!DOCTYPE html>

<html lang="en">

<head>

    <title>Bootstrap Toast Example</title>

    <meta charset="utf-8" />

    <meta name="viewport" content="width=device-width, initial-scale=1" />

    <link rel="stylesheet" href=
"https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css" />

    <script src=
"https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js">
    </script>
    <script src=
"https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js">
    </script>
    <script src=
"https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/js/bootstrap.min.js">
    </script>
</head>

<body>

    <div class="container">

        <h3 class="text-success">Ambiguous Model</h3>

        <h5>Toast Example</h5>

        <div class="toast" data-autohide="false">

            <div class="toast-header">

                <strong class="mr-auto text-primary">
```


Ambiguous Model

```
</strong>

<button type="button"
        class="ml-2 mb-1 close"
        data-dismiss="toast">
    ×
</button>
</div>
<div class="toast-body">
    A Computer Science portal for people.
</div>
</div>
</div>

<script>
$(document).ready(function () {
    $(".toast").toast("show");
});
</script>
</body>
</html>
```

OUTPUT:

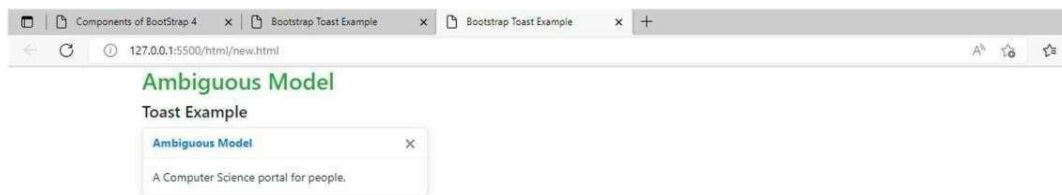

3. Bootstrap Jumbotron

Source Code-

```
<!DOCTYPE html>

<html lang="en">

<head>

    <title>Bootstrap Example</title>

    <meta charset="utf-8" />

    <meta name="viewport" content=

        "width=device-width, initial-scale=1" />

    <link

        rel="stylesheet" href=

"https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css" />

</head>

<body>

    <div class="container">

        <div class="jumbotron">

            <h1 class="text-center text-success">

                Ambiguous Model

            </h1>

            <h3>Bootstrap Jumbotron Tutorial</h3>

            <p>

                Bootstrap is a free and open-source

                tool collection for creating responsive

                websites and web applications. It is

                the most popular HTML, CSS, and

                JavaScript framework for developing

                responsive, mobile-first websites.

            </p>
```


```
</div>
```

```
</div>
```

```
</body>
```

```
</html>
```

OUTPUT:

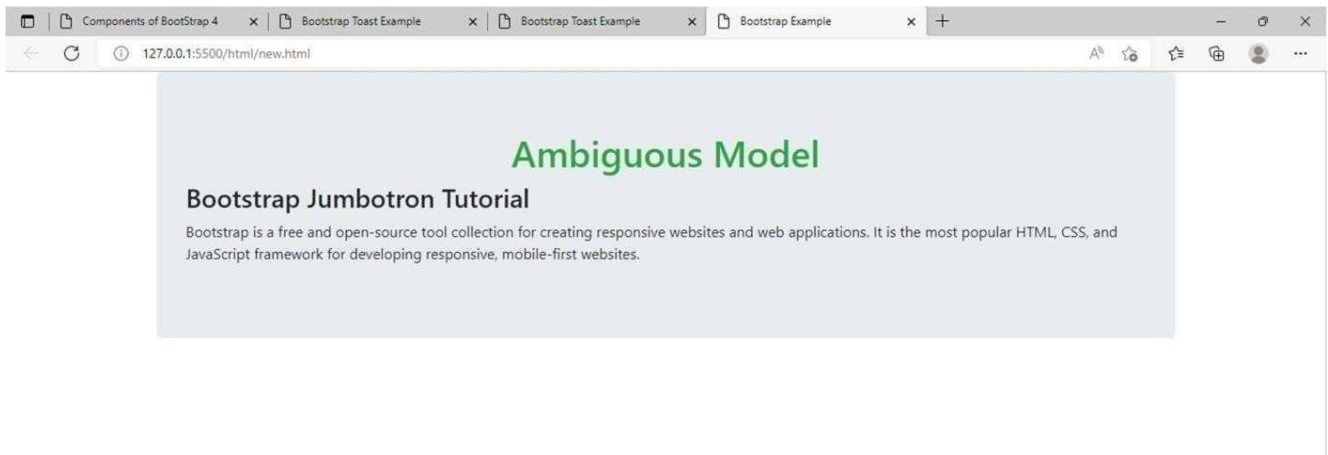

4. Grid System

Source Code-

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta http-equiv="X-UA-Compatible" content="IE=edge">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>CSS Grid System</title>

  <style>

    .wrapper {

      display: grid;

      grid-template-columns: repeat(3, 1fr);

      gap: 10px;

      grid-auto-rows: minmax(100px, auto);

    }

    .one {

      grid-column: 1 / 3;

      grid-row: 1;

    }

    .two {

      grid-column: 2 / 4;

      grid-row: 1 / 3;

    }

    .three {
```

```
grid-column: 1;
```

```
grid-row: 2 / 5;
```

```
.four {
```

```
grid-column: 3;
```

```
grid-row: 3;
```

```
}
```

```
.five {
```

```
grid-column: 2;
```

```
grid-row: 4;
```

```
}
```

```
.six {
```

```
grid-column: 3;
```

```
grid-row: 4;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<div class="wrapper">
```

```
<div class="one">One</div>
```

```
<div class="two">Two</div>
```

```
<div class="three">Three</div>
```

```
<div class="four">Four</div>
```

```
<div class="five">Five</div>
```


```
<div class="six">Six</div>
```

</div>

</body>

</html>

OUTPUT:

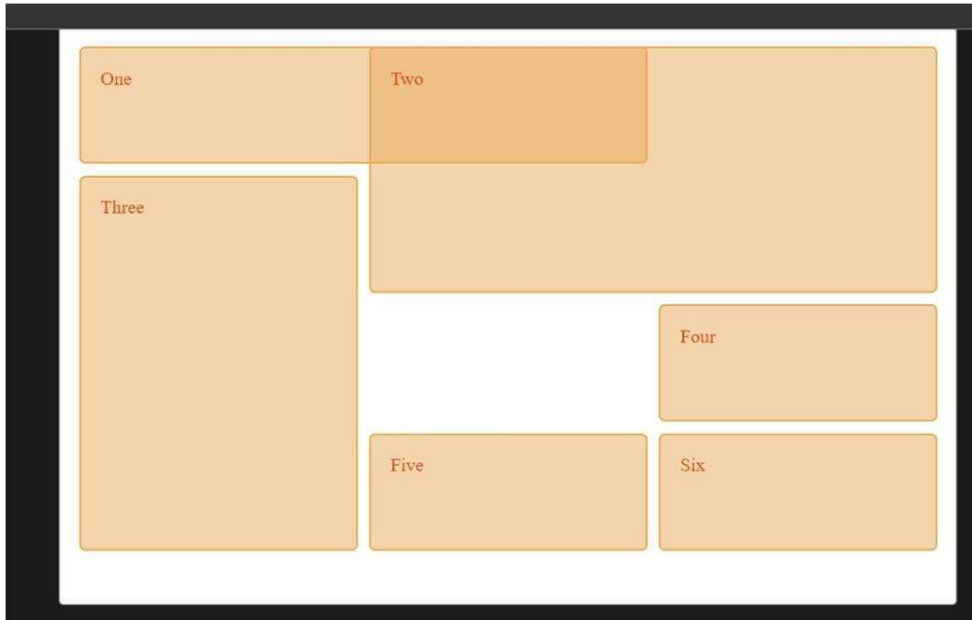

Program -07

Aim-Write HTML program to design Registration form and validate it using JavaScript.

Source Code-

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Registration Form</title>
</head>
<style>
    div {
        box-sizing: border-box;
        width: 100%;
        border: 100px solid black;
        float: left;
        align-content: center;
        align-items: center;
    }

    form {
        margin: 0 auto;
        width: 600px;
    }
</style>

<body>
```

```
<body>

<h1 style="text-align: center;">REGISTRATION FORM</h1>

<form name="RegForm" onsubmit="return GEEKFORGEEKS()" method="post">

  <p>Name: <input type="text" size="65" name="Name" /></p>

  <br />

  <p>Address: <input type="text" size="65" name="Address" />

  </p>

  <br />

  <p>E-mail Address: <input type="text" size="65" name="EMail" /></p>

  <br />

  <p>Password: <input type="text" size="65" name="Password" /></p>

  <br />

  <p>Telephone: <input type="text" size="65" name="Telephone" /></p>

  <br />

  <p>

    SELECT YOUR COURSE

    <select type="text" value="" name="Subject">

      <option>BTECH</option>

      <option>BBA</option>

      <option>BCA</option>

      <option>B.COM</option>

      <option>GEEKFORGEEKS</option>

    </select>

  </p>

  <br />
```


<p>Comments: <textarea cols="55" name="Comment"> </textarea></p>

<p>

<input type="submit" value="send" name="Submit" />

<input type="reset" value="Reset" name="Reset" />

</p>

</form>

</body>

<script>

function GEEKFORGEEKS() {

var name =

document.forms.RegForm.Name.value;

var email =

document.forms.RegForm.EMail.value;

var phone =

document.forms.RegForm.Telephone.value;

var what =

document.forms.RegForm.Subject.value;

var password =

document.forms.RegForm.Password.value;

var address =

document.forms.RegForm.Address.value;

```
var regEmail=/^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/g;
```

```
var regPhone=/^\d{10}$/;
```

```
var regName = /\d+$/g;
```

```
if (name == "" || regName.test(name)) {
```

```
    window.alert("Please enter your name properly.");
```

```
    name.focus();
```

```
    return false;
```

```
}
```

```
if (address == "") {
```

```
    window.alert("Please enter your address.");
```

```
    address.focus();
```

```
    return false;
```

```
}
```

```
if (email == "" || !regEmail.test(email)) {
```

```
    window.alert("Please enter a valid e-mail address.");
```

```
    email.focus();
```

```
    return false;
```

```
}
```

```
if (password == "") {
```

```
    alert("Please enter your password");
```

```
    password.focus();
```

```
    return false;
```

```
}
```

```
if(password.length <6){
```

```
    alert("Password should be atleast 6 character long");
```

```
        password.focus();  
        return false;  
    }  
    if (phone == "" || !regPhone.test(phone)) {  
        alert("Please enter valid phone number.");  
        phone.focus();  
        return false;  
    }  
    if (what.selectedIndex == -1) {  
        alert("Please enter your course.");  
        what.focus();  
        return false;  
    }  
    return true;  
}  
</script>  
</body>  
</html>
```

REGISTRATION FORM

Name:

Address:

E-mail Address:

Password:

Telephone:

SELECT YOUR COURSE

Comments:

This page says
Please enter your name properly.

OK

Name:

Address:

E-mail Address:

Password:

Telephone:

SELECT YOUR COURSE

Comments:

Program-08

Aim-Write JavaScript program to show the use of Dialogue Boxes i.e Alert, Confirm and Prompt Boxes.

1. Alert()

Source Code-

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <meta http-equiv="X-UA-Compatible" content="IE=edge">

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <title>Document</title>

</head>

<script type="text/javascript">

    function fun() {

        alert(" Hello World \n Welcome to my webpage \n This is an alert dialog box ");

    }

</script>

<body>

    <p> Click the following button to see the effect </p>

    <form>


        <input type="button" value="Click me" onclick="fun();" />

    </form>

</body>

</html>
```

OUTPUT:

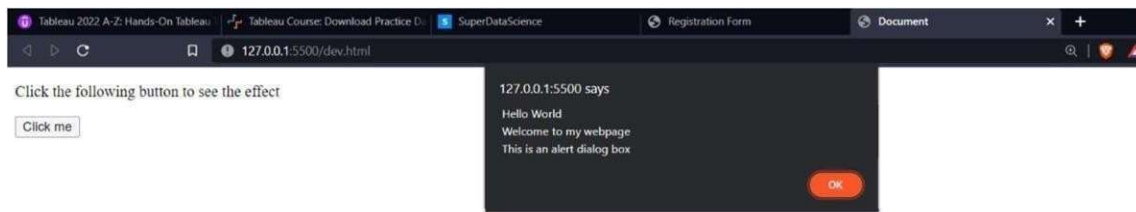

2. Confirm()

Source Code-

```
<!DOCTYPE html>

<html>

<head>

    <title>

        Window confirm() Method

    </title>

</head>

<body style="text-align: center;">

    <h1 style="color: green;">

        MyWebpage.com

    </h1>

    <h2>

        Window confirm() Method

    </h2>

    <p>Click the button to display a confirm box.</p>

    <button onclick="geek()">Click me!</button>
```

```

<script>

    function geek() {

        confirm("Press OK to close this option");

    }

</script>

</body>

</html>

```

OUTPUT:



3. Prompt()

Source Code-

```

<!DOCTYPE html>

<html>

<head>

    <title>

        Window prompt() Method

    </title>

</head>

<body style="text-align: center;">

```

```
<h1 style="color:green;">
```

```
    My Webpage
```

```
</h1>
```

```
<h2>
```

```
    Window prompt() Method
```

```
</h2>
```

```
<button onclick="geek()">
```

```
    Click me!
```

```
</button>
```

```
<p id="g"></p>
```

```
<script>
```

```
    function geek() {
```

```
        var doc = prompt("Please enter some text",
```

```
        "My Programming");
```

```
        if (doc != null) {
```

```
            document.getElementById("g").innerHTML =
```

```
            "Welcome to " + doc;
```

```
        }
```


```
    }
```

```
</script>
```

```
</body>
```

```
</html>
```

OUTPUT:

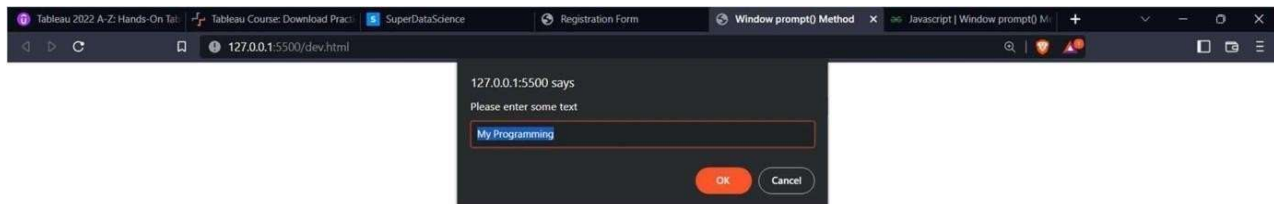

Program-09

Aim-Write a program to show various types of JavaScript Events

1.Click Event

Source Code-

```
<html>

<head> Javascript Events </head>

<body>

<script language="Javascript" type="text/Javascript">

    <!--

    function clickevent()

    {

        document.write("This is MyWebpage");

    }

    //-->

</script>

<form>


<input type="button" onclick="clickevent()" value="Who's this?"/>

</form>


</body>

</html>
```

OUTPUT:



On Clicking the Above Button



2. Mouse Over Event

Source Code-

```
<html>

<head>

<h1> Javascript Events </h1>

</head>

<body>

<script language="Javascript" type="text/Javascript">

    <!--

    function mouseoverevent()

    {

        alert("This is JavaTpoint");

    }

    //-->

</script>

<p onmouseover="mouseoverevent()"> Keep cursor over me</p>

</body>
```

</html>


OUTPUT:



3. Load Event

Source Code-

```
<html>
<head>Javascript Events</head>
<br>
<body onload="window.alert('Page successfully loaded');">
<script>
<!--
document.write("The page is loaded successfully");
//-->
</script>
</body>
</html>
```

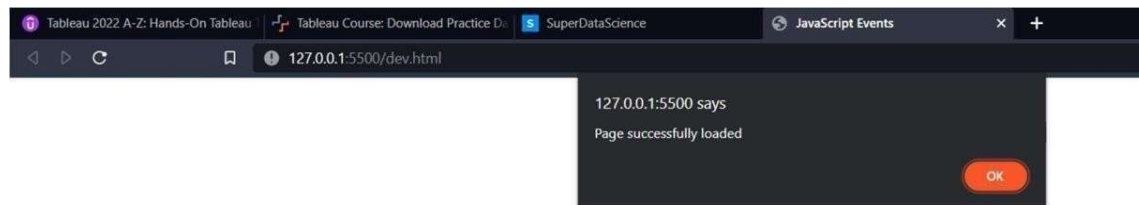

Program-10

Aim-Write a program in PHP to find the factorial of a given number

Source Code-

```
<html>

<head>

<title>Factorial Program using loop in PHP</title>

</head>

<body>

<form method="post">

    Enter the Number:<br>

    <input type="number" name="number" id="number">

    <input type="submit" name="submit" value="Submit" />

</form>

<?php

    if($_POST){

        $fact = 1;

        //getting value from input text box 'number'

        $number = $_POST['number'];

        echo "Factorial of $number:<br><br>";

        //start loop

        for ($i = 1; $i <= $number; $i++){

            $fact = $fact * $i;

        }

        echo $fact . "<br>";

    }

?>

</body>

</html>
```



Enter the Number:

Submit

Factorial of 123:

1.2146304367025E+205

Program-11

Aim-Write a program in PHP to perform file handling.

File handling is needed for any application. For some tasks to be done file needs to be processed. File handling in PHP is similar as file handling is done by using any programming language like C.

1-fopen()-PHP fopen() function is used to open a file. First parameter of fopen() contains name of the file which is to be opened and second parameter tells about mode in which file needs to be opened.

```
<?php
$file = fopen("demo.txt", 'w');
?>
```

2. fread()-After file is opened using fopen() the contents of data are read using fread(). It takes two arguments. One is file pointer and another is file size in bytes.

```
<?php
$filename = "demo.txt";
$file = fopen( $filename, 'r' );
$size = filesize( $filename );
$filedata = fread( $file, $size );
?>
```

3. fwrite()-New file can be created or text can be appended to an existing file using fwrite() function. Arguments for fwrite() function are file pointer and text that is to be written to file.

```
<?php
$file = fopen("demo.txt", 'w');
$text = "Hello world\n";
fwrite($file, $text);
?>
```

4. fclose()-File is closed using fclose() function. Its argument is file which needs to be closed.

```
<?php
$file = fopen("demo.txt", 'r');
//some code to be executed
fclose($file);
?>
```

Program-12

Aim-Write a program in PHP to show the use of Session & Cookies.

PHP Cookies:

Source Code-

```
<?php
setcookie("user", "Sonoo");

?>

<html>

<body>

<?php
if(!isset($_COOKIE["user"])) {
    echo "Sorry, cookie is not found!";
} else {
    echo "<br/>Cookie Value: " . $_COOKIE["user"];
}

?>

</body>

</html>
```

OUTPUT:

Cookie Value: Sonoo

PHP Sessions: Source Code-

```
<?php
// Start the session
session_start();
?>

<!DOCTYPE html>

<html>

<body>


<?php
// Set session variables
$_SESSION["favcolor"] = "green";
$_SESSION["favanimal"] = "cat";
echo "Session variables are set.";
?>

</body>
</html>
```

OUTPUT:

Session variables are set.