

## TCS Interview Question

## Question description

Ravi participated in TCS off campus interview at reputed institution, one of the technical question he has to complete with in the given time, where you need to sort the array in the waveform. There might be multiple possible output of the program, the following pattern output is appreciated.

## Function Description

This is a simple method of solving this question which contains basic 2 steps and they are as follow

**Step : 1** – Sort the array in ascending order.

**Step : 2** – Swap all adjacent elements of the array

Let us consider the input array be {3, 6, 5, 10, 7, 20}. After sorting, we get {3, 5, 6, 7, 10, 20}. After swapping adjacent elements, we get {5, 3, 7, 6, 20, 10}.


## Brute Force Method : Step 1

Array

3 6 5 10 7 20

Step : 1

3 5 6 7 10 20

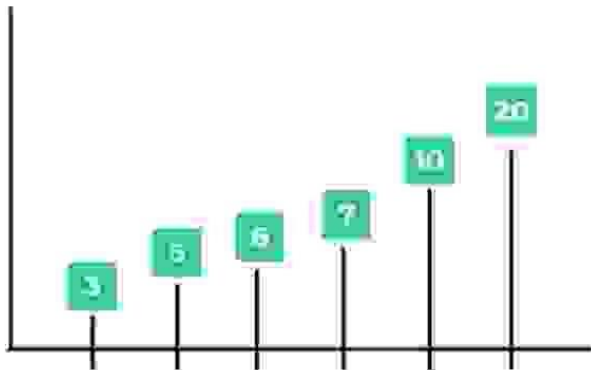


## Brute Force Method : Step 2

Step : 1

3 5 6 7 10 20

Step : 2

5 3 7 6 20 10

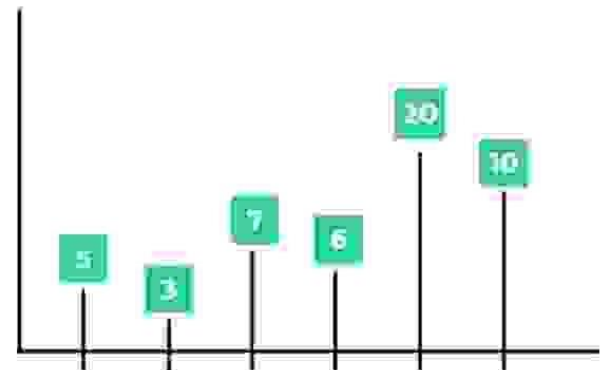

## Constraints

$0 < n < 100$

$0 < arr[i] < 1000$

## Input Format

First line contains the value of  $n$  that is the total number of elements in the array.

-Second line contains the space separated elements of array.

#### Output Format

-Output contains only line that is only the resultant array in the wave form fashion.

#### Logical Test Cases

##### Test Case 1

INPUT (STDIN)

6

EXPECTED OUTPUT

5 3 7 6 20 10

##### Test Case 2

INPUT (STDIN)

8

EXPECTED OUTPUT

3 2 6 5 20 10 98 80

#### Mandatory Test Cases

##### Test Case 1

KEYWORD

int array[n]

##### Test Case 2

KEYWORD

for(int i=0;i<n;i++)

##### Test Case 3

KEYWORD

if(array[i]>array[j])

#### Complexity Test Cases

##### Test Case 1

CYCLOMATIC COMPLEXITY

##### Test Case 2

TOKEN COUNT

##### Test Case 3

NLOC

# Code

```
1  #include <stdio.h>
2  int main()
3  {
4      int n, i, j, temp;
5      scanf("%d", &n);
6
7      int arr[n];
8
9      for(i = 0; i < n; i++)
10     {
11         scanf("%d", &arr[i]);
12     }
13
14     /* Step 1: Sort in ascending order */
15     for(i = 0; i < n - 1; i++)
16     {
17         for(j = i + 1; j < n; j++)
18         {
19             if(arr[i] > arr[j])
20             {
21                 temp = arr[i];
22                 arr[i] = arr[j];
23                 arr[j] = temp;
24             }
25         }
26     }
27
28     /* Step 2: Swap adjacent elements */
29     for(i = 0; i < n - 1; i += 2)
30     {
31         temp = arr[i];
32         arr[i] = arr[i + 1];
33         arr[i + 1] = temp;
34     }
35     /* Print final array */
36     for(i = 0; i < n; i++)
```

```
37     printf("%d ", arr[i]);  
38  
39     return 0;  
40 }
```

## Output:

```
6
3 6 5 10 7 20
5 3 7 6 20 10
-----
Process exited after 18.83 seconds with return value 0
Press any key to continue . . . |
```