The agent asked the forecast service itself.

```
AGENT · OFFLINE
POST /ask
--------------------------------
> Forecast Bob's Diner, 14 days
--------------------------------
tool  forecast(Bob's Diner, 14)
→ live model on :8104 · xgboost
--------------------------------
[offline 84d59c89] Bob's Diner:
about 6,445 units in 14 days
(460.4 a day), xgboost model.
--------------------------------
provider                 offline
tool_calls                     1
keys in source: none
common/llm.py · anthropic | opena…
```

The course version shipped a key in source.

Can an agent run with no key at all?

course version

`1 key in source`



here

`0 keys · 3 providers`

Agent API

Capstone · Applied AI

One LLM door, one real tool, no key in source

```
max@baluyot ~ $ curl -s
localhost:8105/ask -H 'content-type:
application/json' -d
"{\"text\":\"Forecast sales for
Bob's Diner for the next 14 days\"}"
```

Maximus Friedrich Baluyot



1 Two tools
`requests`

2 common/llm.py
`anthropic · openai · google-genai`

3 decide → tool → answer
`complete_json · complete`

4 POST /ask
`FastAPI`


5 Chat page
`HTML + ui.css`


Service down? Fall back, and say so.

Course version → here

API key	in source, as a fallback	environment only
Provider	**Gemini only**	**Anthropic · OpenAI · Gemini · offline**
Shape	proxy: text in, text out	agent: pick a tool, run it, answer
Reply	{response}	{response, provider, model, tool_calls}
Tests	a CLI loop called test_agent.py	9 offline tests, backend mocked

Forecast question: the tool call, shown

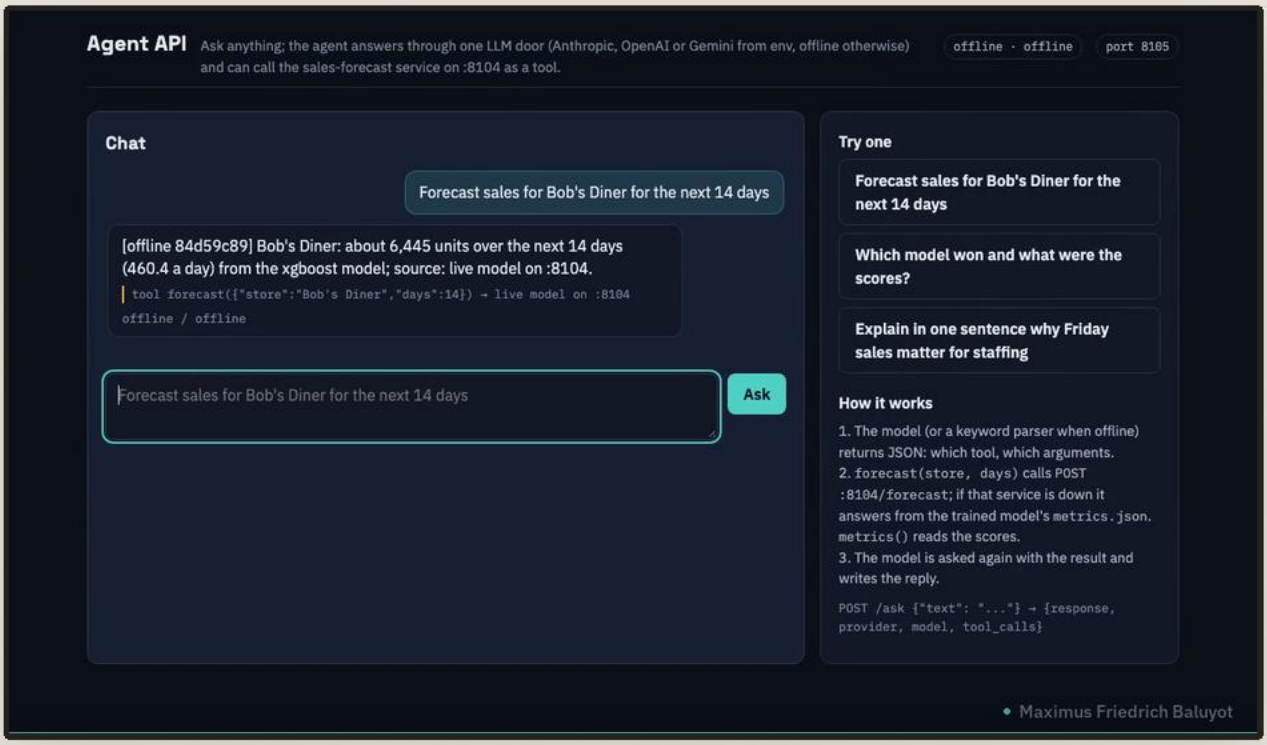

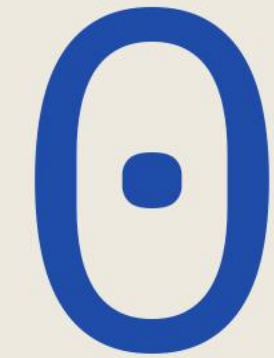

API keys in source · three providers behind one door

one limit

One tool round, no memory.

Replies are summaries.

And it ships.

Maximus Friedrich Baluyot

Try it: ask which model won.

```
max@baluyot ~ $ git clone
https://github.com/Keshigami/
agent-api.git
max@baluyot ~ $ just setup
max@baluyot ~ $ just up
max@baluyot ~ $
```

github.com/Keshigami/agent-api

Maximus Friedrich Baluyot

AI & ML Specialist · Applied AI · ML Engineering · Automation