

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaNangama”, Belgaum -590014, Karnataka.



LAB REPORT on

Machine Learning

Submitted by

KUMAR KETAN(1BM19CS076)

in partial fulfilment for the award of the degree of

BACHELOR OF ENGINEERING

in

COMPUTER SCIENCE AND ENGINEERING



B.M.S. COLLEGE OF ENGINEERING

BENGALURU-560019 May-2022 to July-2022

(Autonomous Institution under VTU)

Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “Machine Learning” carried out by **Kumar Ketan (1BM19CS076)**, who is bonafide student of **B. M. S. College of Engineering**. It is in partial fulfillment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum during the year 2022. The Lab report has been approved as it satisfies the academic requirements in respect of a **Machine Learning - (20CS6PCMAL)** work prescribed for the said degree.

Dr G R Asha

Assistant Professor
Department of CSE
BMSCE, Bengaluru

Dr. Jyothi S Nayak

Professor and Head
Department of CSE
BMSCE, Bengaluru

Index Sheet

Sl. No.	Experiment Title	Page No.
1	Find-S	4
2	Candidate Elimination	7
3	Decision Tree	9
4	Naïve Bayes	16
5	Linear Regression	20
6	Bayesian network	24
7	k-Means algorithm	28
8	EM algorithm	34
9	k-Nearest Neighbour algorithm	36
10	Non-Parametric Locally Weighted Regression algorithm	38

Course Outcome

CO1	Ability to apply the different learning algorithms.
CO2	Ability to analyse the learning techniques for given dataset
CO3	Ability to design a model using machine learning to solve a problem.
CO4	Ability to conduct practical experiments to solve problems using appropriate machine learning Techniques.

1) Implement and demonstrate the FIND-S algorithm for finding the most specific hypothesis based on a given set of training data samples.

a) Using CSV as input:

```
import csv

def updateHypothesis(x,h):
    if h==[]:
        return x

    for i in range(0,len(h)):
        if x[i].upper()!=h[i].upper():
            h[i] = '?'

    return h

if __name__ == "__main__":
    data = []
    h = []

    # reading csv file
    with open('Desktop/FindS.csv', 'r') as file:
        reader = csv.reader(file)
        print("Data: ")
        for row in reader:
            data.append(row)
            print(row)
    if data:
        for x in data:
            if x[-1].upper()=="YES":
                x.pop() # removing last field
                h = updateHypothesis(x,h)
    print("\nHypothesis: ",h)
```

Output:

```
Data:
['Time', 'Weather', 'Temperature', 'Company', 'Humidity', 'Wind', 'Goes']
['Morning', 'Sunny', 'Warm', 'Yes', 'Mild', 'Strong', 'Yes']
['Evening', 'Rainy', 'Cold', 'No', 'Mild', 'Normal', 'No']
['Morning', 'Sunny', 'Moderate', 'Yes', 'Normal', 'Normal', 'Yes']
['Evening', 'Sunny', 'Cold', 'Yes', 'High', 'Strong', 'Yes']

Hypothesis: ['?', 'Sunny', '?', 'Yes', '?', '?']
```

B) Using user Input:

```
import numpy as np
import pandas as pd

n=int(input("Enter the number of attributes "))
l=int(input("Enter the number of rows "))

print("Enter the ",n,"attributes")
attributes=[]
for i in range(1,n+1):
    print("Enter the name of ",i," attribute ")
    name=input()

for i in range(1,l+1):
    print("Enter the values of ",i," row")
    print("Enter the values of attributes")
    res=[]
    for j in range(1,l+1):
        res.append(input())
    attributes.append(res)

print("Enter the target values")
target=[]
for i in range(1,l+1):
    print("Enter the value of ",i," target")
    x=input()
    target.append(x)

def findS(c,t):
    for i, val in enumerate(t):
        if val == "Yes":
            specific_hypothesis = c[i].copy()
            break

    for i, val in enumerate(c):
        if t[i] == "Yes":
            for x in range(len(specific_hypothesis)):
                if val[x] != specific_hypothesis[x]:
                    specific_hypothesis[x] = '?'
            else:
                pass

    return specific_hypothesis

print("\n The final hypothesis is:",findS(attributes,target))
```

Output:

```
Enter the 3 attributes
Enter the name of 1 attribute

Enter the name of 2 attribute

Enter the name of 3 attribute

Enter the values of 1 row
Enter the values of attributes

Enter the values of 2 row
Enter the values of attributes

Enter the values of 3 row
Enter the values of attributes

Enter the target values
Enter the value of 1 target

Enter the value of 2 target

Enter the value of 3 target

The final hypothesis is: ['?', 'Rainy', 'Cold']
```

2) For a given set of training data examples stored in a .CSV file, implement and demonstrate the Candidate-Elimination algorithm to output a description of the set of all hypotheses consistent with the training examples

```
import numpy as np
import pandas as pd

#to read the data in the csv file
data = pd.DataFrame(data=pd.read_csv('/content/drive/MyDrive/enjoysport.csv'))
print(data,"\n")

#making an array of all the attributes
concepts = np.array(data.iloc[:,0:-1])
print("The attributes are: ",concepts)

#segregating the target that has positive and negative examples
target = np.array(data.iloc[:,-1])
print("\n The target is: ",target)

#training function to implement candidate_elimination algorithm
def learn(concepts, target):
    specific_h = concepts[0].copy()
    print("\n Initialization of specific_h and general_h")
    print(specific_h)
    general_h = [["?" for i in range(len(specific_h))] for i in
range(len(specific_h))]
    print(general_h)
    for i, h in enumerate(concepts):
        if target[i] == "yes":
            for x in range(len(specific_h)):
                if h[x] != specific_h[x]:
                    specific_h[x] = '?'
                    general_h[x][x] = '?'
            # print(specific_h)
        if target[i] == "no":
            for x in range(len(specific_h)):
                if h[x] != specific_h[x]:
                    general_h[x][x] = specific_h[x]
            else:
                general_h[x][x] = '?'
    print("\n Steps of Candidate Elimination Algorithm",i+1)
    print(specific_h)
    print(general_h)
    indices = [i for i, val in enumerate(general_h) if val ==
['?', '?', '?', '?', '?', '?']]
    for i in indices:
        general_h.remove(['?', '?', '?', '?', '?', '?'])
    return specific_h, general_h
s_final, g_final = learn(concepts, target)

#obtaining the final hypothesis
```

```
print("\nFinal Specific_h:", s_final, sep="\n")
print("\nFinal General_h:", g_final, sep="\n")
```

Output:

	sky	temp	humidity	wind	water	forecast	enjoysport
0	sunny	warm	normal	strong	warm	same	yes
1	sunny	warm	high	strong	warm	same	yes
2	rainy	cold	high	strong	warm	change	no
3	sunny	warm	high	strong	cool	change	yes

```
The attributes are: [['sunny' 'warm' 'normal' 'strong' 'warm' 'same']
['sunny' 'warm' 'high' 'strong' 'warm' 'same']
['rainy' 'cold' 'high' 'strong' 'warm' 'change']
['sunny' 'warm' 'high' 'strong' 'cool' 'change']]
```

```
The target is: ['yes' 'yes' 'no' 'yes']
```

Initialization of specific_h and general_h

```
['sunny' 'warm' 'normal' 'strong' 'warm' 'same']
[['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
```

Steps of Candidate Elimination Algorithm 1

```
['sunny' 'warm' 'normal' 'strong' 'warm' 'same']
[['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
```

Steps of Candidate Elimination Algorithm 2

```
['sunny' 'warm' '?' 'strong' 'warm' 'same']
[['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
```

Steps of Candidate Elimination Algorithm 3

```
['sunny' 'warm' '?' 'strong' 'warm' 'same']
[['sunny', '?', '?', '?', '?', '?'], ['?', 'warm', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
```

Steps of Candidate Elimination Algorithm 4

```
['sunny' 'warm' '?' 'strong' '?' '?']
[['sunny', '?', '?', '?', '?', '?'], ['?', 'warm', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]
```

Final Specific_h:

```
['sunny' 'warm' '?' 'strong' '?' '?']
```

Final General_h:

```
[['sunny', '?', '?', '?', '?', '?'], ['?', 'warm', '?', '?', '?', '?']]
```


3)Write a program to demonstrate the working of the decision tree based ID3 algorithm. Use an appropriate data set for building the decision tree and apply this knowledge to classify a new sample.

a)ID3 :

```
import math
import csv
def load_csv(filename):
    lines=csv.reader(open(filename,"r"));
    dataset = list(lines)
    headers = dataset.pop(0)
    return dataset,headers

class Node:
    def __init__(self,attribute):
        self.attribute=attribute
        self.children=[]
        self.answer=""

def subtables(data,col,delete):
    dic={}
    coldata=[row[col] for row in data]
    attr=list(set(coldata))

    counts=[0]*len(attr)
    r=len(data)
    c=len(data[0])
    for x in range(len(attr)):
        for y in range(r):
            if data[y][col]==attr[x]:
                counts[x]+=1

    for x in range(len(attr)):
        dic[attr[x]]=[[0 for i in range(c)] for j in range(counts[x])]
        pos=0
        for y in range(r):
            if data[y][col]==attr[x]:
                if delete:
                    del data[y][col]
                dic[attr[x]][pos]=data[y]
                pos+=1
    return attr,dic

def entropy(S):
    attr=list(set(S))
    if len(attr)==1:
        return 0

    counts=[0,0]
```

```

for i in range(2):
    counts[i]=sum([1 for x in S if attr[i]==x])/(len(S)*1.0)

sums=0
for cnt in counts:
    sums+=-1*cnt*math.log(cnt,2)
return sums

def compute_gain(data,col):
    attr,dic = subtables(data,col,delete=False)

    total_size=len(data)
    entropies=[0]*len(attr)
    ratio=[0]*len(attr)

    total_entropy=entropy([row[-1] for row in data])
    for x in range(len(attr)):
        ratio[x]=len(dic[attr[x]])/(total_size*1.0)
        entropies[x]=entropy([row[-1] for row in dic[attr[x]]])
        total_entropy-=ratio[x]*entropies[x]
    return total_entropy

def build_tree(data,features):
    lastcol=[row[-1] for row in data]
    if (len(set(lastcol)))==1:
        node=Node("")
        node.answer=lastcol[0]
        return node

    n=len(data[0])-1
    gains=[0]*n
    for col in range(n):
        gains[col]=compute_gain(data,col)
    split=gains.index(max(gains))
    node=Node(features[split])
    fea = features[:split]+features[split+1:]

    attr,dic=subtables(data,split,delete=True)

    for x in range(len(attr)):
        child=build_tree(dic[attr[x]],fea)
        node.children.append((attr[x],child))
    return node

def print_tree(node,level):
    if node.answer!="":
        print(" "*level,node.answer)
        return

    print(" "*level,node.attribute)
    for value,n in node.children:

```

```

    print("  "*(level+1),value)
    print_tree(n,level+2)

def classify(node,x_test,features):
    if node.answer!="":
        print(node.answer)
        return
    pos=features.index(node.attribute)
    for value, n in node.children:
        if x_test[pos]==value:
            classify(n,x_test,features)

"""Main program"""
dataset,features=load_csv("id3.csv")
node1=build_tree(dataset,features)

print("The decision tree for the dataset using ID3 algorithm is")
print_tree(node1,0)
testdata,features=load_csv("id3.csv")

for xtest in testdata:
    print("The test instance:",xtest)
    print("The label for test instance:",end=" ")
    classify(node1,xtest,features)

```

Output:

The decision tree for the dataset using ID3 algorithm is

```
Outlook
  rain
    Wind
      strong
      no
      weak
      yes
  overcast
  yes
  sunny
    Humidity
      normal
      yes
      high
      no
```

The test instance: ['sunny', 'hot', 'high', 'weak', 'no']

The label for test instance: no

The test instance: ['sunny', 'hot', 'high', 'strong', 'no']

The label for test instance: no

The test instance: ['overcast', 'hot', 'high', 'weak', 'yes']

The label for test instance: yes

The test instance: ['rain', 'mild', 'high', 'weak', 'yes']

The label for test instance: yes

The test instance: ['rain', 'cool', 'normal', 'weak', 'yes']

The label for test instance: yes

The test instance: ['rain', 'cool', 'normal', 'strong', 'no']

The label for test instance: no

The test instance: ['overcast', 'cool', 'normal', 'strong', 'yes']

The label for test instance: yes

The test instance: ['sunny', 'mild', 'high', 'weak', 'no']

The label for test instance: no

The test instance: ['sunny', 'cool', 'normal', 'weak', 'yes']

The label for test instance: yes

The test instance: ['rain', 'mild', 'normal', 'weak', 'yes']

The label for test instance: yes

The test instance: ['sunny', 'mild', 'normal', 'strong', 'yes']

The label for test instance: yes

The test instance: ['overcast', 'mild', 'high', 'strong', 'yes']

The label for test instance: yes

The test instance: ['overcast', 'hot', 'normal', 'weak', 'yes']

The label for test instance: yes

The test instance: ['rain', 'mild', 'high', 'strong', 'no']

The label for test instance: no

b) Using SKlearn:

```
import pandas as pd
```

```
import numpy as np
```

```
from sklearn.datasets import load_iris
```

```
data = load_iris()
```

In [2]:

```
df = pd.DataFrame(data.data, columns = data.feature_names)
```

In [3]:

```
df.head()
```

```
df['Species'] = data.target
```

```
#replace this with the actual names
```

```
target = np.unique(data.target)
```

```
target_names = np.unique(data.target_names)
```

```
targets = dict(zip(target, target_names))
```

```
df['Species'] = df['Species'].replace(targets)
```

In [5]:

```
x = df.drop(columns="Species")
```

```
y = df["Species"]
```

In [6]:

```
feature_names = x.columns
```

```
labels = y.unique()
```

In [7]:

```
from sklearn.model_selection import train_test_split
```

```
X_train, test_x, y_train, test_lab = train_test_split(x,y,test_size = 0.4,random_state = 42)
```

In [8]:

```
from sklearn.tree import DecisionTreeClassifier
```

```
clf = DecisionTreeClassifier(max_depth =4, random_state = 42)
```

In [9]:

```
clf.fit(X_train, y_train)
```

```
test_pred = clf.predict(test_x)
```

In [11]:

```
from sklearn import metrics
```

```
import seaborn as sns
```

```
import matplotlib.pyplot as plt
```

```
confusion_matrix = metrics.confusion_matrix(test_lab,test_pred)
```

In [12]:

```
confusion_matrix
matrix_df = pd.DataFrame(confusion_matrix)
ax = plt.axes()
sns.set(font_scale=1.3)
plt.figure(figsize=(10,7))
sns.heatmap(matrix_df, annot=True, fmt="g", ax=ax, cmap="magma")
ax.set_title('Confusion Matrix - Decision Tree')
ax.set_xlabel("Predicted label", fontsize =15)
ax.set_xticklabels([""]+labels)
ax.set_ylabel("True Label", fontsize=15)
ax.set_yticklabels(list(labels), rotation = 0)
plt.show()

clf.score(test_x,test_lab)

from sklearn import tree
fig = plt.figure(figsize=(25,20))
_ = tree.plot_tree(clf,
                   feature_names=data.feature_names,
                   class_names=data.target_names,
                   filled=True)
```


Output:

```
Out[3]:
```

	sepal length (cm)	sepal width (cm)	petal length (cm)	petal width (cm)
0	5.1	3.5	1.4	0.2
1	4.9	3.0	1.4	0.2
2	4.7	3.2	1.3	0.2
3	4.6	3.1	1.5	0.2
4	5.0	3.6	1.4	0.2


```
Out[9]: DecisionTreeClassifier(max_depth=4, random_state=42)
```

```
Out[12]: array([[23,  0,  0],
                 [ 0, 19,  0],
                 [ 0,  1, 17]], dtype=int64)
```

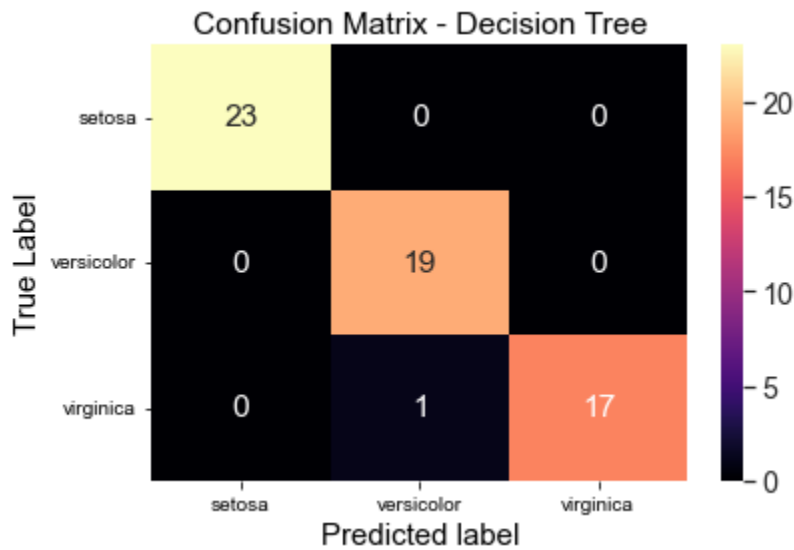

In [14]: `clf.score(test_x, test_lab)`

Out[14]: 0.9833333333333333

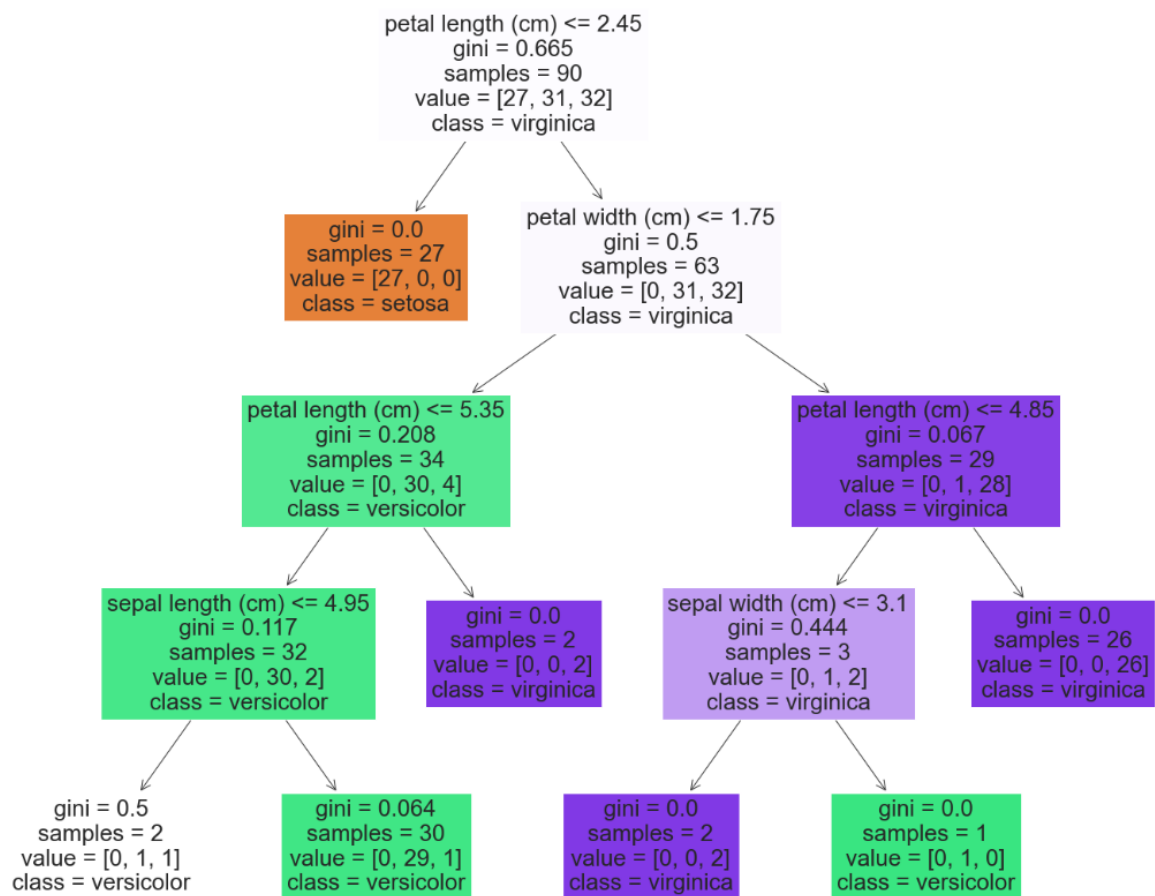

4)Write a program to implement the naïve Bayesian classifier for a sample training data set stored as a .CSV file. Compute the accuracy of the classifier, considering few test data sets

a) Without using SKlearn:

```
import numpy as np
import pandas as pd

data = pd.read_csv('/content/dataset.csv')
data.head()

y = list(data['PlayTennis'].values)
X = data.iloc[:, 1:].values
print(f'Target Values: {y}')
print(f'Features: \n{X}')
y_train = y[:8]
y_val = y[8:]
X_train = X[:8]
X_val = X[8:]

print(f'Number of instances in training set: {len(X_train)}')
print(f'Number of instances in testing set: {len(X_val)}')

class NaiveBayesClassifier:
    def __init__(self, X, y):
        self.X, self.y = X, y
        self.N = len(self.X)
        self.dim = len(self.X[0])
        self.attrs = [[] for _ in range(self.dim)]
        self.output_dom = {}
        self.data = []
        for i in range(len(self.X)):
            for j in range(self.dim):
                if not self.X[i][j] in self.attrs[j]:
                    self.attrs[j].append(self.X[i][j])
            if not self.y[i] in self.output_dom.keys():
                self.output_dom[self.y[i]] = 1
            else:
                self.output_dom[self.y[i]] += 1
        self.data.append([self.X[i], self.y[i]])
    def classify(self, entry):
        solve = None
        max_arg = -1
        for y in self.output_dom.keys():
            prob = self.output_dom[y]/self.N
            for i in range(self.dim):
                cases = [x for x in self.data if x[0][i] == entry[i] and x[1] == y]
                n = len(cases)
                prob *= n/self.N
            if prob > max_arg:
                max_arg = prob
```



```

        solve = y
    return solve
nbc = NaiveBayesClassifier(X_train, y_train)
total_cases = len(y_val)
good = 0
bad = 0
predictions = []
for i in range(total_cases):
    predict = nbc.classify(X_val[i])
    predictions.append(predict)
    if y_val[i] == predict:
        good += 1
    else:
        bad += 1
print('Predicted values:', predictions)
print('Actual values:', y_val)
print()
print('Total number of testing instances in the dataset:', total_cases)
print('Number of correct predictions:', good)
print('Number of wrong predictions:', bad)
print()
print('Accuracy of Bayes Classifier:', good/total_cases)

```

Output:

Out[2]:

	PlayTennis	Outlook	Temperature	Humidity	Wind
0	No	Sunny	Hot	High	Weak
1	No	Sunny	Hot	High	Strong
2	Yes	Overcast	Hot	High	Weak
3	Yes	Rain	Mild	High	Weak
4	Yes	Rain	Cool	Normal	Weak

Target Values: ['No', 'No', 'Yes', 'Yes', 'Yes', 'No', 'Yes', 'No', 'Yes', 'Yes', 'Yes', 'Yes', 'Yes', 'Yes', 'No']

Features:

```

[['Sunny' 'Hot' 'High' 'Weak']
 ['Sunny' 'Hot' 'High' 'Strong']
 ['Overcast' 'Hot' 'High' 'Weak']
 ['Rain' 'Mild' 'High' 'Weak']
 ['Rain' 'Cool' 'Normal' 'Weak']
 ['Rain' 'Cool' 'Normal' 'Strong']
 ['Overcast' 'Cool' 'Normal' 'Strong']
 ['Sunny' 'Mild' 'High' 'Weak']
 ['Sunny' 'Cool' 'Normal' 'Weak']
 ['Rain' 'Mild' 'Normal' 'Weak']
 ['Sunny' 'Mild' 'Normal' 'Strong']
 ['Overcast' 'Mild' 'High' 'Strong']
 ['Overcast' 'Hot' 'Normal' 'Weak']
 ['Rain' 'Mild' 'High' 'Strong']]

```

```
Number of instances in training set: 8
Number of instances in testing set: 6

Predicted values: ['No', 'Yes', 'No', 'Yes', 'Yes', 'No']
Actual values: ['Yes', 'Yes', 'Yes', 'Yes', 'Yes', 'No']

Total number of testing instances in the dataset: 6
Number of correct predictions: 4
Number of wrong predictions: 2

Accuracy of Bayes Classifier: 0.6666666666666666
```

b)Using SKlearn:

```
import numpy as np # linear algebra
import pandas as pd # data processing, CSV file I/O (e.g. pd.read_csv)
from sklearn.model_selection import train_test_split
from sklearn.naive_bayes import GaussianNB
from sklearn import metrics

df = pd.read_csv("/content/pima_indian.csv")
feature_col_names = ['num_preg', 'glucose_conc', 'diastolic_bp', 'thickness', 'insulin', 'bmi', 'diab_pred', 'age']
predicted_class_names = ['diabetes']
X = df[feature_col_names].values
y = df[predicted_class_names].values
print(df.head)
xtrain,xtest,ytrain,ytest=train_test_split(X,y,test_size=0.33)
print ("\nThe total number of Training Data:",ytrain.shape)
print ('The total number of Test Data:',ytest.shape)
clf = GaussianNB().fit(xtrain,ytrain.ravel())
predicted = clf.predict(xtest)
predictTestData= clf.predict([[6,148,72,35,0,33.6,0.627,50]])
print("\nConfusion matrix")
print(metrics.confusion_matrix(ytest,predicted))
print("\nAccuracy of the classifier:",metrics.accuracy_score(ytest,predicted))
print('The value of Precision:', metrics.precision_score(ytest,predicted))
print('The value of Recall:', metrics.recall_score(ytest,predicted))
print("Predicted Value for individual Test Data:", predictTestData)
```

Output:

```
<bound method NDFrame.head of
0      6      148      72 ...    0.627    50      1
1      1      85      66 ...    0.351    31      0
2      8     183      64 ...    0.672    32      1
3      1      89      66 ...    0.167    21      0
4      0     137      40 ...    2.288    33      1
..    ...    ...    ...    ...    ...    ...
763    10     101      76 ...    0.171    63      0
764     2     122      70 ...    0.340    27      0
765     5     121      72 ...    0.245    30      0
766     1     126      60 ...    0.349    47      1
767     1      93      70 ...    0.315    23      0
```

```
[768 rows x 9 columns]>
```

```
The total number of Training Data: (514, 1)
```

```
The total number of Test Data: (254, 1)
```

Confusion matrix

```
[[156  16]
 [ 35  47]]
```

Accuracy of the classifier: 0.7992125984251969

The value of Precision: 0.746031746031746

The value of Recall: 0.573170731707317

Predicted Value for individual Test Data: [1]

5)Implement the Linear Regression algorithm in order to fit data points. Select appropriate data set for your experiment and draw graphs.

a)Using SKlearn:

```
import numpy as np
import matplotlib.pyplot as plt
import pandas as pd

# Importing the dataset
dataset = pd.read_csv('salary_data.csv')
X = dataset.iloc[:, :-1].values #get a copy of dataset exclude last column
y = dataset.iloc[:, 1].values #get array of dataset in column 1st:

# Splitting the dataset into the Training set and Test set
from sklearn.model_selection import train_test_split
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=1/3, random_state=0)

# Fitting Simple Linear Regression to the Training set
from sklearn.linear_model import LinearRegression
regressor = LinearRegression()
regressor.fit(X_train, y_train)

# Visualizing the Training set results
viz_train = plt
viz_train.scatter(X_train, y_train, color='red')
viz_train.plot(X_train, regressor.predict(X_train), color='blue')
viz_train.title('Salary VS Experience (Training set)')
viz_train.xlabel('Year of Experience')
viz_train.ylabel('Salary')
viz_train.show()

# Visualizing the Test set results
viz_test = plt
viz_test.scatter(X_test, y_test, color='red')
viz_test.plot(X_train, regressor.predict(X_train), color='blue')
viz_test.title('Salary VS Experience (Test set)')
viz_test.xlabel('Year of Experience')
viz_test.ylabel('Salary')
viz_test.show()

# Predicting the Test set results
y_pred = regressor.predict(X_test)
print(y_pred)
```

Output:

```
Out[4]: LinearRegression(copy_X=True, fit_intercept=True, n_jobs=None, normalize=False)
```



In [8]:

```
# Predicting the Test set results
y_pred = regressor.predict(X_test)
print(y_pred)
```

```
[ 40835.10590871 123079.39940819  65134.55626083  63265.36777221
 115602.64545369 108125.8914992  116537.23969801  64199.96201652
 76349.68719258 100649.1375447 ]
```

b) Without using SKlearn:

```
import pandas as pd
import numpy as np
```

```
class LR():
    def __init__(self):
        self.w = []
    def fit(self, X, y):
        self.w = np.linalg.solve(X.T@X, X.T@y)
    def predict(self, X):
        return X@self.w
    def score(self, X, y):
        SS_reg = np.sum((X@self.w - y)**2)
        SS_tot = np.sum((y - np.mean(y))**2)
        return (1 - (SS_reg/SS_tot))
```

```
from sklearn.model_selection import train_test_split
from sklearn.datasets import fetch_california_housing

fetch_california_housing
data, labels = fetch_california_housing(return_X_y = True)

data.shape, labels.shape
one = np.ones(data.shape[0])
data = np.column_stack((one, data))

X_train, X_test, y_train, y_test = train_test_split(data, labels, train_size = 0.75, random_state = 42)

lro = LR()
lro.fit(X_train, y_train)

lro.w
lro.predict(X_test)

lro.score(X_test, y_test)
```

Output:

```
data.shape, labels.shape
```

```
((20640, 9), (20640,))
```

```
lro.w
```

```
array([-3.70278276e+01,  4.47600069e-01,  9.56752596e-03, -1.24755956e-01,  
       7.94471254e-01, -1.43902596e-06, -3.44307993e-03, -4.18555257e-01,  
      -4.33405135e-01])
```

```
lro.predict(X_test)
```

```
array([0.72412832, 1.76677807, 2.71151581, ..., 1.72382152, 2.34689276,  
       3.52917352])
```

```
lro.score(X_test, y_test)
```

```
0.5910509795491321
```

6) Write a program to construct a Bayesian network considering training data. Use this model to make predictions.

a) Using built-in:

```
!pip install pgmpy
import numpy as np
import pandas as pd
import csv
from pgmpy.estimators import MaximumLikelihoodEstimator
from pgmpy.models import BayesianModel
from pgmpy.inference import VariableElimination
heartDisease = pd.read_csv('heart_disease.csv')
heartDisease = heartDisease.replace('?', np.nan)

print('Sample instances from the dataset are given below')
print(heartDisease.head())

print('\n Attributes and datatypes')
print(heartDisease.dtypes)
model= BayesianModel([('age','Heartdisease'),('sex','Heartdisease'),('exang','Heartdisease'),
('cp','Heartdisease'),('Heartdisease','restecg'),('Heartdisease','chol')])
print("\n Learning CPD using Maximum likelihood estimators")
model.fit(heartDisease, estimator=MaximumLikelihoodEstimator)
print("\n Inferencing with Bayesian Network:")
HeartDiseasetest_infer = VariableElimination(model)

print("\n 1. Probability of HeartDisease given evidence= restecg")
q1=HeartDiseasetest_infer.query(variables=['Heartdisease'],evidence={'restecg':1})
print(q1)

print("\n 2. Probability of HeartDisease given evidence= cp ")
q2=HeartDiseasetest_infer.query(variables=['Heartdisease'],evidence={'cp':2})
print(q2)
```


Output:

Inferencing with Bayesian Network:

1. Probability of HeartDisease given evidence= restecg

Finding Elimination Order: : 100%  4/4 [00:00<00:00, 100.26it/s]

Eliminating: exang: 100%  4/4 [00:00<00:00, 190.96it/s]

Heartdisease	phi(Heartdisease)
Heartdisease(0)	0.1012
Heartdisease(1)	0.0000
Heartdisease(2)	0.2392
Heartdisease(3)	0.2015
Heartdisease(4)	0.4581

2. Probability of HeartDisease given evidence= cp

Finding Elimination Order: : 100%  3/3 [00:00<00:00, 60.16it/s]

Eliminating: exang: 100%  3/3 [00:00<00:00, 91.15it/s]

Heartdisease	phi(Heartdisease)
Heartdisease(0)	0.3610
Heartdisease(1)	0.2159
Heartdisease(2)	0.1373
Heartdisease(3)	0.1537
Heartdisease(4)	0.1321

b) Without using built-in:

```
import bayespy as bp
```

```
import numpy as np
```

```
import csv
```

```
from colorama import init
```

```
from colorama import Fore, Back, Style
```

```

init()

# Define Parameter Enum values
# Age
ageEnum = {'SuperSeniorCitizen': 0, 'SeniorCitizen': 1,
           'MiddleAged': 2, 'Youth': 3, 'Teen': 4}
# Gender
genderEnum = {'Male': 0, 'Female': 1}
# FamilyHistory
familyHistoryEnum = {'Yes': 0, 'No': 1}
# Diet(Calorie Intake)
dietEnum = {'High': 0, 'Medium': 1, 'Low': 2}
# LifeStyle
lifeStyleEnum = {'Athlete': 0, 'Active': 1, 'Moderate': 2, 'Sedetary': 3}
# Cholesterol
cholesterolEnum = {'High': 0, 'BorderLine': 1, 'Normal': 2}
# HeartDisease
heartDiseaseEnum = {'Yes': 0, 'No': 1}
import pandas as pd
data = pd.read_csv("heart_disease_data.csv")
data = np.array(data, dtype='int8')
N = len(data)
# Input data column assignment
p_age = bp.nodes.Dirichlet(1.0*np.ones(5))
age = bp.nodes.Categorical(p_age, plates=(N,))
age.observe(data[:, 0])

p_gender = bp.nodes.Dirichlet(1.0*np.ones(2))
gender = bp.nodes.Categorical(p_gender, plates=(N,))
gender.observe(data[:, 1])

p_familyhistory = bp.nodes.Dirichlet(1.0*np.ones(2))
familyhistory = bp.nodes.Categorical(p_familyhistory, plates=(N,))
familyhistory.observe(data[:, 2])

p_diet = bp.nodes.Dirichlet(1.0*np.ones(3))
diet = bp.nodes.Categorical(p_diet, plates=(N,))
diet.observe(data[:, 3])

```

```

p_lifestyle = bp.nodes.Dirichlet(1.0*np.ones(4))
lifestyle = bp.nodes.Categorical(p_lifestyle, plates=(N,))
lifestyle.observe(data[:, 4])

p_cholesterol = bp.nodes.Dirichlet(1.0*np.ones(3))
cholesterol = bp.nodes.Categorical(p_cholesterol, plates=(N,))
cholesterol.observe(data[:, 5])
p_heartdisease = bp.nodes.Dirichlet(np.ones(2), plates=(5, 2, 2, 3, 4, 3))
heartdisease = bp.nodes.MultiMixture(
    [age, gender, familyhistory, diet, lifestyle, cholesterol], bp.nodes.Categorical, p_heartdisease)
heartdisease.observe(data[:, 6])
p_heartdisease.update()
m = 0
while m == 0:
    print("\n")
    res = bp.nodes.MultiMixture([int(input('Enter Age: ' + str(ageEnum))), int(input('Enter Gender: ' +
str(genderEnum))), int(input('Enter FamilyHistory: ' + str(familyHistoryEnum))), int(input('Enter dietEnum: ' +
str(
    dietEnum))), int(input('Enter LifeStyle: ' + str(lifeStyleEnum))), int(input('Enter Cholesterol: ' +
str(cholesterolEnum))), bp.nodes.Categorical, p_heartdisease).get_moments()[0][heartDiseaseEnum["Yes"]]
    print("Probability(HeartDisease) = " + str(res))

# print(Style.RESET_ALL)
m = int(input("Enter for Continue:0, Exit :1 "))

```

Output:

```

Enter Age: {'SuperSeniorCitizen': 0, 'SeniorCitizen': 1, 'MiddleAged': 2, 'Youth': 3, 'Teen': 4}0
Enter Gender: {'Male': 0, 'Female': 1}0
Enter FamilyHistory: {'Yes': 0, 'No': 1}0
Enter dietEnum: {'High': 0, 'Medium': 1, 'Low': 2}0
Enter LifeStyle: {'Athlete': 0, 'Active': 1, 'Moderate': 2, 'Sedetary': 3}2
Enter Cholesterol: {'High': 0, 'BorderLine': 1, 'Normal': 2}1
Probability(HeartDisease) = 0.5
Enter for Continue:0, Exit :1 0

```

7) Apply k-Means algorithm to cluster a set of data stored in a .CSV file

a) Using built-in:

```
import pandas as pd
from sklearn.cluster import KMeans
from sklearn.preprocessing import MinMaxScaler
from matplotlib import pyplot as plt
%matplotlib inline
df = pd.read_csv('income.csv')
df.head(10)
scaler = MinMaxScaler()
scaler.fit(df[['Age']])
df[['Age']] = scaler.transform(df[['Age']])

scaler.fit(df[['Income($)']])
df[['Income($)']] = scaler.transform(df[['Income($)']])
df.head(10)
plt.scatter(df['Age'], df['Income($)'])

k_range = range(1, 11)
sse = []
for k in k_range:
    kmc = KMeans(n_clusters=k)
    kmc.fit(df[['Age', 'Income($)']])
    sse.append(kmc.inertia_)
plt.xlabel = 'Number of Clusters'
plt.ylabel = 'Sum of Squared Errors'
plt.plot(k_range, sse)

km = KMeans(n_clusters=3)
km
df0 = df[df.cluster == 0]
df0
df1 = df[df.cluster == 1]
df1
df2 = df[df.cluster == 2]
df2
```


```

p1 = plt.scatter(df0['Age'], df0['Income($)', marker='+', color='red')
p2 = plt.scatter(df1['Age'], df1['Income($)', marker='*', color='blue')
p3 = plt.scatter(df2['Age'], df2['Income($)', marker='^', color='green')
c = plt.scatter(km.cluster_centers_[0], km.cluster_centers_[1], color='black')
plt.xlabel('Age')
plt.ylabel('Income($)')
plt.legend((p1, p2, p3, c),
           ('Cluster 1', 'Cluster 2', 'Cluster 3', 'Centroid'))

```

Output:

`KMeans(n_clusters=3)`

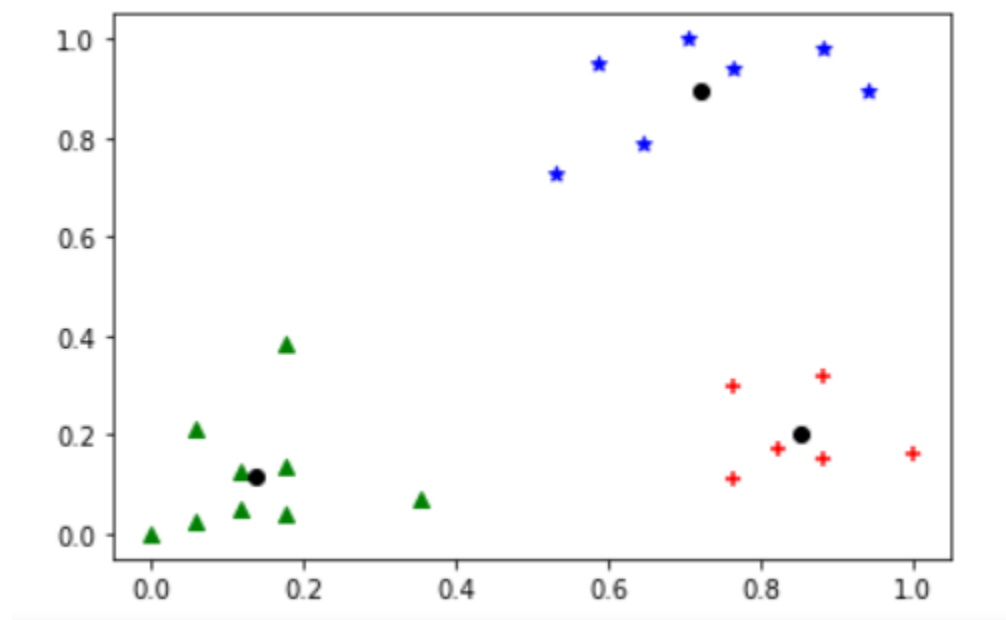

b) Without using built-in:

```

import math;
import sys;
import pandas as pd
import numpy as np
from random import choice
from matplotlib import pyplot
from random import shuffle, uniform;
def ReadData(fileName):
    f = open(fileName,'r')
    lines = f.read().splitlines()

```

```

f.close()

items = []
for i in range(1,len(lines)):
    line = lines[i].split(',')
    itemFeatures = []
    for j in range(len(line)-1):
        v = float(line[j])
        itemFeatures.append(v)
    items.append(itemFeatures)
shuffle(items)
return items

def FindColMinMax(items):
    n = len(items[0])
    minima = [float('inf') for i in range(n)]
    maxima = [float('-inf') - 1 for i in range(n)]
    for item in items:
        for f in range(len(item)):
            if(item[f] < minima[f]):
                minima[f] = item[f]
            if(item[f] > maxima[f]):
                maxima[f] = item[f]
    return minima,maxima

def EuclideanDistance(x,y):
    S = 0
    for i in range(len(x)):
        S += math.pow(x[i]-y[i],2)
    return math.sqrt(S)

def InitializeMeans(items,k,cMin,cMax):
    f = len(items[0])
    means = [[0 for i in range(f)] for j in range(k)]
    for mean in means:
        for i in range(len(mean)):
            mean[i] = uniform(cMin[i]+1,cMax[i]-1)

    return means

```

```

def UpdateMean(n,mean,item):
    for i in range(len(mean)):
        m = mean[i]
        m = (m*(n-1)+item[i])/float(n)
        mean[i] = round(m,3)
    return mean

def FindClusters(means,items):
    clusters = [[] for i in range(len(means))]
    for item in items:
        index = Classify(means,item)
        clusters[index].append(item)
    return clusters

def Classify(means,item):
    minimum = float('inf');
    index = -1
    for i in range(len(means)):
        dis = EuclideanDistance(item,means[i])
        if(dis < minimum):
            minimum = dis
            index = i
    return index

def CalculateMeans(k,items,maxIterations=100000):
    cMin, cMax = FindColMinMax(items)
    means = InitializeMeans(items,k,cMin,cMax)
    clusterSizes = [0 for i in range(len(means))]
    belongsTo = [0 for i in range(len(items))]
    for e in range(maxIterations):
        noChange = True;
        for i in range(len(items)):
            item = items[i];
            index = Classify(means,item)
            clusterSizes[index] += 1
            cSize = clusterSizes[index]
            means[index] = UpdateMean(cSize,means[index],item)
            if(index != belongsTo[i]):
                noChange = False
        belongsTo[i] = index

```

```

        if (noChange):
            break
    return means

def CutToTwoFeatures(items,indexA,indexB):
    n = len(items)
    X = []
    for i in range(n):
        item = items[i]
        newItem = [item[indexA],item[indexB]]
        X.append(newItem)
    return X

def PlotClusters(clusters):
    n = len(clusters)
    X = [[] for i in range(n)]
    for i in range(n):
        cluster = clusters[i]
        for item in cluster:
            X[i].append(item)
    colors = ['r','b','g','c','m','y']
    for x in X:
        c = choice(colors)
        colors.remove(c)
        Xa = []
        Xb = []
        for item in x:
            Xa.append(item[0])
            Xb.append(item[1])
        pyplot.plot(Xa,Xb,'o',color=c)
    pyplot.show()

def main():
    items = ReadData('data.txt')
    k = 3
    items = CutToTwoFeatures(items,2,3)

```



```


print(items)
means = CalculateMeans(k,items)
print("\nMeans = ", means)
clusters = FindClusters(means,items)
PlotClusters(clusters)
newItem = [1.5,0.2]
print(Classify(means,newItem))

if __name__ == "__main__":
    main()

```

Output:

```
Means = [[4.308, 1.372], [5.639, 2.059], [1.465, 0.255]]
```

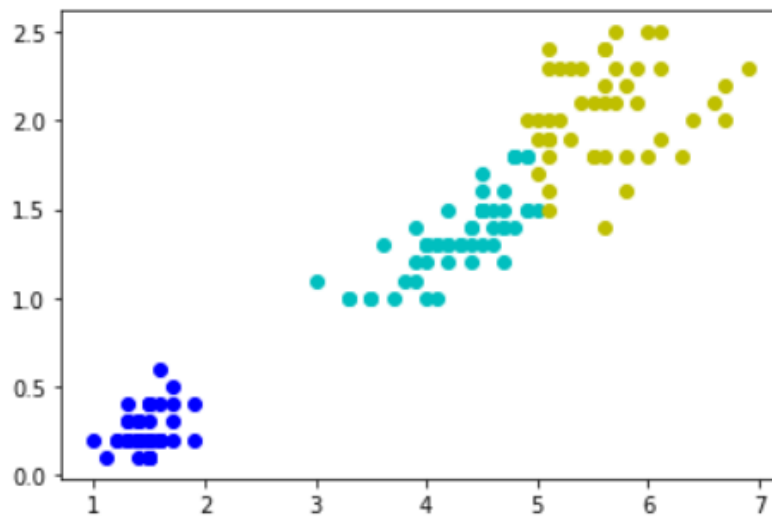

2

8) Apply EM algorithm to cluster a set of data stored in a .CSV file. Compare the results of k-Means algorithm and EM algorithm.

```
import matplotlib.pyplot as plt
from sklearn import datasets
from sklearn.cluster import KMeans
import sklearn.metrics as sm
import pandas as pd
import numpy as np

iris = datasets.load_iris()
X = pd.DataFrame(iris.data)
X.columns = ['Sepal_Length', 'Sepal_Width', 'Petal_Length', 'Petal_Width']
y = pd.DataFrame(iris.target)
y.columns = ['Targets']
model = KMeans(n_clusters=3)
model.fit(X)
plt.figure(figsize=(14,7))
colormap = np.array(['red', 'lime', 'black'])
# Plot the Original Classifications
plt.subplot(1, 2, 1)
plt.scatter(X.Petal_Length, X.Petal_Width, c=colormap[y.Targets], s=40)
plt.title('Real Classification')
plt.xlabel('Petal Length')
plt.ylabel('Petal Width')
# Plot the Models Classifications
plt.subplot(1, 2, 2)
plt.scatter(X.Petal_Length, X.Petal_Width, c=colormap[model.labels_], s=40)
plt.title('K Mean Classification')
plt.xlabel('Petal Length')
plt.ylabel('Petal Width')
print('The accuracy score of K-Mean: ', sm.accuracy_score(y, model.labels_))
print('The Confusion matrix of K-Mean: ', sm.confusion_matrix(y, model.labels_))

from sklearn import preprocessing
scaler = preprocessing.StandardScaler()
scaler.fit(X)
xsa = scaler.transform(X)
xs = pd.DataFrame(xsa, columns = X.columns)
```

```

#xs.sample(5)

from sklearn.mixture import GaussianMixture
gmm = GaussianMixture(n_components=3)
gmm.fit(xs)

y_gmm = gmm.predict(xs)
#y_cluster_gmm
plt.subplot(2, 2, 3)
plt.scatter(X.Petal_Length, X.Petal_Width, c=colormap[y_gmm], s=40)
plt.title('GMM Classification')
plt.xlabel('Petal Length')
plt.ylabel('Petal Width')
print('The accuracy score of EM: ',sm.accuracy_score(y, y_gmm))
print('The Confusion matrix of EM: ',sm.confusion_matrix(y, y_gmm))


```

Output:

```

The accuracy score of K-Mean: 0.24
The Confusion matrix of K-Mean: [[ 0 50  0]
 [48  0  2]
 [14  0 36]]
The accuracy score of EM: 0.3333333333333333
The Confusion matrix of EM: [[ 0 50  0]
 [45  0  5]
 [ 0  0 50]]

```

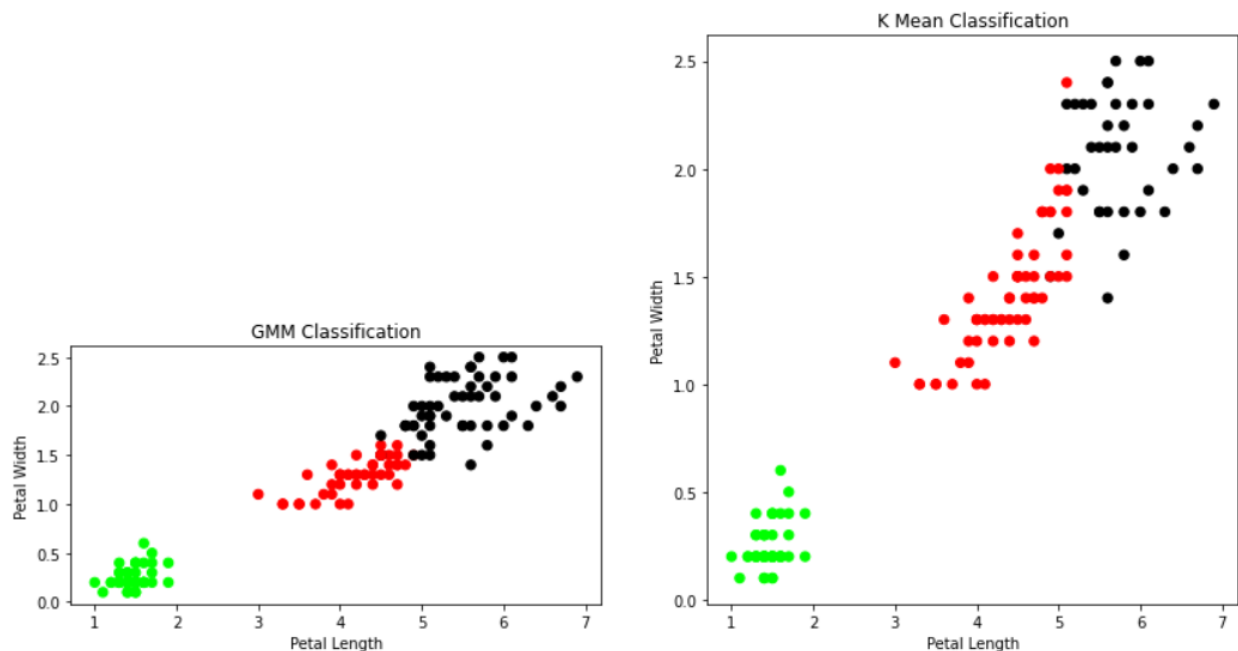

9) Write a program to implement k-Nearest Neighbour algorithm to classify the iris data set. Print both correct and wrong predictions.

```
from sklearn.model_selection import train_test_split
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import classification_report, confusion_matrix
from sklearn import datasets

iris=datasets.load_iris()

x = iris.data
y = iris.target
print ('sepal-length', 'sepal-width', 'petal-length', 'petal-width')
print(x)
print('class: 0-Iris-Setosa, 1- Iris-Versicolour, 2- Iris-Virginica')
print(y)
x_train, x_test, y_train, y_test = train_test_split(x,y,test_size=0.3)
#To Training the model and Nearest nighbors K=5
classifier = KNeighborsClassifier(n_neighbors=5)
classifier.fit(x_train, y_train)
#To make predictions on our test data
y_pred=classifier.predict(x_test)
print('Confusion Matrix')
print(confusion_matrix(y_test,y_pred))
print('Accuracy Metrics')
print(classification_report(y_test,y_pred))
```

Output:

```
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2]
Confusion Matrix
[[14  0  0]
 [ 0 14  0]
 [ 0  2 15]]
Accuracy Metrics
```

	precision	recall	f1-score	support
0	1.00	1.00	1.00	14
1	0.88	1.00	0.93	14
2	1.00	0.88	0.94	17
accuracy			0.96	45
macro avg	0.96	0.96	0.96	45
weighted avg	0.96	0.96	0.96	45

10) Implement the non-parametric Locally Weighted Regression algorithm in order to fit data points. Select appropriate data set for your experiment and draw graphs.

a) Using built-in:

```
import numpy as np
from bokeh.plotting import figure, show, output_notebook
from bokeh.layouts import gridplot
from bokeh.io import push_notebook

def local_regression(x0, X, Y, tau):# add bias term
    x0 = np.r_[1, x0] # Add one to avoid the loss in information
    X = np.c_[np.ones(len(X)), X]

    # fit model: normal equations with kernel
    xw = X.T * radial_kernel(x0, X, tau) # XTranspose * W

    beta = np.linalg.pinv(xw @ X) @ xw @ Y #@ Matrix Multiplication or Dot Product
```

```

# predict value
return x0 @ beta # @ Matrix Multiplication or Dot Product for prediction
def radial_kernel(x0, X, tau):
    return np.exp(np.sum((X - x0) ** 2, axis=1) / (-2 * tau * tau))
# Weight or Radial Kernel Bias Function

n = 1000
# generate dataset
X = np.linspace(-3, 3, num=n)
print("The Data Set ( 10 Samples) X :\n",X[1:10])
Y = np.log(np.abs(X ** 2 - 1) + .5)
print("The Fitting Curve Data Set (10 Samples) Y :\n",Y[1:10])
# jitter X
X += np.random.normal(scale=.1, size=n)
print("Normalised (10 Samples) X :\n",X[1:10])

domain = np.linspace(-3, 3, num=300)
print(" Xo Domain Space(10 Samples) :\n",domain[1:10])

def plot_lwr(tau):
    # prediction through regression
    prediction = [local_regression(x0, X, Y, tau) for x0 in domain]
    plot = figure(plot_width=400, plot_height=400)
    plot.title.text='tau=%g' % tau
    plot.scatter(X, Y, alpha=.3)
    plot.line(domain, prediction, line_width=2, color='red')
    return plot

show(gridplot([
    [plot_lwr(10.), plot_lwr(1.)],
    [plot_lwr(0.1), plot_lwr(0.01)]]))

```

Output:

The Data Set (10 Samples) X :

```
[-2.99399399 -2.98798799 -2.98198198 -2.97597598 -2.96996997 -2.96396396  
-2.95795796 -2.95195195 -2.94594595]
```

The Fitting Curve Data Set (10 Samples) Y :

```
[2.13582188 2.13156806 2.12730467 2.12303166 2.11874898 2.11445659  
2.11015444 2.10584249 2.10152068]
```

Normalised (10 Samples) X :

```
[-3.08663662 -2.79327673 -3.13292877 -3.03726639 -3.0967025 -2.9652877  
-3.00708877 -2.94234969 -2.79405157]
```

Xo Domain Space(10 Samples) :

```
[-2.97993311 -2.95986622 -2.93979933 -2.91973244 -2.89966555 -2.87959866  
-2.85953177 -2.83946488 -2.81939799]
```

b) Without using built-in:

```
import matplotlib.pyplot as plt
```

```
import pandas as pd
```

```
import numpy as np
```

```
def kernel(point, xmat, k):
```

```
    m,n = np.shape(xmat)
```

```
    weights = np.mat(np.eye((m)))
```

```
    for j in range(m):
```

```
        diff = point - X[j]
```

```
        weights[j,j] = np.exp(diff*diff.T/(-2.0*k**2))
```

```
    return weights
```

```
def localWeight(point, xmat, ymat, k):
```

```
    wei = kernel(point,xmat,k)
```

```
    W = (X.T*(wei*X)).I*(X.T*(wei*ymat.T))
```

```
    return W
```

```
def localWeightRegression(xmat, ymat, k):
```

```
    m,n = np.shape(xmat)
```

```
    ypred = np.zeros(m)
```

```
    for i in range(m):
```

```
        ypred[i] = xmat[i]*localWeight(xmat[i],xmat,ymat,k)
```

```
    return ypred
```

```
data = pd.read_csv('10-dataset.csv')
```

```
bill = np.array(data.total_bill)
```

```
tip = np.array(data.tip)

#preparing and add 1 in bill
mbill = np.mat(bill)
mtip = np.mat(tip)
m= np.shape(mbill)[1]
one = np.mat(np.ones(m))
X = np.hstack((one.T,mbill.T))
ypred = localWeightRegression(X,mtip,0.5)
SortIndex = X[:,1].argsort(0)
xsort = X[SortIndex][:,0]
fig = plt.figure()
ax = fig.add_subplot(1,1,1)
ax.scatter(bill,tip, color='green')
ax.plot(xsort[:,1],ypred[SortIndex], color = 'red', linewidth=5)
plt.xlabel('Total bill')
plt.ylabel('Tip')
plt.show();
```

Output:

