

Objectives

- Explain various ways of conditional rendering
- Explain how to render multiple components
- Define list component
- Explain about keys in React applications
- Explain how to extract components with keys
- Explain React Map, map() function

In this hands-on lab, you will learn how to:

- Implement conditional rendering in React applications

Prerequisites

The following is required to complete this hands-on lab:

- Node.js
- NPM
- Visual Studio Code


Notes

Estimated time to complete this lab: **60 minutes**.

Create a React App named “bloggerapp” in with 3 components.

1. Book Details
2. Blog Details
3. Course Details

Implement this with as many ways possible of Conditional Rendering.

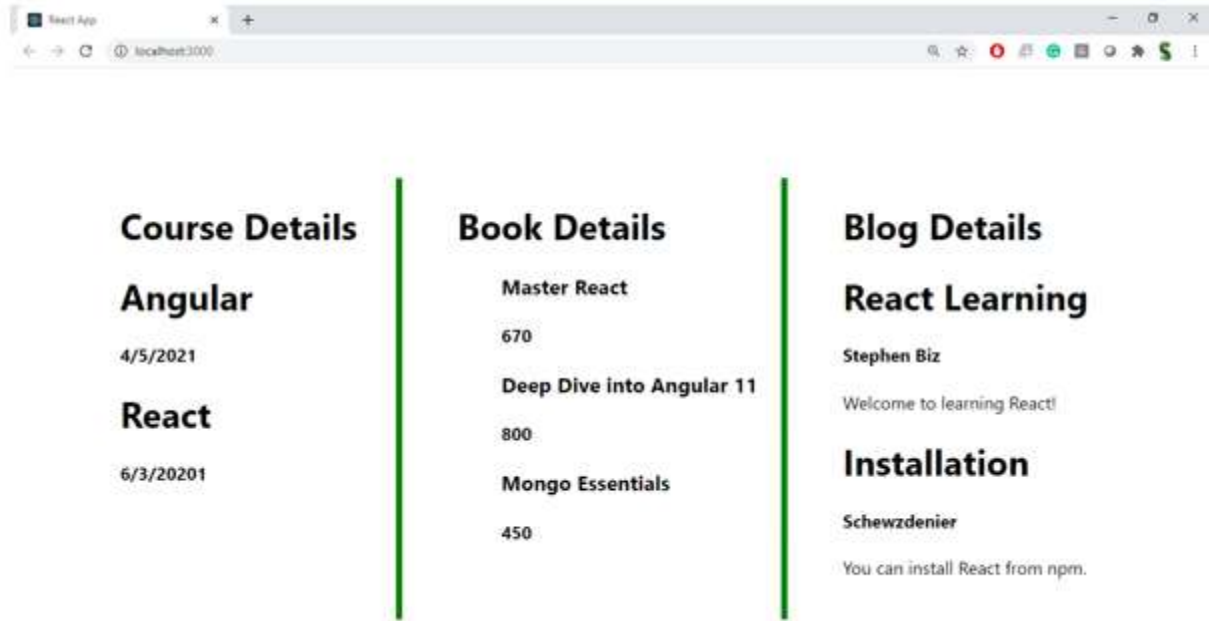

Hint:

```
const bookdet = (  
  <ul>  
    {props.books.map((book) =>  
      <div key={book.id}>  
        <h3> {book.bname}</h3>  
        <h4>{book.price}</h4>  
      </div>  
    )}  
  </ul>  
);
```

```
Windows PowerShell
Creating a new React app in C:\Users\anana\Downloads\Digital Nurture\Week 5\React\13. ReactJS-HOL\bloggerapp.
Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

added 1301 packages in 2m
272 packages are looking for funding
  run `npm fund` for details
Installing template dependencies using npm...
added 17 packages, removed 2 packages, and changed 1 package in 10s
271 packages are looking for funding
  run `npm fund` for details
Removing template package using npm...

removed 1 package, and audited 1316 packages in 7s
271 packages are looking for funding
  run `npm fund` for details
28 vulnerabilities (9 low, 6 moderate, 13 high)
To address issues that do not require attention, run:
  npm audit fix
To address all issues (including breaking changes), run:
  npm audit fix --force
Run `npm audit` for details.
Success! Created bloggerapp at C:\Users\anana\Downloads\Digital Nurture\Week 5\React\13. ReactJS-HOL\bloggerapp
Inside that directory, you can run several commands:

  npm start
  Starts the development server.
```

App.css

```
.container{
  display:flex;
  justify-content:space-around;
  margin-top:40px;
}

.box{
  border-left:4px solid green;
  padding-left:20px;
  width:250px;
}
```

BookDetails.js

```
import React from "react";

export const books = [
  {id:101,bname:"Master React",price:670},
  {id:102,bname:"Deep Dive into Angular 11",price:800},
  {id:103,bname:"Mongo Essentials",price:450}
];

function BookDetails(props){

  const bookdet=(
    <ul>
      {props.books.map((book)=>(
        <div key={book.id}>
          <h3>{book.bname}</h3>
          <h4>{book.price}</h4>
        </div>
      )}
```

```

    ))}
  </ul>
);

return(
  <div className="box">
    <h1>Book Details</h1>
    {bookdet}
  </div>
);
}

```

export default BookDetails;

BlogDetails.js

```

import React from "react";

export const blogs=[
  {
    id:1,
    title:"React Learning",
    author:"Stephen Biz",
    content:"Welcome to learning React!"
  },
  {
    id:2,
    title:"Installation",
    author:"Schwezenier",
    content:"You can install React from npm."
  }
];

function BlogDetails(props){

  const content=(
    <ul>
      {props.blogs.map((blog)=>(
        <div key={blog.id}>
          <h2>{blog.title}</h2>
          <h4>{blog.author}</h4>
          <p>{blog.content}</p>
        </div>
      ))}
    </ul>
  );

  return(
    <div className="box">
      <h1>Blog Details</h1>
      {content}
    </div>
  );
}

```

```
    );  
  }  
  
export default BlogDetails;
```

CourseDetails.js

```
import React from "react";  
  
export const courses=[  
  {  
    id:1,  
    cname:"Angular",  
    date:"4/5/2021"  
  },  
  {  
    id:2,  
    cname:"React",  
    date:"6/3/2021"  
  }  
];  
  
function CourseDetails(props){  
  
  const coursedet=(  
    <ul>  
      {props.courses.map((course)=>(  
        <div key={course.id}>  
          <h2>{course.cname}</h2>  
          <h4>{course.date}</h4>  
        </div>  
      ))}  
    </ul>  
  );  
  
  return(  
    <div className="box">  
      <h1>Course Details</h1>  
      {coursedet}  
    </div>  
  );  
}
```

```
export default CourseDetails;
```

App.js

```
import "./App.css";  
  
import BookDetails,{books} from "./BookDetails";  
import BlogDetails,{blogs} from "./BlogDetails";  
import CourseDetails,{courses} from "./CourseDetails";
```

```
function App(){

  const showBooks=true;
  const showBlogs=true;
  const showCourses=true;

  return(

    <div className="container">

      {showCourses && <CourseDetails courses={courses}/>}

      {showBooks ? <BookDetails books={books}/> : null}

      {showBlogs ? <BlogDetails blogs={blogs}/> : null}

    </div>

  );

}

export default App;
```

index.js


```
import React from "react";
import ReactDOM from "react-dom/client";
import "./App.css";
import App from "./App";


const root = ReactDOM.createRoot(document.getElementById("root"));

root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

Folder Structure

bloggerapp

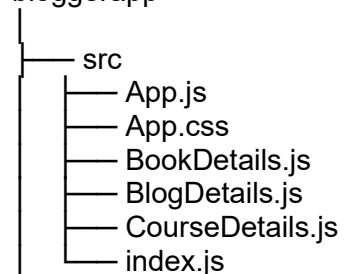

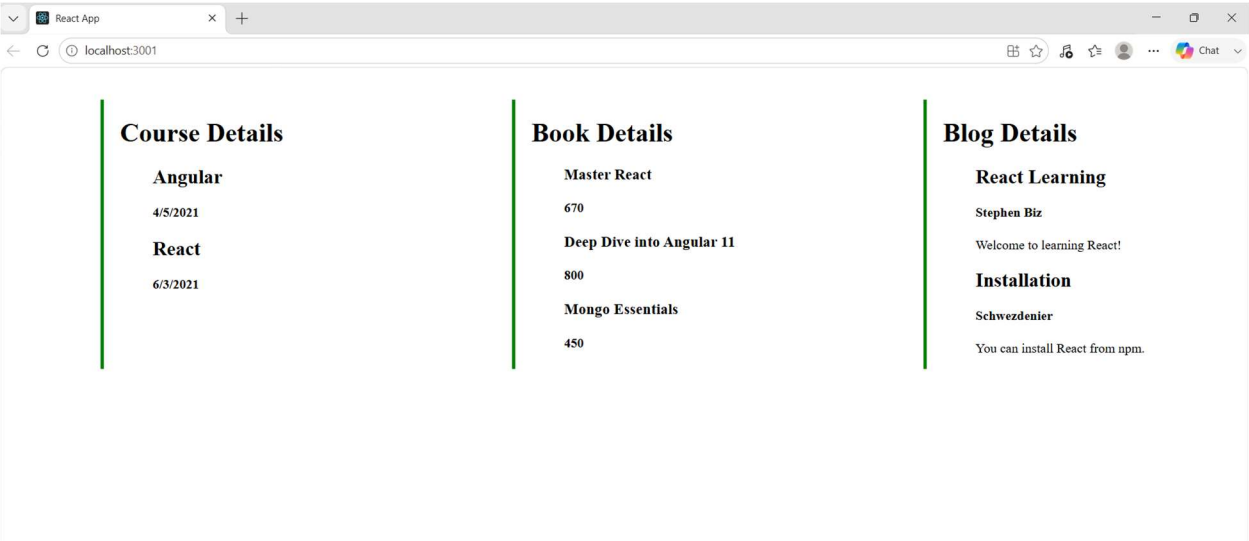

Course Details

Angular

4/5/2021

React

6/3/2021

Book Details

Master React

670

Deep Dive into Angular 11

800

Mongo Essentials

450

Blog Details

React Learning

Stephen Biz

Welcome to learning React!

Installation

Schwezenier

You can install React from npm.