```r
library(tidyverse)
library(sf)
library(car)
library(alr4)
library(leaps)
library(countrycode)

transit_cost <- read.csv("transitcost.csv")
```

```r
clean_transit <- transit_cost %>%
  select(c(e, country, city, start_year, end_year, rr, length,
  tunnel_per, tunnel, stations, year, ppp_rate, real_cost,
   cost_km_millions)) %>%
  filter(!is.na(e) & real_cost != 0)

clean_transit <- clean_transit %>%
  mutate(real_cost = as.numeric(real_cost)) %>%
  mutate(rr = as.factor(rr)) %>%
  filter(end_year <= 2026) %>%
  mutate(duration = as.numeric(end_year) - as.numeric(start_year))
```
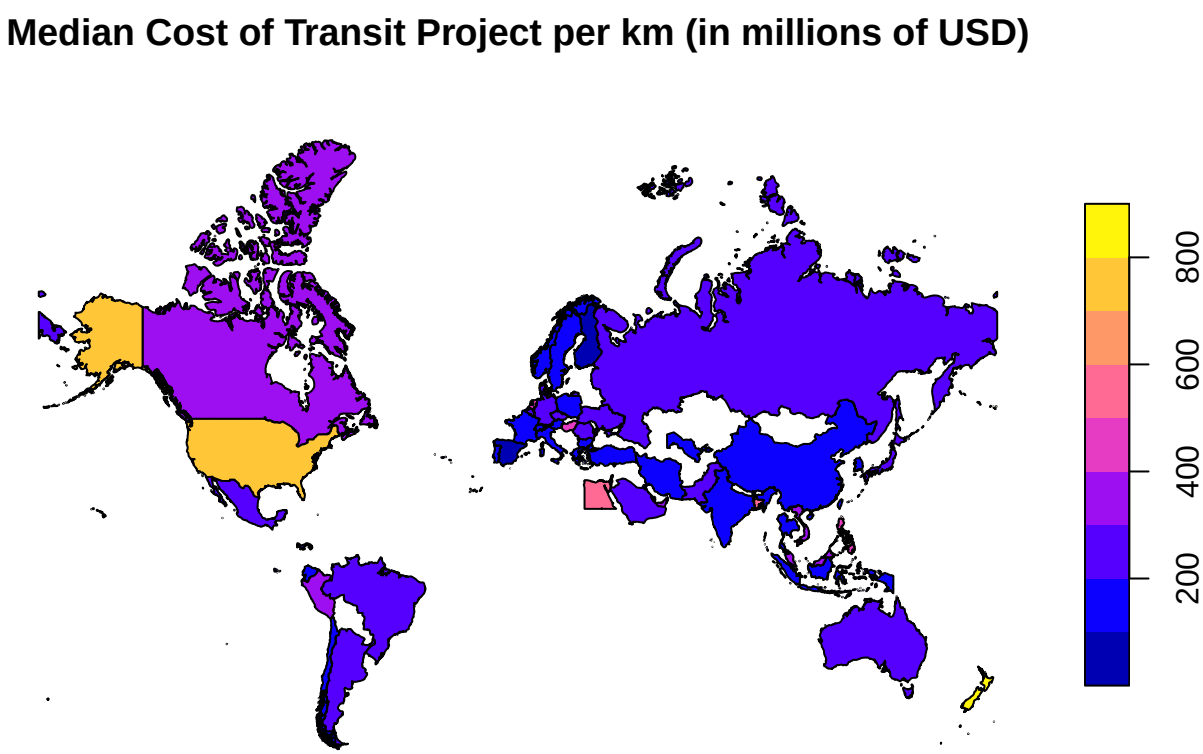
```r
plot(shapefile, main =
"Median Cost of Transit Project per km (in millions of USD)")
```