```r
library(tidyverse)
require(sf)
transit <- read.csv("transit_cost.csv")
```

```r
medcost <- transit %>% group_by(country) %>% summarize(median.cost = median(cost_km_millions, na.rm=T))

colnames(medcost) <- c("ISO", "Median_Cost")

shp <- st_read("World_Countries_Generalized.shp")
```

```
## Reading layer ‘World_Countries_Generalized’ from data source
##   ‘C:\Users\ninte\OneDrive\Documents\GitHub\TransitCosts\World_Countries_Generalized.shp’
##   using driver ‘ESRI Shapefile’
## Simple feature collection with 251 features and 4 fields
## Geometry type: MULTIPOLYGON
## Dimension:     XY
## Bounding box:  xmin: -20037510 ymin: -30240970 xmax: 20037510 ymax: 18418390
## Projected CRS: WGS 84 / Pseudo-Mercator
```
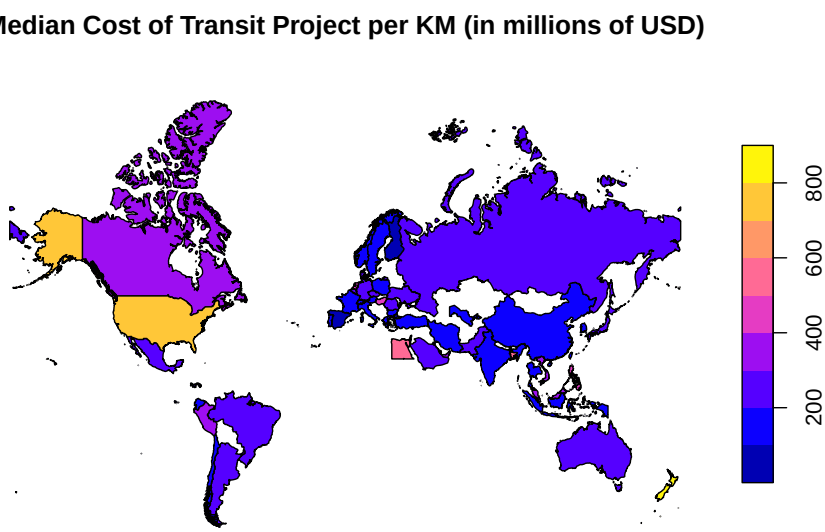
```r
medshp <- merge(shp, medcost)

well <- medshp %>% select(Median_Cost, geometry)

plot(well, main = "Median Cost of Transit Project per KM (in millions of USD)")
```