

# Describing Objects and Classes

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Unauthorized reproduction or distribution prohibited. Copyright© 2014, Oracle and/or its affiliates.

Kevin Gómez González (kev.gomez97@hotmail.com) has a non-transferable license to use this Student Guide.

## Interactive Quizzes

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Before you start today's lessons, test your knowledge by answering some quiz questions that relate to yesterday's lessons. Open your quiz file from labs > Quizzes > Java SE 8 Fundamentals Quiz.html. Click the links for Lessons 1, 2, 3, 4, and 5.

## Objectives

After completing this lesson, you should be able to:

- List the characteristics of an object
- Define an object as an instance of a class
- Instantiate an object and access its fields and methods
- Describe how objects are stored in memory
- Instantiate an array of objects
- Describe how an array of objects is stored in memory
- Declare and instantiate an object as a field
- Use the NetBeans IDE to create and test Java classes



ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Topics

- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- Working with object references
- Doing more with arrays
- Introducing NetBeans IDE
- Introducing the soccer league use case

ORACLE


Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Java Puzzle Ball

Have you played **Basic Puzzle 5**?

Consider the following:

What happens when you put a triangle wall or simple wall icon on the blue wheel?

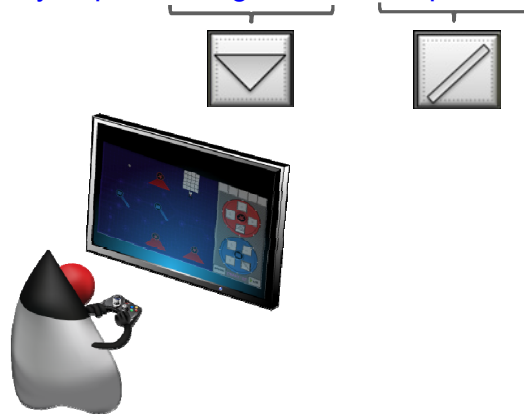

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Java Puzzle Ball Debrief



What happens when you put a triangle wall or simple wall icon on a blue wheel?

- A wall appears on every **instance** of a blue bumper **object**.
- Walls give bumpers **behaviors** that deflect and interact with the ball.
- All blue bumper instances share these same behaviors.




ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

A blue bumper is an object, and every instance of these objects will share the same behavior for interacting with the ball. These behaviors may include deflection via triangle or the simple wall.

## Object-Oriented Programming


- Interaction of objects
- No prescribed sequence

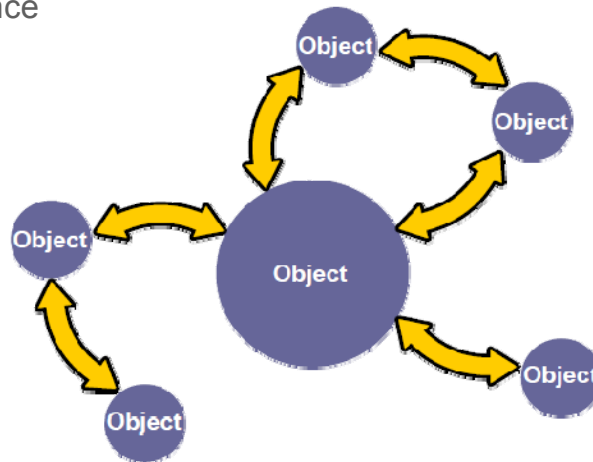**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

You have seen this diagram before in the “What Is a Java Program?” lesson. The diagram illustrates how object-oriented programming stresses the interaction of objects. The current lesson teaches you how to identify the objects that are required for the application that you would like to build. You first identify what the objects are, you determine the object’s characteristics or properties, and then you determine the object’s behaviors or operations. You then translate that analysis into Java code to create your application. It is time to learn more about objects.

## Duke's Choice Order Process

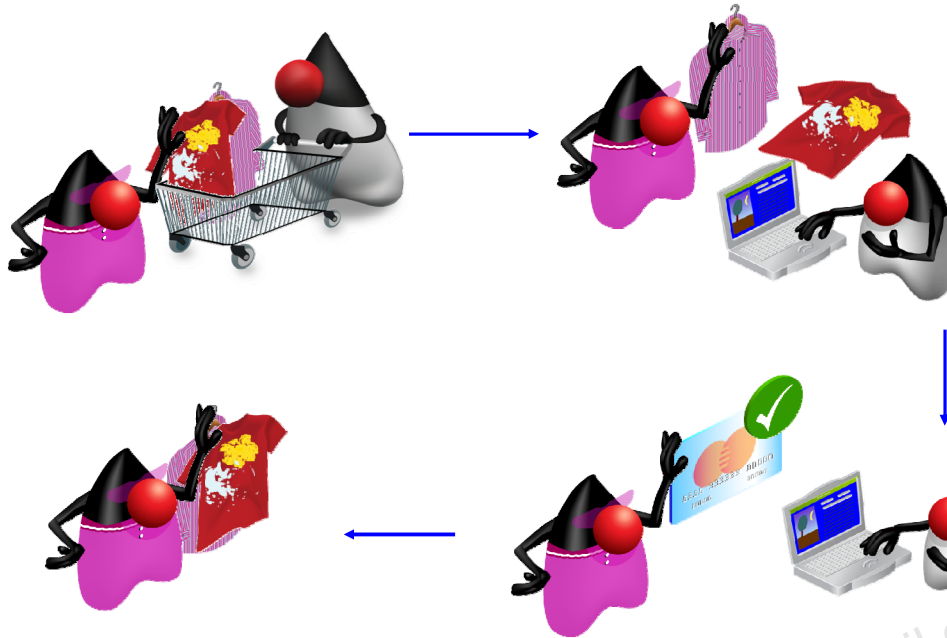

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

In the first five lessons, the exercises mention a shopping cart class that contains items. Take another look at the shopping cart scenario.

Imagine an online store called Duke's Choice. His number one shopper is his mother, Mrs. Duke. As Mrs. Duke shops, she places items in a shopping cart. Mrs. Duke likes shirts, so she places shirts in her cart. After she fills the cart, she checks out. The checkout process applies the purchase to a credit card, which is verified, and then Mrs. Duke receives an order number so that she can track her order or return it.

As a software developer, when you are presented with a scenario such as Duke's Choice for an application that you need to develop, you can analyze the scenario by breaking it into steps and defining the objects of the scenario.



## Characteristics of Objects

Objects are physical or conceptual.

- Objects have **properties**:

- Size
- Shape
- Name
- Color

- Objects have **behaviors**:

- Shop
- Put item in cart
- Pay



Mrs. Duke



Color property value is red

ORACLE


Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

To validate objects in a problem domain, such as the Duke's Choice order process, you identify the properties of all objects:

- Objects can be physical or conceptual. A customer's credit card account is an example of a conceptual object, because it is not something you can physically touch. A shirt is an example of a physical object.
- Objects have properties (attributes) such as size, name, and shape that represent the state of the object. For example, a person has a name (Mrs. Duke), and an object might have a color property. The value of all of an object's properties is often referred to as the object's current state. An object might have a color property with the value of red and a size property with a value of large.
- Objects also have behaviors (things they can do) such as, in our example, shop, put an item in the cart, and purchase.

## Classes and Instances

- A class:
  - Is a blueprint or recipe for an object
  - Describes an object's properties and behaviors
  - Is used to create object instances

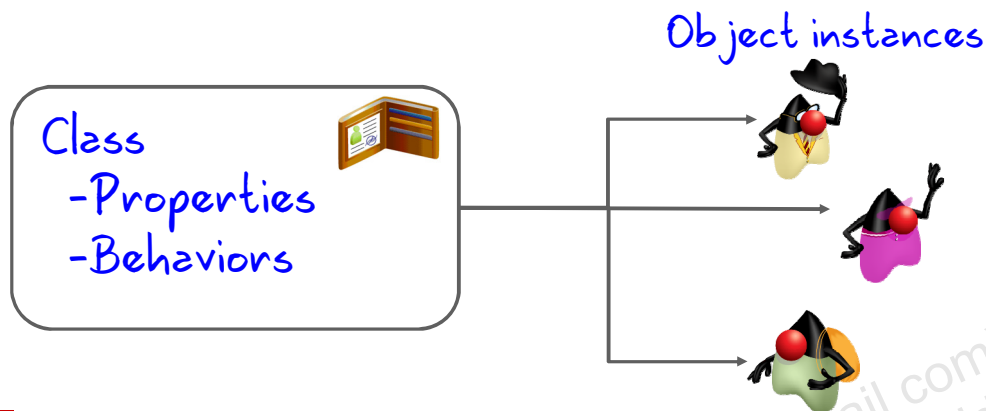**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

You just learned about some of the objects, characteristics, and behaviors in the Duke's Choice scenario. Here is an example of one of Duke's Choice objects, the `Customer`, and its function in the store. `Customer` is the class, and a class is a blueprint or recipe for an object. The class describes an object's properties and behaviors.

Classes are used to create object instances, such as the three `Customer` object instances, as illustrated by the three images.

## Quiz

Which of the following statements is true?

- a. An object is a blueprint for a class.
- b. An object and a class are exactly the same.
- c. An object is an instance of a class.
- d. A class is an instance of an object.



ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

### Answer: c

- a is false because a class is a blueprint for an object.
- b is false because an object is an instantiation of a class, and a class serves as a blueprint for the object.
- c is correct.
- d is false because an object is an instance of a class.

## Topics


- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- Working with object references
- Doing more with arrays
- Introducing NetBeans IDE
- Introducing the soccer league use case

The Oracle logo, consisting of the word "ORACLE" in white capital letters on a red rectangular background.

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

You have just learned about objects, classes, and their characteristics (properties and behaviors). Now it is time to look at fields and methods.

## The Customer Properties and Behaviors



### Properties:

- Name
- Address
- Age
- Order number
- Customer number

### Behaviors:

- Shop
- Set Address
- Add item to cart
- Ask for a discount
- Display customer details

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Think of some properties and behaviors that are in the `Customer` class of Duke's Choice. Think about how you would write this information as a Java class.

## The Components of a Class

Class declaration

```

1 public class Customer {
2     public String name = "Junior Duke";
3     public int custID = 1205;
4     public String address;
5     public int orderNum;
6     public int age;
7
8     public void displayCustomer() {
9         System.out.println("Customer: " + name);
10    }
11 }
    
```

Fields  
(Properties)  
(Attributes)

Methods  
(Behaviors)

ORACLE


Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

In the previous slide, you have identified some properties and behaviors that might be in the `Customer` class. This code example demonstrates how the properties and methods are created in Java. The basic components of a Java class are:

- The class declaration. Notice that the entire class is surrounded by braces.
- Fields of the class. These represent the properties or attributes of the class.
- Methods of the class. These represent the behaviors or operations. Here you see just one method, `displayCustomer`.

**Note:** In the code example above, the word “public” is a modifier, and you learn about modifiers later in the course.

## Modeling Properties and Behaviors

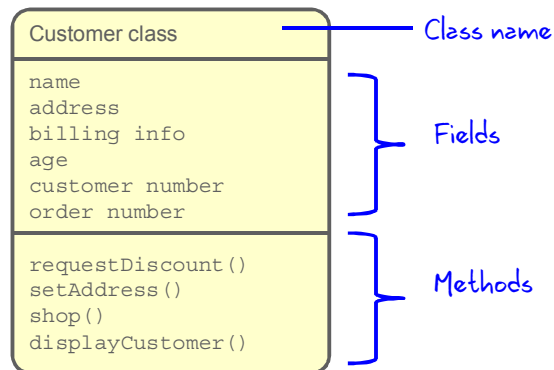
**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

As you design an application, it is often helpful to create a simple model that describes the components of a class. In the table above, the class name is listed at the top. The properties or fields are listed in the second row, and the behaviors, or methods, are listed in the third row. If you compare this modeling in terms of language, you can think of the class as a noun, the properties or fields as adjectives, and the behaviors or methods as verbs.

## Exercise 6-1: Creating the Item Class

In this exercise, you create the `Item` class and declare public fields for `ID` (`int`), `descr`, `quantity` (`int`), and `price` (`double`).

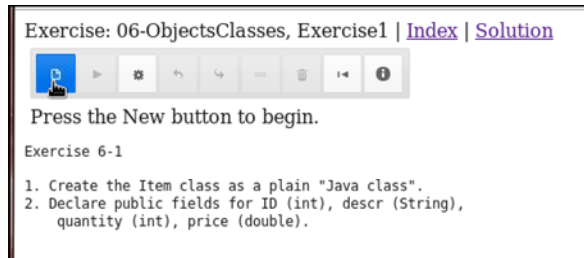

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

- In the Java Code Console, access Lessons > 06-Objects > Exercise1.
- Follow the instructions below the code editor to create the `Item` class and declare public fields for `ID` (`int`), `descr`, `quantity` (`int`), and `price` (`double`). You will not be able to test the `Item` class until Exercise 6-2.
- If you need help, click the [Solution](#) link. To go back to your code, click the [Exercise](#) link again. Any changes that you have made will have been saved.




## Topics

- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- Working with object references
- Doing more with arrays
- Introducing NetBeans IDE
- Introducing the soccer league use case

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Customer Instances

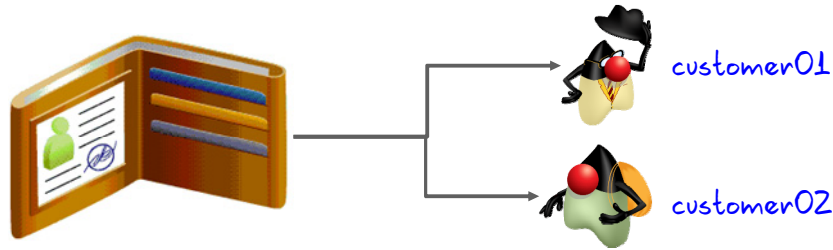

```
public static void main(String[] args){  
  
    Customer customer01 = new Customer();  
    Customer customer02 = new Customer();  
  
    customer01.age = 40;  
    customer02.name = "Duke";  
  
    customer01.displayCustomer();  
    customer02.displayCustomer();  
}
```

} Create new instances (instantiate).  
} Fields are accessed.  
} Methods are called.

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

In the code example, two new instances of the `Customer` object called `customer01` and `customer02` are created. (Another term for created is “instantiated.”) After the objects are instantiated, the reference variables `customer01` and `customer02` can be used to access fields and methods of the objects. The next two slides explain variations on instantiation, and the dot operator. There is more information on methods in the lesson titled “Creating and Using Methods.”

## Object Instances and Instantiation Syntax

The syntax is:

*variable becomes a reference to that object.*

*The new keyword creates (instantiates) a new instance.*

```
<class name> variable = new <class name>()
```

```
public static void main(String[] args){

    Customer customer01 = new Customer();    //Declare and instantiate

    Customer customer02;                    //Declare the reference
    customer02 = new Customer();             //Then instantiate

    new Customer();                         //Instantiation without a reference
                                           //We can't use this object later
                                           //without knowing how to reference it.

}
```



Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

By using the `new` keyword, a new instance of the class is now available to be accessed through the variable, which stores a reference to that object. It can be referred to as a reference variable or an object reference.

Notice that, following the `new` keyword, you see the class name followed by parentheses. This looks similar to calling a method, doesn't it? You are calling a method—the `constructor` method of the `Customer` class. Every class has a `constructor` method that has the same name as the class. Constructors are covered in more detail in the lesson titled “Creating and Using Methods.”

**To summarize, there are three steps to getting an object reference:**

1. Declare the reference.
2. Instantiate the object using the `new` keyword and the class `constructor` method.
3. Assign the object to the reference.

Note that the way that the assignment operator (an `=` symbol) works requires that the reference and the newly created object must be in the same statement. (Statements are ended with the semicolon symbol and are not the same as lines. The end of a line means nothing to the Java compiler; it only helps make the code more readable.)

## The Dot (.) Operator

Follow the reference variable with a dot operator (.) to access the fields and methods of an object.


Customer class
name address billing info age customer number order number
requestDiscount() setAddress() shop() displayCustomer()

```
public static void main(String[] args){  
  
    Customer customer01 = new Customer();  
  
    //Accessing fields  
    System.out.println(customer01.name);  
    customer01.age = 40;  
  
    //Calling methods  
    customer01.requestDiscount();  
    customer01.displayCustomer();  
    }  
}
```

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Objects with Another Object as a Property

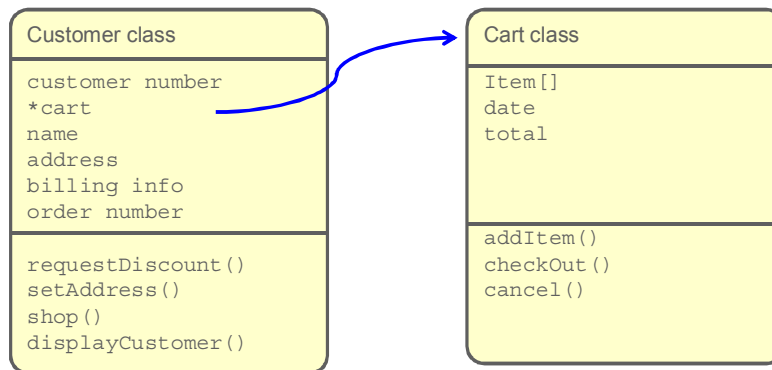

```

public static void main(String[] args){

    Customer customer01 = new Customer();
    customer01.cart.cancel();           //How to access methods of an
                                        //object within another object
}
  
```

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

So far you have seen objects with properties such as `boolean`, `int`, `double`, and `String`. What if you wanted an object's property to be another object with its own set of properties and behaviors, such as a customer with a cart property? That way, an instance of a `Customer` would have access to the properties and behaviors found in a `Cart`. This would enable the customer to add items to the cart and then `checkOut` (purchase) the cart. Can this be done? The answer is yes.

You can access fields and methods of objects within another object by applying the dot operator multiple times.

**Note:** A best practice is to use attribute and operation names that clearly describe the attribute or operation. The asterisk (\*) denotes an attribute that is a reference to another object.

## Quiz

Which of the following lines of code instantiates a `Boat` object and assigns it to a `sailBoat` object reference?

- a. `Boat sailBoat = new Boat();`
- b. `Boat sailBoat;`
- c. `Boat = new Boat();`
- d. `Boat sailBoat = Boat();`

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

**Answer: a**


## Topics

- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- **Working with object references**
- Doing more with arrays
- Introducing NetBeans IDE
- Introducing the soccer league use case

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Accessing Objects by Using a Reference

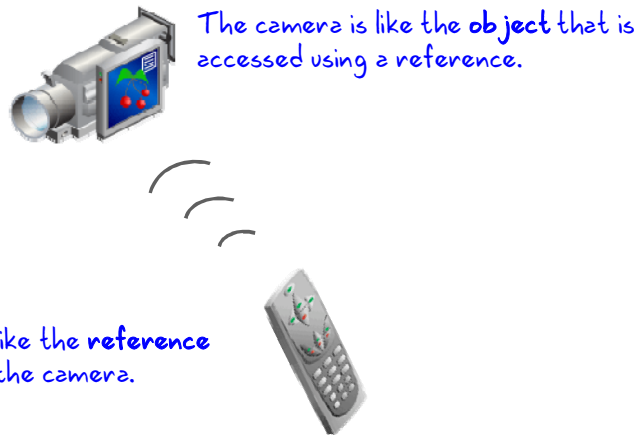**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.


What you have learned up to this point is:

- Objects are accessed using references.
- Objects are instantiated objects of their class type.
- Objects consist of properties and operations, which in Java are fields and methods.

To work with an object, you need to access it using a reference. A good analogy is using a remote control to operate an electronic device. The buttons on the remote control can be used to modify the behavior of the device (in this case, a camera). For example, you can make the camera stop, play, or record by interacting with the remote.



## Working with Object References

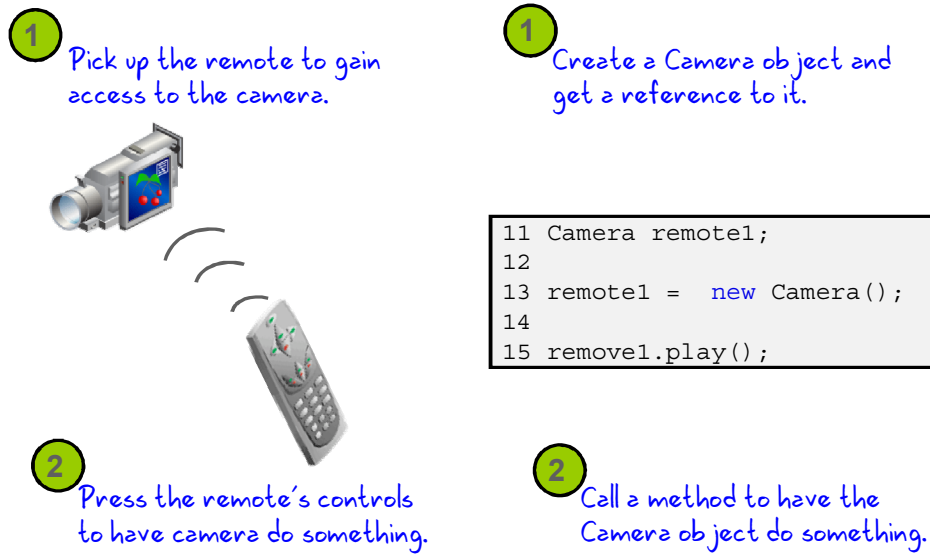

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.


Consider the analogy of using a remote control to operate an electronic device. To operate an electronic device with a remote, you need to:

1. Pick up the remote (and possibly turn it on)
2. Press a button on the remote to do something on the camera

Similarly, to do something with a Java object, you need to:

1. Get its "remote" (called a reference)
2. Press its "buttons" (called methods)

## Working with Object References

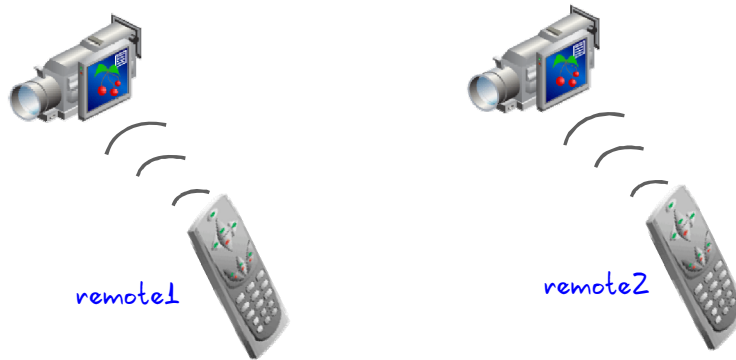

```
12 Camera remote1 = new Camera();  
13  
14 Camera remote2 = new Camera();  
15  
16 remote1.play();  
17  
18 remote2.play();
```


There are two Camera objects.

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

There are two camera objects in this example. Each camera has its own unique remote. remote2 will not work on remote1's camera, and remote1 will not work on remote2's camera. This reflects how in Java, two different objects can be instantiated with their own unique references. These references can be used to call methods on their respective objects.


## Working with Object References

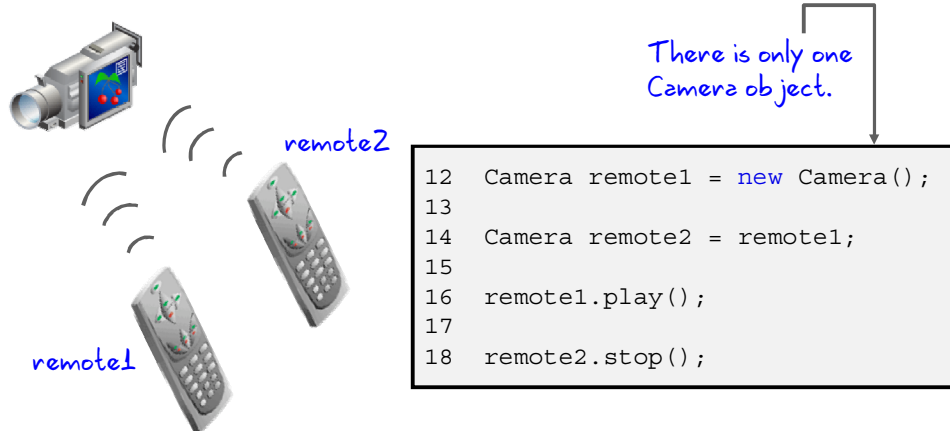**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

The diagram shows another important aspect of how references work. In this example, a `Camera` object is created and its reference assigned to a `Camera` reference, `remote1`. This reference is then assigned to another `Camera` reference, `remote2`. Now both references are associated with the same `Camera` object, and methods called on either reference will affect the same `Camera` object. Calling `remote1.play` is no different than calling `remote2.play`. Both remotes operate the same camera.

## References to Different Objects

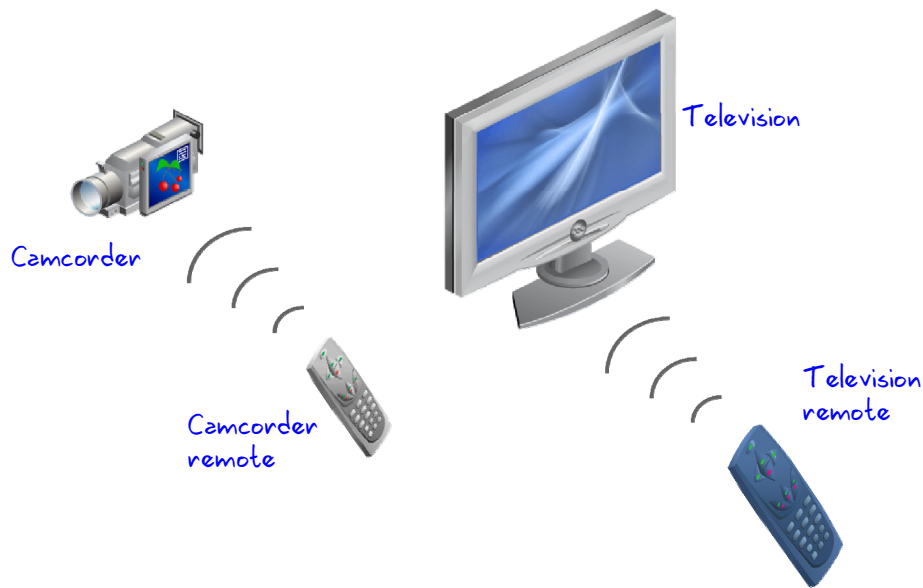**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

To extend the analogy just a little further, to work with a different type of object (for example, a television), you need a remote for that object. In the Java world, you need a reference of the correct type for the object that you are referencing.

You can ignore the fact that there is such a thing as a universal remote controller, although later in the course you will discover that Java also has the concept of references that are not limited to a single object type! For the moment, let's just say that a reference of the same type as the object is one of the reference types that can be used, and is a good place to start exploring the world of Java objects.

## References to Different Objects

```
6  Camera remote1 = new Camera();
7  remote1.menu();
8
9  TV remote2 = new TV();
10 remote2.menu();
11
12 Shirt myShirt = new Shirt();
13 myShirt.display();
14
15 Trousers myTrousers = new Trousers();
16 myTrousers.display();
```

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

remote1 references a Camera object.


remote2 references a TV object.

myShirt references a Shirt object.

myTrousers references a Trousers object.

## References and Objects in Memory

```
12 int counter = 10;
13 Shirt myShirt = new Shirt();
14 Shirt yourShirt = new Shirt();
```

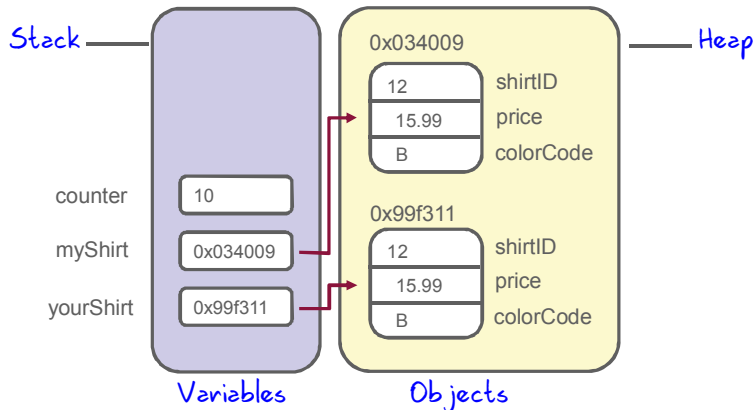

ORACLE


Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

This diagram shows how references point to a particular object in memory. Note that there are two objects in memory, although they are both of type `Shirt`. Also note that there are two `Shirt` references pointing to these two `Shirt` objects.

The diagram also shows two types of memory that Java uses: the stack and the heap. The stack holds local variables, either primitives or reference types, whereas the heap holds objects. Later in this course, you will learn a little more about local variables, but for now it is sufficient to know that local variables are not fields of an object.

## Assigning a Reference to Another Reference

```
myShirt = yourShirt;
```

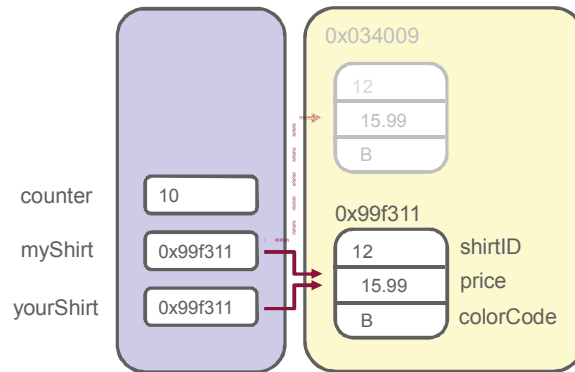
**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

The diagram shows what happens if the `myShirt` reference, after having its own object (in the previous slide), is now assigned the reference `yourShirt`. When this happens, the `myShirt` reference will drop its current object and be reassigned to the same object that `yourShirt` has. As a result, two references, `myShirt` and `yourShirt`, now point to the same object. Any changes to the object made by using one reference can be accessed using the other reference, and vice versa.

Another effect of assigning the reference `yourShirt` to the reference `myShirt` is that if the previous object referred to by `myShirt` has no other references, it will now be inaccessible. In due course, it will be garbage collected, meaning that its memory will become available to store other objects.

## Two References, One Object

### Code fragment:

```
12 Shirt myShirt = new Shirt();
13 Shirt yourShirt = new Shirt();
14
15 myShirt = yourShirt;           //The old myShirt object is
16                               //no longer referenced
17 myShirt.colorCode = 'R';
18 yourShirt.colorCode = 'G';
19
20 System.out.println("Shirt color: " + myShirt.colorCode);
```

### Output from code fragment:

```
Shirt color: G
```



Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

This example now shows what happens if you use either reference to make a change or get a value from the object. References `yourShirt` and `myShirt` refer to the same object, so making a change or getting a field value by using one reference is exactly the same as doing it with the other reference. The old object that was previously referenced by `myShirt` goes away.



## Exercise 6-2: Modify the ShoppingCart to Use Item Fields

- In this exercise, you:
  - Declare and instantiate two variables of type `Item` in the `ShoppingCart` class
  - Experiment with accessing properties and calling methods on the object

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

- In the Java Code Console, access Lessons > 06-ObjectsClasses > Exercise2.
- Follow the instructions below the code editor to:
  - Declare and instantiate two variables of type `Item`.
  - Initialize only the `desc` field.
  - Use different values for each object.
  - Display the description of each object.
- If you need help, click the Solution link. To go back to your code, click the Exercise link again. Any changes that you have made will have been saved.

## Topics

- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- Working with object references
- **Doing more with arrays**
- Introducing NetBeans IDE
- Introducing the soccer league use case

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Arrays Are Objects

Arrays are handled by an implicit Array *object*.

- The Array variable is an *object reference*, not a primitive data type.
- It must be instantiated, just like other objects.

– Example:

```
int[] ages = new int[4];
```

— This array  
can hold four  
elements.

- Previously, you have been using a shortcut to instantiate your arrays.

– Example:

```
int[] ages = {8,7,4,5};
```

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

An array is actually an object type and is handled implicitly through a class called `Array` (not available in the Java API documentation). Therefore, like other object types (`String` is an exception) it must be instantiated using the `new` keyword.

- In the top example, an `int` array called `ages` is declared and instantiated with a capacity to hold four elements.

## Declaring, Instantiating, and Initializing Arrays

- Examples:

```
1 String[] names = {"Mary", "Bob", "Carlos"};
2
3 int[] ages = new int[3];
4 ages[0] = 19;
5 ages[1] = 42;
6 ages[2] = 92;
```

All in one  
line

Multistep  
approach

- Not permitted (compiler will show an error):

```
int [] ages;
ages = {19, 42, 92};
```




Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

As introduced in the lesson titled “Managing Multiple Items,” there are two approaches for creating and initializing arrays. Using the **new** keyword allows you to declare and instantiate an array of a particular size and initialize it at a later time.

## Storing Arrays in Memory

```
int age = 35;
int[] ages = {19, 42, 92};
```

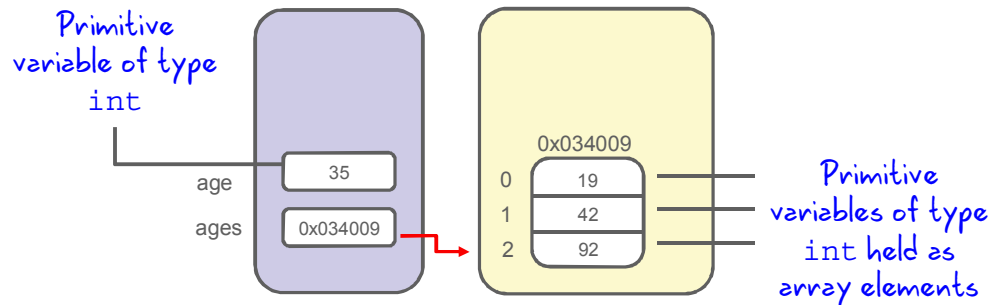

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.


Arrays are objects referred to by an object reference variable. The diagram in the slide illustrates how a primitive array is stored in memory in comparison to how a primitive data type is stored in memory.

The value of the `age` variable (an `int` primitive) is 35. The value of `ages` is 0x034009, an object reference pointing to an object of type array (of `int` types) with three elements.

- The value of `ages[0]` is 19.
- The value of `ages[1]` is 42.
- The value of `ages[2]` is 92.

## Storing Arrays of Object References in Memory

```
Item item = new Item();
Item[] items = { new Item(), new Item(), new Item() };
```

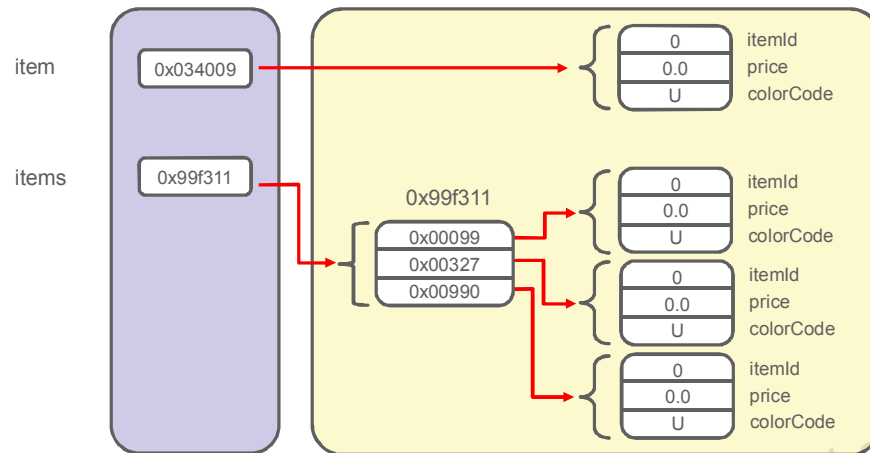

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

The diagram in the slide illustrates how an object reference array is stored in memory. The value of the `item` object reference is `x034009`, which is an address to an object of type `Item` with the values `0`, `0.0`, and `U`.

The value of the `items[ ]` object reference is `x99f311`, which is an address to an object of type `Array` (of `Item` object references) containing three object references:

- The value of the `items[0]` index is `0x00099`, which is an object reference pointing to an object of type `Item`.
- The value of the `items[1]` index is `0x00327`, which is an object reference pointing to another object of type `Item`.
- The value of the `items[2]` index is `0x00990`, which is an object reference pointing to another object of type `Item`.

## Quiz

The following code is the correct syntax for \_\_\_\_\_ an array:

```
array_identifier = new type[length];
```

- a. Declaring
- b. Setting array values for
- c. Instantiating
- d. Declaring, instantiating, and setting array values for

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

### Answer: c

**a** is incorrect. Declaring the array would look like this, assuming an array of object types: `Type [] array_identifier;`

**b** is incorrect. Setting array values would look like this, assuming an array of object types:

```
array_identifier[0] = new Type();
```

**c** is correct. The code example shows the array being initialized to a specific size.

**d** is incorrect. Declaring, instantiating, and setting array values would look like this, assuming an array of object types:

```
Type[] array_identifier = {new Type(), new Type(), new Type()};
```

## Quiz

Given the following array declaration, which of the following statements are true?

```
int [ ] ages = new int [13];
```

- a. ages [0] is the reference to the first element in the array.
- b. ages [13] is the reference to the last element in the array.
- c. There are 13 integers in the ages array.
- d. ages [5] has a value of 0.

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

**Answer: a, c, d**



## Topics

- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- Working with object references
- Doing more with arrays
- Introducing NetBeans IDE
- Introducing the soccer league use case


ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Java IDEs

A Java Integrated Development Environment (IDE) is a type of software that makes it easier to develop Java applications.

- An IDE provides:
  - Syntax checking
  - Various automation features
  - Runtime environment for testing
- It enables you to organize all your Java resources and environment settings into a *Project*.




ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Some well-known Java IDEs are NetBeans (used in this class to perform the practices), Eclipse, and JDeveloper.

## The NetBeans IDE

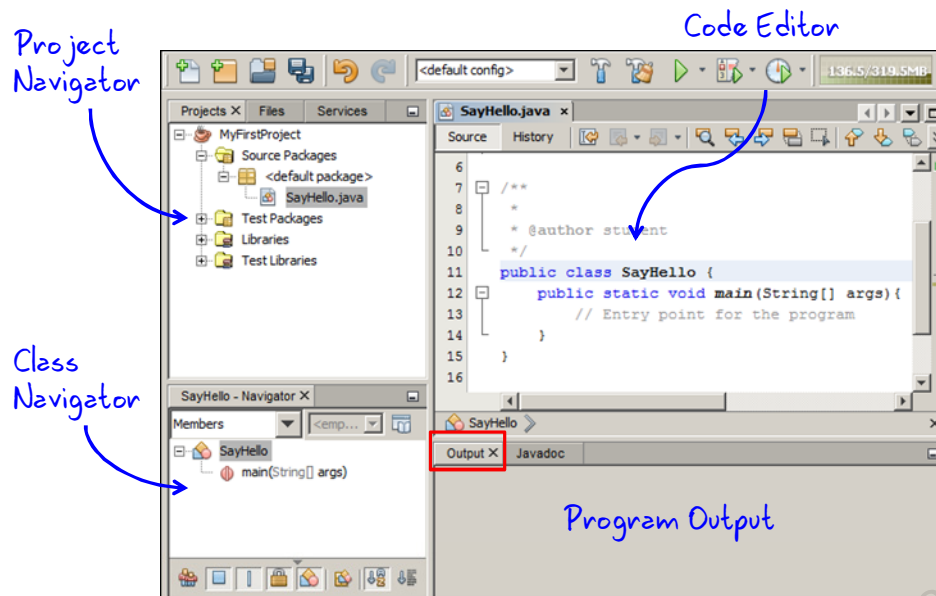

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

The Java project provides a mechanism by which you can organize all of the source and class files and other resources (connection profiles, configuration information, and so on) required by the Java application.


- When you begin working in NetBeans, you either create a project or open an existing one.
- The Project Navigator gives you a visual representation of the project contents.
- You can open files from your project in the code editor by double-clicking the file or using the context menu.

When you select a class within the project, the structure of that class is displayed in the Class Navigator, shown in the lower left part of the NetBeans window.

When you run a file or the entire Java program, any program output appears in the Output panel in the lower right part of the window.

## Creating a Java Project

1. Select **File > New Project**.
2. Select Java Application.
3. Name and set the location for the project.
4. Select "Create Main Class" if you want it done for you automatically.
5. Click **Finish**.

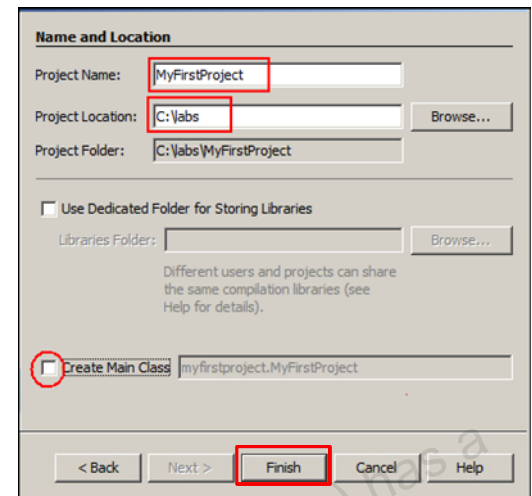

ORACLE


Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

A NetBeans project is a mechanism for organizing the related files and resources used in a Java Application. To create a new project, perform the following steps:

1. Select **File > New Project** from the menu.
2. On the first page of the New Project Wizard (not shown here), select Java as the category and Java Application as the project type. Click **Next**.
3. On the second page of the wizard (shown above), enter a name for the project, and then enter or browse to the directory location to store project files.
4. It is possible to have NetBeans automatically generate a main class for the project.
5. Click **Finish**.

## Creating a Java Class

1. Select **File > New File**.
2. Select your project and choose **Java Class**.
3. Name the class.
4. Assign a package.
5. Click **Finish**.

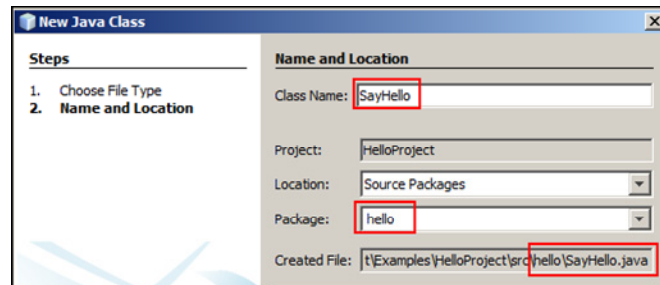

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.


To create a class within your new project, perform the following steps:

1. Select **File > New File** from the menu.
2. On the first page of the New File Wizard, select your project, and then accept the default file type of Java Class. Click **Next**.
3. On the next page of the wizard, enter a name for the Java class. By convention, Java classes should start with an uppercase letter and each subsequent word in the class name should be capitalized (for example, `SayHello`). This is illustrated in the screenshot above.
4. Assign a package for the class.
5. Click **Finish**.

**Note:** If the package for this new class already exists, you can create the class by right-clicking the package in the Project Navigator panel in NetBeans and selecting **New > Java class** from the context menu instead of starting from the File menu.

## Avoiding Syntax Problems

The code editor will tell you when you have done something wrong.

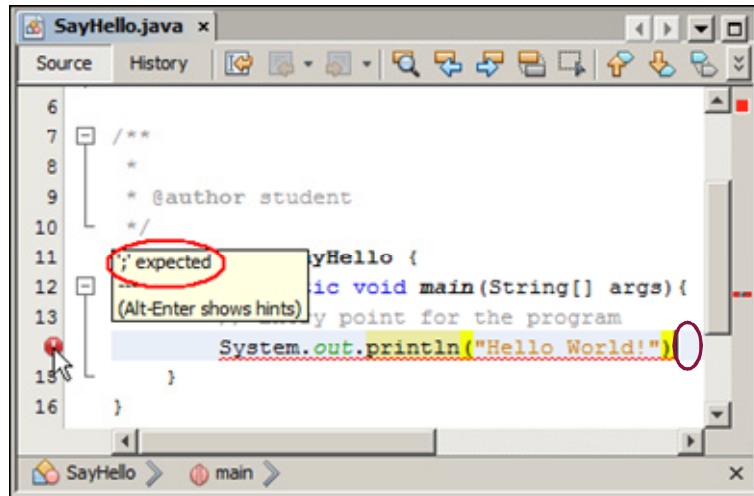

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Most Java editors check the code syntax and show alerts by using icons and red underlines where there are errors in the code.

To avoid syntax problems, be sure to do the following:

- Observe any red bubble indicators in the code editor to locate syntax errors.
- Have a semicolon at the end of every line where one is required.
- Have an even number of symbols such as braces, brackets, and quotation marks.

The screenshot shows an error in Line 13, in which there is a missing semicolon. If you place your cursor over the red bubble, the editor offers a suggestion for fixing the error.

## Compile Error: Variable Not Initialized

```

1 public static void main(String[] args){
2
3     Customer customer01;           //Declare the reference
4                                     //No instantiation
5     customer01.name = "Robert";
6
7
8
9
10 }
```

NetBeans indicates that the variable may not have been initialized.

```

public static void main(String[] args) {
    Customer customer01;           //Declare the reference
                                   //but no instantiation
    customer01.name = "Robert";
    variable customer01 might not have been initialized
    ----
    (Alt-Enter shows hints)
}
```



Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

If you try to use a reference that has been declared but has had no object assigned to it, the class will not compile. This is because there is no `Customer` object assigned to the `customer01` reference. NetBeans will flag this, and indicate that “the variable may not have been initialized.”

## Runtime Error: NullPointerException

```

1 public static void main(String[] args){
2
3     Customer customer01;           //Declare the reference
4     customer01 = new Customer();   //Instantiate and assign
5     customer01.name = "Robert";
6
7     Customer[] customers = new Customer[5];
8     customers[0].name = "Robert";
9
10 }

```

This reference has not been assigned.

NetBeans output window indicates a NullPointerException.

```

run:
Exception in thread "main" java.lang.NullPointerException
    at Test.main(Test.java:49)
Java Result: 1
BUILD SUCCESSFUL (total time: 0 seconds)

```


ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

If an array has been created but the individual elements have had no objects assigned, the class will compile, but you will get a runtime error. The error is a `NullPointerException`. Later in the lesson titled “Handling Exceptions,” you will learn exactly what this means; for now it is just important to recognize that a `NullPointerException` indicates that a reference has no object assigned; that it is ***null***.



## Compiling and Running a Program by Using NetBeans

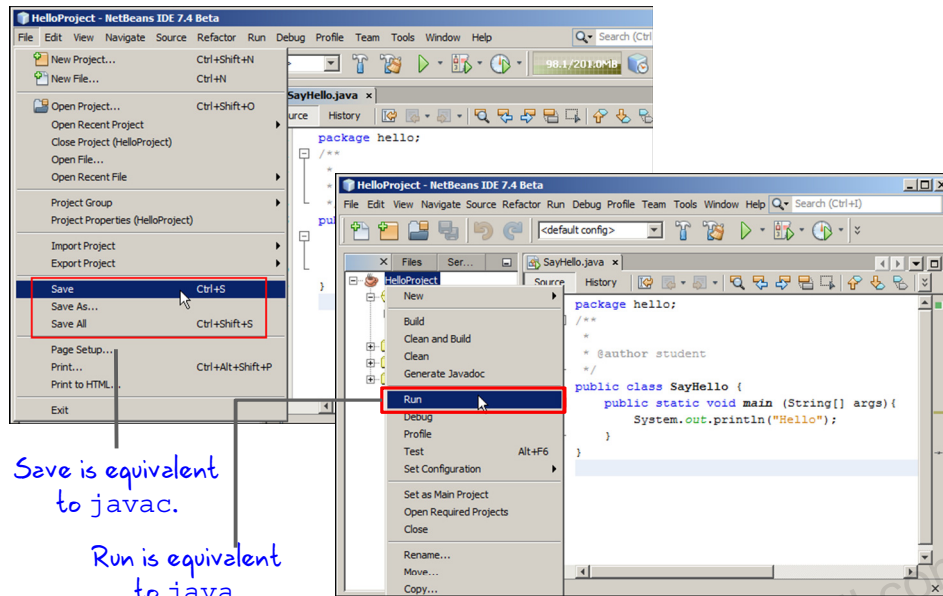

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Save invokes the `javac <classname(s)>` command for all `.java` files in the project. Right-clicking the source code and selecting Run File invokes the `java <classname>` command. Be sure to look for red bubble indicators in the code editor to locate syntax errors.

## Topics

- Describing objects and classes
- Defining fields and methods
- Declaring, instantiating, and using objects
- Working with object references
- Doing more with arrays
- Introducing NetBeans IDE
- Introducing the soccer league use case


ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Soccer Application

Practices 6 through 14 build a soccer league application with the following features:

- Any number of soccer teams, each with up to 11 players
- Set up an all-play-all league.
- Use a random play game generator to create test games.
- Determine the rank order of teams at the end of the season.

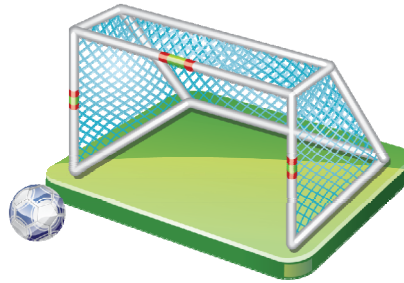

ORACLE


Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

In the remaining practices in this course, you will build an application that manages a Soccer League. The application will keep details on teams and players, as well as the results of games.

You will also write code that will randomly generate game results so that you can then develop code to list the Teams in rank order.

## Creating the Soccer Application

A separate project for each practice

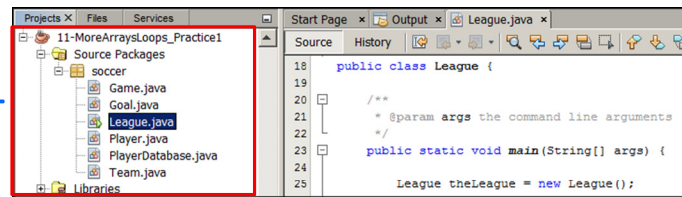

Sample output showing events in a game

Sample output showing rank order of teams

```
The Greys vs. The Pinks (2014-03-08)
Kickoff by Agatha Christie of The Greys. (0.0 mins.)
Arthur Conan Doyle of The Pinks currently has possession. (6.0 mins.)
GOAL! Scored by W. B. Yeats of The Greys. (7.0 mins.)
Kickoff by Alan Patton of The Pinks. (8.0 mins.)
Alexander Solzhenitsyn of The Pinks currently has possession. (11.0 mins.)
GOAL! Scored by Arthur Conan Doyle of The Pinks. (14.0 mins.)
Kickoff by Agatha Christie of The Greys. (18.0 mins.)
Alan Patton of The Pinks currently has possession. (23.0 mins.)
Agatha Christie of The Greys currently has possession. (24.0 mins.)
GOAL! Scored by Agatha Christie of The Greys. (40.0 mins.)
Kickoff by Arthur Conan Doyle of The Pinks. (44.0 mins.)
Arthur Conan Doyle of The Pinks currently has possession. (49.0 mins.)
GOAL! Scored by Arthur Conan Doyle of The Pinks. (55.0 mins.)
Kickoff by Agatha Christie of The Greys. (59.0 mins.)
Alan Patton of The Pinks currently has possession. (73.0 mins.)
GOAL! Scored by W. B. Yeats of The Greys. (89.0 mins.)
The Pinks win! (3 - 2)

Team Points
The Reds:17:20
The Blues:17:17
The Pinks:12:17
The Greens:8:12
The Greys:6:13
BUILD SUCCESSFUL (total time: 0 seconds)
```

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Initially, your application will be developed in NetBeans and you will see the results of running your code as text in the output window.

## Soccer Web Application

**Soccer League Games**

Replay games

		Away Teams							
		The Magpies	The Crows	The Reds	The Blues	The Rovers	The Harriers	Goals	Points
Home Teams	The Magpies	X	(0 - 1)	(4 - 2)	(1 - 0)	(3 - 0)	(1 - 0)	15	18
	The Crows	2 - 1	X	(1 - 0)	(0 - 1)	(0 - 0)	(0 - 0)	10	18
	The Reds	0 - 1	(0 - 1)	X	(1 - 1)	(1 - 0)	(1 - 0)	13	14
	The Blues	4 - 1	(0 - 2)	(0 - 1)	X	(3 - 4)	(1 - 0)	12	14
	The Rovers	3 - 0	(5 - 2)	(2 - 4)				18	13
	The Harriers	1 - 3	(1 - 1)	(3 - 3)				8	7

**The Rovers vs. The Reds (2 - 4)**

Team	Player	Time
The Reds	Jane Austin	7
The Rovers	J. M. Synge	21
The Reds	Jane Austin	41
The Reds	Mark Twain	46
The Reds	Brian Moore	76
The Rovers	Charlotte Bronte	83

[Return to main page](#)

Teams listed in rank order

Click the score of a game to show game details.

Points and goals scored used for ordering

ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

The code that you write in the practices can be used by a simple web application to view the results of games in the league. You will see a demonstration of this.

## Summary

In this lesson, you should have learned how to:

- Describe the characteristics of a class
- Define an object as an instance of a class
- Instantiate an object and access its fields and methods
- Describe how objects are stored in memory
- Instantiate an array of objects
- Describe how an array of objects is stored in memory
- Declare an object as a field
- Use the NetBeans IDE



ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

## Challenge Questions: Java Puzzle Ball

- How many objects can you identify in the game?
- Given that a class is a blueprint for an object, which game components best reflect the class/instance relationship?
- How many object properties can you find?
- Can you guess what some of the methods might be?

**ORACLE**

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.


When you have an opportunity to play the game, see if you can answer these questions, applying the object-oriented concepts that you learned in this lesson.

For some possible answers to these questions and more discussion, see “Appendix A: Java Puzzle Ball Challenge Questions Answered.”

## Practice 6-1 Overview: Creating Classes for the Soccer League

This practice covers creating the five classes required for the soccer application:

- Goal
- Game
- Player
- Team
- League



ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.



## Practice 6-2 Overview: Creating a Soccer Game

This practice covers the following topics:

- Creating a new game
- Adding some goals



ORACLE

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Kevin Gómez González (kev.gomez97@hotmail.com) has a non-transferable license to use this Student Guide.