



IT-DALLMANN

DomMCP

Installation & Configuration

The MCP server for HCL Domino — administrator's handbook

DomMCP opens your Domino applications to AI agents. It runs as an ordinary server task, listens on a port of its own and speaks the Model Context Protocol. What a client is allowed to do stays your decision: read only, write as well, or go all the way and build forms and views.

This guide takes you from a bare Domino server to your first successful call — on Linux, in a container and on Windows.

Document history			
Revision	Date	Author	Change
1.0	2026-07-25	Kevin Dallmann	First edition (DomMCP 0.0.590)
1.1	2026-07-27	Kevin Dallmann	Illustrated (22 figures), Windows chapter extended; repair-design documented (DomMCP 0.0.615)
Software		DomMCP 0.0.615	
Supported		HCL Domino 12.0.2 · 14.0 · 14.5 — Linux x86-64 and Windows x64	
Audience		Domino administrators	

Contents

1	What DomMCP does	3
2	What you need	3
3	What you get	3
4	Installing on Linux and in a container	4
5	Installing on Windows	5
6	Creating the first administrator	8
7	Installing the licence	9
8	Does it work?	10
9	Configuration in the database	11
10	Connecting an AI client	15
11	Day-to-day operation and console commands	18
12	Backup and restore	20
13	Updating	21
14	When something goes wrong	21
15	Acceptance checklist	24

How to read this handbook

Chapters 4 and 5 cover the installation, once for Linux and containers and once for Windows. You only need the one for your platform. Everything after that – the first administrator, the licence, operation, backups – is identical on every system.

1 • What DomMCP does

DomMCP is not a separate service sitting next to Domino. It runs inside it, as a task you start with `load`, exactly like Router or AMgr. Once it is up it accepts JSON-RPC calls at `POST /mcp`, on port 8088 by default.

Access is deliberately tight. A client gets a token, the token points at a grant, and only the grant decides which databases are visible at all. Anything you have not explicitly allowed simply does not exist as far as the client is concerned. These four terms come up throughout the handbook:

Building block	What it means
Token	The client's secret. Only its SHA-256 hash is stored in the configuration, never the secret itself.
Grant	The set of permissions behind it: which databases, which tools, which fields, which views.
Write intent	A second proof for writing calls (token + <code>-write</code>). Over MCP and OAuth the server supplies it for you.
Licence	A signed file. It determines the edition and the feature set.

2 • What you need

Component	Requirement
HCL Domino	12.0.2, 14.0 or 14.5
Platform	Linux x86-64 (native or container) or Windows x64
Operating system	Linux: glibc 2.38 or newer
Permissions	Write access to the Domino data directory and access to the server console
Network	Port 8088 reachable from your clients

On Linux the very same binary runs on all three Domino releases. We build against the oldest supported API, so there is no version-specific delivery to keep track of. If you are still on RHEL or Rocky 8 (glibc 2.28), let us know and you will get a matching build. Windows has its own binary, see chapter 5.

Reaching the server from the internet

If DomMCP needs to be reachable from outside — for Claude.ai, say — put a reverse proxy with TLS in front of it. Alternatively DomMCP can terminate TLS itself on a second port. Inside your LAN the default port works as it is.

3 • What you get

The standard delivery is three files:

File	Purpose	Secrets?
<code>dommcp_addin</code> / <code>dommcp_addin.exe</code>	The program itself	none
<code>dommcp-default-config.json</code>	Starting configuration the server builds its databases from on first run	none, deliberately no tokens
<code>dommcp-license.json</code>	Your signed licence	the licence code only

And the databases?

The container package also contains two ready-made, **token-free** databases: `dommcpcfg.nsf` for the configuration and `dommcpaudit.nsf` for the audit trail. They bring the forms and views you will see in chapter 9, but no credentials whatsoever — you create the first administrator yourself.

If those two files are missing, the server still starts: it creates them from the starting configuration on the first `load`. They will then have no design, so they look empty in the Notes client even though the values are in there. That is fine for pure server operation; if you want to edit the configuration in the client, use the databases we ship.

4 · Installing on Linux and in a container LINUX

Four steps and the task is running.

Where the files belong

What	Path
Program	<code>/opt/hcl/domino/notes/latest/linux/dommcp_addin</code>
Starting configuration	<code>/local/notesdata/dommcp-default-config.json</code>
Configuration NSF	<code>/local/notesdata/dommcp/dommcpcfg.nsf</code>
Licence file	<code>/local/notesdata/dommcp/dommcp-license.json</code>
Audit NSF	<code>/local/notesdata/dommcp/dommcpaudit.nsf</code>

1 Put the program in place

```
cp dommcp_addin /opt/hcl/domino/notes/latest/linux/dommcp_addin
chown notes:notes /opt/hcl/domino/notes/latest/linux/dommcp_addin
chmod 755 /opt/hcl/domino/notes/latest/linux/dommcp_addin
```

2 Put the starting configuration in place

```
cp dommcp-default-config.json /local/notesdata/dommcp-default-config.json
chown notes:notes /local/notesdata/dommcp-default-config.json
```

If your package includes the ready-made databases, also copy `dommcpcfg.nsf`, `dommcpaudit.nsf` and `dommcp-license.json` into `/local/notesdata/dommcp/` and set `notes:notes` there as well.

3 Load the task

On the Domino console, and without any path argument:

```
load dommcp_addin
```

The screenshots in this guide were taken on a German Notes client and a German Claude interface; the field names and menu items you see may be localised differently on your system.

```
... Domino console — load dommcp_addin

07/27/2026 10:02:49 DomMCP add-in starting
07/27/2026 10:02:49 DomMCP (c) 2026 it-dallmann.de - https://it-dallmann.de
07/27/2026 10:02:49 DomMCP started (0.0.615): config=dommcpconfig.nsf
                                audit=dommcp/dommcpaudit.nsf host=0.0.0.0 port=8088
07/27/2026 10:02:49 DomMCP commands ready via TELL DOMMCP {STATUS SHOW-METRICS
                                RELOAD-CONFIG PROVISION-ADMIN <secret> DEBUG ON/OFF QUIT}
```

Fig. 1: A clean start. The line that matters is "DomMCP started", with the port and the configuration path.

The single most common mistake

Do not put a path after `load dommcp_addin`. Doing so switches the server to file-based configuration, and from then on you will wonder why changes in the NSF have no effect. Just `load dommcp_addin`, nothing else.

4 Start it automatically

To bring DomMCP up with every server start, append it to `ServerTasks=` in `notes.ini`:

```
ServerTasks=Update,Replica,Router,AMgr,AdminP,...,dommcp_addin
```

5 • Installing on Windows WINDOWS

Same logic, different paths. On Windows the add-in is an EXE.

Where the files belong

What	Path (example)
Program	C:\Program Files\HCL\Domino\dommcp_addin.exe
Starting configuration	C:\Domino\Data\dommcp-default-config.json
Configuration NSF	C:\Domino\Data\dommcp\dommcpconfig.nsf
Licence file	C:\Domino\Data\dommcp\dommcp-license.json
Audit NSF	C:\Domino\Data\dommcp\dommcpaudit.nsf

Your actual directories are what count, not the examples above. The program belongs wherever `nserver.exe` and `nnotes.dll` live. DomMCP finds the data directory by itself, whether it is called `C:\Domino\Data` or something else entirely.

1 Copy the program into the Domino program directory

Put `dommcp_addin.exe` next to `nserver.exe`. Windows add-ins are EXE files that run as server tasks via `load`.

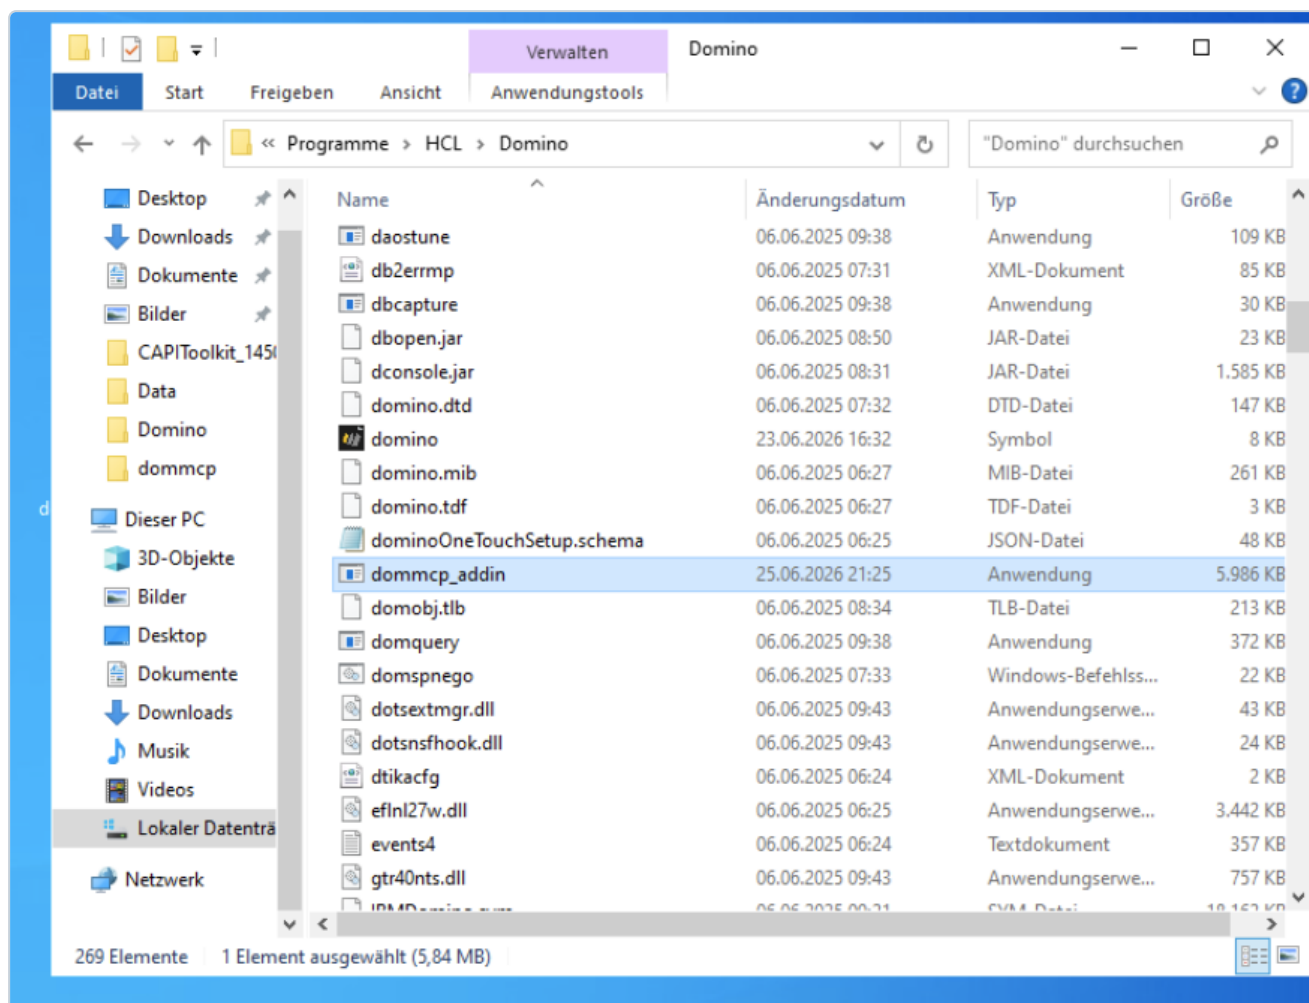


Fig. 2: The add-in sits in the Domino program directory, next to `nserver.exe`.

2 Put the starting configuration in the data directory

Copy `dommcp-default-config.json` into `<Data>`. With the package that includes ready-made databases, `dommcpconfig.nsf`, `dommcpaudit.nsf` and `dommcp-license.json` go into `<Data>\dommcp\`.

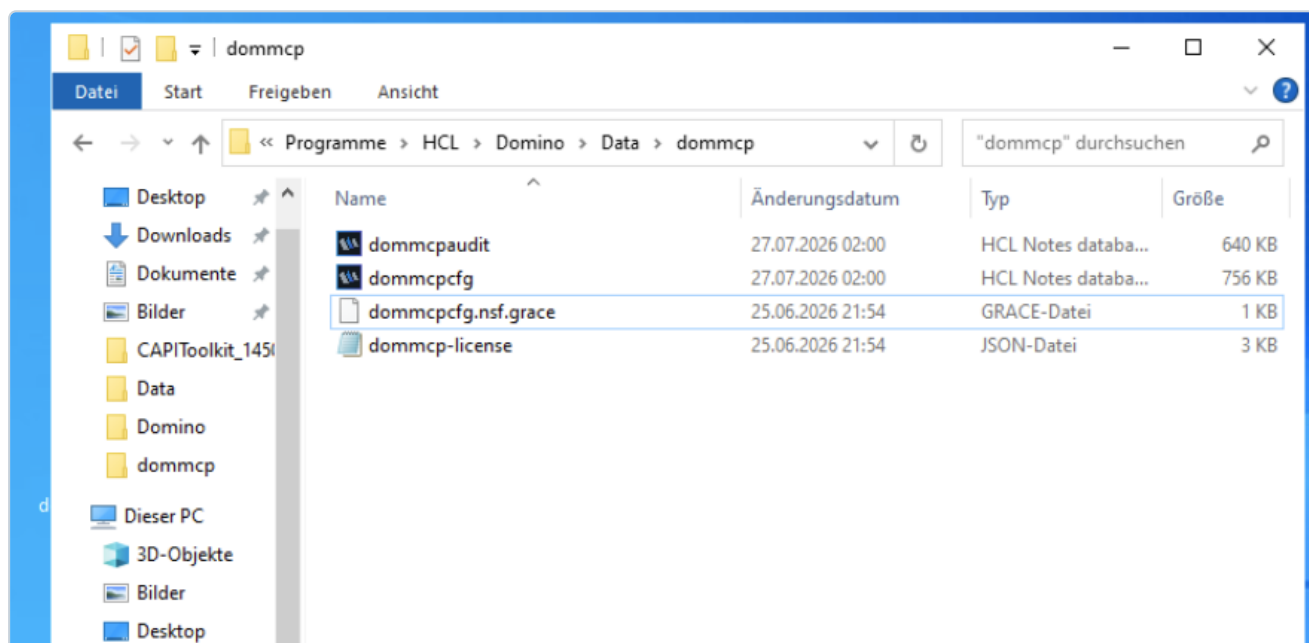


Fig. 3: The `dommcp\` subfolder in the data directory: configuration NSF, audit NSF and licence file.

3 Load the task

On the Domino console, again without a path:

```
load dommcp_addin
```

The messages are the same ones shown in figure 1.

4 Start it automatically

Append it to `ServerTasks=` in `notes.ini`, exactly as on Linux:

```
ServerTasks=Update,Replica,Router,AMgr,AdminP,...,dommcp_addin
```

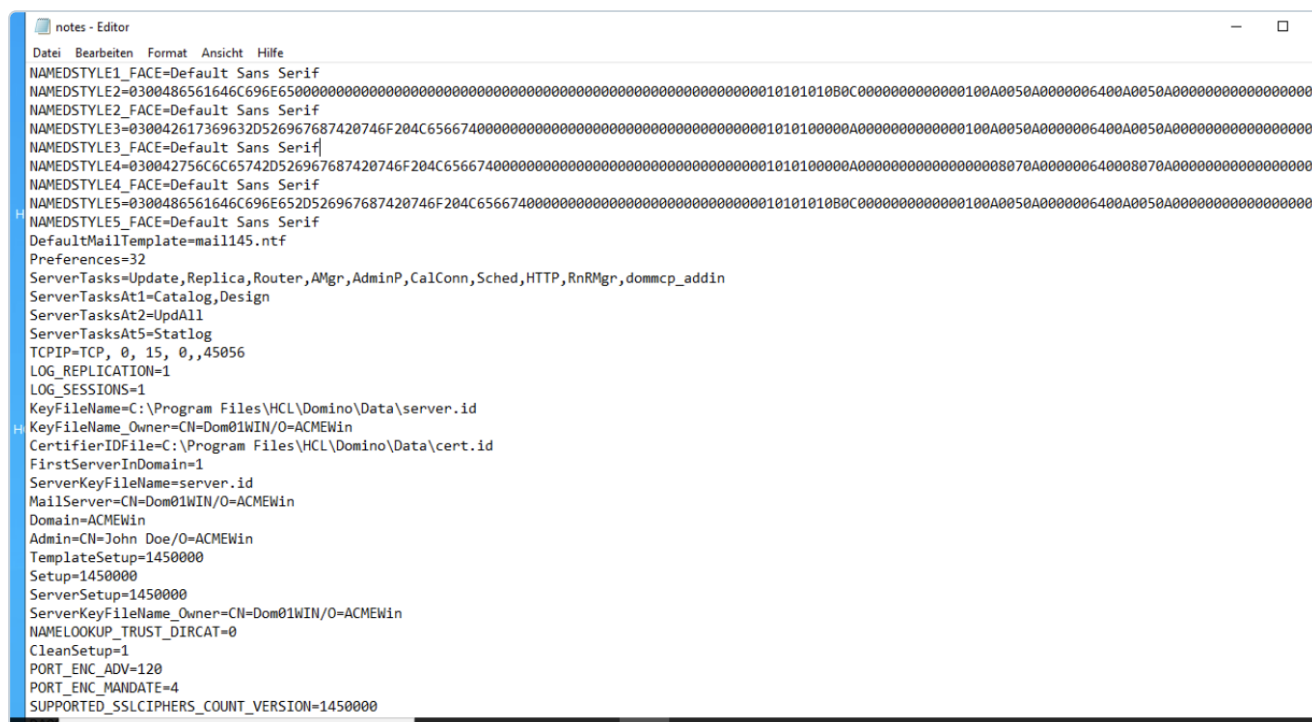


Fig. 4: `dommcp_addin` at the end of the `ServerTasks=` line in `notes.ini` — from now on the task starts with the server.

From here on everything is the same

Creating the administrator, the licence, the smoke test, operation and backups are identical on Linux and Windows. You only need to translate the paths in the example commands.

6 · Creating the first administrator

We ship without any tokens, so there is no default password for anyone to forget to change. You create the first account on the server console instead. Whoever can type there is privileged already, which is why this step needs no further authentication:

```
tell dommcp provision-admin <yourSecret>
```

... Domino console — provision-admin

```
> tell dommcp provision-admin demoAdmin12345
> dommcp_audit token=admin grant=super-admin tool=provision_bootstrap_admin
status=ok error=console bootstrap: minted admin token 'admin' bound to grant 'super-admin'
07/24/2026 21:28:01 DomMCP: admin token 'admin' provisioned and bound to grant
'super-admin'. Use the supplied secret as your Bearer token
(write-intent = secret + "-write"). ROTATE it after first use
and restrict source IPs in the Token doc.
```

Fig. 5: The bootstrap confirms the token and grant it created. The secret itself never appears anywhere.

A few things worth knowing:

- The secret needs at least eight characters and is your bearer token from that moment on.
- The new `admin` token is bound to the supplied `super-admin` template: every database, every tool, write, design and ACL rights.

- For writing calls, use `<yourSecret>-write`.
- You can run the command again at any time. It rotates the secret, which is also your way back in if you ever lock yourself out.

Tidy up afterwards

The admin token is a master key. Do not hand it around — create individual accounts with `provision_person_token` instead. The token document in the configuration NSF also lets you restrict which source addresses may use it.

7 • Installing the licence

1 Put the file in place

Linux:

```
cp dommcp-license.json /local/notesdata/dommcp/dommcp-license.json
chown notes:notes      /local/notesdata/dommcp/dommcp-license.json
chmod 640              /local/notesdata/dommcp/dommcp-license.json
```

Windows: the same file goes to `<Data>\dommcp\dommcp-license.json`.

2 Reload the task

```
tell dommcp quit
load dommcp_addin
```

Two traps we have fallen into ourselves

First: `reload-config` only re-reads the NSF, not the licence file. After a new licence the task really does have to be reloaded, otherwise nothing appears to happen.

Second: a `license_public_key` in the file is ignored. Verification uses the key compiled into the program and nothing else. That is on purpose — otherwise anyone could issue themselves a licence.

What if there is no valid licence?

The server still runs, just restricted. So you can take your time setting things up and add the licence later.

Situation	Behaviour
Never licensed	read-only for seven days, then it stops
Licence expired	read-only permanently; reading tools carry on as normal

License & certifier
Offline license binding and optional certifier.

License file	dommcp/dommcp-license.json
License domain	acme
Validation TTL (s)	60
Strict entitlements	0
Certifier ID path	cert.id
Certifier password	*****
License public key	[redacted] — override verify key (ignored)
Version unverified = error	0
License quota store	[redacted]

Last updated: 21.07.2026 22:20:05

Fig. 6: The "License & certifier" section of the global settings. The licence key is redacted here; verification uses the key built into the program anyway.

8 · Does it work?

The quick look

```
curl -s http://<server>:8088/healthz
```

... healthz — licensed server

```
{
  "copyright": "(c) 2026 it-dallmann.de",
  "license": {
    "edition": "enterprise",
    "expires_at_unix": 2082758399,
    "read_only": false,
    "status": "valid"
  },
  "ok": true,
  "status": "up",
  "vendor": "it-dallmann.de"
}
```

Fig. 7: This is what a healthy server looks like. `status: valid` and `read_only: false` are the ones to check.

Without a licence you will see `"status": "grace"` and `"read_only": true` instead. The server runs but refuses to write. The console gives you more detail:

... Domino console — tell dommcp status

```
> tell dommcp status
DomMCP status: active=true host=0.0.0.0 port=8088 config=dommcpconfig.nsf
audit=dommcp/dommcpaudit.nsf level=info license_status=invalid/grace
detail="starter_default_unlicensed: license not active" domain=itdtest
tokens_loaded=0 grants_loaded=1
```

Fig. 8: A freshly installed server with no licence and no token. After `provision-admin` this reads `tokens_loaded=1`.

The real test

Whether the token actually works only shows in a real call:

```
curl -s -X POST http://<server>:8088/mcp \
  -H 'Authorization: Bearer <yourSecret>' \
  -H 'Content-Type: application/json' \
  --data '{"jsonrpc":"2.0","id":1,"method":"tools/list"}'
```

Back comes the list of tools you have enabled. If you get `unauthorized` instead, something is wrong with the token or the grant — chapter 14 will help.

9 · Configuration in the database

Everything that steers DomMCP at runtime lives in the configuration NSF, which you open in the Notes client like any other database. Three document types matter, and they fit together exactly as chapter 1 describes: a token points at a grant, the grant carries the permissions, and the global settings apply to the whole server.

Global settings

One document per server. This is where the listener's port and address live, along with the path to the audit database, the log level and the defaults for response sizes and timeouts. Changes take effect after `tell dommcp reload-config` — no restart needed.

Global Settings
Server-wide runtime configuration (one document per server). Fields marked * are required (checked on save by ValidationLib).

Server
How the MCP server binds and answers requests.

Config key *	global — must be 'global'
Server active	1 — 1 0
Listen host *	0.0.0.0 — e.g. 0.0.0.0
Listen port *	8088 — e.g. 8088
Reload interval (s)	60 — e.g. 60
Request timeout (ms)	15000 — e.g. 15000
Max response bytes	65536
Log level	info — info debug
Default page size	25 — e.g. 25
Max page size	100 — e.g. 100
Public base URL	https://dev.it-dallmann.de
Trusted proxies	— comma list of proxy IPs (X-Forwarded-For)
TLS enabled	0 — 1 = native TLS, 0 = behind reverse proxy
TLS port	8443 — e.g. 8443
TLS domain	— cert CN / SNI host
TLS cert path	dommcp/tls-test.crt — PEM certificate file path
TLS key path	dommcp/tls-test.key — PEM private key file path
TLS cert (PEM)	— inline PEM certificate (optional)
TLS key (PEM)	— inline PEM private key (optional)

Policies
Default read/response behaviour applied to every grant.

Allow hidden views	0 — 1 0
--------------------	-----------

Fig. 9: Part of the global settings in the Notes client. Security-relevant values are blacked out here.

Token

One document per account. The Grants row is the important one: it ties the token to a set of permissions. The two hash fields are normally filled in for you by `provision-admin` or `provision_person_token`; you only need them by hand if you create a token outside the tools. Allowed source IPs and Rate limit let you fence an account in further.

DomMCP Konfiguration on my-domino-server		New	Open	Edit			
		Token ID	Display name	Status	Grants	Rate/min	Last used
- Configuration - Access - Grants - Tokens - Policies		admin	Bootstrap Admin	active	super-admin	600	2026-07-07T16:34:40Z
		admin-token	Super Admin Token	active	super-admin	99999	2026-07-27T13:05:49Z
		demo-token	Demo Token	active	helpdesk	60	
		n8n-haushalt-token	n8n Haushalt Test Token	active	haushaltsbuch	120	
		test-all-token	TestAll Token	active	helpdesk, log, nam	120	
		tok_12e5bad5378e	John Doe Vollzugriff	active	grant_dom_b3181b	60	
		tok_18e2497f893bf	JD Verify2	active	grant_dom_b3181b	60	2026-07-07T14:46:47Z
		tok_32e51a196e17	ro-negtest	active	grant_0780116789f	60	
		tok_33f9ae43881c6	John Doe Full	active	grant_dom_b3181b	60	2026-07-07T14:46:47Z
		tok_3fde53621c1a2	claude-dev local (full)	active	grant_6e22d50d20f	120	2026-07-27T05:58:58Z
		tok_4f5b936dc31e8	JD Check	active	grant_dom_b3181b	60	2026-07-07T14:49:24Z
		tok_59d429883eab	gate-test-ephemeral	active	grant_f30c3dbbb2c	60	
		tok_63d0928f394b3	ro-negtest	active	grant_92b3306b42f	60	
		tok_7e08b9cc2264f	JD Verify	active	grant_dom_b3181b	60	
		tok_817e5445c845f	Claude Code	active	grant_84fcd146e20	240	2026-07-23T13:43:20Z
		tok_919dd27f1cfd	John Doe Test	active	grant_dom_b3181b	60	2026-07-10T08:16:02Z
		tok_ba61979da21e	ro-negtest	active	grant_8f474b31350	60	
		tok_d3e2ff016726b	ro-negtest	active	grant_76d7ad8088f	60	2026-07-05T06:57:04Z
		tok_da551ffec60a5f	John Doe Login	active	grant_dom_b3181b	60	2026-07-07T14:38:48Z
		tok_dom_8a23fb52	Domino-Login: CN=Max Mustermann	active	grant_dom_8a23fbf	120	
		tok_dom_b3181b1f	Domino-Login: CN=John Doe/O=	active	grant_dom_b3181b	120	2026-07-27T13:04:52Z
		tok_dom_be28b6e2	Domino-Login: CN=Sven Test/O=	active	grant_dom_be28b6	120	
		tok_dom_f1e7c66e	Domino-Login: CN=Login Test/O=	active	grant_dom_f1e7c6f	60	
		tok_edae40c377d9f	Reader Filter Test - John Doe	active	grant_dom_b3181b	60	2026-07-07T12:03:31Z

Fig. 10: The Tokens view: one line per access, with status, assigned grants and last use.

Edit
Cancel

Token

A bearer token an MCP client presents. A token POINTS AT grants (a grant can be shared by several tokens). Fields marked * are required (checked on save by ValidationLib).

Identity

Who this token is and whether it is usable.

Token ID *	tok_12e5bad5378e9e22 — e.g. tok_demo
Display name *	John Doe Vollzugriff — human label
Status *	active — active disabled
Description	— human note
Owner	— e.g. CN=Admin/O=Acme
Valid from	— ISO date, optional
Valid until	— ISO date, optional

Secrets (SHA-256)

Only hashes are stored — echo -n secret | sha256sum.

Token hash *	e2f3bf7f7d8af8e2ea63e7afd2e4c4888ba7d9fc9409f28cc9ff8079531f3df9 — SHA-256 of the bearer secret
Write-intent hash	a0fa1cde9801c75a042b3032ce8b2b6c10d931c48e4d57367fcb4a5a7fc05240 — SHA-256 of secret + '-write'

Grants & limits

Pick which grants this token gets and how often it may call.

Grants *	grant_dom_b3181b1b29596cc2 — click the popup button to choose one or more grants
Allowed client IDs	— optional (comma)
Allowed source IPs	— optional (comma)
Rate limit / min	60 — e.g. 120
Max parallel requests	— e.g. 4
Last used	— set by the server

Last updated: 07.07.2026 16:48:51

Fig. 11: A token document. Only hashes are stored — the secret itself is nowhere in the database.

Grant

This is where the permissions actually live: which databases the account may see, which tools are allowed, whether it may write and how large a response may get. Several tokens can share one grant, which is handy when several people hold the same role.

EditCancel

Grant

A permission set: which databases, tools and fields a token may reach. Fields marked * are required (checked on save by ValidationLib).

Identity

What this grant is and which database it targets.

Grant ID *	grant_07801167899d9e0d — e.g. grant_demo
Description *	— human label
Status *	active — active disabled
Server	— empty = this server
Database path	dommcp_design_smoke.nsf — target NSF or empty
Database title	— optional label

Rights

The capability flags this grant confers (1 = allowed).

All databases	0 — 1 0
Design write	0 — 1 0
Full text	0 — 1 0
Summary only	0 — 1 0
Max results	50 — e.g. 50
Allowed tools	list_allowed_databases, get_database_info, list_views, read_view_entries, search_documents, get_document, get_document_schema, query_documents_dql — "" or comma list
Denied tools	— sperrt einzelne Tools (deny gewinnt)
Allowed views	
Excluded fields	
All system database	0 — 1 0
ACL write	0 — 1 0
Database create	0 — 1 0

DomMCP — Installation & Configuration

Please do not hand-edit more than necessary

For everyday work the tools are the better route: `provision_person_token` creates token and grant consistently, and a typo in a hash cannot lock anybody out by accident. What is genuinely worth editing in the database are limits, source addresses and the status. And after every change: `tell dommcp reload-config`.

The screenshot shows a configuration window with a table of settings. The table has two columns: the setting name and its value. The settings include:

Summary only	0 — 1 0
Max results	50 — e.g. 50
Allowed tools	list_allowed_databases, get_database_info, list_views, read_view_entries, search_documents, get_document, get_document_schema, query_documents_dql — * or comma list
Denied tools	— sperrt einzelne Tools (deny gewinnt)
Allowed views	
Excluded fields	
All system database	0 — 1 0
ACL write	0 — 1 0
Database create	0 — 1 0
Formula search	0 — 1 0
View access	0 — 1 0
Document direct access	0 — 1 0
Document write	0 — 1 0
Allowed forms	— comma list or *
Allowed fields	— comma list
Masked fields	— comma list
Max field bytes	4096 — e.g. 4096
Max response bytes	65536 — e.g. 1048576

Below the table, there is a section for 'Run-as' with the following settings:

Optional: act as a Domino user so the DB ACL enforces access.	
Mapped Domino user	— e.g. CN=AI Agent/O=Acme
Read enforcement	grant — grant acl hybrid

At the bottom, it says 'Last updated: 05.07.2026 10:40:56'.

Fig. 14: The same grant further down: the individual rights, the limits and the run-as mapping.

10 · Connecting an AI client

Claude Code and other local MCP clients

One entry in the project's `.mcp.json` is enough:

```
{ "mcpServers": {
  "dommcp": {
    "type": "http",
    "url": "http://<server>:8088/mcp",
    "headers": { "Authorization": "Bearer <yourSecret>" }
  }
}
```

Claude.ai as a custom connector

For this DomMCP brings a complete OAuth flow, consent page included. The prerequisite is that the server is reachable over HTTPS from the internet. When connecting, the user enters their token; the access token that is issued is then bound to that grant. You do not have to worry about the write intent here, the server adds it automatically.

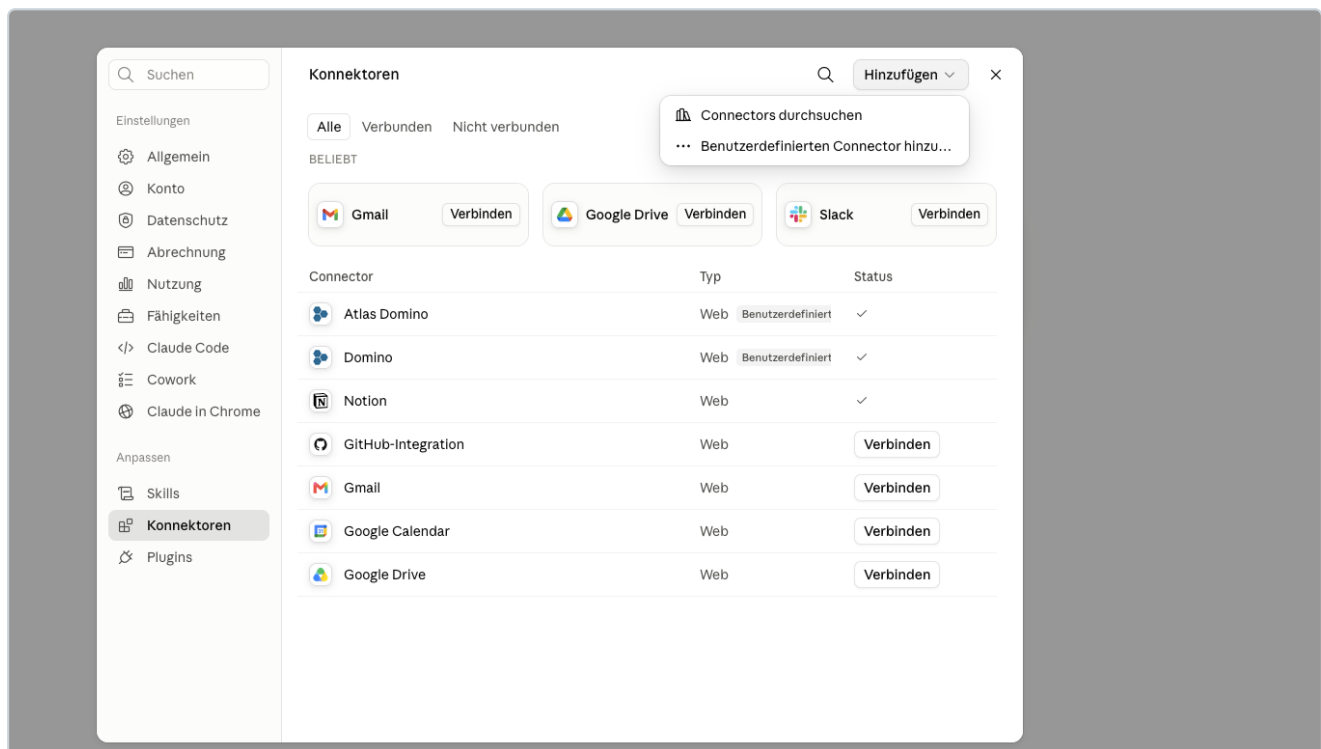


Fig. 15: In Settings under Connectors, Add leads to "Add custom connector".


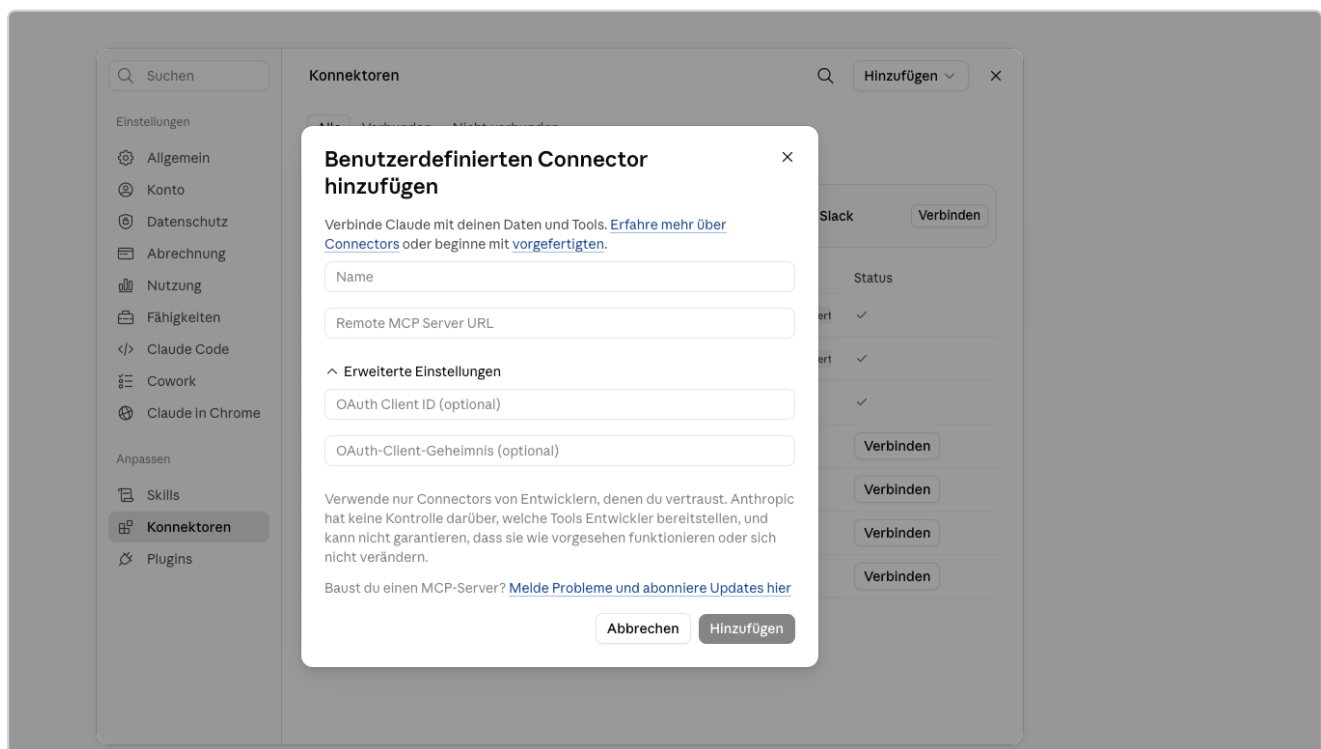


Fig. 16: Give it a name and enter the server's MCP URL. The OAuth fields stay empty — DomMCP negotiates the rest itself.

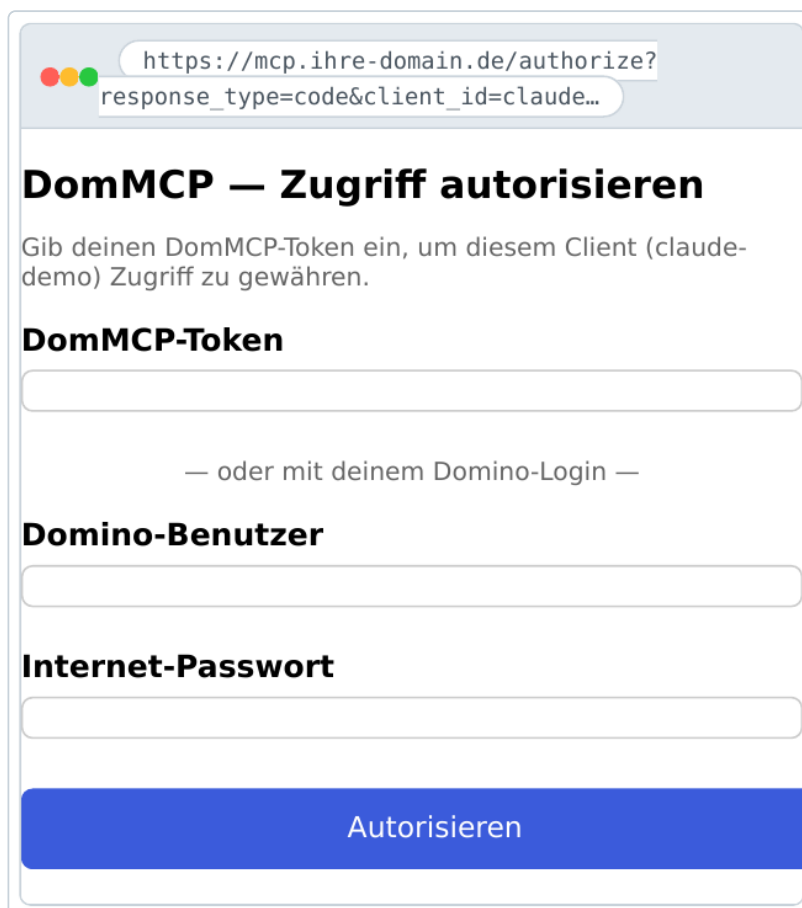

https://mcp.ihre-domain.de/authorize?
response_type=code&client_id=claude...

DomMCP — Zugriff autorisieren

Gib deinen DomMCP-Token ein, um diesem Client (claude-demo) Zugriff zu gewähren.

DomMCP-Token

— oder mit deinem Domino-Login —

Domino-Benutzer

Internet-Passwort

Autorisieren

Fig. 17: The DomMCP sign-in page that Claude opens when connecting. Either a DomMCP token, or a Domino user with their internet password — whichever you handed out. **Note:** this page is currently shipped in German; an English version is on the roadmap.

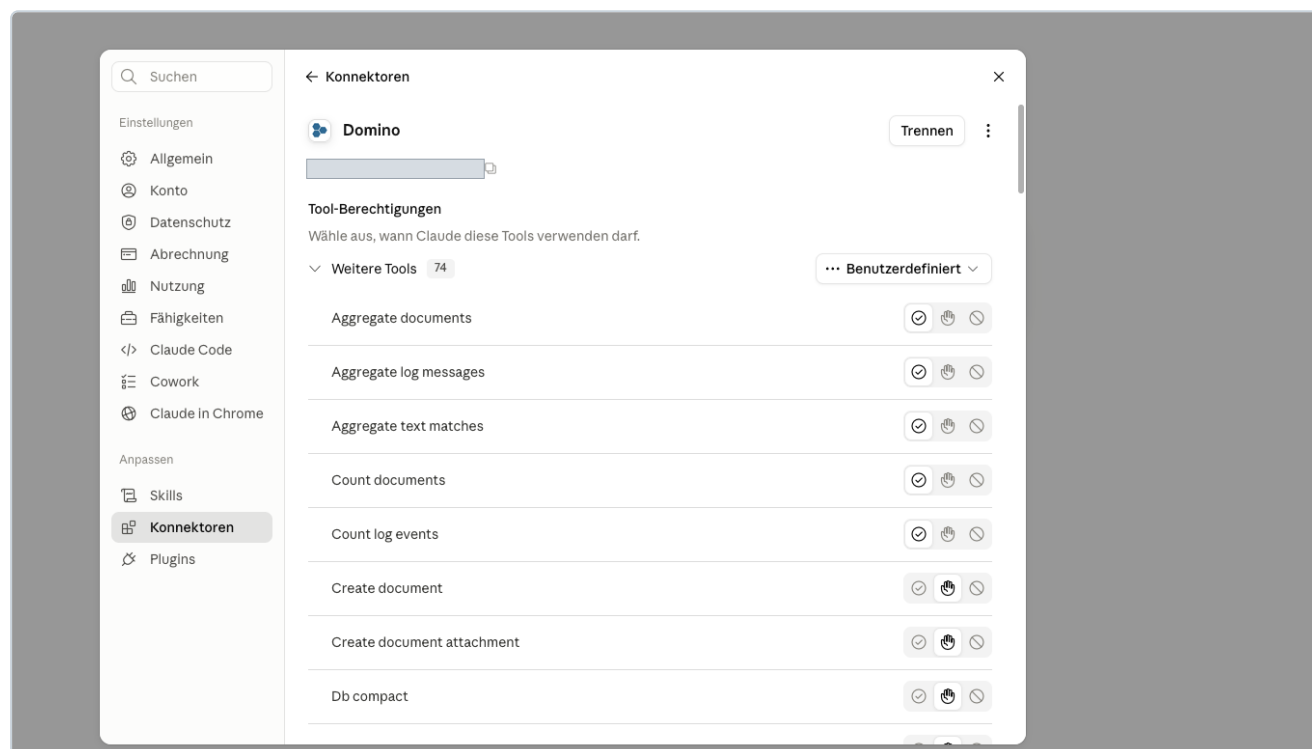


Fig. 18: Connected: Claude lists the tools that were granted and lets you decide per tool whether it may run without asking. The server address is redacted.

Both routes end up in the same place: Claude receives an access token bound to the grant behind the sign-in. Anyone signing in with their Domino login works with the rights of their own Domino account, so the ACLs on your databases continue to apply unchanged.

n8n and your own applications

Any HTTP client will do: `POST /mcp`, the header `Authorization: Bearer ...` and a JSON-RPC 2.0 body like the one in the smoke test above.

11 · Day-to-day operation and console commands

Command	What it does
<code>tell dommcp status</code>	State, licence, loaded tokens and grants
<code>tell dommcp show-metrics</code>	Runtime figures: calls, errors, durations
<code>tell dommcp reload-config</code>	Re-read the configuration from the NSF, no restart
<code>tell dommcp provision-admin <s></code>	Create the first admin, or rotate the secret
<code>tell dommcp debug on off</code>	Turn verbose logging on and off
<code>tell dommcp repair-design [<target.nsf> <source.nsf>]</code>	Install the missing design into the configuration or audit NSF (documents are left untouched)
<code>tell dommcp quit</code>	Stop the task

How to swap the program cleanly

If `dommcp_addin` is listed in `ServerTasks=`, Domino may restart the task immediately after a `quit`. Two instances then fight over port 8088 and neither comes up properly. It looks like a broken program, but it is only a race.

The reliable way to change versions: replace the file first, then restart the whole Domino server. And please never kill the task hard (`kill -9` on Linux). That leaves shared memory segments behind which block the next server start, and then you really do have a problem.

DomMCP Audit on my-domino-server		New	Open	Edit				
		Occurred	Tool	Status	Token	Database	Duration (ms)	
Events All Events Errors Analysis More Views Settings		07/27/2026 12:01:52	PI dommcp_sign_databa	ok	tok_dom_b3181	WITTODO_PWA.nsf	553	
		07/27/2026 12:01:41	PI dommcp_patch_desigi	ok	tok_dom_b3181	WITTODO_PWA.nsf	359	
		07/27/2026 12:01:24	PI dommcp_patch_desigi	ok	tok_dom_b3181	WITTODO_PWA.nsf	197	
		07/27/2026 12:01:09	PI dommcp_patch_desigi	ok	tok_dom_b3181	WITTODO_PWA.nsf	867	
		07/27/2026 12:00:53	PI get_guidance	ok	tok_dom_b3181		27	
		07/27/2026 10:52:58	AI delete_database	ok	admin-token	dommcpctest/surface_copy	513	
		07/27/2026 10:52:58	AI delete_database	ok	admin-token	dommcpctest/surface.nsf	513	
		07/27/2026 10:52:57	AI dommcp_create_datat	ok	admin-token	dommcpctest/surface_copy	16096	
		07/27/2026 10:52:57	AI dommcp_list_design_	ok	admin-token	dommcpctest/surface_copy	19	
		07/27/2026 10:52:41	AI server_console_comm	ok	admin-token		501	
		07/27/2026 10:52:41	AI get_guidance	ok	admin-token		1	
		07/27/2026 10:52:41	AI dommcp_upsert_lotus	ok	admin-token	dommcpctest/surface.nsf	100	
		07/27/2026 10:52:41	AI dommcp_run_agent	ok	admin-token	dommcpctest/surface.nsf	21	
		07/27/2026 10:52:41	AI query_documents_dql	ok	admin-token	dommcpctest/surface.nsf	15	
		07/27/2026 10:52:41	AI dommcp_upsert_lotus	ok	admin-token	dommcpctest/surface.nsf	69	
		07/27/2026 10:52:41	AI dommcp_manage_gro	ok	admin-token		7	
		07/27/2026 10:52:41	AI dommcp_manage_gro	ok	admin-token		7	
		07/27/2026 10:52:41	AI list_server_groups	ok	admin-token		6	
		07/27/2026 10:52:41	AI dommcp_manage_gro	ok	admin-token		7	
		07/27/2026 10:52:40	AI dommcp_query_audit	ok	admin-token		729	
		07/27/2026 10:52:40	AI dommcp_list_design_	ok	admin-token		1	
		07/27/2026 10:52:40	AI get_guidance	ok	admin-token		0	
		07/27/2026 10:52:40	AI self_test	ok	admin-token		24	
		07/27/2026 10:52:39	AI list_replica_status	ok	admin-token	dommcpctest/surface.nsf	1007	
		07/27/2026 10:52:39	AI get_license_status	ok	admin-token		11	
		07/27/2026 10:52:39	AI dommcp_list_tokens	ok	admin-token		1	
		07/27/2026 10:52:39	AI dommcp_list_grants	ok	admin-token		1	
		07/27/2026 10:52:38	AI list_server_processes	ok	admin-token		502	
		07/27/2026 10:52:38	AI list_active_users	ok	admin-token		501	
		07/27/2026 10:52:38	AI list_server_groups	ok	admin-token		9	
		07/27/2026 10:52:37	AI get_server_health	ok	admin-token		1504	
		07/27/2026 10:52:37	AI get_server_stats	ok	admin-token		509	
		07/27/2026 10:52:35	AI show_database_users	ok	admin-token	dommcpctest/surface.nsf	1002	
		07/27/2026 10:52:34	AI create_document	ok	admin-token	dommcpctest/surface.nsf	7	

Fig. 19: The audit database, All Events view: one line per call with tool, status, token, database and duration.

Edit
Cancel

Audit Event

One row per tool call. Written automatically by the server — normally read-only. Fields marked * are required (checked on save by ValidationLib).

Request

Who called, which tool, and the correlation ids.

Occurred at *	07/27/2026 12:01:52 PM
Request ID *	0
Tool *	dommcp_sign_database
Token	tok_dom_b3181b1b29596cc2
Grant	grant_dom_b3181b1b29596cc2
Client ID	
Client address	10.10.30.10
Idempotency key	sign-relogin-v11-v34-20260727

Target

Which database / view / document the call touched.

Server	
Database	WITTODO_PWA.nsf
View	
Document UNID	
Search mode	formula
Query	

Result

Outcome, timing and (for writes) the reason.

Status *	ok — ok error class
Error class	
Result count	1
Duration (ms)	553
Reason	
Subject	dommcp_sign_database · WITTODO_PWA.nsf · ok — audit summary line
Change ticket	— optional

Fig. 20: A single event. It records who did what with which tool — including the idempotency key and the runtime.

12 · Backup and restore

There are exactly two things you need to back up:

What	Contents	Where (Linux)
Configuration NSF	Settings, tokens (hashes only), grants, licence document	<code>/local/notesdata/dommcp/dommcpconfig.nsf</code>
Licence file	Signed licence code and domain	<code>/local/notesdata/dommcp/dommcp-license.json</code>

On Windows both live under `<Data>\dommcp\`. The audit NSF is optional and only interesting if you need history or an audit trail. Files ending in `.grace` belong to the tamper protection and are best left alone.

Backing up

```

tell dommcp quit                                # for a consistent copy
cp /local/notesdata/dommcp/dommcpconfig.nsf    ./backup/
cp /local/notesdata/dommcp/dommcp-license.json  ./backup/
load dommcp_addin

```

Restoring

```
tell dommcp quit
cp ./backup/dommcpconfig.nsf /local/notesdata/dommcp/
cp ./backup/dommcp-license.json /local/notesdata/dommcp/
chown notes:notes /local/notesdata/dommcp/dommcpconfig.nsf /local/notesdata/dommcp/dommcp-
license.json
load dommcp_addin
```

Lost the configuration?

Not the end of the world. If `dommcpconfig.nsf` is missing, the next start rebuilds it from the starting configuration. You are back at the beginning: run `provision-admin` once and you are going again. The old tokens are gone, though, because only their hashes ever lived in the NSF.

13 · Updating

1. Put the new program in place as in chapter 4 or 5. The configuration is untouched.
2. Restart the task. If it is listed in `ServerTasks=`, restart the server instead, for the reason given in chapter 11.
3. Check briefly: query `healthz` and look at the console to see which version the start banner reports.

Take a backup as described in chapter 12 beforehand and keep the previous program. That turns rolling back into a two-minute job.

14 · When something goes wrong

Symptom	What it usually is
<code>healthz</code> does not answer	Is the task running at all? Ask <code>tell dommcp status</code> . Otherwise port 8088 is taken, or a firewall sits in between. Looking at the console log for the start banner is always worth it.
<code>unauthorized</code>	The token is wrong or inactive. Set it again with <code>provision-admin</code> . And remember: changes made directly in the NSF only take effect after <code>reload-config</code> .
Token valid, access still denied	Then the grant does not cover the database or the tool. Check in this order: is the tool allowed, is the path in the allowlist, and is the Domino ACL of the mapped user sufficient?
Reading works, writing does not	The server is in read-only mode. The licence is missing, has expired, or the seven trial days are over. <code>healthz</code> shows it under <code>read_only</code> .
New licence has no effect	The classic: <code>reload-config</code> instead of a reload. The licence file is only read when the task loads.
Configuration change has no effect	Was the task loaded with a path argument? Then the file wins over the NSF. Reload without a path.
Server will not start after a hard kill	Remove the stale lock files and shared memory segments belonging to the notes user, then start normally. See the note in chapter 11.

DomMCP Audit on my-domino-server		New	Open	Edit				
		Occurred	Tool	Status	Token	Database	Duration (ms)	
Events All Events Errors Analysis More Views Settings		07/27/2026 10:52:34	AI get_document	denied	admin-token		455	
		07/27/2026 10:52:34	AI get_document	denied	admin-token		61	
		07/27/2026 10:52:27	AI query_documents_dql	query_parse	admin-token	Haushaltsbuch.nsf	1	
		07/27/2026 10:52:02	AI dommmcp_patch_desigi	denied	admin-token	dommmcp_design_smoke.i	13	
		07/27/2026 10:51:55	AI dommmcp_patch_desigi	denied	admin-token	dommmcp_design_smoke.i	4	
		07/27/2026 10:51:45	AI dommmcp_patch_desigi	compile_erro	admin-token	dommmcp_design_smoke.i	58	
		07/27/2026 10:35:13	AI update_document	denied	admin-token	dommmcp_design_smoke.i	8	
		07/27/2026 08:25:19	AI dommmcp_patch_desigi	denied	tok_dom_b3181	WITTODO_PWA.nsf	16	
		07/27/2026 08:25:19	AI dommmcp_patch_desigi	denied	tok_dom_b3181	WITTODO_PWA.nsf	7	
		07/27/2026 06:49:48	AI dommmcp_patch_desigi	denied	tok_dom_b3181	WITTODO_PWA.nsf	23	
		07/27/2026 06:49:48	AI dommmcp_patch_desigi	denied	tok_dom_b3181	WITTODO_PWA.nsf	4	
		07/27/2026 04:23:17	AI query_documents_dql	query_parse	admin-token	Haushaltsbuch.nsf	0	
		07/27/2026 04:04:51	AI aggregate_documents	query_parse	tok_dom_b3181	WITTODO_PWA.nsf	15	
		07/27/2026 03:58:43	AI dommmcp_set_databas	error	admin-token	dommmcp_design_smoke.i	12	
		07/27/2026 03:58:33	AI dommmcp_set_databas	denied	admin-token	dommmcp_design_smoke.i	9	
		07/27/2026 03:47:42	AI dommmcp_upsert_lotus	compile_erro	admin-token	dommmcp_design_smoke.i	52	
		07/27/2026 03:47:42	AI dommmcp_run_agent	not_found	admin-token	dommmcp_design_smoke.i	14	
		07/27/2026 03:47:16	AI dommmcp_sign_databa	denied	admin-token	dommmcp_design_smoke.i	10	
		07/27/2026 03:47:16	AI dommmcp_run_agent	denied	admin-token	dommmcp_design_smoke.i	1	
		07/27/2026 03:46:55	AI list_databases	denied	admin-token		34	
		07/27/2026 01:06:01	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	1	
		07/27/2026 01:05:49	PI get_database_info	denied	admin-token	dommmcpaudit.nsf	1	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	0	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	1	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	0	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	1	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	0	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	0	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	1	
		07/27/2026 01:05:49	PI dommmcp_list_design_	denied	admin-token	dommmcpaudit.nsf	0	
		07/26/2026 10:52:13	AI dommmcp_upsert_lotus	compile_erro	tok_dom_b3181	WITTODO_PWA.nsf	57	
		07/26/2026 10:42:43	AI dommmcp_get_design_	denied	tok_dom_b3181		9	
		07/26/2026 10:42:43	AI dommmcp_get_design_	denied	tok_dom_b3181		1	
		07/26/2026 10:41:50	AI dommmcp_get_design_	denied	tok_dom_b3181		523	
		07/26/2026 10:41:50	AI dommmcp_get_design_	denied	tok_dom_b3181		1	

Fig. 21: The Errors view shows only the failed calls. This is the first place to look when something is wrong.

Edit
Cancel

Audit Event

One row per tool call. Written automatically by the server — normally read-only. Fields marked * are required (checked on save by ValidationLib).

Request

Who called, which tool, and the correlation ids.

Occurred at *	07/27/2026 10:52:34 AM
Request ID *	1
Tool *	get_document
Token	admin-token
Grant	
Client ID	
Client address	10.10.30.20
Idempotency key	

Target

Which database / view / document the call touched.

Server	
Database	
View	
Document UNID	99B01283AF136F6200258E41003BBE89
Search mode	formula
Query	

Result

Outcome, timing and (for writes) the reason.

Status *	denied — ok error class
Error class	document not found (check grant/database_path and identifier; fields may be null or omitted)
Result count	0
Duration (ms)	455
Reason	
Subject	get_document · · · denied — audit summary line
Change ticket	— optional

Fig. 22: A rejected call: Status is **denied**, and Error class says why.

The configuration or audit database will not open in the Notes client

If the shipped, designed databases were not in place at install time, DomMCP creates empty ones on first start. They hold your documents and the server works with them perfectly — but they contain no form and no view, which is exactly why the client cannot do anything with them. Since DomMCP 0.0.615 the task says so itself at startup:

```
DomMCP WARNING: the config database '.../dommcpcfg.nsf' has NO DESIGN (no forms, no views).
```

To repair it, put the delivered database next to it as `<name>-master.nsf` and run on the console:

```
tell dommcp repair-design
```

This copies design elements only. Your documents, the ACL and the database icon stay as they are.

15 · Acceptance checklist

✓	Check
☐	Program is in the Domino program directory (Linux: <code>notes:notes</code> , mode 755)
☐	<code>load dommcp_addin</code> was run without a path
☐	The configuration NSF was created and is found automatically
☐	<code>provision-admin</code> has run, the secret was handed over securely
☐	Licence installed and the task reloaded afterwards
☐	<code>healthz</code> reports <code>status: valid</code> and <code>read_only: false</code>
☐	<code>tools/list</code> returns the expected tools with the admin token
☐	Configuration and audit NSF opened in the Notes client — they show views and documents (otherwise the design is missing, see chapter 14)
☐	AI client connected and a read access tested successfully
☐	Backup of the configuration NSF and the licence file exists
☐	Admin secret rotated, source addresses restricted
☐	<code>dommcp_addin</code> is listed in <code>ServerTasks=</code>

Any questions?

Just get in touch. The fastest route is to send us the output of `tell dommcp status` along with the console excerpt around the incident. That is usually enough to place almost any case straight away.

IT-Dallmann · Kevin Dallmann · it-dallmann.de