

Prompt Life · v0.27.16

Journey Visual Aid Consistency Report

This pass adds a reusable visual aid grammar and audits all 39 Journey visual aids for numbered marker/list consistency, mobile-safe callouts, and generated PNG boundaries.

AUDITED 39	MISMATCHES 0	GENERATED PNGS 4	CODED AIDS 35
----------------------	------------------------	----------------------------	-------------------------

Grammar Summary

Numbered callouts are now reserved for visuals with matching diagram markers. Generated PNG-backed and atmospheric/metaphorical visuals use unnumbered HTML callouts. Exact mechanism diagrams remain coded SVG/HTML.

Top 10 Fixed Items

1. Added shared visual aid frame, diagram shell, caption, and callout-list grammar.
2. Added numbered-vs-bulleted callout rendering.
3. Changed generated PNG-backed scenes to unnumbered HTML callouts.
4. Added four chart markers to Overfitting vs Generalization.
5. Rewrote Overfitting callouts to remove stray Point 2 wording.
6. Added 1/2/3 badges to the Tokenization HTML diagram.
7. Added the fourth Token IDs marker for the lookup-key boundary.
8. Added the fourth Autoregression marker for run-again.
9. Added four Context Window markers for visible/limited/temporary/next-token use.
10. Added complete marker sets for Grounding and Hallucination evidence visuals.

Remaining Backlog

- Collective Intelligence, Benefits, Costs, and Human-Centered AI remain good atmospheric Image 2 candidates.
- Fine-Tuning Path can later receive coded overlay markers if learners need more explicit contrast with prompting/RAG.
- Attention, MLP, Layers, Hidden States, Logits, Softmax, and Sampling are readable but should remain candidates for future precision polish.

- No new PNGs were generated in this pass.

Image 2 Prompt Summary

The prompt sheet recommends future atmospheric PNGs for Collective Intelligence, Benefits, Costs, and Human-Centered AI. It explicitly keeps exact mechanism visuals such as tokenization, vectors, tensors, RAG, grounding, logits, softmax, sampling, and context windows as coded SVG/HTML.

39-Card Visual Aid Table

ID	Title	Type	Callouts	Markers	Items	Status	Note
before-morning-llm-cloud	Prompt to Prediction	generated-image	bullets	0	4	ok	Textless PNG with HTML callouts.
ai-family-tree	AI Family Tree	coded-svg	bullets	0	5	ok	Taxonomy labels are short; definitions stay below.
traditions	Rules and Learned Patterns	coded-svg	bullets	0	3	ok	Concept comparison, not step markers.
training-loop	Training Loop	coded-svg	numbered	5	5	ok	Five loop nodes have matching seals.
before-morning-pretraining-landscape	Broad Pretraining	generated-image	bullets	0	4	ok	Textless PNG with HTML callouts.
overfitting-generalization	Overfitting vs Generalization	coded-svg	numbered	4	4	ok	Training dots, validation dots, overfit curve, and smooth curve now match markers.
before-morning-finetuning-path	Fine-Tuning Path	generated-image	bullets	0	4	ok	HTML callouts preserve durable adaptation versus prompt/RAG boundaries.
before-morning-alignment-garden	Alignment Landscape	generated-image	bullets	0	4	ok	Textless PNG with behavior-shaping callouts.
inference-pass	Forward Pass	coded-svg	numbered	4	4	ok	Context, fixed weights, temporary activations, next token.
prompt-response	Prompt vs Response	coded-html	numbered	4	4	ok	Four stacked panels have matching badges.
tokenization	Text to Tokens	coded-html	numbered	3	3	ok	Source, token stream, uneven examples have matching badges.
token-ids	Token IDs	coded-svg	numbered	4	4	ok	Token, ID, embedding row, and limit markers match.
embeddings	Embedding Lookup	coded-svg	numbered	4	4	ok	Durable table through hidden-later boundary.
vectors	Feature Vector	coded-svg	numbered	3	3	ok	Teaching sliders, distributed features, vector usefulness.
tensors	Tensor Block	coded-svg	numbered	3	3	ok	Token axis, feature axis, batch note.
attention	Attention Weave	coded-svg	bullets	0	4	ok	Relationship diagram without numbered markers.
mlp	MLP Feature Workshop	coded-svg	bullets	0	4	ok	Feature reshaping is described in bullets.

ID	Title	Type	Callouts	Markers	Items	Status	Note
layers	Transformer Stack	coded-svg	bullets	0	4	ok	Repeated layer structure is not a marker sequence.
hidden-states	Hidden State Flow	coded-svg	bullets	0	4	ok	Flow labels stay short; definitions stay below.
logits	Raw Scoreboard	coded-svg	bullets	0	4	ok	Raw-score bars are conceptual, not numbered steps.
softmax	Score to Probability	coded-svg	bullets	0	4	ok	Function contrast remains unnumbered.
sampling	Weighted Token Choice	coded-svg	bullets	0	4	ok	Probability bubble scene remains unnumbered.
autoregression	Append and Repeat	coded-svg	numbered	4	4	ok	Response-so-far, token choice, append, run-again markers match.
context-window	Temporary Context Window	coded-svg	numbered	4	4	ok	Visible context, capacity, temporary boundary, next-token use markers match.
rag-retrieval	Open-Book Retrieval	coded-svg	numbered	5	5	ok	Prompt, retriever, notes, response, fixed weights.
grounding-evidence	Claim Support Map	coded-svg	numbered	4	4	ok	Claim, evidence, support check, and review markers match.
hallucination-bridge	Unsupported Bridge	coded-svg	numbered	4	4	ok	Fluent surface, supported claim, missing support, review markers match.
ai-learns	Learning Modes Matrix	coded-svg	bullets	0	4	ok	Matrix distinctions are unnumbered.
diffusion	Append Or Denoise	coded-svg	bullets	0	3	ok	Two-lane mechanism contrast remains unnumbered.
multimodal	Media Lane Map	coded-svg	bullets	0	4	ok	Input/representation/output scene remains unnumbered.
perfect-storm	Storm Front	coded-svg	bullets	0	4	ok	Convergence ingredients stay as short labels.
collective-intelligence-lantern	Borrowed Flames	coded-svg	bullets	0	3	ok	Atmospheric candidate, currently coded.
benefits-tool-garden	Benefit Tiers	coded-svg	bullets	0	3	ok	Tier labels stay in diagram; detail stays below.
costs-invisible-factory	Cost Ledger	coded-svg	bullets	0	3	ok	Cost categories stay unnumbered.
human-centered-ai-garden	Accountability Flow	coded-svg	bullets	0	3	ok	Accountability flow stays unnumbered.
responsible-ai-forked-path	Better-AI Control Panel	coded-svg	bullets	0	3	ok	Lever panel stays unnumbered.
prompting-context-tray	Context Tray	coded-svg	bullets	0	3	ok	Prompt-parts scene stays unnumbered.
synthesis-map-compass-lantern	Full Chain Map	coded-svg	bullets	0	3	ok	Final synthesis map stays coded.
risk	Risk Ledger	coded-svg	bullets	0	3	ok	Risk/myth ledger stays unnumbered.

Screenshot QA

OVERFITTING-GENERALIZATION

Overfitting vs Generalization


Lesson: Overfitting and Generalization

Pattern: overfitting

Variant: zen-garden-map

Callouts: numbered

Markers: 4

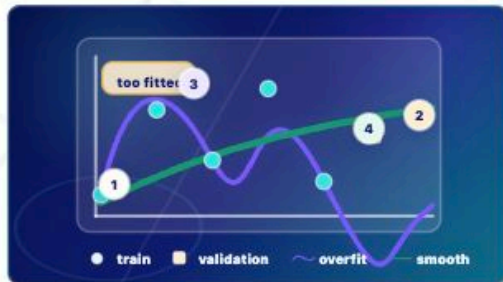

Overfitting vs Generalization

Memorizing training examples is not the same as learning patterns that transfer to set-aside validation examples.

- 1 **Training examples** Old dots are examples the model fit during training.
- 2 **Validation examples** Set-aside examples are kept out of training to test transfer.
- 3 **Overfit curve** The overfit curve traces old dots too tightly.
- 4 **Generalizing curve** The smoother curve reaches new examples better.

Key takeaway:

A model should learn transferable patterns, not just memorize the training dots.

LEARNING OBJECTIVE

Memorizing training examples is not the same as learning patterns that transfer to set-aside

Overfitting at 390px

BEFORE-MORNING-FINETUNING-PATH

Fine-Tuning Path

Lesson: Fine-Tuning

Pattern: generatedImage

Variant: generated-image

Callouts: bullets

Markers: 0

Asset: before-morning-finetuning-path.png

Type: generated-image



Fine-Tuning Path

Durable adaptation after pretraining

Fine-tuning starts from a pretrained base, adds targeted examples or preference data, and shapes future responses more durably than one prompt.

- **Pretrained base** Fine-tuning begins with a model already shaped by broad pretraining.
- **Targeted data** Examples, domain data, or preference data guide the additional training step.
- **Future responses** The training changes how the model is likely to behave later.
- **More than a prompt** Fine-tuning is durable

Fine-tuning generated PNG at 390px

TOKENIZATION

Text to Tokens

Lesson: Tokenization

Pattern: token

Variant: paper-diagram

Callouts: numbered

Markers: 3

1

SOURCE TEXT

human-readable sentence

A jealous dog chased a startled cat...

2

TOKEN STREAM

model-readable chunks

A | jealous | dog | chased | a | startled | cat | across | the | kitchen | floor | .

3

UNEVEN EXAMPLES

tokens are not always words

startled becomes start led

floor. becomes floor .

Text to Tokens

Uneven chunks, punctuation included

Text is split into model-readable chunks before token IDs and embedding lookup.

1

Simplified split A | jealous | dog | chased | a | startled | cat | across | the | kitchen | floor | .

2

Uneven chunks Some tokenizers may split words or punctuation, such as start | led or

Tokenization at 390px

VECTORS

Feature Vector

Lesson: Vectors

Pattern: bars

Variant: origami-object

Callouts: numbered

Markers: 3

teaching slider. 1

distributed 2

animal-is

grammar

tone

position

real dimensions are usually unlabeled 3

Feature Vector

Teaching labels versus distributed features

A vector is a list of numbers; real features are distributed rather than neat English sliders.

1

Teaching sliders Labels such as animal-ish or tone are simplified for learning.

2

Distributed features Real model features are spread across many dimensions.

3

Why vectors Vectors let the model compute with fuzzy numerical relationships.

Key takeaway:

Vectors are useful because many fuzzy features can vary at once.

LEARNING OBJECTIVE

Let learners compare a simplified slider view with unlabeled distributed numerical features.

ACCESSIBLE DESCRIPTION

Vectors at 390px

BEFORE-MORNING-LLM-CLOUD

Prompt to Prediction

Lesson: What is an LLM?

Pattern: generatedImage

Variant: generated-image

Callouts: bullets

Markers: 0

Asset: before-morning-llm-cloud.png

Type: generated-image



Prompt to Prediction

Score, choose, append, repeat

Current context enters the model, learned weights shape next-token probabilities, one token is generated, and the response grows token by token.

- **Context enters** The current prompt and response-so-far become the visible input for this run.
- **Weights shape probabilities** Learned weights, built earlier during training, shape next-token scores.
- **One token is generated** The model chooses

Generated PNG example at 390px

INFERENCE-PASS

Forward Pass


Lesson: Inference

Pattern: inference

Variant: neon-flow

Callouts: numbered

Markers: 4

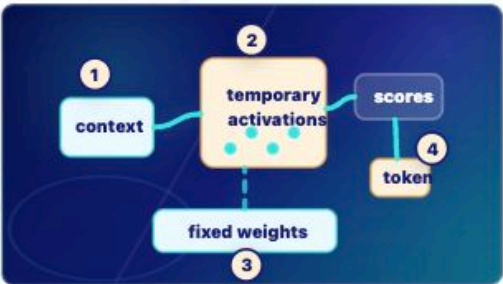

Forward Pass

Fixed weights, temporary activations

Inference uses fixed weights to create temporary activations, hidden states, and next-token scores.

- 1 **Context** The current prompt, retrieved text, conversation, and response-so-far enter the run.
- 2 **Fixed weights** The learned weights are used but not normally updated.
- 3 **Temporary activations** The run creates temporary internal states that lead to next-token scores.
- 4 **Next token** Decoding chooses one response token, then the loop can repeat.

Key takeaway:
Inference is a forward pass, not durable training.

LEARNING OBJECTIVE

Coded SVG example at 390px

TOKENIZATION

Text to Tokens

Lesson: Tokenization

Pattern: token

Variant: paper-diagram

Callouts: numbered

Markers: 3

1

SOURCE TEXT

human-readable sentence

A jealous dog chased a startled cat...

2

TOKEN STREAM

model-readable chunks

A

jealous

dog

chased

a

startled

cat

across

the

kitchen

floor

.

3

UNEVEN EXAMPLES

tokens are not always words

startled

becomes

start

led

floor.

becomes

floor

.

Text to Tokens

Uneven chunks, punctuation included

Text is split into model-readable chunks before token IDs and embedding lookup.

1

Simplified split

A | jealous | dog | chased | a | startled | cat | across | the | kitchen | floor | .

2

Uneven chunks

Some

Tokenization at 320px

OVERFITTING-GENERALIZATION

Overfitting vs Generalization

Lesson: Overfitting and Generalization

Pattern: overfitting

Variant: zen-garden-map

Callouts: numbered

Markers: 4

Overfitting vs Generalization

Memorizing training examples is not the same as learning patterns that transfer to set-aside validation examples.

1

Training examples

Old dots are examples the model fit during training.

2

Validation examples

Set-aside examples are kept out of training to test transfer.

3

Overfit curve

The overfit curve traces old dots too tightly.

4

Generalizing curve

The smoother curve reaches new examples better.

Key takeaway:

A model should learn transferable patterns, not just memorize the training dots.

LEARNING OBJECTIVE

Overfitting desktop sample

file:///Users/kevinhegg/Desktop/promptlife/docs/journey/visual-aids/prompt-life-v0-27-16-visual-aid-consistency-report.html

7/7