

AER1516 Assignment 2

By: Kevin Hu

Random Seed used for RRT and RRT* algorithms: random.seed(10)

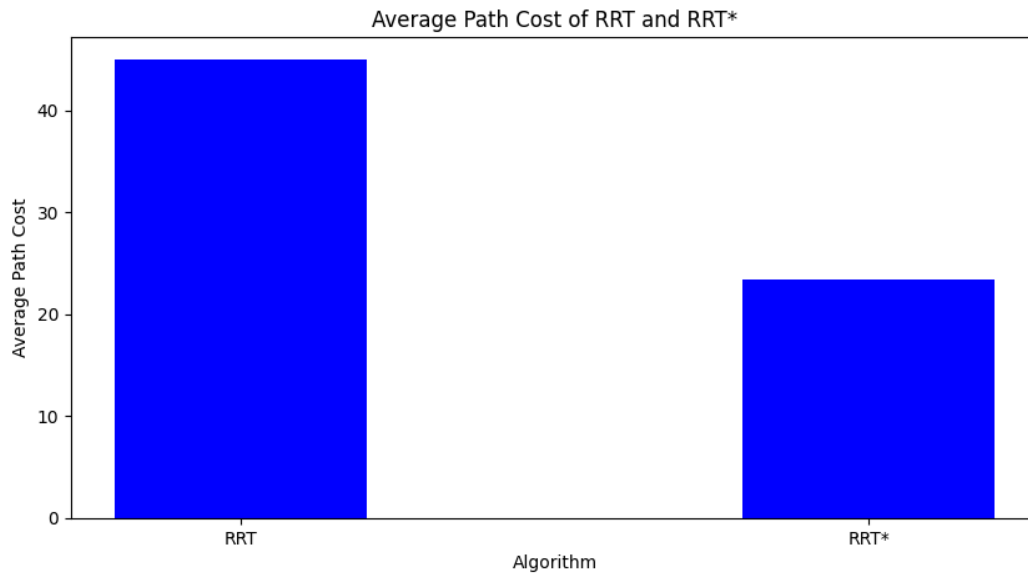


Figure 1: Comparison of Average Path Length given by RRT and RRT* Algorithms

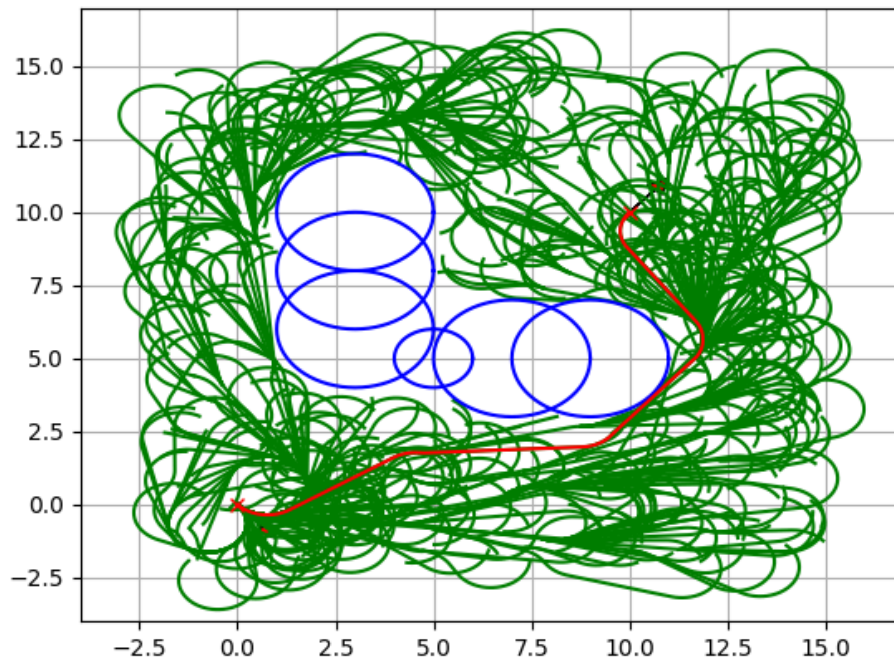


Figure 2: Environment and Obstacle where RRT and RRT* was used