


2)

a) Soạn thảo file Dockerfile ở trên với nội dung thích hợp để tạo docker image cho ứng dụng (docker build)

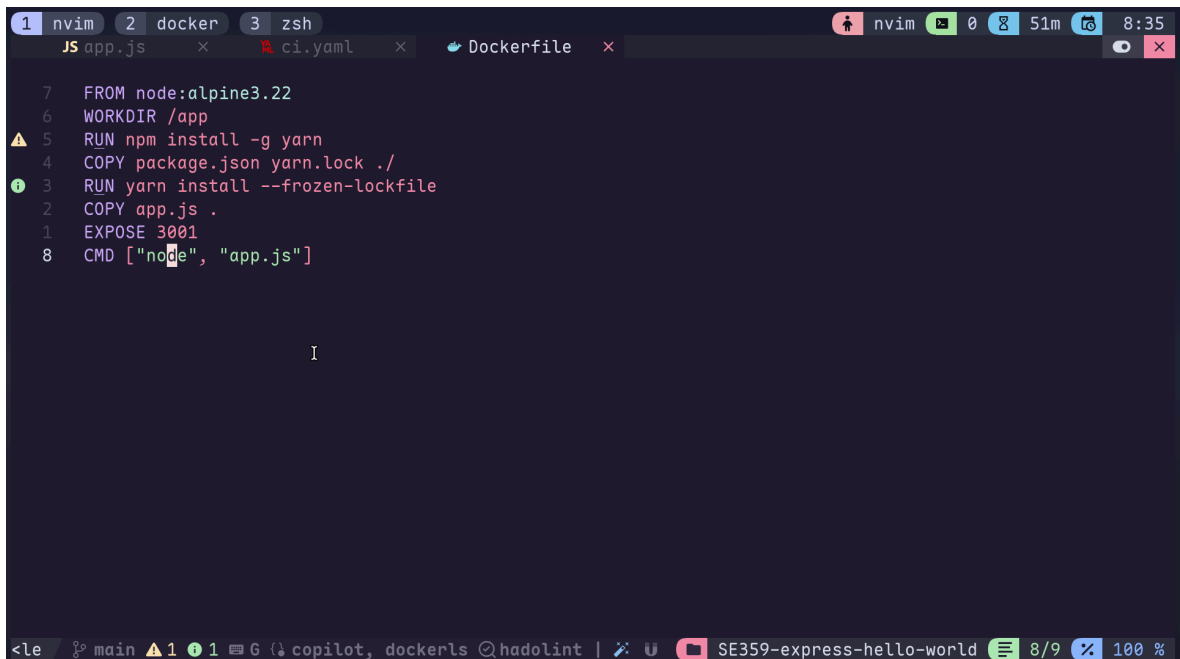


```
1 nvim 2 docker 3 zsh
JS app.js x ci.yaml x Dockerfile x
7 FROM node:alpine3.22
6 WORKDIR /app
5 RUN npm install -g yarn
4 COPY package.json yarn.lock ./
3 RUN yarn install --frozen-lockfile
2 COPY app.js .
1 EXPOSE 3001
8 CMD ["node", "app.js"]

I

<le % main 1 1 6 ( copilot, dockerls hadolint | U SE359-express-hello-world 8/9 100 %
```


b) Sau đó chạy container của ứng dụng từ ảnh đã tạo ở bước trên (docker run)

- Build

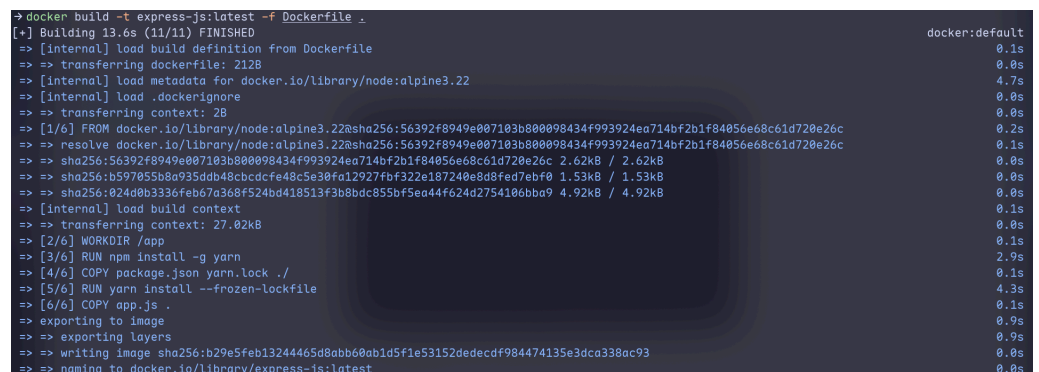

```
→ docker build -t express-js:latest -f Dockerfile .
[+] Building 13.6s (11/11) FINISHED
=> [internal] load build definition from Dockerfile
=> transferring dockerfile: 212B
=> [internal] load metadata for docker.io/library/node:alpine3.22
=> [internal] load .dockerignore
=> transferring context: 2B
=> [1/6] FROM docker.io/library/node:alpine3.22@sha256:56392f8949e007103b80098434f993924ea714bf2b1f84056e68c61d720e26c
=> resolve docker.io/library/node:alpine3.22@sha256:56392f8949e007103b80098434f993924ea714bf2b1f84056e68c61d720e26c
=> sha256:56392f8949e007103b80098434f993924ea714bf2b1f84056e68c61d720e26c 2.62kB / 2.62kB
=> sha256:b597055b8a935ddb48cbcdcf48c5e30fa12927fbf322e187240e8d8fed7ebf0 1.53kB / 1.53kB
=> sha256:024d0b3336feb67a368f524bd418513f3b8bdc855bf5ea44f624d2754106bba9 4.92kB / 4.92kB
=> [internal] load build context
=> transferring context: 27.02kB
=> [2/6] WORKDIR /app
=> [3/6] RUN npm install -g yarn
=> [4/6] COPY package.json yarn.lock ./
=> [5/6] RUN yarn install --frozen-lockfile
=> [6/6] COPY app.js .
=> exporting to image
=> exporting layers
=> writing image sha256:b29e5feb1324465d8abb60ab1d5f1e53152dedecdf984474135e3dca338ac93
=> naming to docker.io/library/express-js:latest
```

- Run



```
^ kevinnitro kevostro-arch .../SE359-express-hello-world main v26.2.0 kevblink-local 43s
→ docker run --rm -p 3001:3001 express-js:latest
Example app listening on port 3001!
```

