



Câu 1:


a) Fork repo về GitHub cá nhân

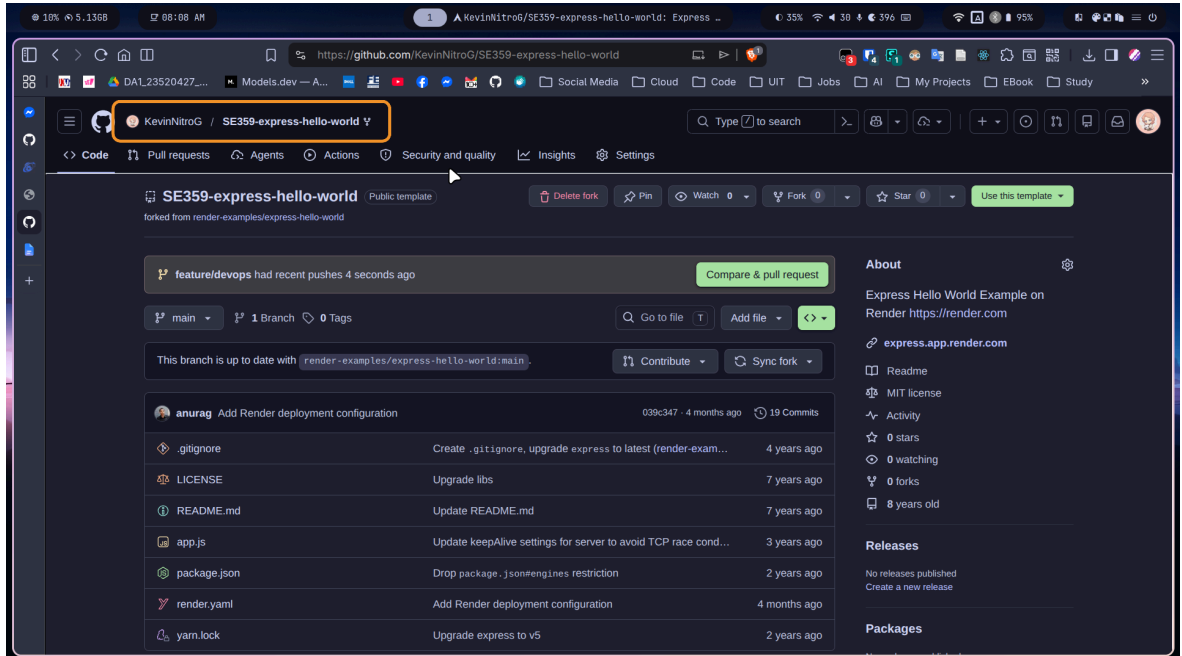

b) Clone repo vừa fork về máy cá nhân

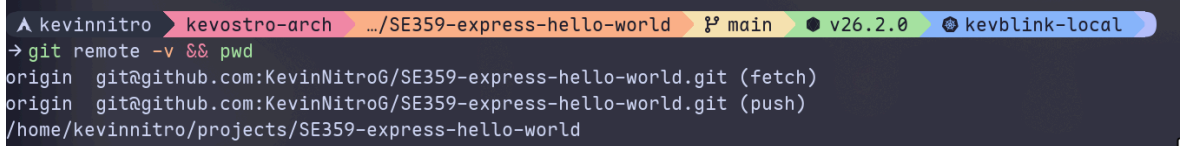

c) Tạo nhánh làm việc có tên: feature/devops

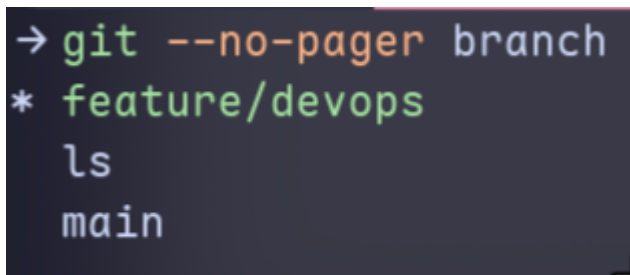

d)

1)

```

→ git --no-pager diff HEAD~2
diff --git a/Dockerfile b/Dockerfile
new file mode 100644
index 0000000..e69de29
diff --git a/app.js b/app.js
index 5ab128e..d425914 100644
--- a/app.js
+++ b/app.js
@@ -13,7 +13,7 @@ const html = `
<!DOCTYPE html>
<html>
  <head>
-   <title>Hello from Render!</title>
+   <title>Hello from 23520161 - Trần Nguyễn Thái Bình!</title>
    <script src="https://cdn.jsdelivr.net/npm/canvas-confetti@1.5.1/dist/confetti.browser.min.js"></script>
    <script>
      setTimeout(() => {
@@ -54,7 +54,7 @@ const html = `
</head>
<body>
  <section>
-   Hello from Render!
+   Hello from 23520161 - Trần Nguyễn Thái Bình!
  </section>
</body>
</html>

```

Với HEAD~2 là

<https://github.com/KevinNitroG/SE359-express-hello-world/commit/cee3ff15ff765a4266c98203608d209b88007b4f>

2)

```

→ git --no-pager diff HEAD~1
diff --git a/Dockerfile b/Dockerfile
new file mode 100644
index 0000000..e69de29

```

HEAD~1

<https://github.com/KevinNitroG/SE359-express-hello-world/commit/d1437d7829f5a372154516a05e441da7f4f402a5>

Câu 2 (build ứng dụng bằng Docker):