

# Kennesaw State University

## Parallel and Distributed Computing

### Project - OpenMP

Instructor: Kun Suo  
Points Possible: 100  
Due date: check on the D2L

The following code implements multiplication of two matrices. The order of the matrix is 2048. Function `matrixInit()` initializes a double type value for all elements in the matrix. Function `matrixMulti()` performs the multiply calculation. However, the program executes in the sequential implementation.

[https://github.com/kevinsuo/CS4504/blob/master/Matrix\\_Multiple\\_Sample.c](https://github.com/kevinsuo/CS4504/blob/master/Matrix_Multiple_Sample.c)

```
-----  
#include <stdio.h>  
#include <omp.h>  
#include <time.h>  
#include <stdlib.h>  
  
#define N 2048  
#define FactorIntToDouble 1.1;  
  
double firstMatrix [N] [N] = {0.0};  
double secondMatrix [N] [N] = {0.0};  
double matrixMultiResult [N] [N] = {0.0};  
  
void matrixMulti()  
{  
    for(int row = 0 ; row < N ; row++){  
        for(int col = 0; col < N ; col++){  
            double resultValue = 0;  
            for(int transNumber = 0 ; transNumber < N ; transNumber++) {  
                resultValue += firstMatrix [row] [transNumber] *  
secondMatrix [transNumber] [col] ;  
            }  
  
            matrixMultiResult [row] [col] = resultValue;  
        }  
    }  
}
```

```

void matrixInit()
{
    for(int row = 0 ; row < N ; row++ ) {
        for(int col = 0 ; col < N ; col++){
            srand(row+col);
            firstMatrix [row] [col] = ( rand() % 10 ) * FactorIntToDouble;
            secondMatrix [row] [col] = ( rand() % 10 ) *
FactorIntToDouble;
        }
    }
}

int main()
{
    matrixInit();

    clock_t t1 = clock();
    matrixMulti();
    clock_t t2 = clock();
    printf("time: %ld", t2-t1);

    return 0;
}

```

---

### Task 1 (50 points):

Write a parallel program using OpenMP based on this sequential solution.

To compile the program with OpenMP, use:

`$ gcc program.c -o program.o -fopenmp`

Please write a one-page report (with number and figures), which compares the execution time of sequential solution and parallel solution under different matrix orders (value of N).

Order of Matrix	1024	2048	4096
Sequential Time			
Parallel Time			
Speedup			


### Task 2 (50 points):

In order to further improve the performance, the matrix can be divided into blocks, and a part of the matrix can be calculated at one time. Under such the implementation, the CPU

can move a part of the matrix data into the cache, which can improve the cache hit rate and the program performance.

Please write a block-optimized matrix multiplication program and use OpenMP to parallel its execution. Compare the program execution time with that in Task 1 and write another report with data and figures.

Order of Matrix	1024	2048	4096
Block-optimized Sequential Time			
Block-optimized Parallel Time			
Speedup			

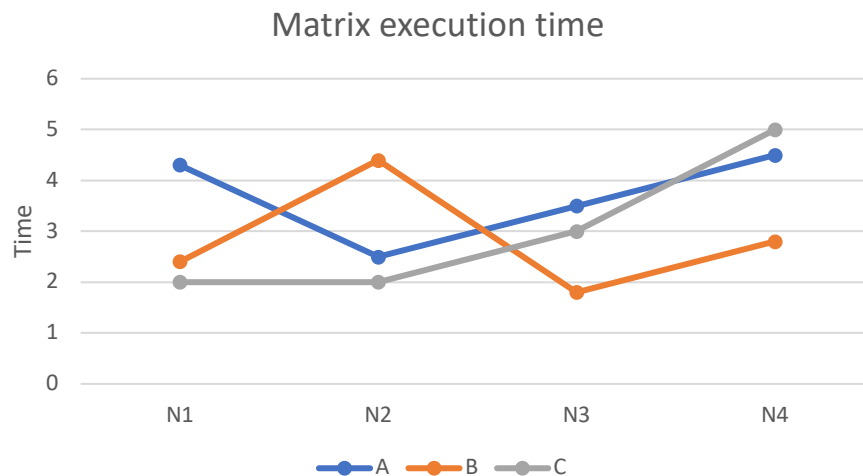

## Submitting Assignment

Submit your assignment through D2L using the appropriate assignment link. For task, please submit the [source code](#) , [screenshot of output](#) and [report](#).