

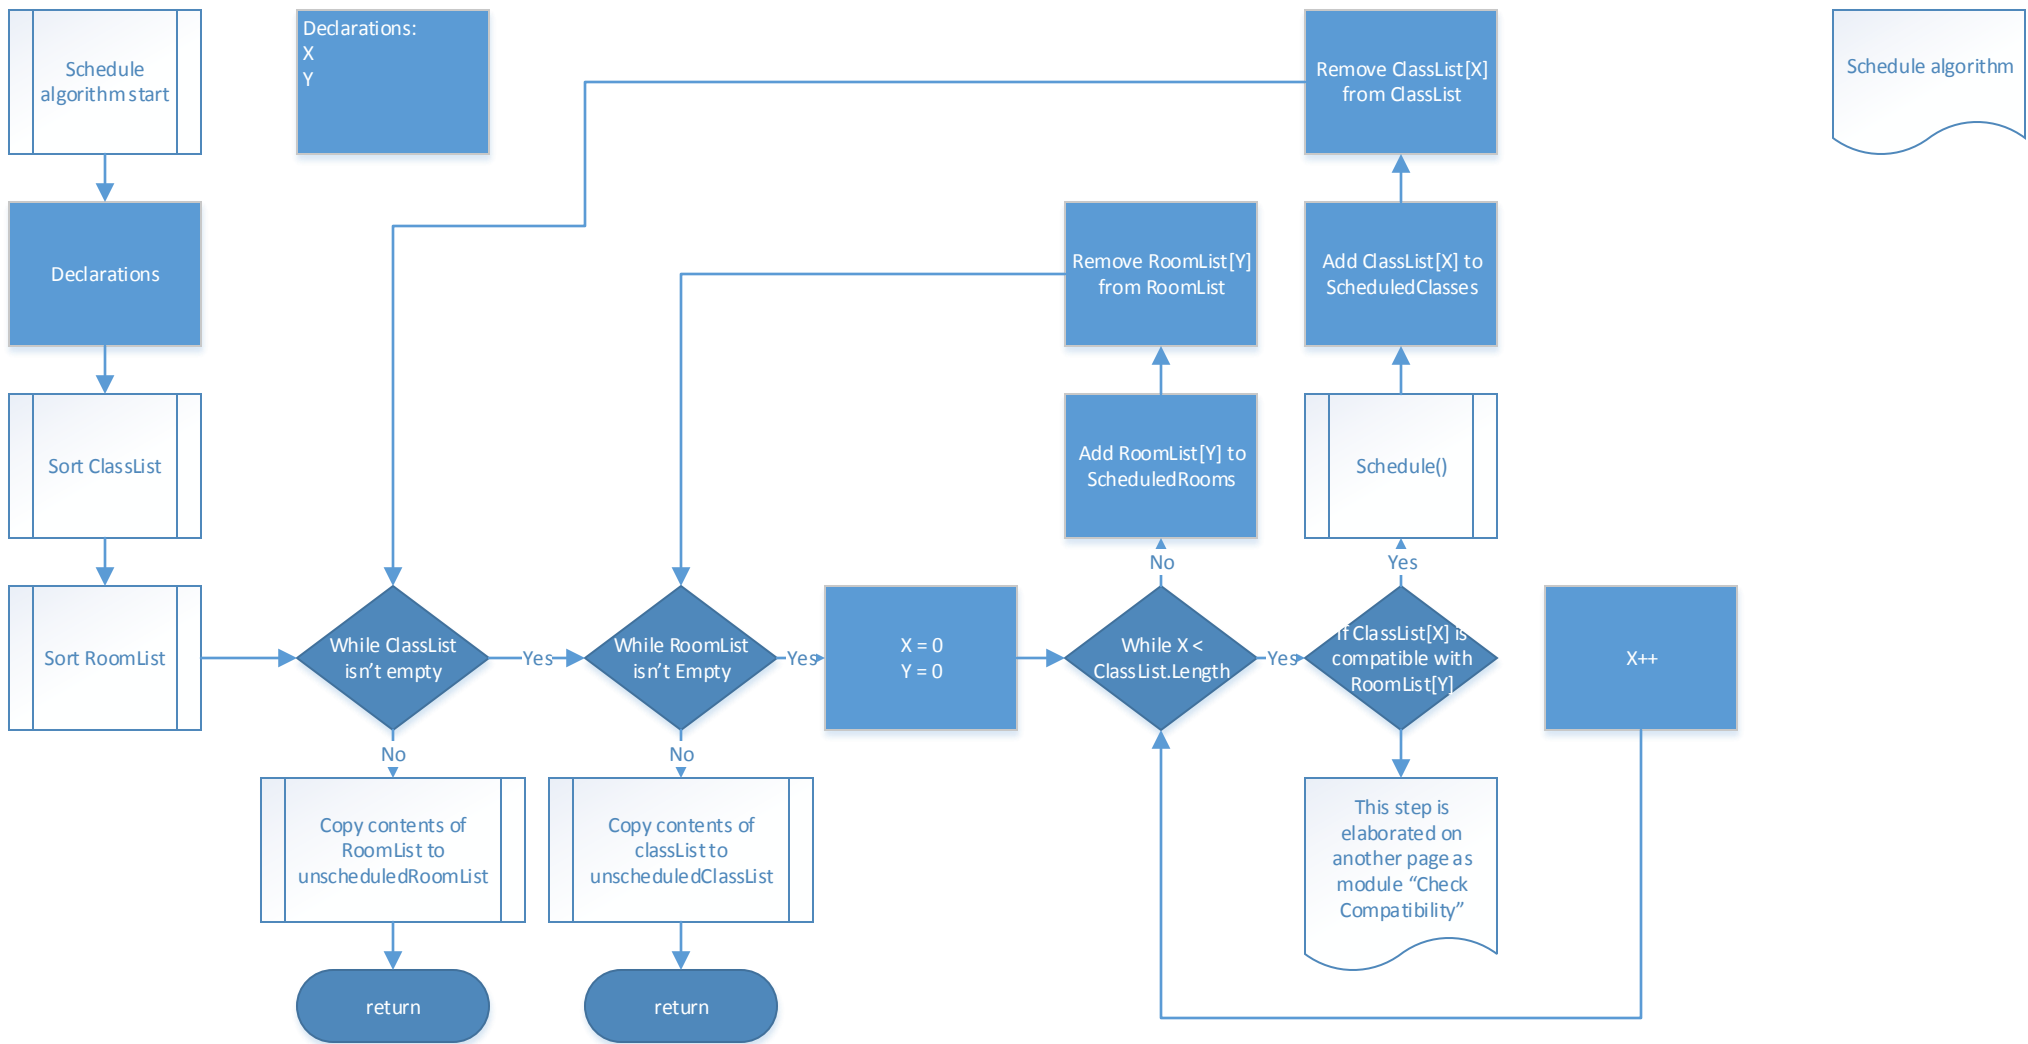



Declarations:  
 ClassList  
 RoomList  
 ScheduledClasses  
 ScheduledRooms  
 UnscheduledClasses  
 UnscheduledRooms

ClassList to be used in schedule algorithm populated from storage  
 RoomList to be used in schedule algorithm populated from storage  
 ScheduledClasses used to store any classes that have been scheduled successfully  
 ScheduledRooms used to store Rooms the program believes can't fit any more classes  
 UnscheduledClasses used to store classes that were unable to be scheduled  
 UnscheduledRooms used to store Rooms that still have space for more classes

Repopulating the lists that the schedule algorithm uses

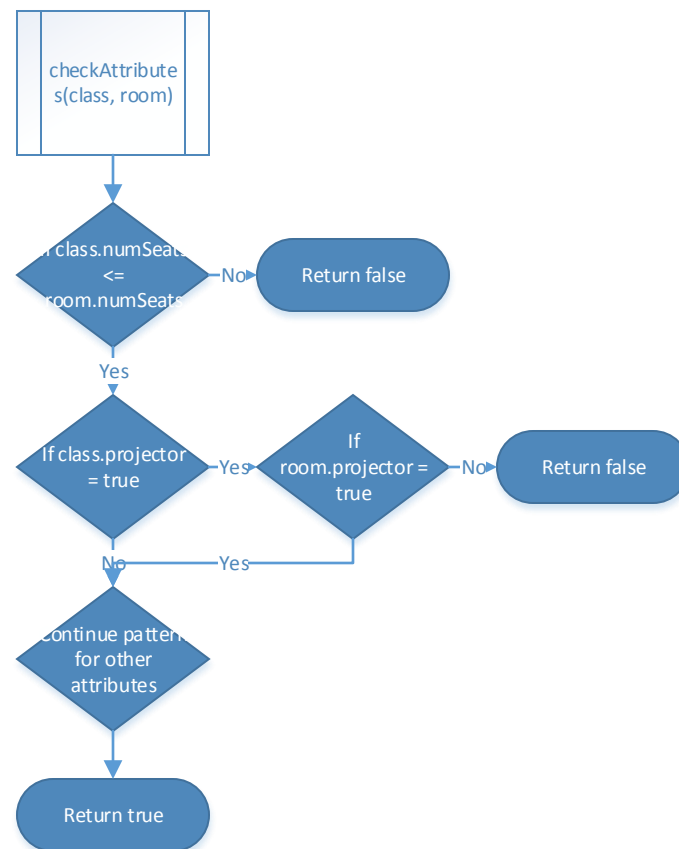

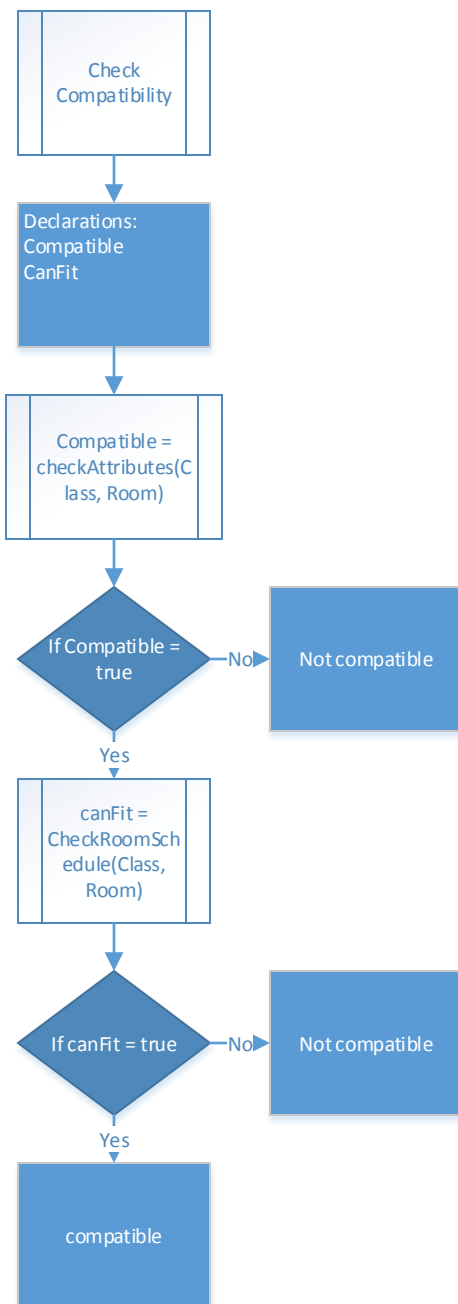

Declarations:  
 indexBeginAvailability  
 indexEndAvailability  
 indexClassLength  
 open  
 indexDay = 0  
 indexTime = 0  
 Z = 0

Note: Schedule is a two dimensional array,  
 dayList refers to one axis  
 and timeList refers to the other

