



VS code Remote FS 安裝使用

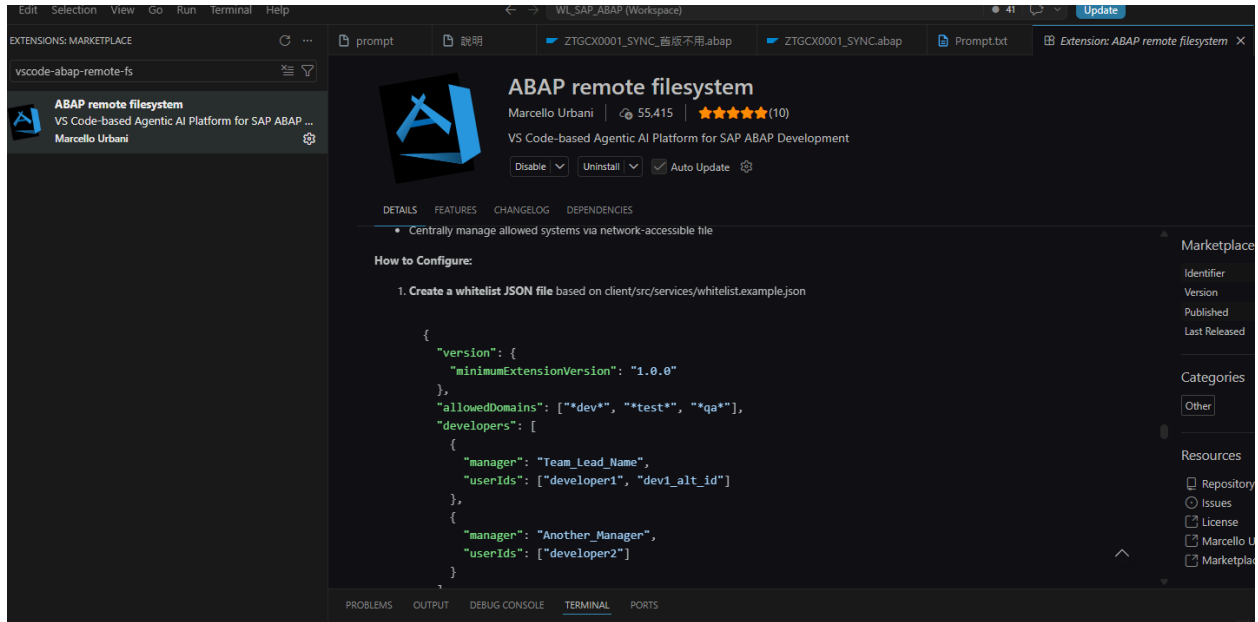

值	範例	怎麼拿
URL(host+HTTPS port)	<code>https://sapdev.yourco.com:44300</code>	SICF 右鍵 /sap/bc/adt → Test Service, 瀏覽器網址列複製 <code>scheme://host:port</code> (去掉後面路徑);或問 Basis(SMICM 的 HTTPS port, 通常 443<系統號>)

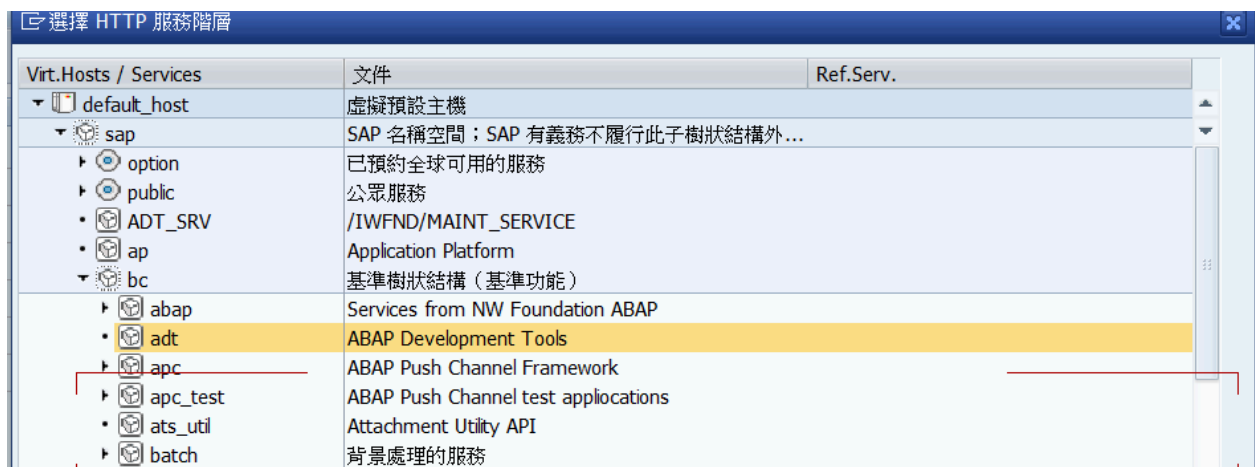

定義服務



呼叫 ICF 階層篩選

階層類型	SERVICE
虛擬主機	DEFAULT_HOST
服務路徑	/sap/bc/adt/
服務名稱	
參考服務	
說明	
語言	繁體中文

明細資訊的篩選

建立者			
建立日期		至	
上次更改者			
更改日期		至	

定義服務

建立主機/服務

外部別名

系統監控器啟用中

篩選明細

虛擬主機

DEFAULT_HOST

服務路徑

/sap/bc/adt/

服務名稱

說明

語言

繁體中文

參考

套用

重設

微調

default_host

sap

bc

adt

紀錄文件

參考服務

虛擬預設主機

SAP 名稱空間；SAP 有義務不履行此子樹狀結構外...

基準樹狀結構（基準功能）

ABAP Development Tools

新的子元素

顯示服務

刪除服務

重新命名服務

啟用服務

停用服務

測試服務

參考服務

物件目錄輸入項



剪下

複製

貼上

VS code Remote FS 安裝使用

3

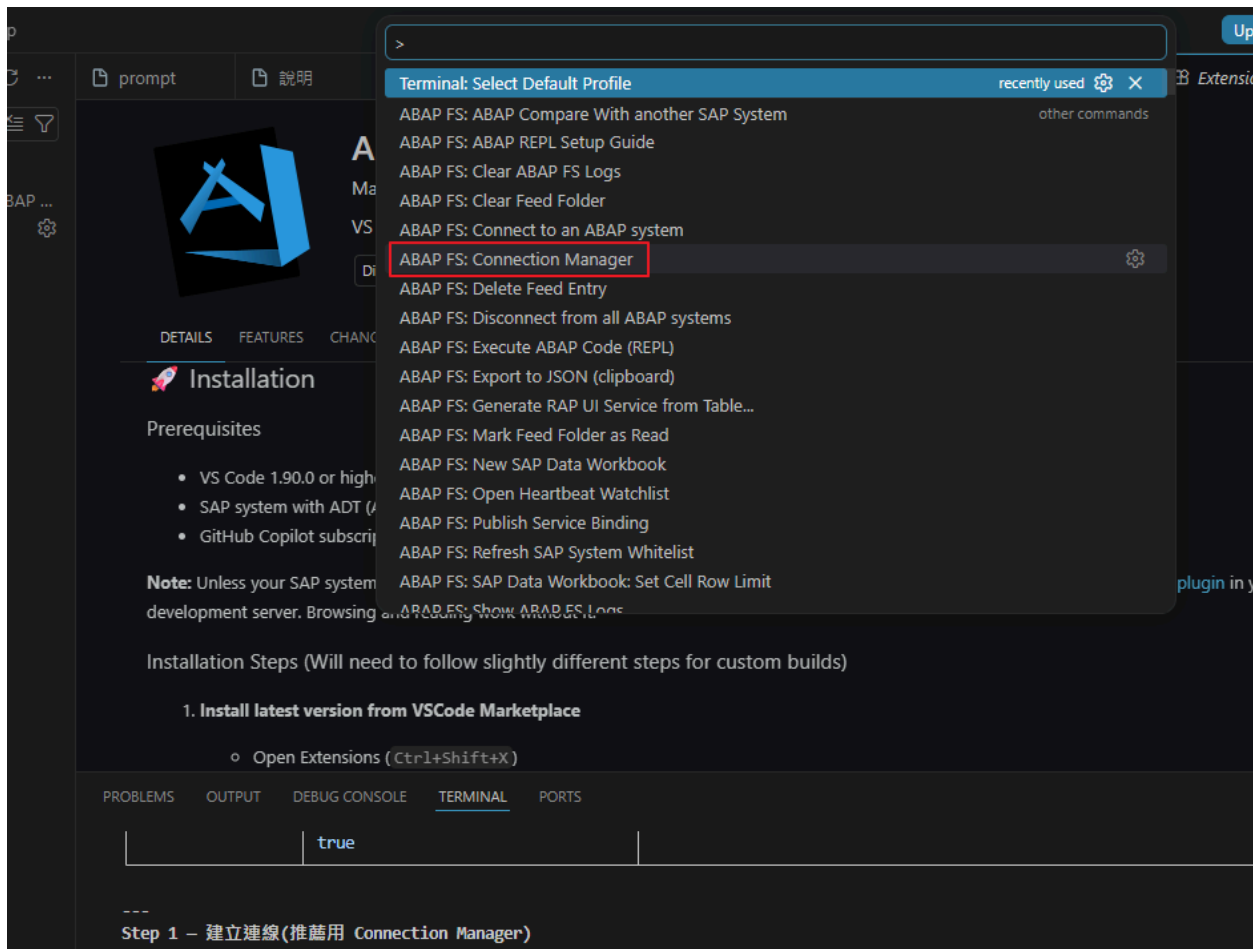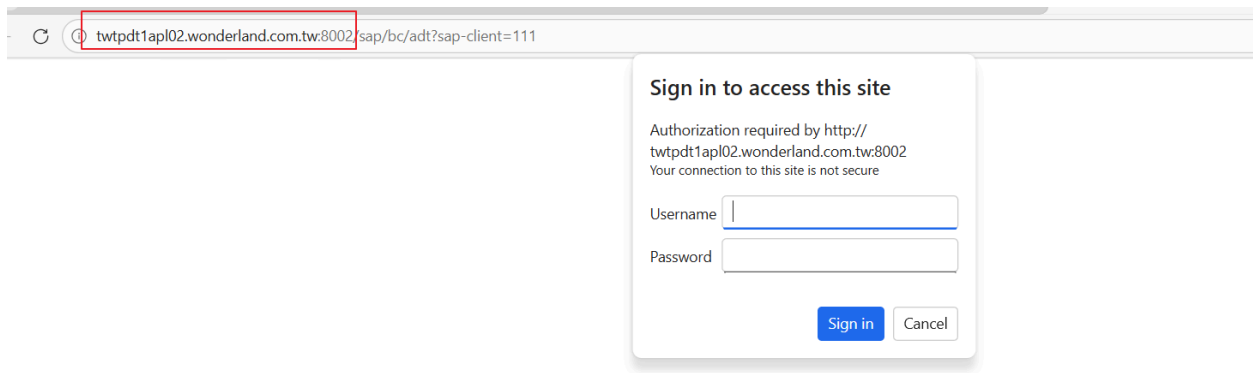

明 ZTGCX0001_SYNC_舊版不用.abap ZTGCX0001_SYNC.abap Prompt.txt SAP Connection Manager X

Add New Connection

Basic Configuration

Connection Name * DT1_111 Unique identifier for this connection	Server URL (ADT URL) * http://twtpdt1apl02.wonderland.com.tw:8002/ Contact your Basis team for this URL. Format: http(s)://domain[port] (e.g., https://myserver.com:44311)
Username * AB135 Password will be requested on first connection and stored securely in OS credential manager	
Client * 111 3 digit number from 000 to 999	Language * zf 2 lowercase letters (e.g., en, de, fr)



Enable SAP GUI Integration

GUI Type Native SAP GUI Embedded works in VS Code; Native requires SAP GUI installed; Controlled opens in browser	Connection Type Direct Application Server Needed for opening unsupported objects in native SAPGUI (e.g., transactions)
Application Server twtps4dt1.wonderland.com.tw:3600 Needed for opening unsupported objects in native SAPGUI	System Number 02 Instance number (00-99). Needed for opening unsupported objects in native SAPGUI
SAP Router String (Optional) /H/saprouter.domain.com/S/3299 SAProuter connection string if required	

.....

Enter password for AB135 on dt1_111 (Press 'Enter' to confirm or 'Escape' to cancel)

Add Cloud Connection Expert Con

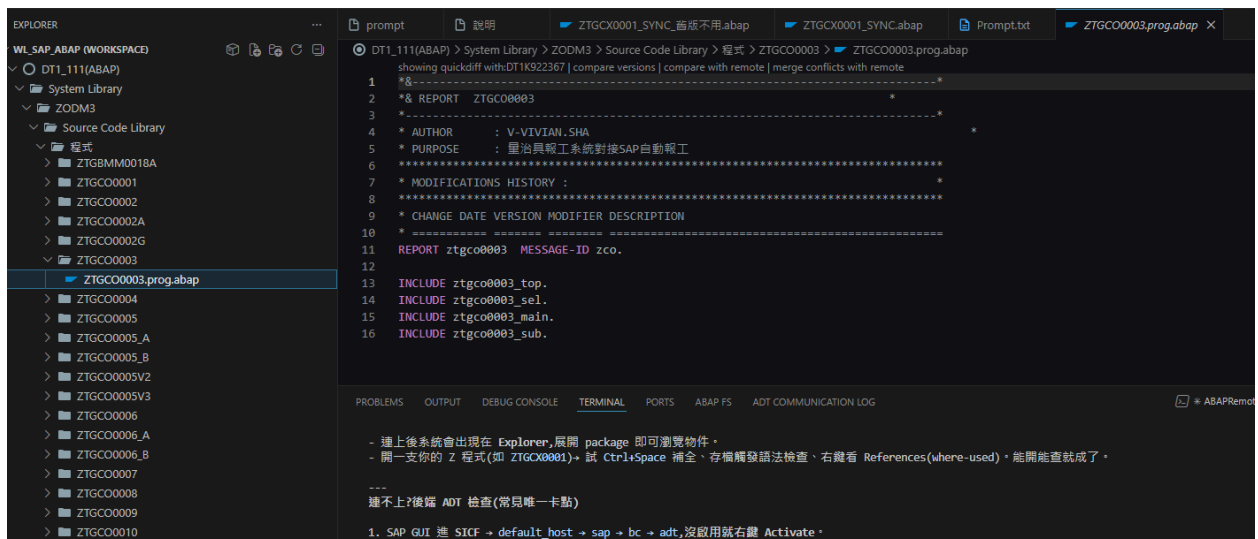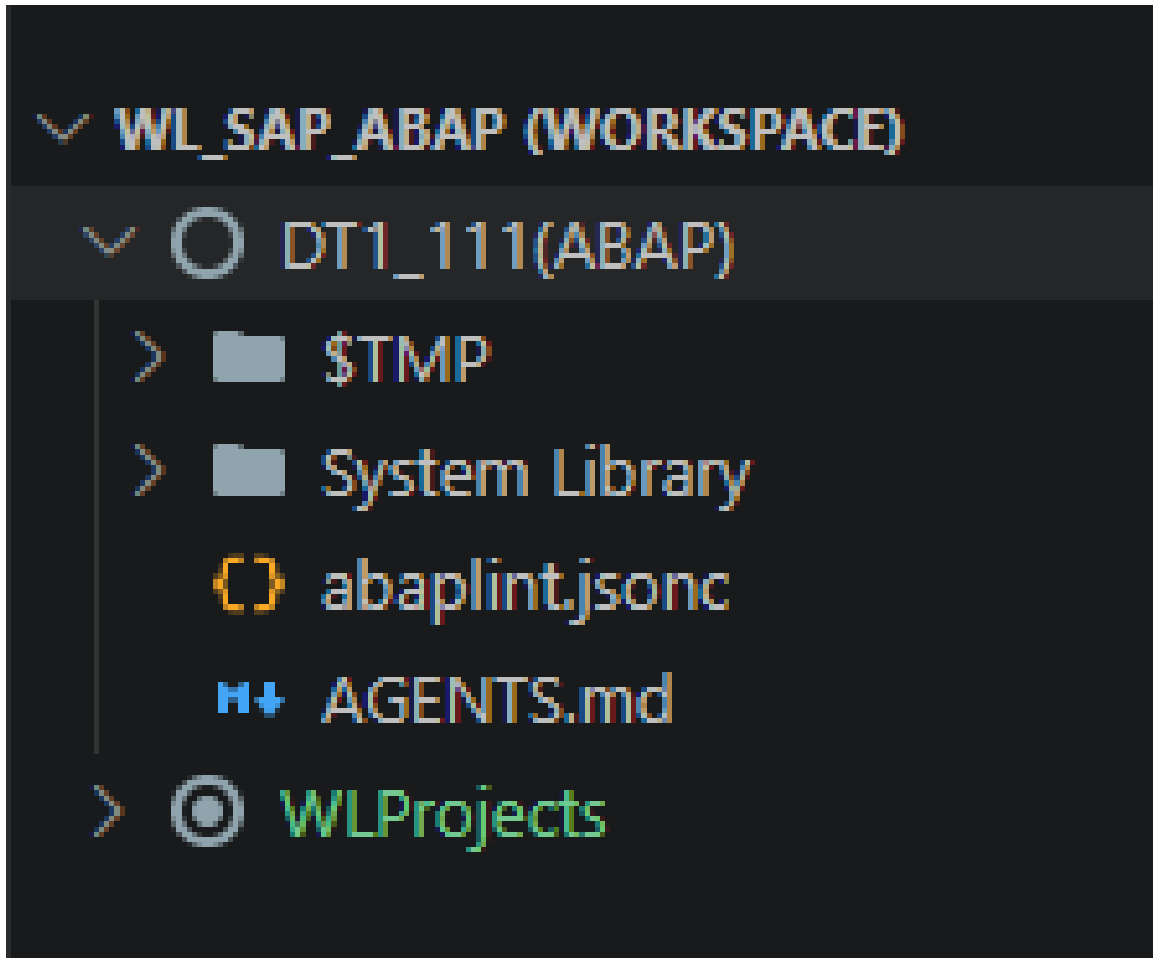

> [Image #1] 看起來可以連進去了

└ [Image #1]

- 連上了! 🎉 截圖看得很清楚: 已連到 DT1 / client 111, 正瀏覽 ZOOM3 → 程式 → ZTGC00003 並開啟原始碼。連線這關過了。

接下來就是開 MCP server, 讓我 (Claude Code) 能直接讀你們系統。我先看一下你的 workspace 設定檔現況, 才能乾淨地把 MCP 設定加進去、不蓋掉你已建好的連線。

Listed 1 directory (ctrl+o to expand)

- 沒有既有的 .vscode/settings.json (代表你的連線是用 Connection Manager 存進 user settings, 很好)。我直接幫你建一個只放 MCP 設定的 workspace 設定檔, 不會動到

• Write(.vscode/settings.json)

└ Wrote 4 lines to .vscode/settings.json

```
1 {  
2   "abapfs.mcpServer.autoStart": true,  
3   "abapfs.mcpServer.port": 4847  
4 }
```

⚡ Processing... (1m 56s · ↑ 5.7k tokens)

└ Tip: Name your conversations with /rename to find them easily in /resume later

> █

▶▶ accept edits on (shift+tab to cycle)