



Sun Federated Access Manager 8.0 Installation and Configuration Guide

Beta



Sun Microsystems, Inc.
4150 Network Circle
Santa Clara, CA 95054
U.S.A.

Part No: 820-3320-05
August 6, 2008

Copyright 2008 Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 U.S.A. All rights reserved.

Sun Microsystems, Inc. has intellectual property rights relating to technology embodied in the product that is described in this document. In particular, and without limitation, these intellectual property rights may include one or more U.S. patents or pending patent applications in the U.S. and in other countries.

U.S. Government Rights – Commercial software. Government users are subject to the Sun Microsystems, Inc. standard license agreement and applicable provisions of the FAR and its supplements.

This distribution may include materials developed by third parties.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, the Solaris logo, the Java Coffee Cup logo, docs.sun.com, Java, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.

The OPEN LOOK and SunTM Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

Products covered by and information contained in this publication are controlled by U.S. Export Control laws and may be subject to the export or import laws in other countries. Nuclear, missile, chemical or biological weapons or nuclear maritime end uses or end users, whether direct or indirect, are strictly prohibited. Export or reexport to countries subject to U.S. embargo or to entities identified on U.S. export exclusion lists, including, but not limited to, the denied persons and specially designated nationals lists is strictly prohibited.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright 2008 Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 U.S.A. Tous droits réservés.

Sun Microsystems, Inc. détient les droits de propriété intellectuelle relatifs à la technologie incorporée dans le produit qui est décrit dans ce document. En particulier, et ce sans limitation, ces droits de propriété intellectuelle peuvent inclure un ou plusieurs brevets américains ou des applications de brevet en attente aux Etats-Unis et dans d'autres pays.

Cette distribution peut comprendre des composants développés par des tierces personnes.

Certains composants de ce produit peuvent être dérivées du logiciel Berkeley BSD, licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays; elle est licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, le logo Solaris, le logo Java Coffee Cup, docs.sun.com, Java et Solaris sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays. Toutes les marques SPARC sont utilisées sous licence et sont des marques de fabrique ou des marques déposées de SPARC International, Inc. aux Etats-Unis et dans d'autres pays. Les produits portant les marques SPARC sont basés sur une architecture développée par Sun Microsystems, Inc.

L'interface d'utilisation graphique OPEN LOOK et Sun a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui, en outre, se conforment aux licences écrites de Sun.

Les produits qui font l'objet de cette publication et les informations qu'il contient sont régis par la législation américaine en matière de contrôle des exportations et peuvent être soumis au droit d'autres pays dans le domaine des exportations et importations. Les utilisations finales, ou utilisateurs finaux, pour des armes nucléaires, des missiles, des armes chimiques ou biologiques ou pour le nucléaire maritime, directement ou indirectement, sont strictement interdites. Les exportations ou réexportations vers des pays sous embargo des Etats-Unis, ou vers des entités figurant sur les listes d'exclusion d'exportation américaines, y compris, mais de manière non exclusive, la liste de personnes qui font objet d'un ordre de ne pas participer, d'une façon directe ou indirecte, aux exportations des produits ou des services qui sont régis par la législation américaine en matière de contrôle des exportations et la liste de ressortissants spécifiquement désignés, sont rigoureusement interdites.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFACON.

Contents

Preface	7
1 Getting Started With Federated Access Manager	13
Federated Access Manager Requirements	14
Overview of Installing and Configuring Federated Access Manager	15
Some Changes to Consider	15
Summary of the Installation and Configuration Steps	16
2 Installing Federated Access Manager	17
Downloading Federated Access Manager	17
Adding Federated Access Manager Permissions to the Server Policy File	19
Deploying the Federated Access Manager WAR (fam.war) File	22
▼ To Deploy the Federated Access Manager WAR (fam.war) File	22
Creating and Deploying Specialized Federated Access Manager WAR Files	23
Uninstalling a Federated Access Manager Server Deployment	23
▼ To Uninstall a Federated Access Manager Server Deployment	24
3 Configuring Federated Access Manager Using the Configurator	25
Starting the Configurator	25
▼ To Start the Configurator	25
Configuring Federated Access Manager With the Default Configuration	26
▼ To Configure Federated Access Manager With the Default Configuration	27
Configuring Federated Access Manager With a Custom Configuration	28
▼ To Configure Federated Access Manager With a Custom Configuration	28
4 Installing the Federated Access Manager Utilities and Scripts	37
Installing the Federated Access Manager Utilities and Scripts in the famAdminTools.zip	

File	37
▼ To Install the Federated Access Manager Utilities and Scripts in the famAdminTools.zip File	38
Running the Unix Authentication Helper (amunixd)	39
▼ To Run the Unix Authentication Helper (amunixd)	40
Uninstalling the Federated Access Manager Utilities and Scripts	40
▼ To Uninstall the Federated Access Manager Utilities and Scripts	40
5 Implementing Federated Access Manager Session Failover	41
Overview of Federated Access Manager Session Failover	41
Federated Access Manager Session Failover Components	41
Federated Access Manager Session Failover Flow	44
Installing and Configuring the Federated Access Manager Session Failover Components	44
Unzipping the famSessionTools.zip File	45
Running the Session Failover setup Script	46
Creating a New User to Connect to the Message Queue Broker (Optional)	47
Editing the amsessiondb Script (if Needed)	48
Encrypting the Message Queue Broker Password Using the amsfopassword Script (Required)	48
Running the amsf script to Start and Stop the Session Failover Components	49
Configuring Session Failover in the Federated Access Manager Console	52
▼ To Configure Session Failover in the Federated Access Manager Console	52
6 Deploying a Distributed Authentication UI Server	55
Distributed Authentication UI Server Overview	55
Distributed Authentication UI Server Deployment Scenario	55
Requirements for a Distributed Authentication UI Server Deployment	56
Flow for a Distributed Authentication End-User Request	57
Generating a Distributed Authentication UI Server WAR File	58
▼ To Generate a Distributed Authentication UI Server WAR File	58
Deploying the Distributed Authentication UI Server WAR File	59
▼ To Deploy the Distributed Authentication UI Server WAR File	59
Configuring the Distributed Authentication UI Server	59
▼ To Configure the Distributed Authentication UI Server	60
Accessing the Distributed Authentication User Interface Web Application	61

Uninstalling a Distributed Authentication UI Server Deployment	62
▼ To Uninstall a Distributed Authentication UI Server Deployment	62
7 Installing the Federated Access Manager Console Only	63
Requirements to Deploy Only the Console	63
Generating a Console Only WAR File	63
▼ To Generate a Console Only WAR File	63
Configuring the Console Only WAR File	64
▼ To Configure the Console Only WAR File	64
Accessing the Console	66
Uninstalling a Federated Access Manager Console Only Deployment	66
▼ To Uninstall a Federated Access Manager Console Only Deployment	66
8 Installing Federated Access Manager Server Only	69
Requirements to Deploy Federated Access Manager Server Only	69
Generating a WAR File to Deploy Federated Access Manager Server Only	69
▼ To Generate a WAR File to Deploy Federated Access Manager Server Only	69
Deploying Federated Access Manager Server Only	70
▼ To Deploy Federated Access Manager Server Only	70
Uninstalling a Federated Access Manager Server Only Deployment	71
▼ To Uninstall a Federated Access Manager Server Only Deployment	71
9 Installing the Federated Access Manager Client SDK	73
Federated Access Manager Client SDK Requirements	73
Installing the Federated Access Manager Client SDK	74
▼ To Install the Federated Access Manager Client SDK	74
Compiling and Running the Client SDK Samples	75
▼ To Compile and Run the Client SDK Samples	75
Uninstalling the Federated Access Manager Client SDK	76
▼ To Uninstall the Federated Access Manager Client SDK	76
10 Configuring Federated Access Manager Sessions	77
Setting Session Quota Constraints	77
Deployment Scenarios for Session Quota Constraints	77

Multiple Settings For Session Quotas 78

Configuring Session Quota Constraints 79

Configuring Session Property Change Notifications 80

▼ To Configure Session Property Change Notifications 81

Index83

Preface

The *Sun Federated Access Manager Installation and Configuration Guide* provides information about installing and configuring Sun Federated Access Manager (hence Federated Access Manager). This preface includes these topics:

- “Who Should Use This Guide” on page 7
- “Before You Read This Guide” on page 7
- “How This Guide Is Organized” on page 8
- “Related Documentation” on page 8
- “Searching Sun Product Documentation” on page 10
- “Related Third-Party Web Site References” on page 10
- “Documentation, Support, and Training” on page 11
- “Typographic Conventions” on page 11
- “Revision History” on page 12
- “Sun Welcomes Your Comments” on page 12

Who Should Use This Guide

This guide is intended for system administrators, system integrators, and others who are installing and configuring Federated Access Manager.

Before You Read This Guide

Readers should be familiar with the following components and concepts:

- Sun Federated Access Manager technical concepts, as described in the *Sun Federated Access Manager 8.0 Technical Overview*.
- Deployment platform: Solaris™, Linux, or Windows operating system
- Web container that will run Federated Access Manager, such as Sun Java System Application Server, Sun Java System Web Server, BEA WebLogic, or IBM WebSphere Application Server
- Technical concepts: Lightweight Directory Access Protocol (LDAP), Java™ technology, JavaServer Pages™ (JSP™) technology, HyperText Transfer Protocol (HTTP), HyperText Markup Language (HTML), and eXtensible Markup Language (XML)

How This Guide Is Organized

This guide is organized as follows:

- Chapter 1, “Getting Started With Federated Access Manager”
- Chapter 2, “Installing Federated Access Manager”
- Chapter 3, “Configuring Federated Access Manager Using the Configurator”
- Chapter 4, “Installing the Federated Access Manager Utilities and Scripts”
- Chapter 5, “Implementing Federated Access Manager Session Failover”
- Chapter 6, “Deploying a Distributed Authentication UI Server”
- Chapter 7, “Installing the Federated Access Manager Console Only”
- Chapter 8, “Installing Federated Access Manager Server Only”
- Chapter 9, “Installing the Federated Access Manager Client SDK”
- Chapter 10, “Configuring Federated Access Manager Sessions”

Related Documentation

Related documentation is available as follows:

- “Federated Access Manager Documentation Set” on page 8
- “Related Product Documentation” on page 9

Federated Access Manager Documentation Set

The following table describes the Federated Access Manager documentation set, which is available on the Open SSO project site:

<https://opensso.dev.java.net/public/use/docs/fampdf/index.html>

Note: Not all documentation is available for the EA release.

TABLE P-1 Federated Access Manager Documentation Set

Title	Description
<i>Sun Federated Access Manager 8.0 Documentation Center</i>	Contains links to commonly referenced information in the Federated Access Manager documentation collection.
<i>Sun Federated Access Manager 8.0 Release Notes</i>	Describes new features, installation notes, and known issues and limitations. The Release Notes are updated periodically after the initial release to describe any new features, patches, or problems.

TABLE P-1 Federated Access Manager Documentation Set (Continued)

Title	Description
<i>Sun Federated Access Manager 8.0 installation and Configuration Guide</i> (this guide)	Provides information about installing and configuring Federated Access Manager.
<i>Sun Federated Access Manager 8.0 Technical Overview</i>	Provides an overview of how components work together to consolidate access control functions, and to protect enterprise assets and web-based applications. It also explains basic concepts and terminology.
<i>Sun Federated Access Manager 8.0 Deployment Planning Guide</i>	Provides planning and deployment solutions for based on the solution life cycle.
<i>Sun Federated Access Manager 8.0 Administration Guide</i>	Describes how to use the Federated Access Manager Administration Console as well as how to manage user and service data using the command-line interface (CLI).
<i>Sun Federated Access Manager 8.0 Administration Reference</i>	Provides reference information for the Federated Access Manager command-line interface (CLI), configuration attributes, log files, and error codes.
<i>Sun Federated Access Manager 8.0 Developer's Guide</i>	Provides information about customizing Federated Access Manager and integrating its functionality into an organization's current technical infrastructure. It also provides details about the programmatic aspects of the product and its API.
<i>Sun Federated Access Manager 8.0 C API Reference</i>	Provides summaries of data types, structures, and functions that make up the public Federated Access Manager C APIs.
<i>Sun Federated Access Manager 8.0 Java API Reference</i>	Provides information about the implementation of Java packages in Federated Access Manager.
<i>Sun Federated Access Manager 8.0 Performance Tuning Guide</i>	Provides information about how to tune Federated Access Manager and its related components for optimal performance.
<i>Sun Federated Access Manager Policy Agent 3.0 User's Guide</i>	Provides an overview of version 3.0 policy agents, including the web agents and J2EE agents that are currently available. To view the version 3.0 policy agent EA documentation, see: https://opensso.dev.java.net/public/use/docs/fampdf/index.html

Related Product Documentation

The following table provides links to documentation collections for related products.

TABLE P-2 Related Product Documentation

Product	Link
Sun Java System Directory Server 6.3	http://docs.sun.com/coll/1224.4
Sun Java System Web Server 7.0 Update 3	http://docs.sun.com/coll/1653.3
Sun Java System Application Server 9.1	http://docs.sun.com/coll/1343.4
Sun Java System Message Queue 4.1	http://docs.sun.com/coll/1307.3
Sun Java System Web Proxy Server 4.0.6	http://docs.sun.com/coll/1311.6
Sun Java System Identity Manager 7.1	http://docs.sun.com/coll/1514.3

Searching Sun Product Documentation

Besides searching Sun product documentation from the docs.sun.comSM web site, you can use a search engine by typing the following syntax in the search field:

search-term site:docs.sun.com

For example, to search for “broker,” type the following:

broker site:docs.sun.com

To include other Sun web sites in your search (for example, java.sun.com, www.sun.com, and developers.sun.com), use sun.com in place of docs.sun.com in the search field.

Related Third-Party Web Site References

Third-party URLs are referenced in this document and provide additional, related information.

Note – Sun is not responsible for the availability of third-party web sites mentioned in this document. Sun does not endorse and is not responsible or liable for any content, advertising, products, or other materials that are available on or through such sites or resources. Sun will not be responsible or liable for any actual or alleged damage or loss caused or alleged to be caused by or in connection with use of or reliance on any such content, goods, or services that are available on or through such sites or resources.

Documentation, Support, and Training

The Sun web site provides information about the following additional resources:

- Documentation (<http://www.sun.com/documentation/>)
- Support (<http://www.sun.com/support/>)
- Training (<http://www.sun.com/training/>)

Typographic Conventions

The following table describes the typographic conventions that are used in this book.

TABLE P-3 Typographic Conventions

Typeface	Meaning	Example
AaBbCc123	The names of commands, files, and directories, and onscreen computer output	Edit your .login file. Use <code>ls -a</code> to list all files. <code>machine_name%</code> you have mail.
AaBbCc123	What you type, contrasted with onscreen computer output	<code>machine_name%</code> su Password:
<i>aabbcc123</i>	Placeholder: replace with a real name or value	The command to remove a file is <i>rm filename</i> .
<i>AaBbCc123</i>	Book titles, new terms, and terms to be emphasized	Read Chapter 6 in the <i>User's Guide</i> . A <i>cache</i> is a copy that is stored locally. Do <i>not</i> save the file. Note: Some emphasized items appear bold online.

Shell Prompts in Command Examples

The following table shows the default UNIX® system prompt and superuser prompt for the C shell, Bourne shell, and Korn shell.

TABLE P-4 Shell Prompts

Shell	Prompt
C shell	machine_name%
C shell for superuser	machine_name#
Bourne shell and Korn shell	\$
Bourne shell and Korn shell for superuser	#

Revision History

TABLE P-5 Revision History

Date (Part Number)	Description of Change
August 6, 2008 (820-3320-05)	Preliminary draft

Sun Welcomes Your Comments

Sun is interested in improving its documentation and welcomes your comments and suggestions.

To share your comments, go to <http://docs.sun.com> and click Send comments. In the online form, provide the document title and part number. The part number is a seven-digit or nine-digit number that can be found on the title page of the guide or at the top of the document.

For example, the title of this guide is the *Sun Federated Access Manager 8.0 Installation and Configuration Guide*, and the part number is 820-3320-05.

Getting Started With Federated Access Manager

SunTM Federated Access Manager (hence Federated Access Manager) is being developed as part of the OpenSSO open source project and is the commercial version of OpenSSO server.

Federated Access Manager includes features such as access management, federation management, and web services security that are found in earlier releases of Sun Java System Access Manager and Sun Java System Federation Manager. Federated Access Manager also includes many new features, which are described in the *Federated Access Manager 8.0 Release Notes* and the *Federated Access Manager 8.0 Technical Overview*.

Federated Access Manager is available as a web archive (WAR) file on the OpenSSO project web site: <http://opensso.dev.java.net/>

Before you install and configure Federated Access Manager:

- First, check the “[Federated Access Manager Requirements](#)” on page 14.
- Then, review the “[Overview of Installing and Configuring Federated Access Manager](#)” on page 15 before you continue with the detailed steps in subsequent chapters of this guide.

In addition to installing and configuring a Federated Access Manager full server instance, this guide also includes the following information:

- Chapter 4, “Installing the Federated Access Manager Utilities and Scripts”
- Chapter 5, “Implementing Federated Access Manager Session Failover”
- Chapter 6, “Deploying a Distributed Authentication UI Server”
- Chapter 7, “Installing the Federated Access Manager Console Only”
- Chapter 8, “Installing Federated Access Manager Server Only”
- Chapter 9, “Installing the Federated Access Manager Client SDK”

Federated Access Manager Requirements

TABLE 1–1 Federated Access Manager Requirements

Requirement	Description
Web container	<p>One of the following web containers must be running on the host server where you plan to deploy Federated Access Manager:</p> <ul style="list-style-type: none">■ Sun Java System Application Server 9.1 Update 1 and Update 2■ Glassfish Application Server V2 UR1 and UR2■ Sun Java System Web Server 7.0 Update 3■ Apache Tomcat 5.5.x and 6.x■ BEA WebLogic Server 10■ BEA WebLogic Server 9.2 MP2■ Oracle Application Server 10g■ IBM WebSphere Application Server 6.1■ Apache Geronimo Application Server 2.1.2 (with Tomcat on Solaris systems only)■ JBoss Application Server 4.x <p>Note: These web container versions and any subsequent updates to the version are supported.</p> <p>For more information about supported versions and open issues for each web container, see the <i>Federated Access Manager 8.0 Release Notes</i>.</p>
Configuration Data Store	<p>Federated Access Manager requires a data store for its configuration data, which you select when you run the Configurator:</p> <ul style="list-style-type: none">■ Embedded data store (transparent to the user)■ Sun Java System Directory Server 5.1, 5.2, 6.2, or 6.3.
User Data Store	<ul style="list-style-type: none">■ Embedded data store <p>Note: The Embedded data store is recommended only for prototype, proof of concept (POC), or developer deployments that have a small set of users. It is not recommended for production deployments.</p> <ul style="list-style-type: none">■ Sun Java System Directory Server 5.1, 5.2, 6.2, or 6.3 <p>If you are deploying multiple Federated Access Manager instances in a multiple server deployment, all instances must access the same Directory Server.</p>
Password encryption key	<p>If you deploying Federated Access Manager in a multiple server deployment, you must use the same password encryption key value for each Federated Access Manager instance.</p> <p>Copy the encryption key value from the first instance and then use this value when you configure each additional instance.</p>

TABLE 1-1 Federated Access Manager Requirements (Continued)

Requirement	Description
Web container runtime user permissions	<p>If the runtime user of the Federated Access Manager web container instance is a non-root user, this user must be able to write to its own home directory.</p> <p>For example, if you are installing Sun Java System Web Server, the default runtime user for the Web Server instance is <code>webservd</code>. On Solaris systems, the <code>webservd</code> user has the following entry in the <code>/etc/passwd</code> file:</p> <pre>webservd:x:80:80:WebServer Reserved UID:/:</pre> <p>The <code>webservd</code> user does not have permission to write to its default home directory (<code>/</code>). Therefore, you must change the permissions to allow the <code>webservd</code> user to write to its default home directory. Otherwise, the <code>webservd</code> user will encounter an error after you configure Federated Access Manager using the Configurator.</p>
Mode	Federated Access Manager is always deployed in Realm Mode.

Overview of Installing and Configuring Federated Access Manager

- [“Some Changes to Consider” on page 15](#)
- [“Summary of the Installation and Configuration Steps” on page 16](#)

Some Changes to Consider

Before you install and configure Federated Access Manager, here are a few changes to consider:

- You install Federated Access Manager from a WAR file, using the web container administration console or deployment command. You no longer run a standalone installer.
- Configuration data, including policy agent configuration data, is stored in a centralized repository. This repository can be either Sun Java System Directory Server or the embedded data store, which is transparent to the user. Federated Access Manager does not use the `AMConfig.properties` or `server.xml` files (except for compatibility with previous versions of Access Manager).
- You initially configure Federated Access Manager using the Configurator. Then, to perform additional configuration, you use either the Administration Console or command-line utilities. You no longer run the `amconfig` script with the `amsamplesilent` file.

Summary of the Installation and Configuration Steps

To install and configure an instance of Federated Access Manager server, follow these general steps:

1. If necessary, install, configure, and start one of the supported web containers listed in [Table 1-1](#).
2. Download and unzip the `fam.zip` file from the OpenSSO project site:
<http://opensso.dev.java.net/public/use/index.html>
Be sure to check the *Federated Access Manager 8.0 Release Notes* page for any current issues.
3. Deploy the `fam.war` file to the web container, using the web container administration console or deployment command.
For the detailed steps, see [Chapter 2, “Installing Federated Access Manager.”](#)
4. Launch the Federated Access Manager Configurator using the specific web container command or by specifying the following URL in your browser:

`protocol://host.domain:port/fam`

For example: `http://fam.example.com:8080/fam`

5. Configure Federated Access Manager by entering values in the Configurator fields or by accepting the default value for some fields. The Configurator has two configuration options:
 - The **Default Configuration** option requires you to enter only the Federated Access Manager administrator (`amAdmin`) and default agent (`amldapuser`) passwords. The Configurator then uses default values for the other configuration options, including the embedded data store as the configuration data store.
 - The **Custom Configuration** option allows you to enter specific configuration values for your deployment (or accept the default values).

For the detailed steps, see [Chapter 3, “Configuring Federated Access Manager Using the Configurator.”](#)

6. Launch Federated Access Manager using the specific web container console or deployment command, or by specifying the URL from Step 4.
7. Login to the Console as the Federated Access Manager administrator (`amAdmin`) using the password you specified when you ran the Configurator.
8. To make additional configuration changes to your deployment, use the Federated Access Manager Administration Console or the command-line utilities. For information, refer to the Administration Console Online Help or the *Federated Access Manager 8.0 Administration Guide*.

Installing Federated Access Manager

Installing Sun™ Federated Access Manager from a web archive (WAR) file involves these steps:

- “Downloading Federated Access Manager” on page 17
- “Adding Federated Access Manager Permissions to the Server Policy File” on page 19
- “Deploying the Federated Access Manager WAR (fam.war) File” on page 22
- “Creating and Deploying Specialized Federated Access Manager WAR Files” on page 23
- “Uninstalling a Federated Access Manager Server Deployment” on page 23

Before you begin, check the “Federated Access Manager Requirements” on page 14.

Downloading Federated Access Manager

Federated Access Manager is available in the fam.zip file, which you can download from the OpenSSO project site:

<http://opensso.dev.java.net/public/use/index.html>

If you prefer, you can request a media kit from your Sun representative.

The following table describes the layout after you unzip the fam.zip file. The directory where you unzip the file is represented by *zip_root*.

TABLE 2-1 Federated Access Manager fam.zip File Layout

<i>zip_root</i> Directory	Description
/fam	Top-level README file and license file.

TABLE 2-1 Federated Access Manager fam.zip File Layout (Continued)

zip_root Directory	Description
/fam/deployable-war	<p>Federated Access Manager WAR and related files:</p> <ul style="list-style-type: none">■ fam.war contains all Federated Access Manager components. Use this file you to deploy Federated Access Manager server or to generate specialized WAR files. For more information, see “Deploying the Federated Access Manager WAR (fam.war) File” on page 22.■ /console contains the additional files for deploying only the Federated Access Manager Console. See Chapter 7, “Installing the Federated Access Manager Console Only.”■ /distauth contains the additional files for deploying a Distributed Authentication UI server. See Chapter 6, “Deploying a Distributed Authentication UI Server.”■ /idpdiscovery contains the additional files for deploying Federated Access Manager as an identity provider (IDP) using the Discovery Service.■ /noconsole contains the files for deploying Federated Access Manager server without the Console. See Chapter 8, “Installing Federated Access Manager Server Only.”■ distauth.list, fam-console.list, fam-noconsole.list, fam-idpdiscovery.list, and fam-nosample.list allow you to create specialized WAR files. For more information, see “Creating and Deploying Specialized Federated Access Manager WAR Files” on page 23.
/fam/docs	Java API reference documentation (fam-public-javadocs.jar).
/fam/ldif	LDIF files for Sun Java System Directory Server, Microsoft Active Directory, and other LDAPv3 complaint directory servers.
/fam/libraries	DLL and JAR files for components such as secure attribute exchange (SAE), Federated Access Manager client SDK, and the C SDK for agents.
/fam/migration	Federated Access Manager migration utilities and related files.
/fam/patches	Reserved for Federated Access Manager patches.
/fam/samples	Client SDK and samples (fam-client.zip). See Chapter 9, “Installing the Federated Access Manager Client SDK.”

TABLE 2-1 Federated Access Manager fam.zip File Layout *(Continued)*

<i>zip_root</i> Directory	Description
/fam/tools	Federated Access Manager tools and utilities: <ul style="list-style-type: none"> ■ famAdminTools.zip contains files to setup and run the Federated Access Manager command-line (CLI) utilities and scripts such as famadm and ampassword. ■ famSessionTools.zip contains the files to setup and configure Federated Access Manager session failover. ■ /helpers contains files for the UNIX authentication helper (amunixd).
/fam/upgrade	Scripts and required files to upgrade Access Manager.
/fam/xml	Federated Access Manager XML files, such as amAdminConsole.xml, amAuth.xml, amSession.xml, and amUser.xml.

Adding Federated Access Manager Permissions to the Server Policy File

If the Java security manager is enabled for the Federated Access Manager web container, you must add Federated Access Manager permissions to the web container server policy file. Usually, this file is named server.policy, but some web containers might use a different name.

If the Java security manager is disabled for the web container (for example, Glassfish), you do not need to add the permissions.



Caution – Before you modify the server policy file, backup the existing file.

The following examples show the permissions required for different web containers.

EXAMPLE 2-1 Application Server 9.1: Federated Access Manager Permissions in the Server Policy File

```
// ADDITIONS FOR Access Manager
grant {
    permission java.net.SocketPermission "*", "listen,connect,accept,resolve";
    permission java.util.PropertyPermission "*", "read, write";
    permission java.lang.RuntimePermission "modifyThreadGroup";
    permission java.lang.RuntimePermission "setFactory";
    permission java.lang.RuntimePermission "accessClassInPackage.*";
    permission java.util.logging.LoggingPermission "control";
    permission java.lang.RuntimePermission "shutdownHooks";
    permission javax.security.auth.AuthPermission "getLoginConfiguration";
    permission javax.security.auth.AuthPermission "setLoginConfiguration";
```

EXAMPLE 2-1 Application Server 9.1: Federated Access Manager Permissions in the Server Policy File
(Continued)

```

permission javax.security.auth.AuthPermission "modifyPrincipals";
permission javax.security.auth.AuthPermission "createLoginContext.*";
permission java.io.FilePermission "<<ALL FILES>>", "read,write,execute,delete";
permission java.util.PropertyPermission "java.util.logging.config.class", "write";
permission java.security.SecurityPermission "removeProvider.SUN";
permission java.security.SecurityPermission "insertProvider.SUN";
permission javax.security.auth.AuthPermission "doAs";
permission java.util.PropertyPermission "java.security.krb5.realm", "write";
permission java.util.PropertyPermission "java.security.krb5.kdc", "write";
permission java.util.PropertyPermission "java.security.auth.login.config", "write";
permission java.util.PropertyPermission "user.language", "write";
permission javax.security.auth.kerberos.ServicePermission "*", "accept";
permission javax.net.ssl.SSLPermission "setHostnameVerifier";
permission java.security.SecurityPermission "putProviderProperty.IAIK";
permission java.security.SecurityPermission "removeProvider.IAIK";
permission java.security.SecurityPermission "insertProvider.IAIK";
permission java.lang.RuntimePermission "setDefaultUncaughtExceptionHandler";
permission javax.management.MBeanServerPermission "newMBeanServer";
permission javax.management.MBeanPermission "*", "registerMBean";
permission java.lang.RuntimePermission "createClassLoader";
permission javax.security.auth.AuthPermission "getSubject";
//following is already in AS 9.1EE but required for other containers
permission javax.management.MBeanTrustPermission "register";
};
// END OF ADDITIONS FOR Access Manager

```

EXAMPLE 2-2 IBM WebSphere Application Server 6.1: Federated Access Manager Permissions in the Server Policy File

```

// ADDITIONS FOR Access Manager
grant {
    permission java.net.SocketPermission "*", "listen,connect,accept,resolve";
    permission java.util.PropertyPermission "*", "read, write";
    permission java.lang.RuntimePermission "modifyThreadGroup";
    permission java.lang.RuntimePermission "setFactory";
    permission java.lang.RuntimePermission "accessClassInPackage.*";
    permission java.util.logging.LoggingPermission "control";
    permission java.lang.RuntimePermission "shutdownHooks";
    permission javax.security.auth.AuthPermission "getLoginConfiguration";
    permission javax.security.auth.AuthPermission "setLoginConfiguration";
    permission javax.security.auth.AuthPermission "modifyPrincipals";
    permission javax.security.auth.AuthPermission "createLoginContext.*";
    permission java.io.FilePermission "<<ALL FILES>>", "read,write,execute,delete";
    permission java.util.PropertyPermission "java.util.logging.config.class", "write";
    permission java.security.SecurityPermission "removeProvider.SUN";

```

EXAMPLE 2-2 IBM WebSphere Application Server 6.1: Federated Access Manager Permissions in the Server Policy File *(Continued)*

```

permission java.security.SecurityPermission "insertProvider.SUN";
permission javax.security.auth.AuthPermission "doAs";
permission java.util.PropertyPermission "java.security.krb5.realm", "write";
permission java.util.PropertyPermission "java.security.krb5.kdc", "write";
permission java.util.PropertyPermission "java.security.auth.login.config", "write";
permission java.util.PropertyPermission "user.language", "write";
permission javax.security.auth.kerberos.ServicePermission "*", "accept";
permission javax.net.ssl.SSLPermission "setHostnameVerifier";
permission java.security.SecurityPermission "putProviderProperty.IAIC";
permission java.security.SecurityPermission "removeProvider.IAIC";
permission java.security.SecurityPermission "insertProvider.IAIC";
permission java.lang.RuntimePermission "setDefaultUncaughtExceptionHandler";
permission javax.management.MBeanServerPermission "newMBeanServer";
permission javax.management.MBeanPermission "*", "registerMBean";
permission java.lang.RuntimePermission "createClassLoader";
permission javax.security.auth.AuthPermission "getSubject";
//following is already in AS 9.1EE but required for other containers
permission javax.management.MBeanTrustPermission "register";
};
// END OF ADDITIONS FOR Access Manager

```

EXAMPLE 2-3 Glassfish Application Server: Federated Access Manager Permissions in the Server Policy File

```

// ADDITIONS FOR Access Manager
grant {
    permission java.net.SocketPermission "*", "listen,connect,accept,resolve";
    permission java.util.PropertyPermission "*", "read, write";
    permission java.lang.RuntimePermission "modifyThreadGroup";
    permission java.lang.RuntimePermission "setFactory";
    permission java.lang.RuntimePermission "accessClassInPackage.*";
    permission java.util.logging.LoggingPermission "control";
    permission java.lang.RuntimePermission "shutdownHooks";
    permission javax.security.auth.AuthPermission "getLoginConfiguration";
    permission javax.security.auth.AuthPermission "setLoginConfiguration";
    permission javax.security.auth.AuthPermission "modifyPrincipals";
    permission javax.security.auth.AuthPermission "createLoginContext.*";
    permission java.io.FilePermission "<<ALL FILES>>", "read,write,execute,delete";
    permission java.util.PropertyPermission "java.util.logging.config.class", "write";
    permission java.security.SecurityPermission "removeProvider.SUN";
    permission java.security.SecurityPermission "insertProvider.SUN";
    permission javax.security.auth.AuthPermission "doAs";
    permission java.util.PropertyPermission "java.security.krb5.realm", "write";
    permission java.util.PropertyPermission "java.security.krb5.kdc", "write";
    permission java.util.PropertyPermission "java.security.auth.login.config", "write";
    permission java.util.PropertyPermission "user.language", "write";

```

EXAMPLE 2-3 Glassfish Application Server: Federated Access Manager Permissions in the Server Policy File *(Continued)*

```

permission javax.security.auth.kerberos.ServicePermission "*", "accept";
permission javax.net.ssl.SSLPermission "setHostnameVerifier";
permission java.security.SecurityPermission "putProviderProperty.IAIC";
permission java.security.SecurityPermission "removeProvider.IAIC";
permission java.security.SecurityPermission "insertProvider.IAIC";
permission java.lang.RuntimePermission "setDefaultUncaughtExceptionHandler";
permission javax.management.MBeanServerPermission "newMBeanServer";
permission javax.management.MBeanPermission "*", "registerMBean";
permission java.lang.RuntimePermission "createClassLoader";
permission javax.security.auth.AuthPermission "getSubject";
//following is already in AS 9.1EE but required for other containers
permission javax.management.MBeanTrustPermission "register";
};
// END OF ADDITIONS FOR Access Manager

```

Deploying the Federated Access Manager WAR (fam.war) File

Deploy the Federated Access Manager WAR (fam.war) file using the web container administration console or deploy command.

▼ To Deploy the Federated Access Manager WAR (fam.war) File

- 1 **Check the *Federated Access Manager Release Notes* on the OpenSSO project site for the web container you are using:**

<https://opensso.dev.java.net/public/use/docs/fampdf/index.html>.

For example, if the Java security manager is enabled for the web container, you must add Federated Access Manager Permissions to the server policy file, as described in “[Adding Federated Access Manager Permissions to the Server Policy File](#)” on page 19.

- 2 **Login as a user who has the following privileges:**
 - Access to the Federated Access Manager web container administration console, if you plan to deploy fam.war using the console.
or
 - The capability to execute the web container's deploy command-line utility, if you plan to deploy fam.war using the CLI.
- 3 **If necessary, copy fam.war to the server where you want to deploy Federated Access Manager.**

4 Deploy fam.war using either the web container administration console or deploy command.

If the Federated Access Manager web container administration console includes the option to deploy a WAR file, this method is usually the simplest one to use.

Otherwise, use the web container deploy command. For example, the following command deploys fam.war on the Application Server 9.1 web container on Solaris systems:

```
# cd /opt/SUNWappserver/appserver/bin
# ./asadmin deploy --user admin --passwordfile /tmp/pwdfile
--port 4848 zip_root/fam/deployable-war/fam.war
```

where:

- *zip_root* is where you unzipped the fam.zip file. Or, if you copied fam.war to a different location, use that location in the command.
- /tmp/pwdfile is the Application Server 9.1 password file. This ASCII text file contains the AS_ADMIN_PASSWORD variable set to the administrator password.

Next Steps Continue with [Chapter 3, “Configuring Federated Access Manager Using the Configurator.”](#)

Creating and Deploying Specialized Federated Access Manager WAR Files

In addition to a Federated Access Manager full server deployment, you can also create and deploy the following specialized WAR files:

- Distributed Authentication UI Server: [Chapter 6, “Deploying a Distributed Authentication UI Server”](#)
- Federated Access Manager Administration Console only: [Chapter 7, “Installing the Federated Access Manager Console Only”](#)
- Federated Access Manager server without the Administration Console: [Chapter 8, “Installing Federated Access Manager Server Only”](#)
- Federated Access Manager client SDK: [Chapter 9, “Installing the Federated Access Manager Client SDK”](#)
- Federated Access Manager Identity Provider (IDP) Discovery Service

Uninstalling a Federated Access Manager Server Deployment

This scenario applies to a full Federated Access Manager server deployment and a Federated Access Manager server only (no console) deployment.

▼ To Uninstall a Federated Access Manager Server Deployment

- 1 **Undeploy `fam.war` in the web container using the web container administration console or command-line utility.**

On Windows systems, you might first need to stop the web container.

- 2 **Remove the following directories and all of their contents:**

- `/fam`
- `/AccessManager`

- 3 **Optionally, remove the `fam.zip` and extracted files.**

Configuring Federated Access Manager Using the Configurator

SunTM Federated Access Manager includes the Configurator to perform the initial configuration of a Federated Access Manager server instance:

- [“Starting the Configurator” on page 25](#)
- [“Configuring Federated Access Manager With the Default Configuration” on page 26](#)
- [“Configuring Federated Access Manager With a Custom Configuration” on page 28](#)

Starting the Configurator

▼ To Start the Configurator

Before You Begin If you plan to use Sun Java System Directory Server to store configuration or user data, Directory Server must be installed and running before you launch the Configurator.

1 Launch Federated Access Manager.


When you access Federated Access Manager for the first time, you will be directed to the Configurator, where you will be guided through the Federated Access Manager setup process.

To launch Federated Access Manager, specify the following URL in your browser:

protocol://host.domain:port/fam

For example: `http://fam.example.com:8080/fam`

The Configurator starts and display the **Configuration Options** page:

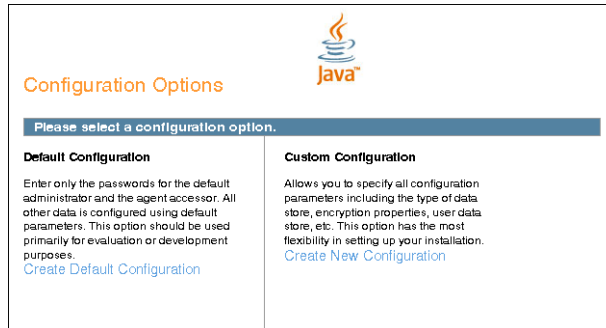

2 Select the configuration option:

- **Default Configuration:** You specify and confirm passwords for the Federated Access Manager administrator (amAdmin) and the default agent (amldapuser), which is the user that connects to the embedded data store. The Configurator uses default values for the other configuration settings.

Click **Create Default Configuration** and continue with “[Configuring Federated Access Manager With the Default Configuration](#)” on page 26.

or

- **Custom Configuration:** You specify the configuration settings that meet the specific requirements for your deployment (or accept the default settings).

Click **Create New Configuration** and continue with “[Configuring Federated Access Manager With a Custom Configuration](#)” on page 28.

Considerations for determining the configuration option include:

- Choose **Default Configuration** for development environments or simple demonstration purposes when you just want to evaluate Federated Access Manager features.
- Choose **Custom Configuration** for production and more complex environments. For example, a multi-server installation with several Federated Access Manager instances behind a load balancer.

Configuring Federated Access Manager With the Default Configuration

In this scenario, you launched the Configurator and clicked **Create Default Configuration**.

▼ To Configure Federated Access Manager With the Default Configuration

- 1 On the Default Configuration Options page, enter and confirm the following passwords.

Federated Access Manager Configurator

Default Configuration Option

Use this option for a quick setup. Only the super user name and agent user name are required. All other configuration parameters are defaulted for you. The user and agent passwords must be different values.

* Indicates required field

Default User [amAdmin]

* Password

* Confirm

Default Agent [amldapuser]

* Password

* Confirm

Create Configuration Cancel

- **Default User** (amAdmin) is the Federated Access Manager administrator.
- **Default Agent** (amldapuser) is the user that connects to the embedded data store.

- 2 Click **Create Configuration** to continue.

Next Steps When the configuration is complete, the Configurator displays a link to redirect you to the Federated Access Manager Administration Console to perform any additional configuration required for your deployment.

If a problem occurred during the configuration, the Configurator displays an error message. If you can, correct the error and retry the configuration. Also, check the web container log files to help determine the problem.

Configuring Federated Access Manager With a Custom Configuration

In this scenario, you launched the Configurator and clicked **Create New Configuration**.

▼ To Configure Federated Access Manager With a Custom Configuration

- 1 On the **Default User Passwords** page, enter and confirm the `amAdmin` password.

The screenshot shows the 'Federated Access Manager Configurator' window with the 'Custom Configuration Option' selected. The left sidebar lists the configuration steps: General (selected), Server Settings, Configuration Store, User Store, Site Configuration, Agent Information, and Summary. The main area displays 'Step 1: General' with instructions to enter the password for the default user, amAdmin, which must be at least 8 characters long. A red asterisk indicates required fields. Below the instructions is a 'Default User Passwords' section with two input fields: 'Password' and 'Confirm', both marked with a red asterisk. At the bottom, there are 'Previous', 'Next', and 'Cancel' buttons.

Click **Next** to continue.

- 2 On the **Server Settings** page, specify the Federated Access Manager server information:

Sun Federated Access Manager Configurator

Custom Configuration Option

1. General
→ **Server Settings**
3. Configuration Store
4. User Store
5. Site Configuration
6. Agent Information
7. Summary

Step 2: Server Settings
Confirm the following settings to use for the server.
* Indicates required field

Server Settings

* Server URL: ☒ OK

* Cookie Domain: ☒ OK

* Platform Locale:

* Configuration Directory:

Previous Next Cancel

- **Server URL** is the host server where you deployed Federated Access Manager. It can be one of the following values:
 - localhost
 - Fully qualified domain name (FQDN). For example:
http://famhost.example.com:8080

If you plan to use the Federated Access Manager client SDK or a policy agent, you must specify the FQDN.

The default is the host where you deployed the fam.war file.

- **Cookie Domain** is the name of the trusted DNS domain that Federated Access Manager returns to a browser when it grants a single sign-on (SSO) token to a user.
Specify a value only if the FQDN is used as the Server URL. For example, if the FQDN for Server URL is http://fam.example.com:8080, the value is .example.com.
- **Platform Locale** is the default language subtype for Federated Access Manager. The default is en_US (US English).
- **Configuration Directory** is the location of the Federated Access Manager configuration directory.
Important: The runtime user of the web container instance must have write access to the location where this directory will be created. For example, if the web container instance is running as the websrvd user, then the websrvd user must be able to write to the configuration directory.

Click **Next** to continue.

3 Specify the Configuration Store Settings.

The screenshot shows the 'Federated Access Manager Configurator' window with the 'Custom Configuration Option' tab selected. The left sidebar lists steps: 1. General, 2. Server Settings, 3. Configuration Store (selected), 4. User Store, 5. Site Configuration, 6. Agent Information, and 7. Summary. The main area is titled 'Step 3: Configuration Store' and includes a note: 'FAM can be configured against an existing deployment. Choose first instance if this is the first instance.' Below this, there are two radio buttons: 'First Instance' (selected) and 'Add to Existing Deployment?'. A note '* Indicates required field' is present. The 'Configuration Store Details' section contains the following fields:

- Data Store Type: ☒ Embedded (Open DS) ☐ External (Sun Java System DS)
- * Host Name: localhost
- * Port: 50389
- * Encryption Key: tpbJNLkIGmu5OHTDTUEMasU+EMt
- * Root Suffix: dc=opensso,dc=java,dc=net

At the bottom, there are 'Previous', 'Next', and 'Cancel' buttons.

Check whether the instance you are configuring is the **First Instance** (or only instance) or if you want to **Add to an Existing Deployment**.

If you check **Add to an Existing Deployment**, the Configurator displays the following page. Enter the **Server URL**.

Note – If you are configuring a second instance in a Federated Access Manager site and the first instance in the site is SSL-enabled, you must import the root CA certificate of the server certificate of the first Federated Access Manager instance into the second Federated Access Manager instance's web container's JVM key store.

By default, the JDK key store is the `/jre/lib/security/cacerts` file. For example, to import a root CA certificate to this key store:

```
keytool -import -v -alias -keystore /jre/lib/security/cacerts -storepass
changeit -file CAcert.crt
```

Then, to verify that the root CA certificate was stored correctly in the key store:

```
keytool -list -keystore /jre/lib/security/cacerts -storepass changeit
```

After you import the certificate, restart the web container for the second instance.

Federated Access Manager Configurator

Custom Configuration Option

1. General
2. Server Settings
→ 3. Configuration Store
4. User Store
5. Site Configuration
6. Agent Information
7. Summary

Step 3: Configuration Store

FAM can be configured against an existing deployment. Choose first instance if this is the first instance.

☐ First Instance ☒ Add to Existing Deployment? * Indicates required field

Configuration Store Details

* Server URL

URL of the existing FAM server. ex: http://server.co.com:8080/opensso

Previous Next Cancel

Configuration Store Details page:

- **Data Store Type**
 - **Embedded** uses stores Federated Access Manager configuration data in the embedded data store under the `/configuration_directory/opensso` directory on the local server.
 - **External (Sun Java System DS)** stores Federated Access Manager configuration data in Sun Java System Directory Server.
- **Port** is the directory server port number. Default is 50389.
- **Encryption Key** is a random number used to encrypt passwords. Either accept the default encryption key value or specify a new value. The encryption key must be at least 12 characters.

Important: If you are deploying multiple Federated Access Manager instances in a multiple server deployment, you must use the same password encryption key value for each instance.

- **Root Suffix** is the directory server initial or root suffix.

Click **Next** to continue.

4 Specify the User Store Settings.

- **Embedded** stores user data in the embedded data store.
- **Remote Directory** stores user data in Sun Java System Directory Server.

Use Configuration Store Settings? To use the same values as the configuration data store, check this option.

User Store Details:

- **SSL Enabled:** Check if you want to use LDAPS to connect to the directory server acting as the user data store.

Note – Before you continue with the configuration, the JVM of the web container instance on which Federated Access Manager is deployed must trust the root CA certificate of the certificate on the LDAPS-enabled directory server. The root CA certificate for the directory server certificate must be imported into the web container JVM's trust store.

The default trust store is `/jre/lib/security/cacerts`. If this certificate is not imported, use the `keytool` utility to import the directory server root CA. For example, to import a root CA certificate to this key store:

```
keytool -import -v -alias -keystore /jre/lib/security/cacerts -storepass
changeit -file CACert.crt
```

Then, verify that the root CA certificate was stored correctly in the key store:

```
keytool -list -keystore /jre/lib/security/cacerts -storepass changeit
```

After you import the certificate, restart the web container.

- **Directory Name** is the hostname of the directory server that will serve as the user store.
- **Port** is the user directory server port number. Default is 389. If **SSL Enabled** is checked the **Port** value should be the LDAPS port of the directory server instance.
- **Root Suffix** is the user directory server initial or root suffix.

- **Login ID** is the user who has unlimited access the user directory server.
- **Password** is the password for the user specified in Login ID.
- **Store Type:**
 - **LDAP with FAM Schema:** The directory server already has the Federated Access Mnanager schema loaded.
 - **Generic LDAP:** The directory server does not have the Federated Access Mnanager schema loaded.

Click **Next** to continue.

5 Answer the following question on the Site Configuration page:

Will this instance be deployed behind a load balancer as part of a site configuration?

If **No**, click **Next** to continue.

If **Yes**, specify the **Site Configuration Details**:

- **Site Name** is the name of the new site.
- **Primary URL** is the URL of the load balancer in the site.

Click **Next** to continue.

6 Specify the Default Agent (UrlAccessAgent).

The screenshot shows the 'Sun Federated Access Manager Configurator' window. The left sidebar lists steps: 1. General, 2. Server Settings, 3. Configuration Store, 4. User Store, 5. Site Configuration, 6. Agent Information (selected), and 7. Summary. The main area is titled 'Step 6: Default Agent User' with a sub-header 'Agent User'. Below this, it says 'Default Agent (UrlAccessAgent)' and 'This setting is used by the FAM agents for retrieving their properties.' There are two input fields: 'Password' and 'Confirm', both marked with a red asterisk indicating they are required. At the bottom, there are 'Previous', 'Next', and 'Cancel' buttons.

Enter and confirm the **Default Agent (UrlAccessAgent)** password. Federated Access Manager agents use the Default Agent user to retrieve properties.

Click **Next** to continue.

7 Check the Summary page:

The screenshot shows the 'Sun Federated Access Manager Configurator' window at the 'Summary' step. The left sidebar shows steps 1 through 7, with 'Summary' selected. The main area is titled 'Configurator Summary Details' with a sub-header 'Configurator Summary Details'. Below this, it says 'Take a moment to review the settings below. If any values are not correct you may go back and modify the settings prior to configuration.' There are three sections: 'Configuration Store Details' (SSL Enabled: No, Host Name: localhost, Listening Port: 50389, Root Suffix: dc=opensso,dc=java,dc=net), 'User Store Details' (Using Configuration Store Settings), and 'Site Configuration Details' (This instance is not setup behind a load balancer). At the bottom, there are 'Previous', 'Create Configuration', and 'Cancel' buttons.

- If the settings in the summary are correct, click **Create Configuration**.

- To make changes, click **Previous** or **Edit** to return to previous pages to make changes to your configuration (or click **Cancel** to start over).

Next Steps When the configuration is complete, the Configurator displays a link to redirect you to the Federated Access Manager Administration Console to perform any additional configuration required for your deployment.

Login to the Console as `amAdmin` using the password you specified during the initial configuration using the Configurator.

The Console includes Common Tasks to help you configure common deployment scenarios.

For information about the Common Tasks as well as other configuration you can do in the Console, see the Console online Help.

If a problem occurred during the configuration, the Configurator displays an error message. If you can, correct the error and retry the configuration.

Also, check the web container log files to help determine the problem. In some cases, there might be an `amSetupServlet` debug log (`/debug/amSetupServlet`) containing errors or exceptions.

Installing the Federated Access Manager Utilities and Scripts

The Sun™ Federated Access Manager ZIP (`fam.zip`) file includes utilities, scripts, libraries, and other supporting files in the following ZIP files:

- `famAdminTools.zip` contains the files to run the Federated Access Manager command-line utilities and scripts such as `famadm`, `amtune`, and `ampassword`.

See [“Installing the Federated Access Manager Utilities and Scripts in the `famAdminTools.zip` File” on page 37](#).

- `famSessionTools.zip` contains the scripts and supporting files to install Sun Java System Message Queue and the Oracle Berkeley DB, which then allows you to configure multiple Federated Access Manager instances for session failover.

For information about the `famSessionTools.zip` file and how to configure session failover, see [Chapter 5, “Implementing Federated Access Manager Session Failover.”](#)

This chapter also describes [“Running the Unix Authentication Helper \(`amunixd`\)” on page 39](#) and [“Uninstalling the Federated Access Manager Utilities and Scripts” on page 40](#)

Installing the Federated Access Manager Utilities and Scripts in the `famAdminTools.zip` File

After you download and unzip the `fam.zip` file, the `famAdminTools.zip` file is available in the `zip_root/fam/tools` directory.

The following table describes the layout after you unzip the `famAdminTools.zip` file. The directory where you unzip `famAdminTools.zip` is represented by `tools_zip_root`.

TABLE 4-1 famAdminTools.zip File Layout

<i>tools_zip_root</i> File or Directory	Description
README.setup	Description of the famAdminTools.zip file.
license.txt	License agreement.
setup	Script to install the tools on Solaris and Linux systems.
setup.bat	Script to install the tools on Windows systems.
/lib	JAR files required to run the scripts.
/locale	Properties files required to run the scripts.
/mo	Files for localizing the amtune scripts
/template	Script templates for Solaris, Linux, and Windows systems.

▼ To Install the Federated Access Manager Utilities and Scripts in the famAdminTools.zip File

Before You Begin Before executing the setup or setup.bat script, make sure that the JAVA_HOME environment variable points to a JDK of version 1.5 or greater.

- 1 **Create a new directory to unzip the famAdminTools.zip file (represented by *tools_zip_root* in the previous table).**
- 2 **Unzip the famAdminTools.zip file in the new directory.**
- 3 **In the directory where you unzipped the famAdminTools.zip file, run the setup script:**

On Solaris and Linux systems, run the setup script as follows:

```
./setup -p famconfig
```

or

```
./setup --path famconfig
```

where *famconfig* is the path to the Federated Access Manager configuration directory. The configuration directory was specified during the initial configuration using the Configurator.

Considerations:

- On Windows systems, run the setup.bat script.
- If you run the setup script without any options, the script prompts you for the path to the Federated Access Manager configuration directory.

- If the path to the Federated Access Manager configuration directory contains a space, include double quotes (") around the path.
- To display the help for the setup script:
./setup -h or ./setup --help

Next Steps You can now run the Federated Access Manager CLI utilities and scripts from the following directory:

`tools_zip_root/faminstance_deploy_uri/bin`

where:

- `tools_zip_root` is the directory where you unzipped the `famAdminTools.zip` file.
- `faminstance_deploy_uri` is the name of the Federated Access Manager instance URI. For example: `fam`

For information about the Federated Access Manager CLI utilities, see the *Federated Access Manager 8.0 Administration Guide*.

Running the Unix Authentication Helper (amunxd)

Federated Access Manager includes the helper files for the Unix authentication module in the `zip_root/fam/tools/helpers` directory.

The Federated Access Manager Unix authentication module requires the `amunxd` daemon for Unix authentication. The `amunxd` daemon runs on both Solaris SPARC and Solaris x86 systems.

The Unix authentication module attributes are:

- Configuration Port: Port that the `amunxd` daemon listens to at startup for configuration information. Default: 58946
- Authentication Port: Port that the `amunxd` daemon listens for authentication requests. Default: 57946
- Timeout: Minutes to complete the authentication. Default: 3
- Threads: Number of simultaneous authentication sessions. Default: 5
- Authentication Level: How much to trust an authentication mechanism. Default: 0
- PAM (Pluggable Authentication Module) Service Name: Configuration or stack that is shipped for the operating system and used for UNIX authentication. Default: other

▼ To Run the Unix Authentication Helper (amunxd)

- 1 To change any of the Unix authentication module configuration values, use the Federated Access Manager administration Console:
 - a. Login into the Console as `amadmin`.
 - b. Click Configuration, Authentication, and then Unix.
 - c. Set the Unix authentication attributes, as required for your deployment.
For Solaris systems, PAM Service Name must be `other`.
For Linux systems, PAM Service Name must be `password`.
 - d. Click Save.
- 2 Start the `amunxd` daemon by running the `amunxd` script in the `zip_root/fam/tools/helpers/bin` directory.
For example:

```
cd zip_root/fam/tools/helpers/bin
./amunxd
```

Uninstalling the Federated Access Manager Utilities and Scripts

▼ To Uninstall the Federated Access Manager Utilities and Scripts

- 1 Remove the directory and its contents where `famAdminTools.zip` was extracted.
- 2 Optionally, remove the `famAdminTools.zip` file.

Implementing Federated Access Manager Session Failover

SunTM Federated Access Manager provides a web container independent session failover implementation using Sun Java System Message Queue (Message Queue) as the communications broker and the Oracle Berkeley DB as the session store database. This chapter describes these topics:

- [“Overview of Federated Access Manager Session Failover” on page 41](#)
- [“Installing and Configuring the Federated Access Manager Session Failover Components” on page 44](#)
- [“Configuring Session Failover in the Federated Access Manager Console” on page 52](#)

Overview of Federated Access Manager Session Failover

- [“Federated Access Manager Session Failover Components” on page 41](#)
- [“Federated Access Manager Session Failover Flow” on page 44](#)

Federated Access Manager Session Failover Components

A Federated Access Manager session failover deployment scenario includes these components:

- Two or more Federated Access Manager instances running on different host servers and configured as a site.

To configure the Federated Access Manager instances as a site, use one of these methods:

- When you run the Configurator for the Federated Access Manager instances, specify the same Site Name and load balancer Primary URL on the Site Configuration page for each instance. For information, see [“Configuring Federated Access Manager With a Custom Configuration” on page 28](#).

or

- If you did not configure the deployment as a site when you ran the Configurator, use either the Administrator Console or the `famadm` command-line utility to configure the Federated Access Manager instances as a site.
- Load balancer for the Federated Access Manager instances.
- Message Queue brokers, running in cluster mode on different servers.
- Berkeley DB client (`amsessiondb`) and database, running on the same servers as the Message Queue brokers.

Federated Access Manager uses the Oracle Berkeley DB Java Edition as the session data store. For information see

<http://www.oracle.com/database/berkeley-db/je/index.html>.

- Client requests, which can originate from a Web browser, C or Java application using the Federated Access Manager SDK, or a J2EE or web policy agent.
- Federated Access Manager configuration and user data stores (not shown in the figure):
 - Sun Java System Directory Server: All Federated Access Manager instances must access the same Directory Server.
 - Embedded data store: Instances must be configured for replication and act as a single directory server.

The configuration data store must be running and accessible in the deployment.

The following figure shows a session failover deployment with three Federated Access Manager instances. (The Federated Access Manager configuration data store and user data store are not shown.)

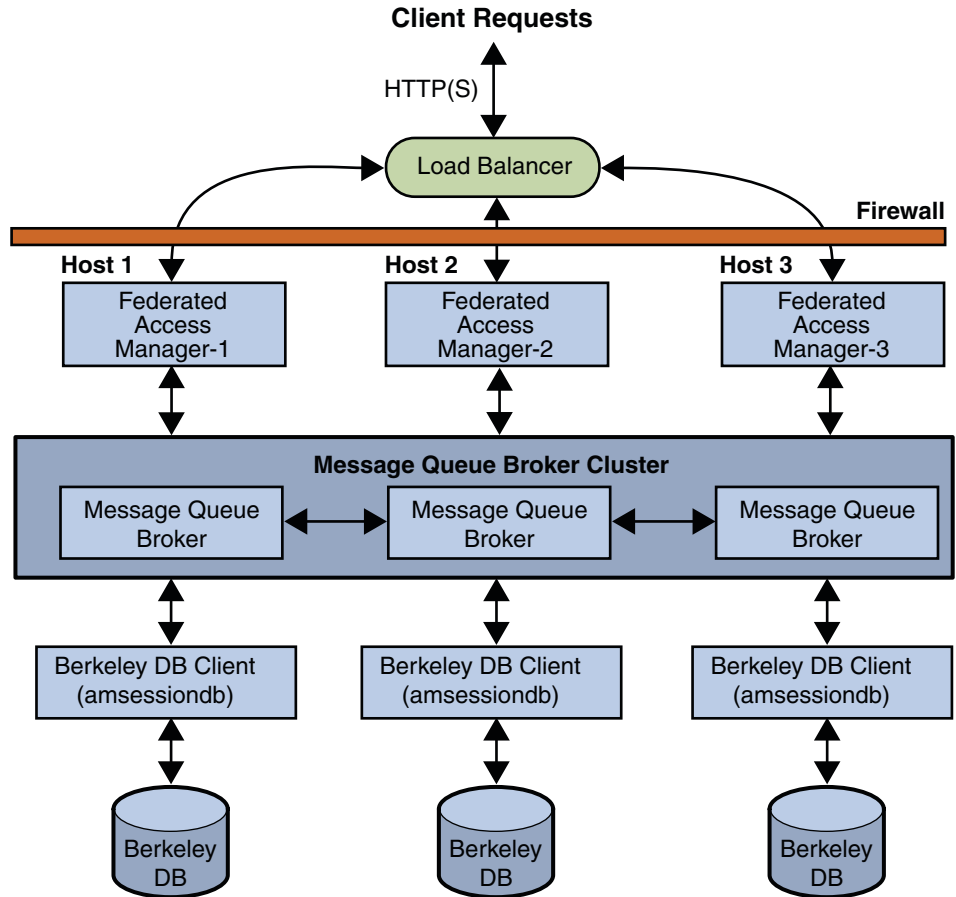


FIGURE 5-1 Federated Access Manager Session Failover Components

Federated Access Manager Session Failover Flow

Federated Access Manager session failover follows the Message Queue publish/subscribe delivery model:

1. When a user initiates, updates, or ends a session, the Federated Access Manager instance publishes a session creation, update, or deletion message to the Message Queue broker cluster.
2. The Berkeley DB client (`amsessiondb`) subscribes to the Message Queue broker cluster, reads the session messages, and stores the session operations in the database.

The Federated Access Manager instances communicate with each other using an internal routing mechanism. If a Federated Access Manager instance goes down due to a single hardware or software problem, a user's session associated with that instance moves to a secondary Federated Access Manager instance, as follows:

1. The secondary Federated Access Manager instance publishes a query request to the Message Queue broker cluster to get the user's session information.
2. The Berkeley DB client (`amsessiondb`) receives the query request, retrieves the corresponding user entry from the session database, and then publishes the user's session information to the Message Queue broker cluster.
3. The secondary Federated Access Manager instance receives the response with the user's session information from the Message Queue broker and continues the session, without losing any session information or requiring the user to login again.

If a Message Queue broker goes down, Federated Access Manager continues to operate in non-session failover mode. When the Message Queue broker is later restarted, Federated Access Manager returns to session failover mode.

For more information about the Message Queue components and the publish/subscribe delivery model, see the *Sun Java System Message Queue 4.1 Technical Overview* in the following collection:

<http://docs.sun.com/coll/1307.3>

Installing and Configuring the Federated Access Manager Session Failover Components

To install and configure the Federated Access Manager session failover components, follow this procedure on each server in the Message Queue broker cluster:

- “Unzipping the `famSessionTools.zip` File” on page 45
- “Running the Session Failover setup Script” on page 46
- “Creating a New User to Connect to the Message Queue Broker (Optional)” on page 47

- “Editing the `amsessiondb` Script (if Needed)” on page 48
- “Encrypting the Message Queue Broker Password Using the `amsfopassword` Script (Required)” on page 48
- “Running the `amsfo` Script to Start and Stop the Session Failover Components” on page 49

Unzipping the `famSessionTools.zip` File

The `famSessionTools.zip` file, which is part of the `fam.zip` file, contains the session failover scripts, JAR, properties, and related files.

▼ To Unzip the `famSessionTools.zip` File

Before You Begin Unzip the `fam.zip` file. The `famSessionTools.zip` file is then available in the `zip_root/fam/tools` directory, where `zip_root` is where you unzipped `fam.zip`.

- 1 **Log in to the server where you want to install and configure the session failover components.**
- 2 **Create a new directory to unzip the `famSessionTools.zip`. For example: `sfo_zip_root`**
- 3 **Copy the `famSessionTools.zip` file to the new directory.**
- 4 **Unzip the `famSessionTools.zip` file in the new directory.**

The following table describes the layout after you unzip the `famSessionTools.zip` file. The directory where you unzip `famSessionTools.zip` is represented by `sfo_zip_root`.

<i>sfo_zip_root</i> File or Directory	Description
<code>README.txt</code>	Description of the <code>famSessionTools.zip</code> file.
<code>setup</code>	Script to install the session tools on Solaris and Linux systems.
<code>setup.bat</code>	Script to install the session tools on Windows systems.
<code>ext</code> directory	<ul style="list-style-type: none"> ■ Message Queue JAR files for Solaris SPARC, Solaris x86, Linux, and Windows systems. ■ Berkeley DB JAR file (<code>je.jar</code>)
<code>lib</code> directory	<ul style="list-style-type: none"> ■ JAR file for the setup scripts (<code>am_session_setup.jar</code>) ■ JAR file for the session API (<code>am_sessiondb.jar</code>)
<code>locale</code> directory	Properties file for the session API (<code>amSessionDB.properties</code>)
<code>template</code> directory	Script templates for Solaris, Linux, and Windows systems.

Running the Session Failover setup Script

The session failover setup script installs these files:

- Sun Java System Message Queue JAR and related files
- Berkeley DB JAR and related files
- `amsfo`, `amsfopassword`, and `amsessiondb` scripts on Solaris and Linux system
`amsfo.pl`, `amsfopassword.bat`, and `amsessiondb.bat` on Windows systems
- `amsfo.conf` session failover configuration file

▼ To Run the Session Failover setup Script

Before You Begin

- The setup script requires Java Runtime Environment (JRE) 1.5 or later. Make sure that your `JAVA_HOME` environment variable points to your JDK installation directory.
- On Solaris and Linux systems, you might need to issue the following command before you run the setup script: `chmod +x setup`

- **In the directory where you unzipped the `famSessionTools.zip` file, run the setup script.**

On Solaris and Linux systems, use this syntax to run the setup script:

`setup -p|--path dirname`

where *dirname* is a directory under the current directory where the setup script places the session failover scripts and related files. If *dirname* does not exist, the script will create the directory for you.

For example: `# ./setup -p sfo`

Considerations:

- On Windows systems, run the `setup.bat` script.
- If you run the setup script without any options, the script prompts you for a path.
- If the path contains a space, run the setup script without any options and then provide the path when you are prompted.
- To display the help for the setup script: `setup -h|--help`

The setup (or `setup.bat`) script installs the session failover scripts and related files in the following directories:

<i>sfo_zip_root</i> Directory	Script or File
<code>jqmq/jmq</code>	Message Queue scripts and related files
<i>dirname</i> /config/lib	<code>amsfo.conf</code> session failover configuration file

<i>sfo_zip_root</i> Directory	Script or File
<i>dirname/bin</i>	<ul style="list-style-type: none"> ■ Scripts to start and stop the Message Queue broker and <code>amssessiondb</code> client: <ul style="list-style-type: none"> ■ <code>amsfo</code> on Solaris and Linux systems ■ <code>amsfo.pl</code> on Windows systems ■ Scripts to run the Berkeley DB client (called by <code>amsfo</code>): <ul style="list-style-type: none"> ■ <code>amssessiondb</code> on Solaris and Linux systems ■ <code>amssessiondb.bat</code> on Windows systems ■ Scripts to encrypt the Message Queue broker user password: <ul style="list-style-type: none"> ■ <code>amsfopassword</code> on Solaris and Linux systems ■ <code>amsfopassword.bat</code> on Windows systems

Creating a New User to Connect to the Message Queue Broker (Optional)

Federated Access Manager requires a user and password to connect to the Message Queue broker. Message Queue provides the default guest user with password `guest` to connect to the broker.

However, if you don't want to use the guest user, you can create a new user and password using the Message Queue User Manager utility (`imqusermgr`).

The following example creates a new user named `fammqusr` on a Solaris system.

▼ To Create a New User to Connect to the Message Queue Broker

- 1 **Change to the Message Queue `/bin` directory. For example:**

```
# cd sfo_zip_root/sfo/jmq/bin
```

- 2 **Create a new broker instance named `mqbroker`:**

```
# ./imqbrokerd -name mqbroker -port 7777 &
```

- 3 **Check to make sure that the new broker instance is running:**

```
netstat -an | grep 7777
```

- 4 **Create the new Message Queue user and password:**

```
# ./imqusermgr add -u fammqusr -p mq-password
```

5 Disable the guest user so guest will not be able to access Federated Access Manager:

```
# ./imqusermgr update -u guest -a false
```

6 Stop the broker instance. For example:

```
# ./imqbrokerd -name mqbroker -remove instance
```

See Also For more information, see “Using the User Manager Utility” in *Sun Java System Message Queue 4.1 Administration Guide*.

Editing the `amsessiondb` Script (if Needed)

The `amsfo` script calls `amsessiondb` to start the Berkeley DB client (`amsessiondb`), create the database, and set specific database values. The `amsessiondb` script contains variables that specify various default paths and directories. For example:

```
JAVA_HOME=/usr/jdk/entsys-j2se/  
AM_HOME=/fam/tools/sfo_zip_root/sfo  
JMS_JAR_PATH=/usr/share/lib  
IMQ_JAR_PATH=/usr/share/lib  
BDB_JAR_PATH=/usr/share/db.jar  
BDB_SO_PATH=/usr/lib
```

If any of these components are not installed in the directories shown in the `amsessiondb` script, edit the script and set each variable, as needed, to the path where the component is installed.

Encrypting the Message Queue Broker Password Using the `amsfopassword` Script (Required)

The `amsfopassword` script accepts the Message Queue broker password in clear text and returns the encrypted password in a file. You can then use this file as input to the `amsfo` script by setting the `PASSWORDFILE` variable in the `amsfo.conf` configuration file.

To run the `amsfopassword` script, use the following syntax:

```
amsfopassword  
-f|-passwordfile password-file -e|--encrypt clear-text-password
```

- *password-file* is the path to the destination file where `amsfopassword` stores the encrypted password.
- *clear-text-password* is the clear text password that `amsfopassword` encrypts.

To display help, specify `-h|--help`.

▼ To Encrypt the Message Queue Broker Password Using the `amsfopassword` Script

- 1 On the server where you ran the setup script, run the `amsfopassword` script.

For example, on a Solaris system:

```
# cd /sfo_zip_root/sfo/bin
# ./amsfopassword -f /sfo_zip_root/sfo/mqpassword -e cleat-text-password
```

You are not required to run `amsfopassword` as superuser (root).

- 2 Use the encrypted password in the `mqpassword` file as input to the `amsfo` script by setting the `PASSWORDFILE` variable in the `amsfo.conf` file.

For information about the `PASSWORDFILE` variable, see [Table 5–1](#).

Running the `amsfo` Script to Start and Stop the Session Failover Components

The `amsfo` script (or `amsfo.pl` on Windows systems) reads variables in the `amsfo.conf` configuration file and then performs these functions:

- Starts or stops the Message Queue broker and the Berkeley DB client (`amsessiondb`) on each server in the broker list (`CLUSTER_LIST` variable).
- Deletes and then recreates the Berkeley DB database, if requested.
- Writes the `amsessiondb.log`, `jmql.pid`, and `amdb.pid` files in the `/tmp/amsession/logs/` directory. The default log directory is determined by the `LOG_DIR` variable in the `amsfo.conf` file.

To run the script on Windows systems, Active Perl version 5.8 or later is required.

To run `amsfo`, use the following syntax:

```
amsfo configuration-file start | stop
```

where *configuration-file* is the path to the `amsfo.conf` file.

The following table describes the variables in the `amsfo.conf` file. Some variables are set when you run the setup (or `setup.pl`) script. Before you run the `amsfo` script, set other variables as required for your deployment.

TABLE 5-1 amsfo.conf Configuration File Parameters

Variable	Description
AM_HOME_DIR	<p>Specifies the following directory: <i>sfo_zip_root/dirname</i></p> <p>where:</p> <ul style="list-style-type: none"> ■ <i>sfo_zip_root</i> is where you unzipped the <code>famSessionTools.zip</code> file. ■ <i>dirname</i> is the name you specified when you ran the setup script to install the session failover scripts and related files.
AM_SFO_RESTART	<p>Specifies (<code>true</code> or <code>false</code>) whether the script should automatically restart the Berkeley DB client (<code>amsessiondb</code>).</p> <p>The default is <code>true</code> (restart the <code>amsessiondb</code> client).</p>
CLUSTER_LIST	<p>Specifies the Message Queue broker list participating in the cluster. The format is:</p> <p><i>host1:port,host2:port, ... hostn:port</i></p> <p>For example:</p> <p><code>mq1.example.com:7777,mq2.example.com:7777, mq3.example.com:7777</code></p> <p>You can deploy the Message Queue brokers on the same servers that are running Federated Access Manager instances. However, for improved performance, consider installing the brokers on different servers.</p>
DATABASE_DIR	<p>Specifies the directory where the session database files will be created.</p> <p>Default: <code>/tmp/amsession/sessiondb</code></p>
DELETE_DATABASE	<p>Specifies (<code>true</code> or <code>false</code>) whether the script should delete and then create a new database each time the Berkeley DB client (<code>amsessiondb</code>) is restarted.</p> <p>Default: <code>true</code></p>
LOG_DIR	<p>Specifies the location of the log directory.</p> <p>Default: <code>/tmp/amsession/logs</code></p>
START_BROKER	<p>Specifies (<code>true</code> or <code>false</code>) whether the Message Queue broker should be started with the <code>amsessiondb</code> process on the same server:</p> <p><code>true</code> - The Message Queue broker will run on the same server as the <code>amsessiondb</code> process.</p> <p><code>false</code> - The Message Queue broker and the <code>amsessiondb</code> process will run on different servers.</p> <p>Default: <code>true</code></p>

TABLE 5-1 `amsfo.conf` Configuration File Parameters (Continued)

Variable	Description
<code>BROKER_INSTANCE_NAME</code>	Specifies the name of the Message Queue broker instance to start. For example: <code>mqbroker</code>
<code>BROKER_PORT</code>	Specifies the port for the local Message Queue broker instance. Default: <code>7777</code>
<code>BROKER_VM_ARGS</code>	Specifies the Java VM arguments. Set to a maximum of <code>1024m</code> , based on the system resources. Default: <code>"-Xms256m -Xmx512m"</code>
<code>USER_NAME</code>	Specifies the user name used to connect to the Message Queue broker. Default: <code>guest</code> If you specified a different user name, as described in “Creating a New User to Connect to the Message Queue Broker (Optional)” on page 47, set <code>USER_NAME</code> to that name.
<code>PASSWORDFILE</code>	Location of the password file that contains the encrypted password used to connect to the Message Queue broker. To generate the encrypted password, use the <code>amsfopassword</code> script, as described in “Encrypting the Message Queue Broker Password Using the <code>amsfopassword</code> Script (Required)” on page 48. Default: <code>\$fo_zip_root/dirname/.password</code>
<code>AMSESSIONDB_ARGS</code>	<code>amsessiondb</code> script arguments. The <code>amsessiondb</code> script is called by the <code>amsfo</code> (or <code>amsfo.pl</code>) script. To determine the list of arguments, run: <code>amsessiondb -h</code>
<code>lbServerPort</code>	Specifies the port for the load balancer. Default: <code>80</code>
<code>lbServerProtocol</code>	Specifies the protocol (<code>http</code> or <code>https</code>) used to access the load balancer. The default is <code>http</code> .
<code>lbServerHost</code>	Specifies the name of the load balancer. For example: <code>lbhost.example.com</code>
<code>SiteID</code>	Specifies the identifier for the new site (and the load balancer). <code>SiteID</code> can be any value greater than the Server IDs that already exist in the platform server list. Default: <code>10</code>

▼ To Run the `amsfo` Script

Before You Begin Stop each of the Federated Access Manager instances in the session failover deployment.

- 1 **Set the variables in the `amsfo.conf` file, as required for your deployment.**
For a description of all variables, see [Table 5–1](#).
- 2 **Run the `amsfo` script on Solaris or Linux systems or the `amsfo.pl` script on Windows systems.**
For example, to start the session failover components on a Solaris system:

```
# cd /sfo_zip_root/sfo/bin
# ./amsfo /sfo_zip_root/sfo/config/lib/amsfo.conf start
```

The script displays status information as it runs.
- 3 **To check the results, see the `/var/tmp/amsfo.log` file.**

Configuring Session Failover in the Federated Access Manager Console

▼ To Configure Session Failover in the Federated Access Manager Console

Before You Begin If necessary, start each Federated Access Manager instance in the session failover deployment.

- 1 **Log in to the Federated Access Manager Console as `amadmin`.**
- 2 **Click Configuration, Global, and then Session.**
- 3 **Under Secondary Configuration Instance, click the site Name for the session failover configuration.**
- 4 **On the Edit Sub Configuration page, specify the Global Attributes.**
When applicable, use the same values for the corresponding parameters in the `amsfo.conf` configuration file.
 - **Session Store User** is the user that connects to the Message Queue broker. For example: `fammquser`
 - **Session Store Password** (and confirmation) is the password for the user that connects to the Message Queue broker.
 - **Maximum Wait Time** should be the default value of 5000 milliseconds.

- **Database Url** is the Message Queue broker address list, which is the list of Message Queue brokers participating in the cluster. For example:
`mq1.example.com:7777,mq2.example.com:7777,mq3.example.com:7777`
- **Session Failover Enabled** must be Enabled.

5 Check Save and log out of the console.

6 Restart each Federated Access Manager instance in the site for the new session failover values to take effect.

Deploying a Distributed Authentication UI Server

A Sun™ Federated Access Manager Distributed Authentication UI server provides for secure, distributed authentication across two firewalls in a Federated Access Manager deployment.

A Distributed Authentication UI server does not run Federated Access Manager. This server exists only to provide the customizable authentication interface between end users and a Federated Access Manager instance.

Topics in this chapter include:

- [“Distributed Authentication UI Server Overview” on page 55](#)
- [“Generating a Distributed Authentication UI Server WAR File” on page 58](#)
- [“Deploying the Distributed Authentication UI Server WAR File” on page 59](#)
- [“Configuring the Distributed Authentication UI Server” on page 59](#)
- [“Accessing the Distributed Authentication User Interface Web Application” on page 61](#)
- [“Uninstalling a Distributed Authentication UI Server Deployment” on page 62](#)

Distributed Authentication UI Server Overview

- [“Distributed Authentication UI Server Deployment Scenario” on page 55](#)
- [“Requirements for a Distributed Authentication UI Server Deployment” on page 56](#)
- [“Flow for a Distributed Authentication End-User Request” on page 57](#)

Distributed Authentication UI Server Deployment Scenario

You install the Distributed Authentication UI server subcomponent on one or more servers within the DMZ layer of a Federated Access Manager deployment. This subcomponent acts as an authentication interface between end users and the Federated Access Manager instances behind the second firewall, thus eliminating the exposure of the Federated Access Manager service URLs to the end users.

The following figure shows a Distributed Authentication UI server deployment scenario.

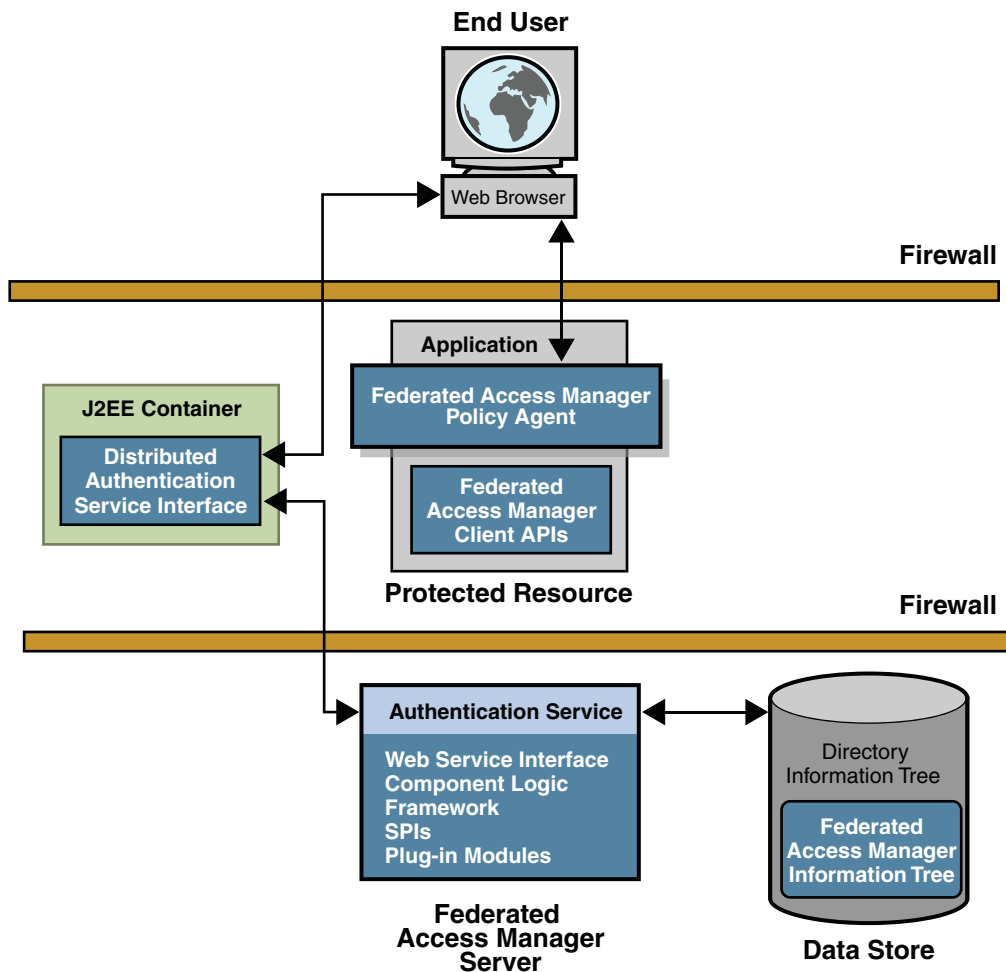


FIGURE 6-1 Distributed Authentication UI Server Deployment Scenario

Requirements for a Distributed Authentication UI Server Deployment

The Distributed Authentication UI server must be installed in a supported web containers, as listed in [“Federated Access Manager Requirements” on page 14](#).

Several other considerations for a Distributed Authentication UI server include:

- If you are deploying multiple Distributed Authentication UI servers behind a load balancer, stickiness is not required for the load balancer to talk to only one Distributed Authentication UI server for authentication process completion.
- The HTTP Basic and MSISDN authentication modules are not supported through the Distributed Authentication UI.

Flow for a Distributed Authentication End-User Request

In a typical deployment using one or more Distributed Authentication UI servers, an end-user request follows this flow:

1. An end user sends an HTTP or HTTPS request from a Web browser to access a protected resource.
2. If the request does not have a cookie containing an SSO token, the Federated Access Manager policy agent issues a redirect to its authentication URL, which is the URL of the Distributed Authentication UI server in the DMZ (usually through a load balancer).
3. The end user follows the redirect and sends the request to the Distributed Authentication UI server.
4. The Distributed Authentication UI server sends the request to a Federated Access Manager instance behind the second firewall to determine the appropriate authentication mechanism.
5. The Federated Access Manager instance determines the appropriate authentication mechanism and then returns the authentication framework to the Distributed Authentication UI server.
6. Using the information from the Federated Access Manager instance, the Distributed Authentication UI server returns a login page to the user's Web browser.
7. The end user replies with the login credentials (such as user name and password) to the Distributed Authentication UI server.
8. The Distributed Authentication UI server uses the Federated Access Manager Client SDK to send the end user's credentials to the Federated Access Manager instance behind the second firewall.
9. Federated Access Manager tries to authenticate the end user using the appropriate authentication method:
 - If the authentication is successful, Federated Access Manager returns the SSO token. The Distributed Authentication UI server sets the session cookie in the browser and then redirects the end user to the protected resource.
 - If the authentication is not successful, Federated Access Manager returns the appropriate error information.

Generating a Distributed Authentication UI Server WAR File

To generate a Distributed Authentication UI server WAR file, use the `jar` command to extract the files from the `fam.war` file and then to generate the specialized WAR file.

▼ To Generate a Distributed Authentication UI Server WAR File

Before You Begin If you have not already done so, download and unzip the `fam.zip` file. You will then need the following files:

- `zip_root/deployable-war/fam.war` is the Federated Access Manager WAR file that contains all components, including the Distributed Authentication UI server files.
- `zip_root/deployable-war/fam-distauth.list` specifies the files that are required to generate a Distributed Authentication UI server WAR file.
- `zip_root/deployable-war/distauth` contains the additional files you will need to deploy and configure a Distributed Authentication UI server.

where `zip_root` is the directory where you unzipped the `fam.zip` file.

For more information about the `fam.war` file, see [“Downloading Federated Access Manager” on page 17](#).

- 1 **Make sure that your `JAVA_HOME` environment variable points to a JDK of version 1.5 or greater.**
- 2 **Create a new staging directory and extract the files from `fam.war` in this staging directory. For example:**

```
# mkdir dastaging
# cd dastaging
# jar xvf zip_root/fam/deployable-war/fam.war
```

- 3 **Create the Distributed Authentication UI server WAR using the files in `fam-distauth.list`:**

```
# cd dastaging
# jar cvf zip_root/fam/deployable-war/famDistauth.war
  @zip_root/fam/deployable-war/fam-distauth.list
```

where `famDistauth.war` is the name of the new Distributed Authentication UI server WAR file.

Note: Some web containers require the Distributed Authentication WAR file name to use the same name as the deployment URI.

- 4 **Update the WAR file created in previous step with the additional files required for the Distributed Authentication UI server WAR. For example:**

```
# cd zip_root/fam/deployable-war/distauth
# jar uvf zip_root/fam/deployable-war/famDistauth.war *
```

You are now ready to configure the new `famDistauth.war`, as described in the next section.

Deploying the Distributed Authentication UI Server WAR File

▼ To Deploy the Distributed Authentication UI Server WAR File

- Before You Begin**
- The web container that you plan to use for the Distributed Authentication UI server must be installed. See [“Requirements for a Distributed Authentication UI Server Deployment” on page 56](#) for a list of the supported web containers.
 - One or more Federated Access Manager full server instances must be running remotely in the deployment.
- 1 **Login as a user who has the following privileges:**
 - Access to the web container administration console, if you plan to deploy Distributed Authentication UI server WAR file using the console.
 - or
 - The capability to execute the web container's deploy command-line utility, if you plan to deploy the WAR file using the CLI.
 - 2 **Make sure that the Distributed Authentication UI server web container is running.**
 - 3 **Deploy the Distributed Authentication UI WAR file using the using the web container administration console or deployment command.**

Configuring the Distributed Authentication UI Server

Federated Access Manager includes the Distributed Authentication UI server Configurator (`distAuthConfigurator.jsp`) to configure a Distributed Authentication UI server after you deploy the WAR file.

▼ To Configure the Distributed Authentication UI Server

- 1 **Make sure that the Distributed Authentication UI server web container is running.**

- 2 **Launch the Distributed Authentication UI server WAR file using the following URL:**

protocol://host.domain:port/distauth_uri

For example: `http://distauth.example.com:8080/famDistauth`

If the Distributed Authentication UI server is not already configured, you will be directed to the Configurator (`distAuthConfigurator.jsp`) page. (If the Distributed Authentication UI server is already configured, you will be directed to the login page.)

- 3 **On the Configurator page, specify the following information:**

- **Server Protocol** is the Federated Access Manager server protocol: `http` or `https`. Default: `http`
Note: If the Distributed Authentication UI Server is being configured to use an SSL-enabled Federated Access Manager server, you must import the root CA certificate for the server certificate on the Federated Access Manager server into the trust store of the web container JVM on which the Distributed Authentication UI Server is being deployed. After you import the certificate, restart the web container instance.
- **Server Host** is the fully qualified host name of the system where Federated Access Manager server is deployed.
- **Server Port** is the Federated Access Manager server port number. Default: `8080`
- **Server Deployment URI** is the URI prefix for accessing the HTML pages, classes, and JAR files associated with Federated Access Manager server.
- **DistAuth Server Protocol** is the protocol (`http` or `https`) used by the Distributed Authentication UI server web container. Default: `http`
- **DistAuth Server Host** is the fully qualified host name where the Distributed Authentication UI server is deployed.
- **DistAuth Server Port** is the port number on DistAuth Server Host where the Distributed Authentication UI server is deployed. Default: `80`
- **DistAuth Server Deployment URI** is the deployment URI that will be used on the host by the Distributed Authentication UI server.
- **DistAuth Cookie Name** is the cookie name used on the host by the Distributed Authentication UI server.
- **Debug directory** is the directory where the debug files will be created.
- **Debug level** is the level for the debug service. Values can be: `error`, `warning`, or `message`. Default: `error`
- **Encryption Key** is the password encryption key.

- **Application user name** is the user name for the Distributed Authentication UI server application. For example: `UrlAccessAgent`
 - **Application user password** is the password of the user for the application.
 - **Confirm Application user password** is confirmation for the password.
- 4 After you have specified all configuration values (or accepted the default values), click **Configure**.
(Or, to reset all values, click **Reset**.)

Next Steps After the configuration finishes, you will get a message showing the location of the `AMDistAuthConfig.properties` configuration file. This file is created in the home directory of the runtime user who owns the web container instance on which the Distributed Authentication UI WAR file is deployed.

Important: It is highly recommended that you change the permissions of this configuration file to limit access to the sensitive configuration information.

Accessing the Distributed Authentication User Interface Web Application

To access the Distributed Authentication UI server application, use the following URL in your browser:

daserver_protocol://daserver_host:daserver_port/dadeploy_uri/UI/Login

Where:

- *daserver_protocol* is the protocol (`http` or `https`) used by the Distributed Authentication UI server web container instance.
- *daserver_host* is the fully qualified host name of the Distributed Authentication UI server.
- *daserver_port* is the port for the Distributed Authentication UI server host.
- *dadeploy_URI* is the deployment URI prefix for the Distributed Authentication UI server. The default value is the URI used to access the Configurator..

For example:

`https://daserver.example.com:80/famDistauth/UI/Login`

Note –

- In a production environment, the Distributed Authentication UI server web application is usually deployed in the DMZ layer. So, always specify the successful redirect URL to an absolute URL. For example:
`https://daserver.example.com:80/famDistauth/UI/Login?
goto=/absolute-successful-redirect-URL/`
 - For testing purposes, if you use the server returned default successful redirect URL (which is the server Federated Access Manager Admin Console URL), make sure that you change this URL from its relative value to the absolute value before your move to a production environment by using the server Administration Console (Authentication Configuration > Properties).
-

Uninstalling a Distributed Authentication UI Server Deployment

▼ To Uninstall a Distributed Authentication UI Server Deployment

- 1 **Undeploy the Distributed Authentication UI server WAR file in the web container using the web container administration console or command-line utility.**

On Windows systems, you might first need to stop the web container.

- 2 **Remove the /FAMDistAuth directory including the AMDistAuthConfig.properties configuration file.**

The /FAMDistAuth directory is located in the home directory of the user running the web container on which the Distributed Authentication UI WAR file is deployed.

- 3 **Remove the debug directory and its contents.**

The location of the debug directory was specified when the Distributed Authentication UI server was configured using the configurator.

Installing the Federated Access Manager Console Only

This chapter describes how to install only the Sun™ Federated Access Manager Administration Console, including:

- “Requirements to Deploy Only the Console” on page 63
- “Generating a Console Only WAR File” on page 63
- “Configuring the Console Only WAR File” on page 64
- “Accessing the Console” on page 66
- “Uninstalling a Federated Access Manager Console Only Deployment” on page 66

Requirements to Deploy Only the Console

To deploy only the Administration Console, your deployment must meet the following requirements:

- You must deploy the Console to a supported web container, as listed in the [“Federated Access Manager Requirements”](#) on page 14.
- One or more Federated Access Manager full server instances must be running remotely in the deployment.

Generating a Console Only WAR File

To generate a console only WAR file, use the `jar` command to extract the files from the `fam.war` file and then to generate the specialized WAR file.

▼ To Generate a Console Only WAR File

Before You Begin Download and unzip the `fam.zip` file. You will then need the following files:

- `zip_root/deployable-war/fam.war` is the Federated Access Manager WAR file that contains all components, including the console files.
- `zip_root/deployable-war/fam-console.list` specifies the files that are required to generate a console only WAR file.
- `zip_root/deployable-war/console` contains additional files you will need to deploy and configure the console.

where `zip_root` is where you unzipped the `fam.zip` file.

For more information about the `fam.war` file, see [“Downloading Federated Access Manager” on page 17](#).

- 1 **Make sure that your `JAVA_HOME` environment variable points to a JDK of version 1.5 or greater.**
- 2 **Create a new staging directory and extract the files from `fam.war` in this staging directory. For example:**

```
# mkdir consolestaging
# cd consolestaging
# jar xvf zip_root/fam/deployable-war/fam.war
```

- 3 **Create the Console only WAR using the files in `fam-console.list`:**

```
# cd consolestaging
# jar cvf zip_root/fam/deployable-war/fam-console.war
  @zip_root/fam/deployable-war/fam-console.list
```

where `fam-console.war` is the name of the new Console only WAR file.

- 4 **Update the WAR file created in previous step with the additional files required for the specific Console only WAR. For example:**

```
# cd zip_root/fam/deployable-war/console
# jar uvf zip_root/fam/deployable-war/fam-console.war *
```

You are now ready to configure the new `fam-console.war`, as described in the next section.

Configuring the Console Only WAR File

Federated Access Manager includes the Console only WAR File Configurator (`Configurator.jsp`) to configure a Console only WAR file.

▼ To Configure the Console Only WAR File

- 1 **Login as a user who has the following privileges:**

- Access to the web container administration console, if you plan to deploy `consoleonly.war` using this console.
- or
- The capability to execute the web container's deploy command-line utility, if you plan to deploy `consoleonly.war` using the CLI.

2 Launch the Configurator using the following URL:

protocol://host.domain:port/console

For example: `http://consoleonly.example.com:8080/console`

If the Console only deployment is not already configured, you will be directed to the Configurator page. (If the deployment is already configured, you will be directed to the login page.)

3 On the Configurator page, specify the following information:

- **Server Protocol** is the Federated Access Manager server protocol: `http` or `https`. Default: `http`
- **Server Host** is the fully qualified host name of the system where Federated Access Manager server is deployed.
- **Server Port** is the Federated Access Manager server port number. Default: `58080`
- **Server Deployment URI** is the URI prefix for accessing the HTML pages, classes, and JAR files associated with Federated Access Manager server.
Important: This value must include the leading slash (/).
- **Application user name** is the user name for the Console only application.
- **Application user password** is the password of the user for the application.
- **Administration Console Protocol** is the protocol (`http` or `https`) used by the Console only server web container. Default: `http`
- **Administration Console Host** is the fully qualified host name where the Console only server is deployed.
- **Administration Console Port** is the port number for the Console only server is deployed.
- **Administration Console Deployment URI** is the deployment URI Console only server. Default: `/console`
- **Administration Console Debug directory** is the directory where the debug files will be created.

4 After you have specified all configuration values (or accepted the default values), click **Configure**.

(Or, to reset all values, click **Reset**.)

Next Steps After the configuration finishes, you will get a message showing the location of the Console only configuration file. This file is created in the home directory of the runtime user who owns the web container instance on which Console only WAR file is deployed.

Important: It is highly recommended that you change the permissions of this configuration file to limit access to the sensitive configuration information.

Accessing the Console

To access the Console in a Console only deployment, use the following URL in your browser:

consoleonly_protocol://consoleonly_host:consoleonly_port/consoleonly_URI

Where:

- *consoleonly_protocol* is the protocol (http or https) used by the Console only server web container instance.
- *consoleonly_host* is the fully qualified host name of the Console only server.
- *consoleonly_port* is the port for the Console only server host.
- *consoleonly_URI* is the deployment URI prefix for the Console only server. The default value is /console.

For example:

`http://famconsole.example.com:8080/console`

Uninstalling a Federated Access Manager Console Only Deployment

▼ To Uninstall a Federated Access Manager Console Only Deployment

- 1 **Undeploy `fam.war` in the web container using the web container administration console or command-line utility.**

On Windows systems, you might first need to stop the web container.

- 2 **Remove the `AMConfig.properties` file under home directory of the user running the web container.**

3 Remove the debug directory.

The location of the debug directory was specified when the console only deployment was configured using the configurator.

Installing Federated Access Manager Server Only

In some deployments, you might need to install Sun™ Federated Access Manager server without the administration console. For instance, you might want to use only the command-line utilities such as `famadm` to access the server. This chapter describes these topics:

- “Requirements to Deploy Federated Access Manager Server Only” on page 69
- “Generating a WAR File to Deploy Federated Access Manager Server Only” on page 69
- “Deploying Federated Access Manager Server Only” on page 70
- “Uninstalling a Federated Access Manager Server Only Deployment” on page 71

Requirements to Deploy Federated Access Manager Server Only

You must deploy the Federated Access Manager server to a supported web container, as listed in the “[Federated Access Manager Requirements](#)” on page 14.

Generating a WAR File to Deploy Federated Access Manager Server Only

To generate a WAR file to deploy Federated Access Manager server without an administration console, use the `jar` command to extract the files from the `fam.war` file and then to generate the specialized WAR file.

▼ To Generate a WAR File to Deploy Federated Access Manager Server Only

Before You Begin Download and unzip the `fam.zip` file. You will then need the following files:

- `zip_root/deployable-war/fam.war` is the Federated Access Manager WAR file that contains all components, including the server only files.
- `zip_root/deployable-war/fam-noconsole.list` specifies the files that are required to generate a server only WAR file.
- `zip_root/deployable-war/noconsole` contains additional files you will need to deploy the server only.

where `zip_root` is where you unzipped the `fam.zip` file.

For more information about the `fam.war` file, see [“Downloading Federated Access Manager” on page 17](#).

- 1 **Make sure that your `JAVA_HOME` environment variable points to a JDK of version 1.5 or greater.**
- 2 **Create a new staging directory and extract the files from `fam.war` in this staging directory. For example:**

```
# mkdir noconsolestaging
# cd noconsolestaging
# jar xvf zip_root/fam/deployable-war/fam.war
```

- 3 **Create the server only WAR using the files in `fam-noconsole.list`:**

```
# cd noconsolestaging
# jar cvf zip_root/fam/deployable-war/fam-noconsole.war
  @zip_root/fam/deployable-war/fam-noconsole.list
```

where `fam-noconsole.war` is the name of the new server only WAR file.

- 4 **Update the WAR file created in previous step with the additional files required for the specific server only WAR. For example:**

```
# cd zip_root/fam/deployable-war/noconsole
# jar uvf zip_root/fam/deployable-war/fam-noconsole.war *
```

You are now ready to configure the new `fam-noconsole.war`, as described in the next section.

Deploying Federated Access Manager Server Only

▼ To Deploy Federated Access Manager Server Only

- 1 **Login as a user who has the following privileges:**
 - Access to the web container administration console, if you plan to deploy Distributed Authentication UI server WAR file using the console.

or

- The capability to execute the web container's deploy command-line utility, if you plan to deploy the WAR file using the CLI.
- 2 Make sure that the web container for the server only deployment is running.
 - 3 Deploy the server only WAR file using the using the web container console or deployment command.
 - 4 Restart the Federated Access Manager Server web container.

Uninstalling a Federated Access Manager Server Only Deployment

This scenario applies to a full Federated Access Manager server deployment and a Federated Access Manager server only (no console) deployment.

▼ To Uninstall a Federated Access Manager Server Only Deployment

- 1 Undeploy `fam.war` in the web container using the web container administration console or command-line utility.
On Windows systems, you might first need to stop the web container.
- 2 Remove the following directories and all of their contents:
 - `/fam`
 - `/AccessManager`
- 3 Optionally, remove the `fam.zip` and extracted files.

Installing the Federated Access Manager Client SDK

The Sun™ Federated Access Manager Client SDK is a smaller version of the Federated Access Manager SDK that includes only the client-side Java classes and configuration properties. You can use the Client SDK to write remote standalone or web applications that access a Federated Access Manager server to use services such as authentication, SSO, authorization, auditing, logging, and the Security Assertion Markup Language (SAML).

The Client SDK also includes sample applications that you can deploy to help you write your own custom applications.

This chapter describes:

- [“Federated Access Manager Client SDK Requirements” on page 73](#)
- [“Installing the Federated Access Manager Client SDK” on page 74](#)
- [“Compiling and Running the Client SDK Samples” on page 75](#)
- [“Uninstalling the Federated Access Manager Client SDK” on page 76](#)

Federated Access Manager Client SDK Requirements

The requirements to use the Client SDK include:

- Federated Access Manager server must be running on a remote server. You will need the following information about this remote installation:
 - Protocol (http or https) used by web container instance on which the Federated Access Manager server is deployed.
 - Fully qualified domain name (FQDN) of the host on which the Federated Access Manager server is deployed.
 - Port on which the Federated Access Manager server is running.
 - Deployment URI for the Federated Access Manager server (default is fam).
 - Default Agent user (amldapuser) password that you entered when you ran the Federated Access Manager Configurator.

- If you are writing a web application, you need a web container supported by Federated Access Manager. For the list of supported web containers, see the [“Federated Access Manager Requirements” on page 14](#).

Installing the Federated Access Manager Client SDK

▼ To Install the Federated Access Manager Client SDK

Before You Begin

- If you have not already done so, download and unzip the fam.zip file, as described in [“Downloading Federated Access Manager” on page 17](#).
The Client SDK and samples are then available in the zip_root/fam/samples/fam-client.zip file, where zip_root is the directory where you unzipped fam.war.
- If you plan to install the Client SDK in a web container, the web container must be installed on the server where you plan to deploy the Client SDK.

- 1 **On the server where you plan to deploy the Client SDK, copy the fam-client.zip to a staging directory.**
- 2 **In the directory from Step 1, unzip the fam-client.zip file.**

The following table describes the layout after you unzip the fam-client.zip file. The directory where you unzip the file is represented by fam-client-zip_root.

fam-client-zip_root Directory	Description
/sdk	Client SDK CLI-based samples, which you can run in a standalone JVM outside of a web container: <ul style="list-style-type: none">■ /source contains the source files that require compilation.■ /scripts contains the scripts to compile and run the samples.■ /resources contains the properties files required to run the samples.■ /lib contains the JAR files required by the Client SDK.■ /classes contains the compiled classes from the source files.
/war	Client SDK WAR files, which include the web-based client samples: <ul style="list-style-type: none">■ fam-client-jdk15.war is for web containers running JDK 1.5 or later■ fam-client-jdk14.war is for web containers running JDK 1.4.x <p>Deploy these files using the web container administration console or command-line utility.</p>

Compiling and Running the Client SDK Samples

▼ To Compile and Run the Client SDK Samples

Before You Begin If you have not already do so, unzip the `fam-client.zip` file, as described in [“Installing the Federated Access Manager Client SDK” on page 74](#).

The Client SDK samples are then available in the `fam-client-zip_root/src` directory, where `fam-client-zip_root` is the directory where you unzipped `fam-client-zip_root`.

- 1 On Solaris and Linux systems, make all shell scripts in the `fam-client-zip_root/src/scripts` directory executable. For example:**

```
# cd fam-client-zip_root/sdk/scripts
# chmod 755 *.sh
```

- 2 Compile the samples by executing the `scripts/compile-samples.sh` script.**

Note: You can invoke the sample scripts only from the `/sdk` parent directory and not directly from the `/scripts` directory.

- 3 Run the appropriate setup script for the samples: `scripts/setup.sh` on Solaris and Linux systems or `scripts/setup.bat` on Windows systems.**

Run the setup script only once for of the all Client SDK samples. The script will setup the `AMConfig.properties` file to point to the Federated Access Manager server.

- 4 Run individual Client SDK samples by executing the shell or bat scripts in the `/scripts` directory. For example:**

```
# scripts/run-xacml-client-sample.sh
```

Note: At run time, a sample might require additional property files to be setup in the `/resources` directory. Check the comments included in each individual script for more information.

See Also For information about writing custom applications after you install the Client SDK, see Chapter 1, Enhancing Remote Applications Using the Client Software Development Kit, in the *Sun Federated Access Manager 8.0 Developer's Guide*.

Uninstalling the Federated Access Manager Client SDK

▼ To Uninstall the Federated Access Manager Client SDK

1 Remove the directory where the `fam-client.zip` file was extracted.

2 Remove the client SDK debug directory.

The client SDK debug directory was specified when one of the following setup scripts was run:

- Solaris and Linux systems: `scripts/setup.sh`
- Windows systems: `scripts/setup.bat`

3 Optionally, remove the `fam-client.zip` file.

Configuring Federated Access Manager Sessions

Sun™ Federated Access Manager session configuration includes:

- [“Setting Session Quota Constraints” on page 77](#)
- [“Configuring Session Property Change Notifications” on page 80](#)

For other session attributes that you can configure, refer to the Federated Access Manager Console online Help.

Setting Session Quota Constraints

The session quota constraints feature allows Federated Access Manager to limit users to a specific number of active, concurrent sessions. A Federated Access Manager administrator can set session quota constraints at the following levels:

- Globally. Constraints apply to all users.
- To an entity (organization or realm, role, or user). Constraints apply only to the specific users that belong to the entity.

Deployment Scenarios for Session Quota Constraints

The following Federated Access Manager deployments support session quota constraints:

- Federated Access Manager single server deployment

In this scenario, Federated Access Manager is deployed on a single host server. Federated Access Manager maintains the active session counts in memory for all logged in users. When a user attempts to log in to the server, Federated Access Manager checks whether the number of the valid sessions for the user exceeds the session quota and then takes action based on the configured session quota constraints options.
- Federated Access Manager session failover deployment

In this scenario, multiple instances of Federated Access Manager are deployed on different host servers in a session failover configuration. The Federated Access Manager instances are configured for session failover using Sun Java System Message Queue (Message Queue) as the communications broker and the Berkeley DB as the session store database. For more information about Federated Access Manager session failover, see [Chapter 5, “Implementing Federated Access Manager Session Failover.”](#)

In a session failover deployment, when a user attempts to log in, the Federated Access Manager server receiving the session creation request first retrieves the session quota for the user from the Federated Access Manager identity repository. Then, the Federated Access Manager server fetches the session count for the user directly from the centralized session repository (accumulating all the sessions from all the Federated Access Manager servers within the same site) and checks whether the session quota has been exhausted. If the session quota has been exhausted for the user, the Federated Access Manager server takes action based on the configured session quota constraints options.

If session constraints are enabled in a session failover deployment and the session repository is not available, users (except superuser) are not allowed to log in.

In a session failover deployment, if a Federated Access Manager instance is down, all the *valid* sessions previously hosted by that instance are still considered to be valid and are counted when the server determines the actual active session count for a given user. A Federated Access Manager multiple server deployment that is not configured for session failover does not support session quota constraints.

Multiple Settings For Session Quotas

If a user has multiple settings for session quotas at different levels, Federated Access Manager follows this precedence to determine the actual quota for the user:

- user (highest)
- role/organization/realm (based on the conflict resolution levels)
- global (lowest)

For example, Ken is a member of both the marketing and management roles. Session quotas are defined as follows (all have the same conflict resolution level):

- organization - 1
- marketing role - 2
- management role - 4
- user Ken - 3

Ken's quota is 3.

Configuring Session Quota Constraints

To configure session quota constraints, the top-level Federated Access Manager administrator (such as amAdmin) must set specific attributes in the Federated Access Manager Console for one of the Federated Access Manager instances in your deployment.

▼ To Configure Session Quota Constraints

- 1 Log in to Federated Access Manager Console as amAdmin.
- 2 Click Configuration, Global and then Session.
- 3 On the Session page, set Enable Quota Constraints to ON.
When this attribute is enabled, Federated Access Manager enforces session quota constraints whenever a user attempts to log in as a new client and create a new session.
- 4 On the Session page, for each session attribute, either accept the default value or set a value as required for your deployment.
If you are configuring session property change notifications , see “[Configuring Session Property Change Notifications](#)” on page 80.

Read Timeout for Quota Constraint	<p>Specifies the time in milliseconds that an inquiry to the session repository for the active user session counts continues before timing out. If the maximum wait time is reached due to the unavailability of the session repository, the session creation request is rejected.</p> <p>Default: 6000 milliseconds</p>
Resulting Behavior If Session Quota Exhausted	<p>Determines the behavior if a user exhausts the session constraint quota. This attribute takes effect only if Enable Quota Constraints is enabled. Values can be:</p> <ul style="list-style-type: none">■ DENY_ACCESS. Federated Access Manager rejects the login request for a new session.■ DESTROY_OLD_SESSION. Federated Access Manager destroys the next expiring existing session for the same user and allows the new login request to succeed. <p>Default: DESTROY_OLD_SESSION</p>

Exempt Top-Level Admins From Constraint Checking	<p>Specifies whether session constraint quotas apply to the administrators who have the Top-level Admin Role. Takes effect only if the Enable Quota Constraints attribute is enabled.</p> <p>Default: NO</p> <p>The super user defined for Federated Access Manager (<code>com.sun.identity.authentication.super.user</code>) is always exempt from session quota constraint checking.</p>
Deny User Login When Session Repository is Down	<p>Specifies whether a user can login if the session repository is down. Takes effect only if the Enable Quota Constraints attribute is enabled.</p> <p>Default: NO</p>
Maximum Session Time	<p>Specifies the time in minutes before a session expires and the user must re-authenticate to regain access. To balance the security requirements and convenience, consider setting the Max Session Time interval to a higher value and setting the Max Idle Time interval to a relatively low value.</p> <p>Default: 120 minutes</p>
Maximum Idle Time	<p>Specifies the idle time in minutes before a session expires and the user must re-authenticate to regain access.</p> <p>Default: 30 minutes</p>
Maximum Caching Time	<p>Specifies the time in minutes before a session contacts Federated Access Manager to refresh cached session information. It is recommended that the Maximum Caching Time should always be less than the Maximum Idle Time.</p> <p>Default: 3 minutes</p>
Active User Sessions	<p>Specifies the maximum number of concurrent sessions for a user.</p> <p>Default: 5</p>

- 5 **When you have finished setting attributes, click Save.**
- If you reset any of these attributes, you must restart the server for the new values to take effect.

Configuring Session Property Change Notifications

The session property change notification feature causes Federated Access Manager to send a notification to all registered listeners when a change occurs to a specific session property. This feature takes effect when **Enable Property Change Notifications** is enabled (ON) in the Federated Access Manager Console.

For example, in a single sign-on (SSO) environment, one Federated Access Manager session can be shared by multiple applications. When a change occurs on a specific session property defined in the “Notification Properties” list, Federated Access Manager sends a notification to all registered listeners.

All client applications participating in the SSO automatically get the session notification if they are configured in the notification mode. The client cached sessions are automatically updated based on the new session state (including the change of any session property, if there is any).

An application that wants to take a specific action based on a session notification can write an implementation of the `SSOTokenListener` interface and then register the implementation through the `SSOToken.addSSOTokenListener` method. For more information, see the *Sun Federated Access Manager 8.0 Developer’s Guide*.

▼ To Configure Session Property Change Notifications

1 Log in to Federated Access Manager Console as `amAdmin`.

2 Click **Configuration, Global and then Session**.

3 On the **Session** page, set **Enable Property Change Notifications** to **ON**.

4 On the **Session** page, add properties to the **Notification Properties** list.

This list specifies the properties that cause Federated Access Manager to send a notification to registered listeners when a change to a property occurs.

In **New Value**, add each property for which you want a notification sent when the property is changed, and then click **Add**.

5 When you have finished adding properties to the list, click **Save**.

Index

A

- amsfo script, 49
- amsfopassword script, 48
- audience for this guide, 7

D

- documentation
 - Access Manager, 8-9
 - collections, 9-10
 - related product, 9-10

G

- guest user, Message Queue, 47

I

- imqusermgr command, Message Queue, 47

O

- organization of this guide, 8

P

- prerequisites for this guide, 7
- publish/subscribe, Message Queue, 44

R

- related guides, 8-10

S

- session property change notification, 80
- session quota constraints, 77

