Steps for UI Cache Clearing

STEPS TO BE PERFORMED:

1. Go to **SAP GUI** and login
2. Open t-code **SMICM**

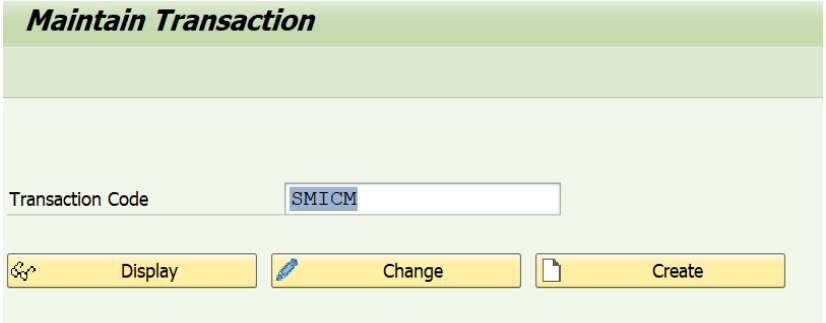

3. Navigate to GUI header, and click on **Goto → HTTP Plug-In → Server Cache**
   a. **Invalidate Locally**

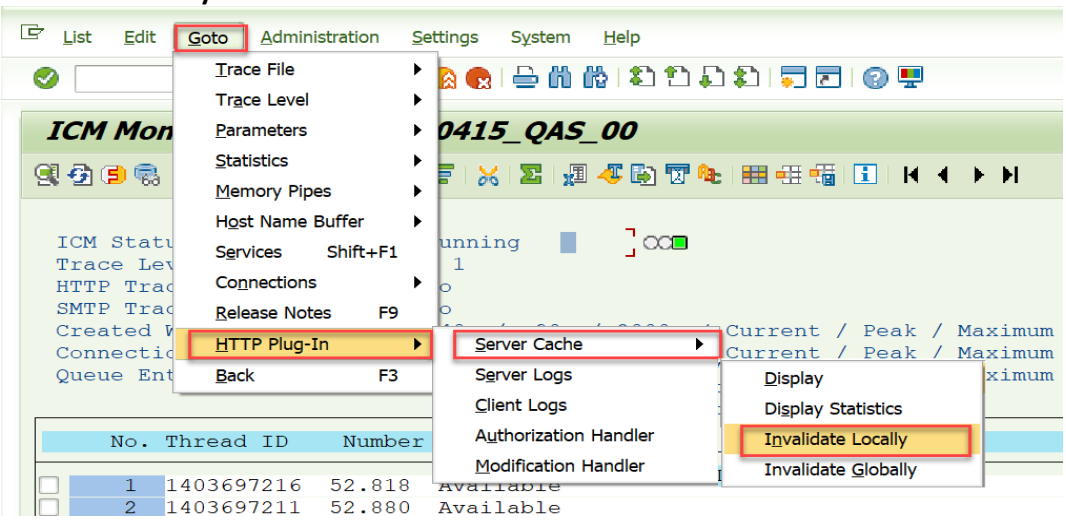

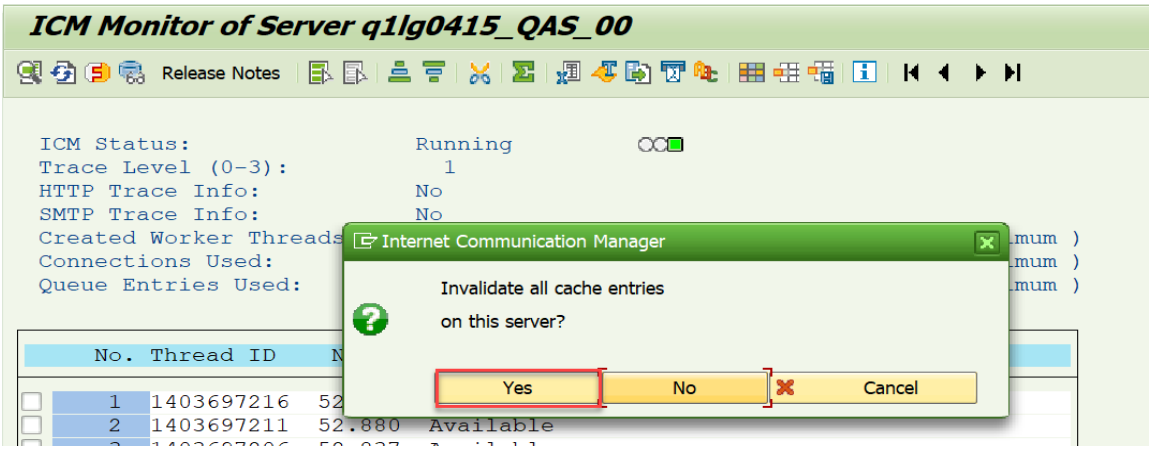

b. Invalidate Globally

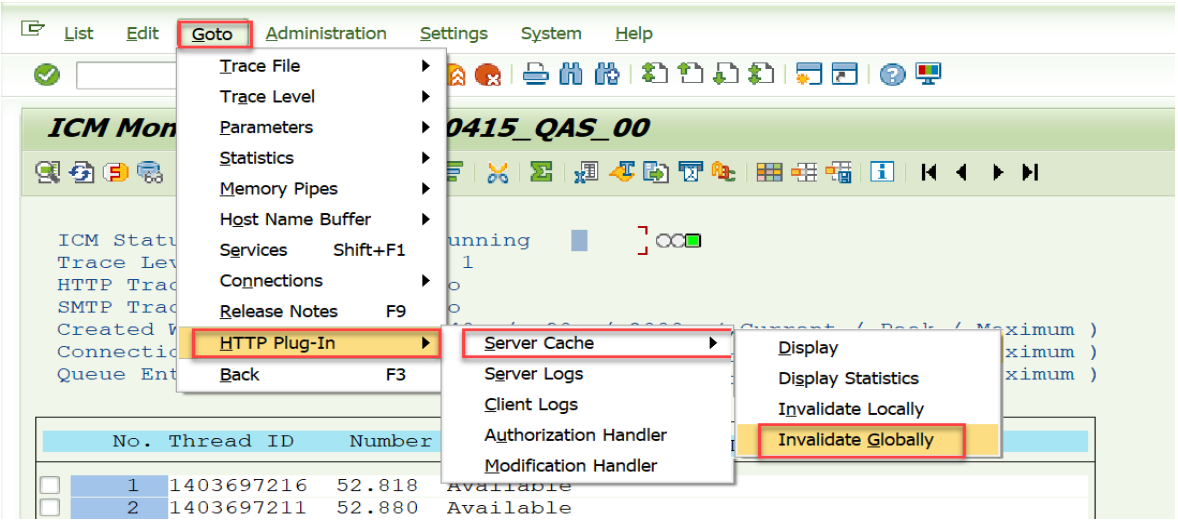

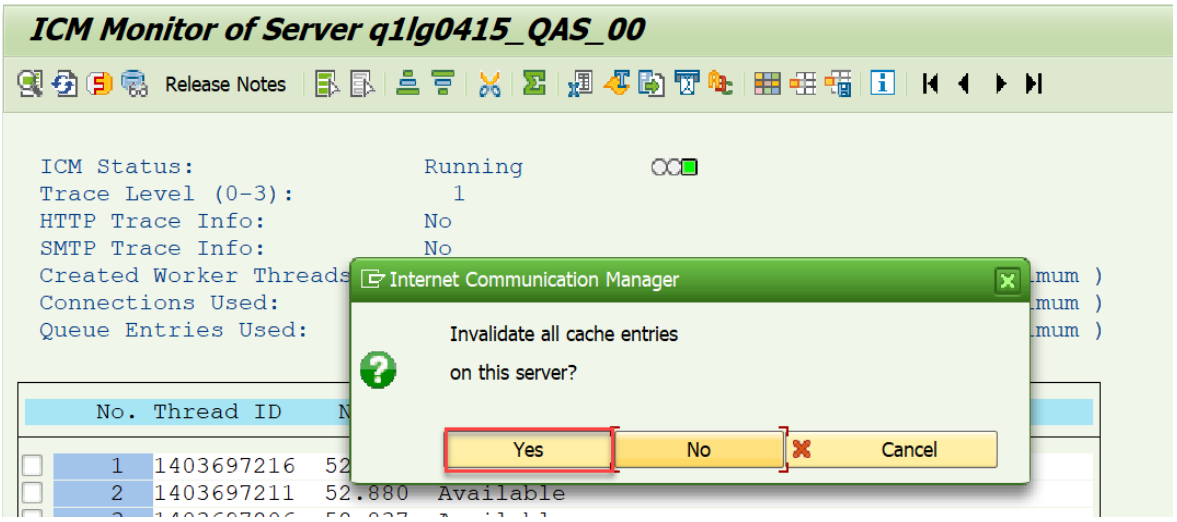

4. Now open a new t-code **/IWBEP/CACHE_CLEANUP**

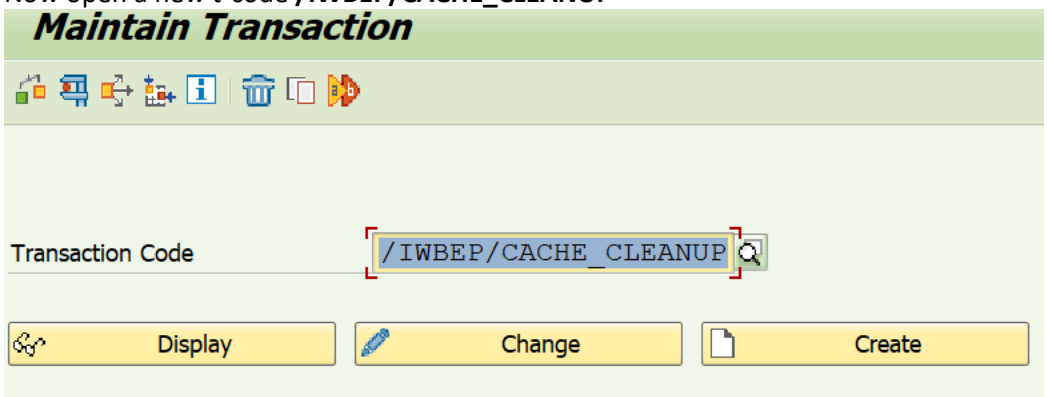

a. Select the checkbox **Cleanup Cache for all Models** and execute **(F8)**

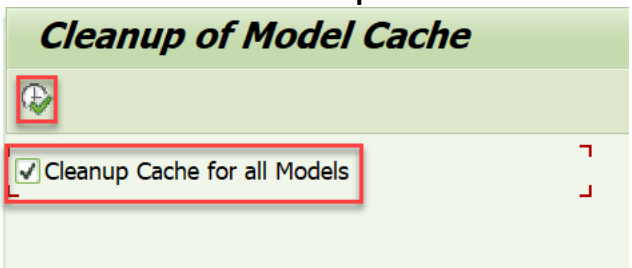

5. Now open a new t-code **/IWFND/CACHE_CLEANUP**

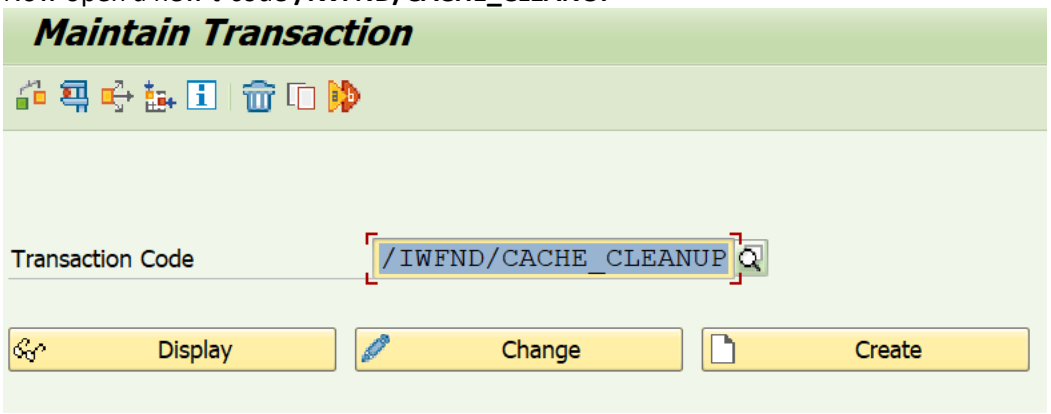

a. Make sure **All Models** & **All Proxy Models** are checked and execute **(F8)**

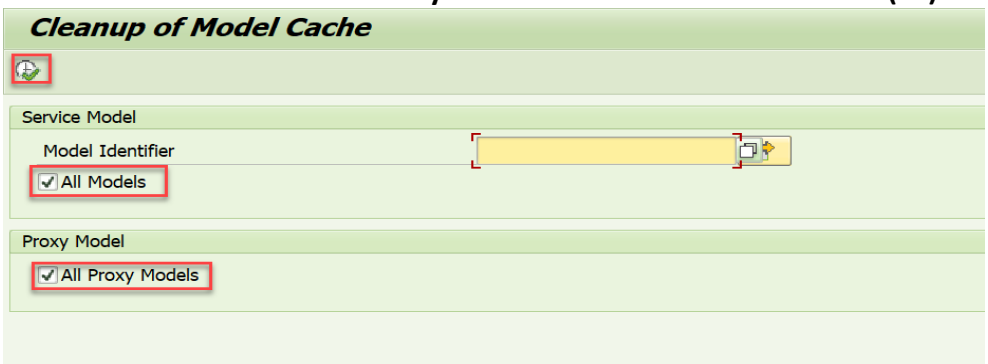

6. Now open a new t-code **SE38**

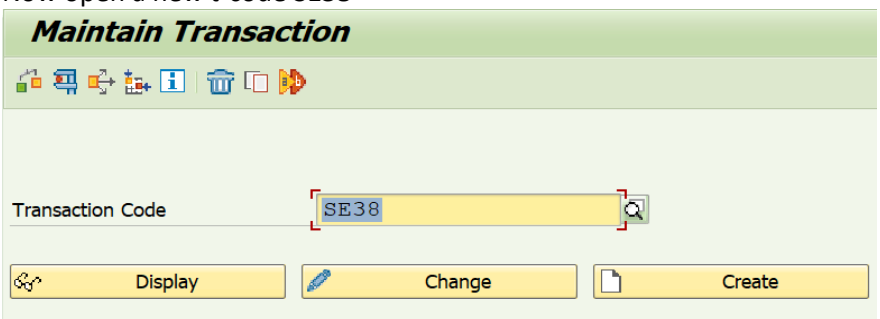

a. Now enter program name **/UI2/INVALIDATE_CLIENT_CACHES** and execute **(F8)**

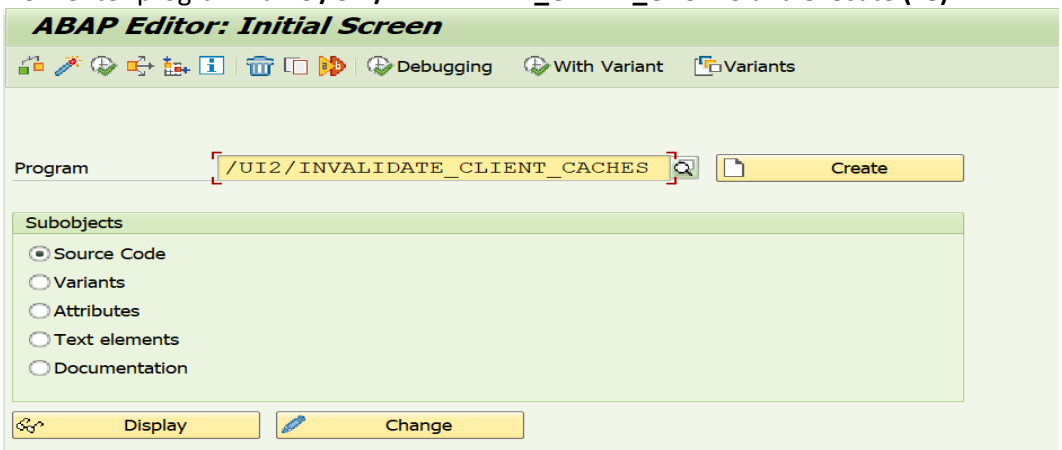

i. Make sure **For All Users** is checked and then execute **(F8)**

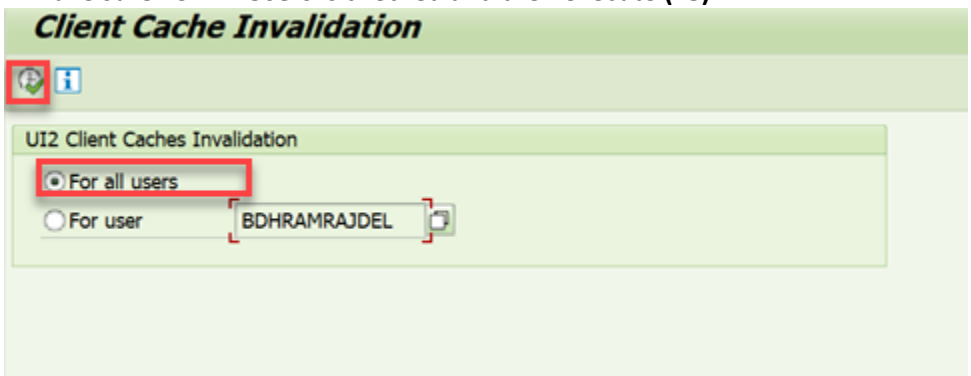

b. Now enter program name **/UI2/INVALIDATE_GLOBAL_CACHES** and execute **(F8)**

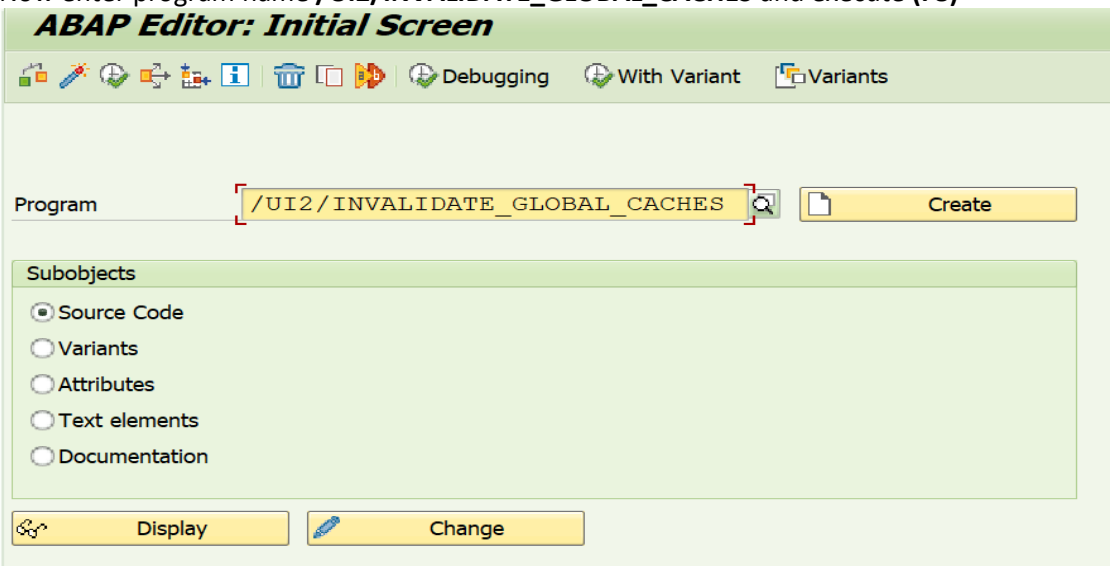

i. Select Execution Mode and execute (F8)

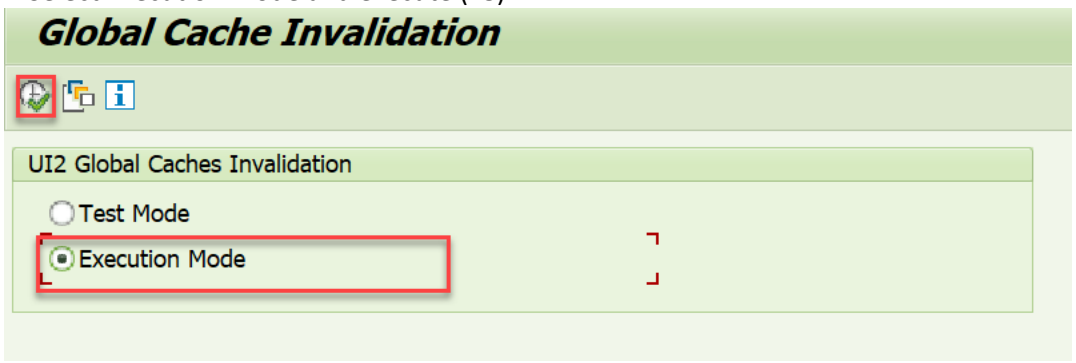

c. Now enter program name **/UI2/DELETE_CACHE** and execute **(F8)**

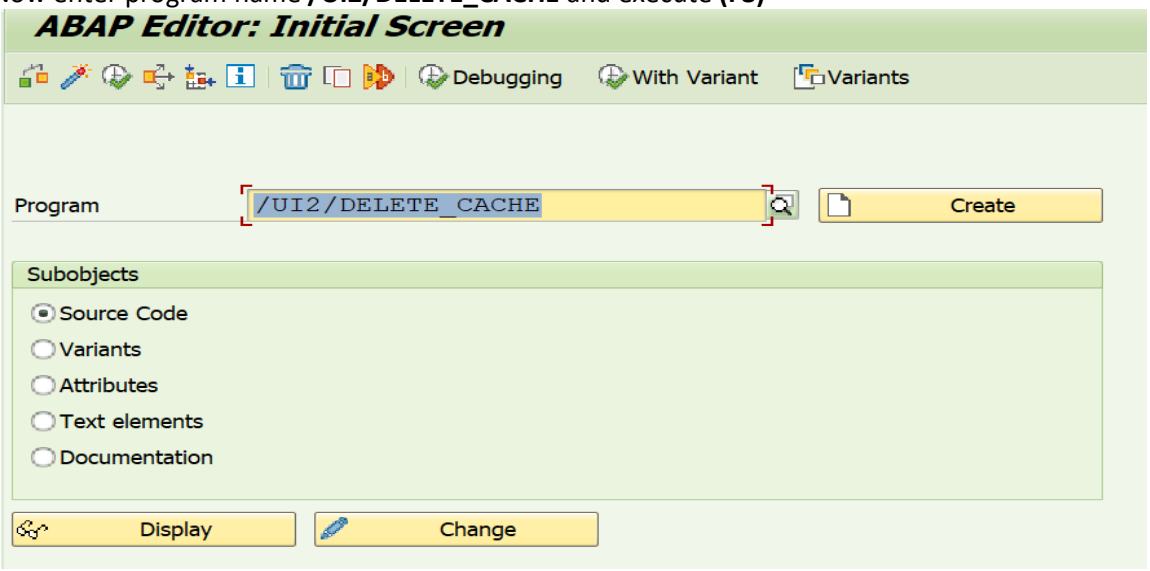

i. Enter * in **User Name** & Select **Delete in all clients** & **Show Output** and execute (F8)

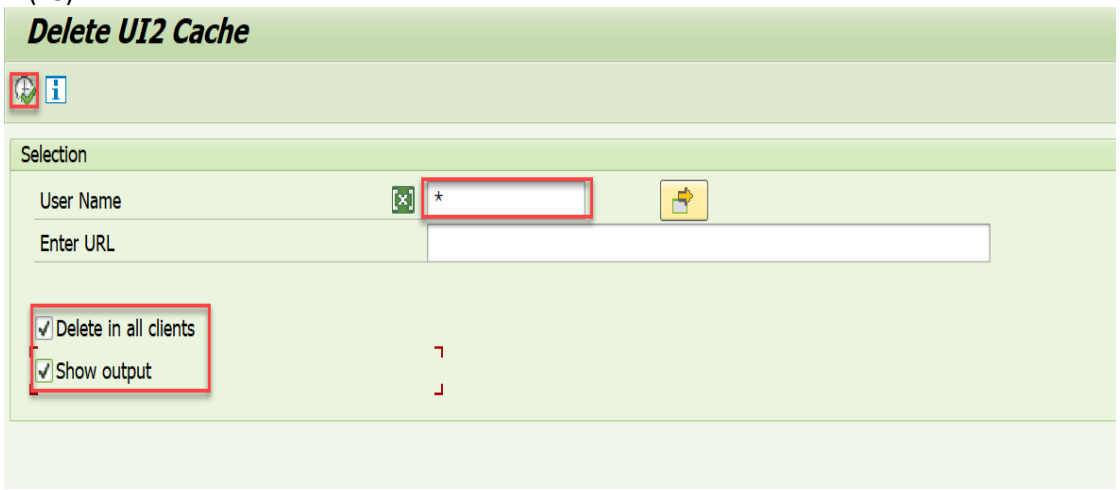

d. Now enter program name **/UI2/DELETE_CACHE_AFTER_IMP** and execute **(F8)**

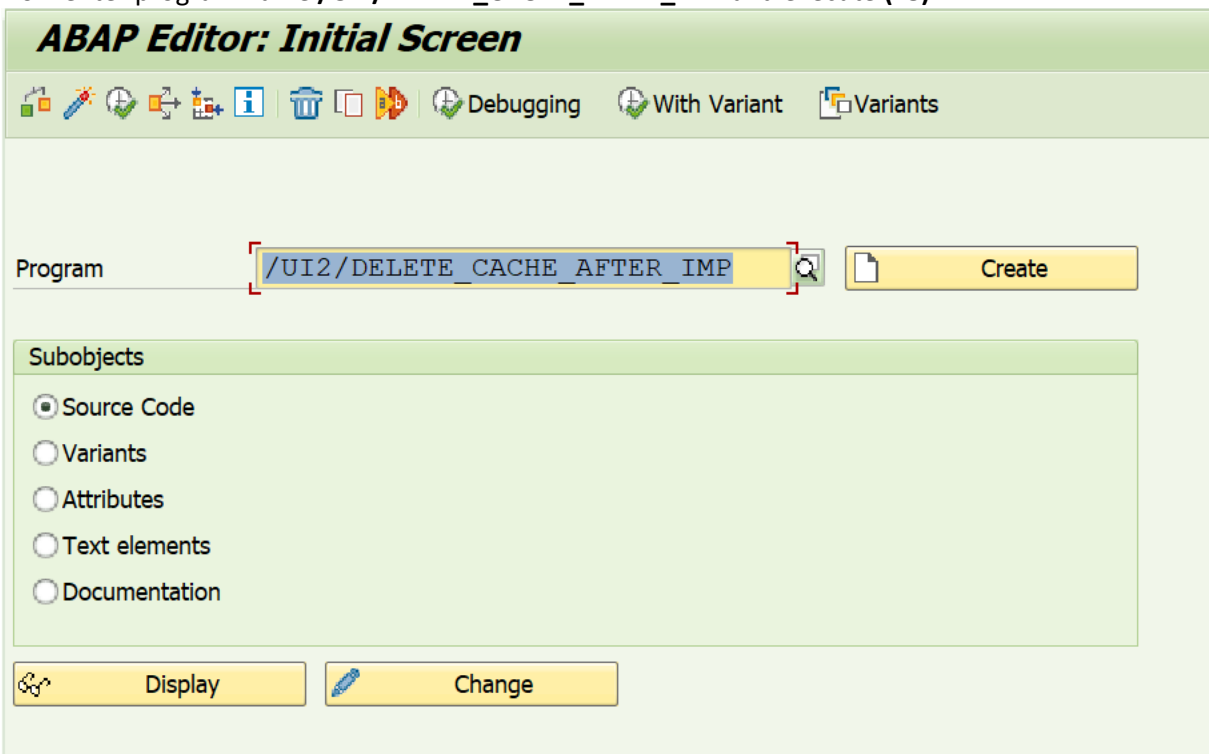

e. Now enter program name **/UI2/CHIP_SYNCHRONIZE_CACHE** and execute **(F8)**

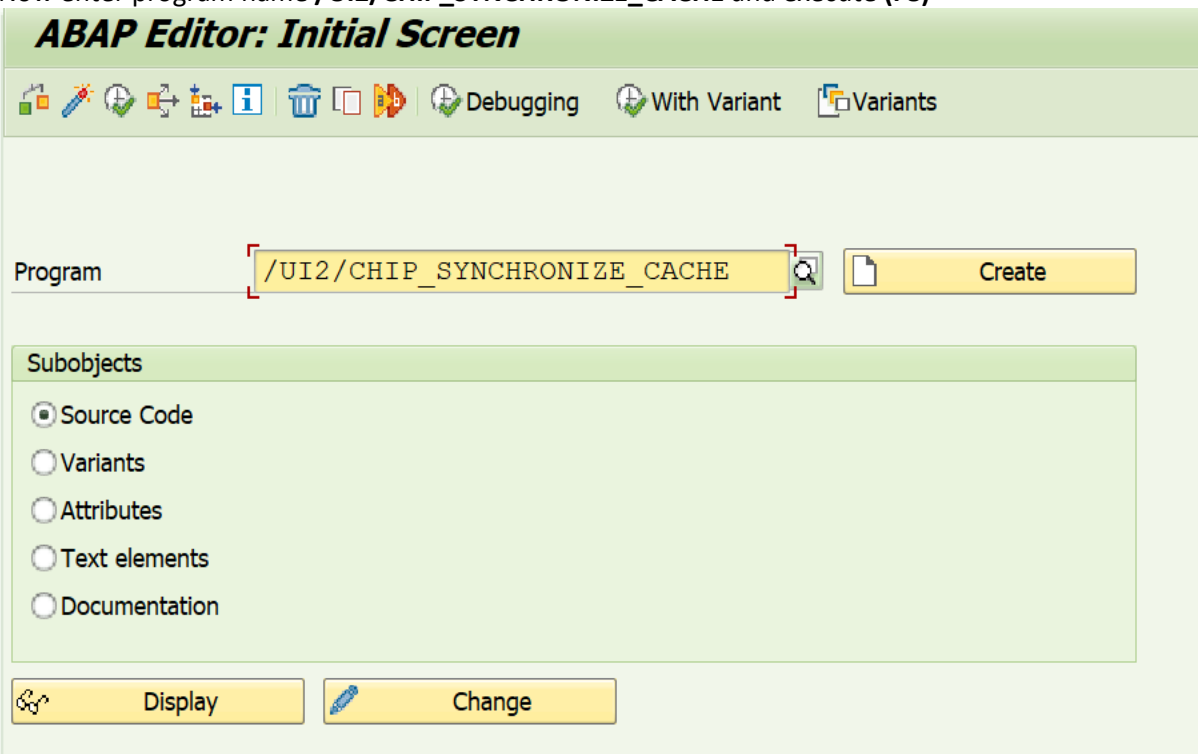

f. Now enter program name **/UI5/APP_INDEX_CALCULATE** and execute **(F8)**

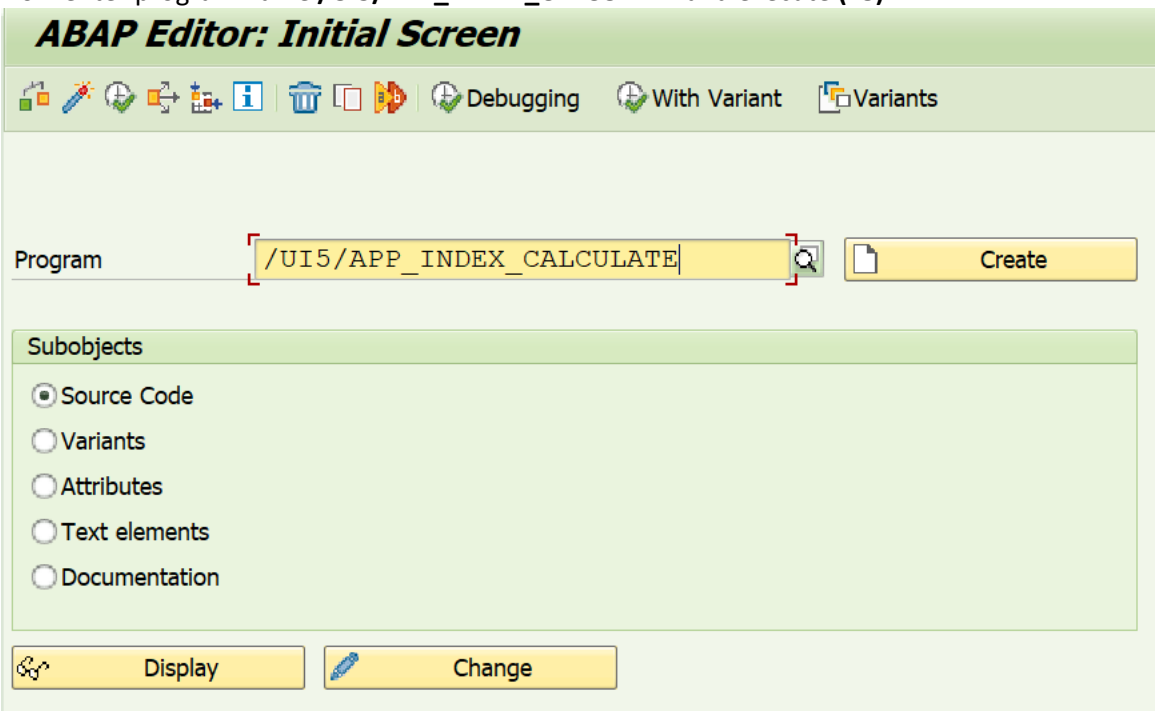

i. If you want re-index for all apps cache then select tab Complete Index, select **Depending on Expiry Period and Import of Transport Requests** & enter **Expiry Periods – Hours** as **24** and execute **(F8)**

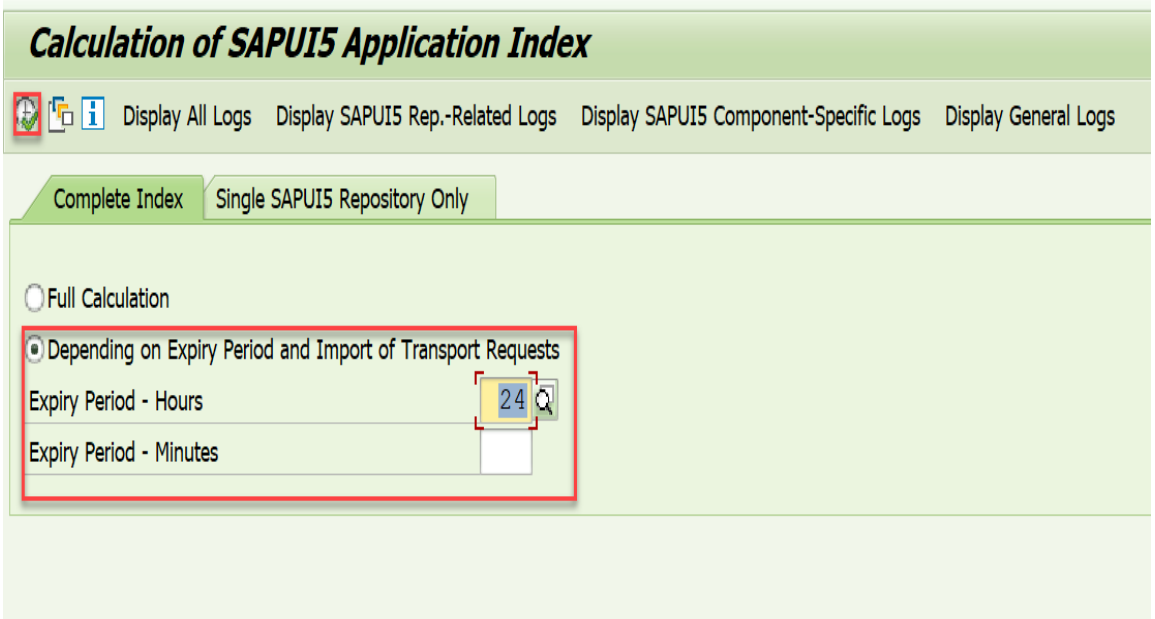

ii. Else if you want to re-index cache for individual apps then select tab **Single SAPUI5 Repository Only**, enter **SAPUI5 Repository** (SAPUI5 BSP/App name) and execute **(F8)**

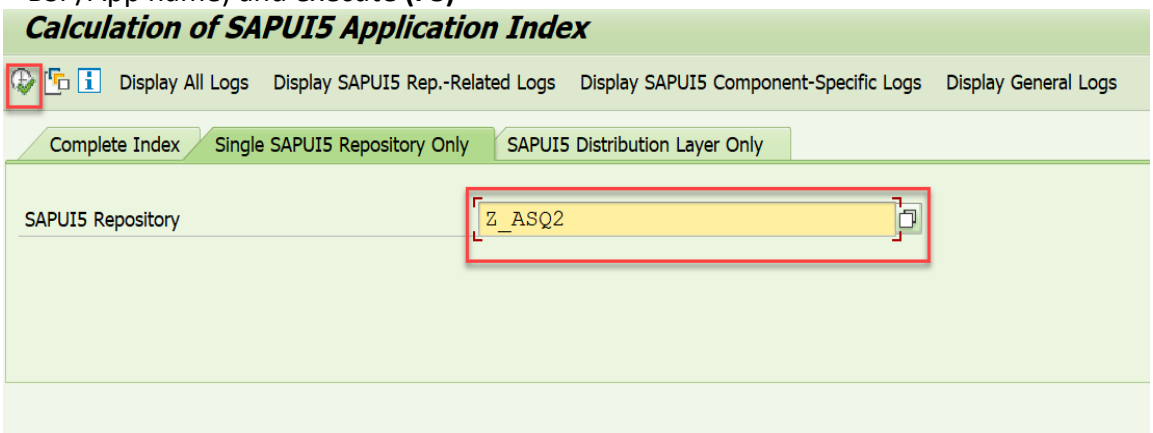

7. Now, open t-code **SM51**

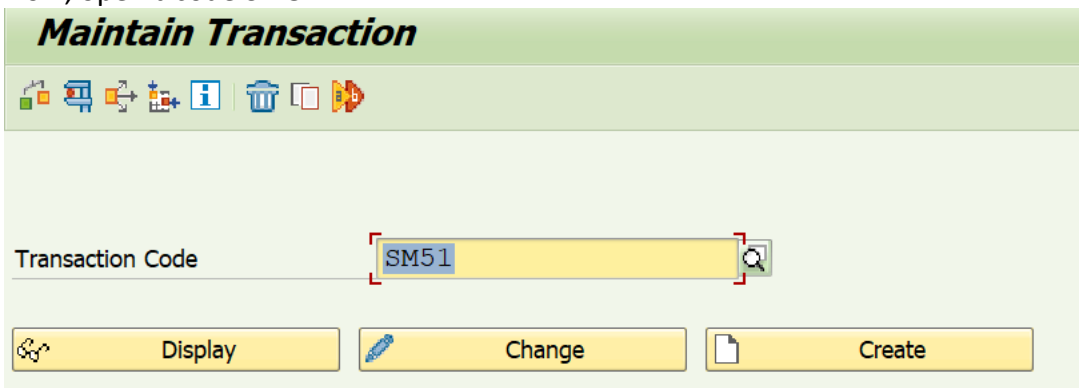
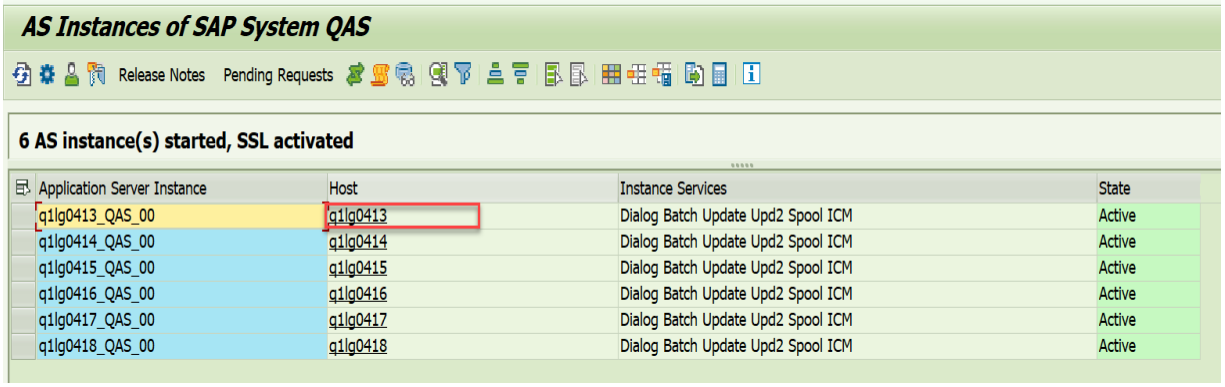
a. Now click on **Host** and repeat steps 2 – 6 again in every host instances