Diagrama geral completo do banco de dados

Todas as tabelas e colunas próprias, chaves e quatro relacionamentos impostos por FK.

FK owner_id

public.legal_sources

PK id : uuid
title : text
url : text
provision : text
consulted_at : timestamptz
review_status : text
created_at : timestamptz

1 : 0..N

public.legal_rule_versions

PK id : uuid
rule_key : text
version : text
FK source_id : uuid
scope : jsonb
valid_from : date
valid_until : date [nulo]
definition : jsonb
review_status : text
created_at : timestamptz

UK (rule_key, version)

public.calendar_versions

PK id : uuid
calendar_key : text
version : text
court : text
locality : text
coverage_start : date
coverage_end : date
is_complete : boolean
review_status : text
snapshot : jsonb
created_at : timestamptz

UK (calendar_key, version)

auth.users [gerenciada pelo Supabase]

PK id : uuid
Identidade, e-mail e estado da conta.
Demais campos pertencem ao Supabase Auth.

1 : 0..N

public.deadline_calculations

PK id : uuid
FK owner_id : uuid
title : text
input : jsonb
result_snapshot : jsonb
status : text
created_at : timestamptz

1 : 0..N

public.deadline_reminders

PK id : uuid
FK calculation_id : uuid
FK owner_id : uuid
due_date : date
lead_days : integer
send_hour : integer
time_zone : text
send_at : timestamp with time zone
snapshot_metadata : jsonb
status : text
attempt_count : integer
next_attempt_at : timestamp with time zone
claim_token : uuid [nulo]
claimed_at : timestamp with time zone [nulo]
accepted_at : timestamp with time zone [nulo]
error_code : text [nulo]
created_at : timestamp with time zone
delivery_mode : text

UK parcial: uma geração ativa por cálculo

reminder_private.scheduler_config

PK singleton : boolean
enabled : boolean

CHECK singleton = true; inicia desligado

reminder_private.scheduler_invocations

PK nonce : uuid
issued_at : bigint
operation : text
created_at : timestamp with time zone
used_at : timestamp with time zone [nulo]
request_id : bigint [nulo]
http_status : integer [nulo]
completed_at : timestamp with time zone [nulo]
timed_out : boolean [nulo]
summary : jsonb

UK request_id; sem FK para pg_net

Leitura do modelo e fronteiras

7 tabelas próprias; 65 colunas.
4 FKs: setas do pai para o filho.
Exclusão do usuário: cascata nos próprios cálculos e lembretes. Fonte: RESTRICT.
PK = chave primária; UK = unicidade.
[nulo] = coluna que aceita NULL.
Sem FK entre JSONB e catálogos.
Sem FK entre scheduler e fila HTTP.
Auth / cron / net / Vault são gerenciados.
Dicionário: cap. 5; restrições e índices: cap. 6.
RLS habilitada nas sete tabelas próprias.

Diagrama completo da arquitetura do sistema
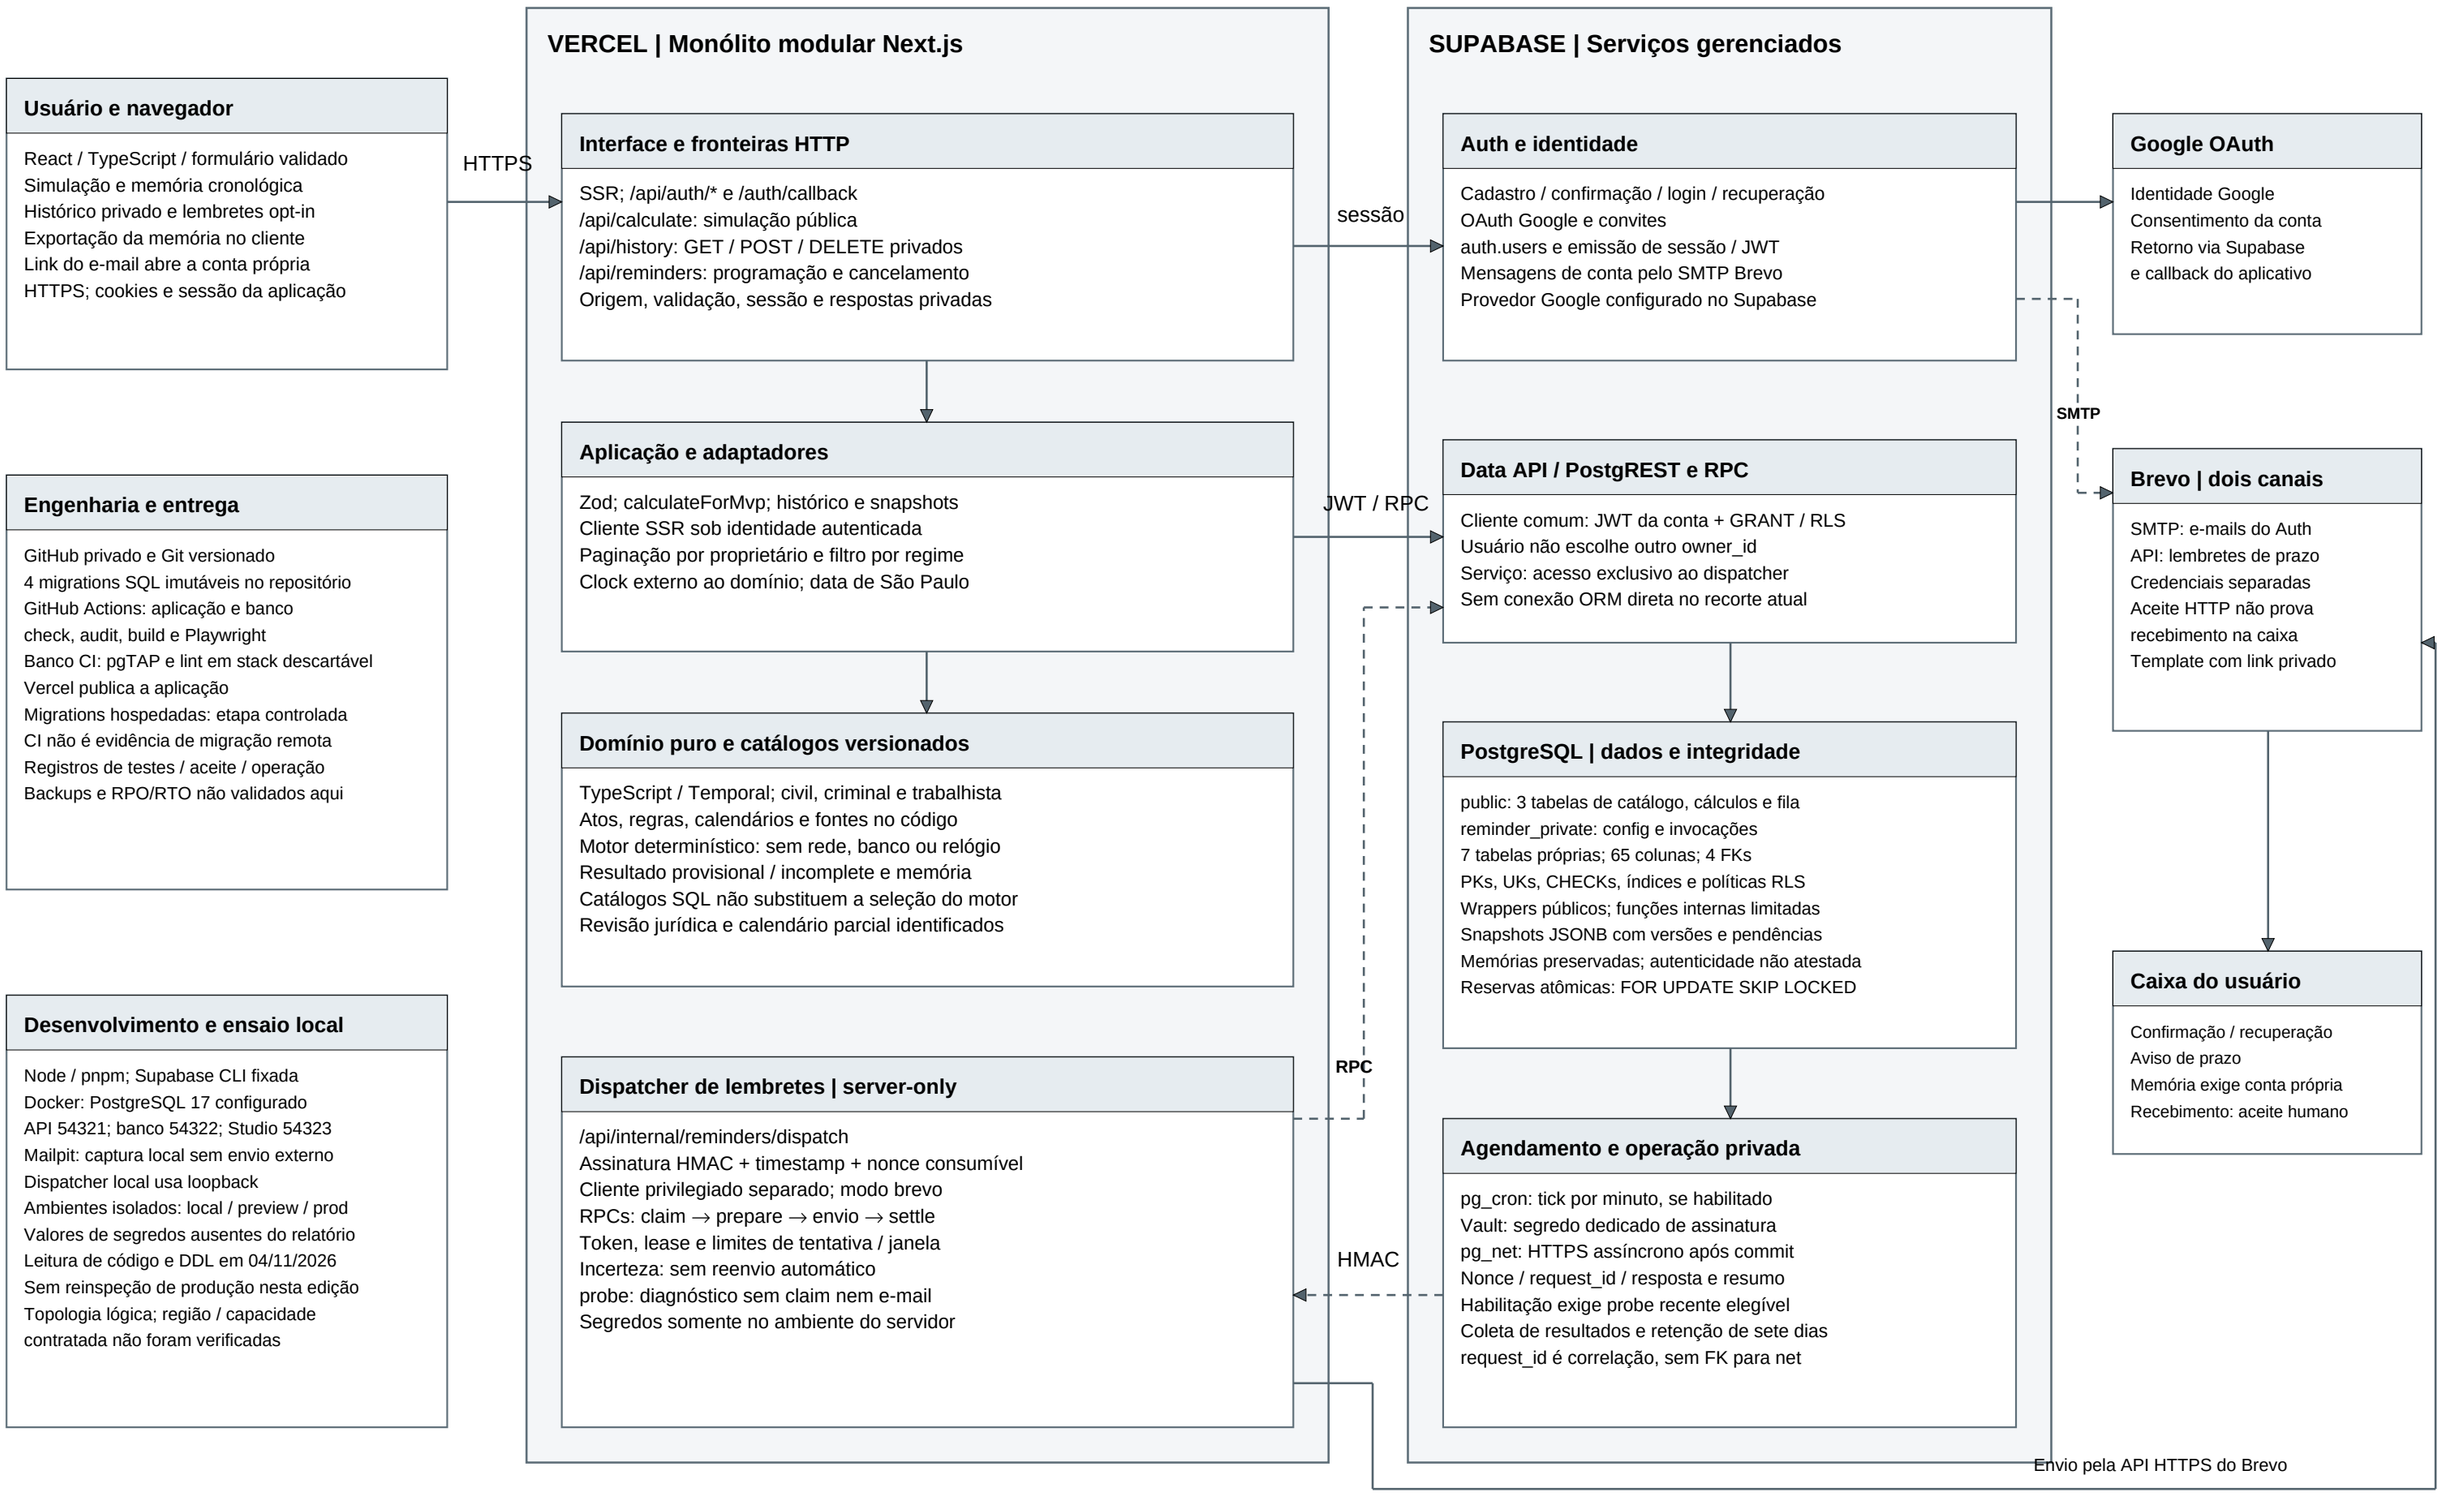
Aplicação, domínio, persistência, autenticação, lembretes, serviços externos e entrega.