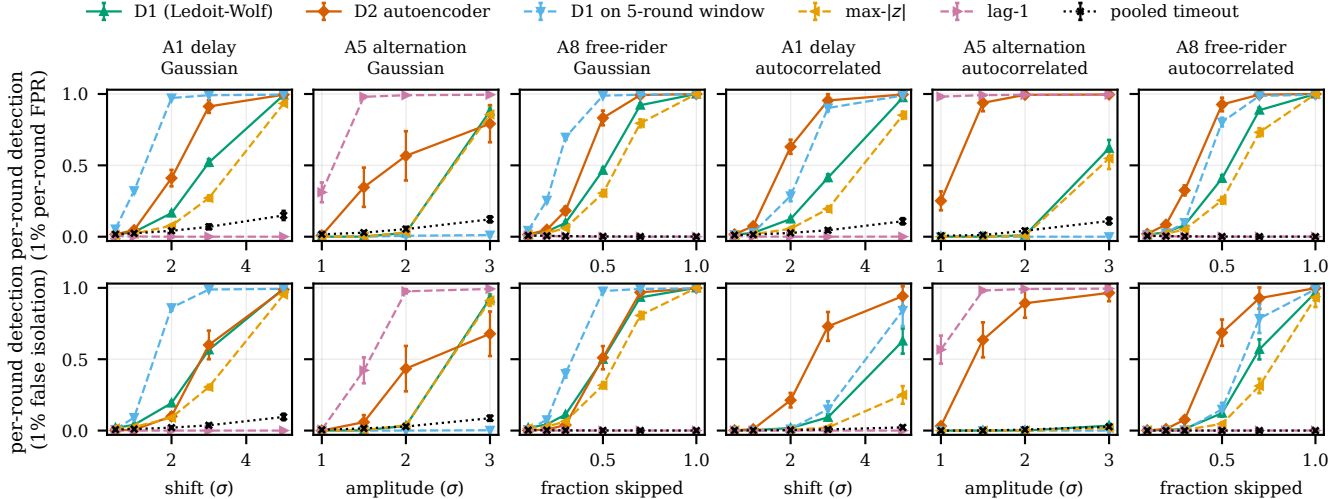

D1 (Ledoit-Wolf)
D2 autoencoder
D1 on 5-round window
max-|z|
lag-1
pooled timeout
A1 delay Gaussian
A5 alternation Gaussian
A8 free-rider Gaussian
A1 delay autocorrelated
A5 alternation autocorrelated
A8 free-rider autocorrelated
per-round detection (1% false isolation)
per-round FPR)
shift (σ)
amplitude (σ)
fraction skipped