


Data migration with SQL*Loader in Oracle EBS

Load a comma-separated data file into the table KHADIJA_TEST using a control file, from creating the files to checking the result.

Step 1: Create a new text document on your PC

In the DATA MIGRATION folder, right-click, choose New, then Text Document. This file becomes the control file.

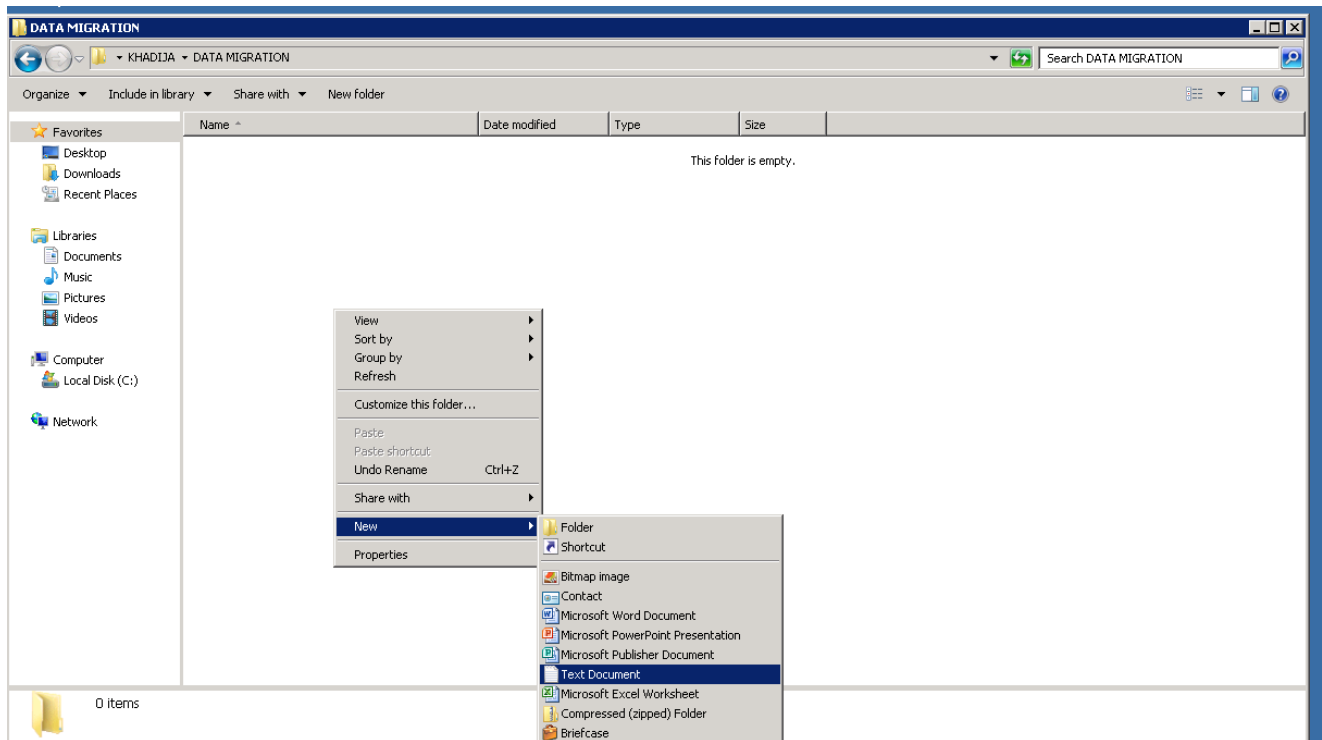


Step 2: Write the control file content

Open the new document and type the SQL*Loader instructions: the data file location, the target table, the field separator and the column list.


```
LOAD DATA
INFILE '<path to data file>'
INTO TABLE KHADIJA_TEST
FIELDS TERMINATED BY ','
OPTIONALLY ENCLOSED BY '"'
(ID, NAME, COURSE)
```

Note: The screenshot shows the table name as KHADIJA_TSET. Make sure it matches the real table name, KHADIJA_TEST.

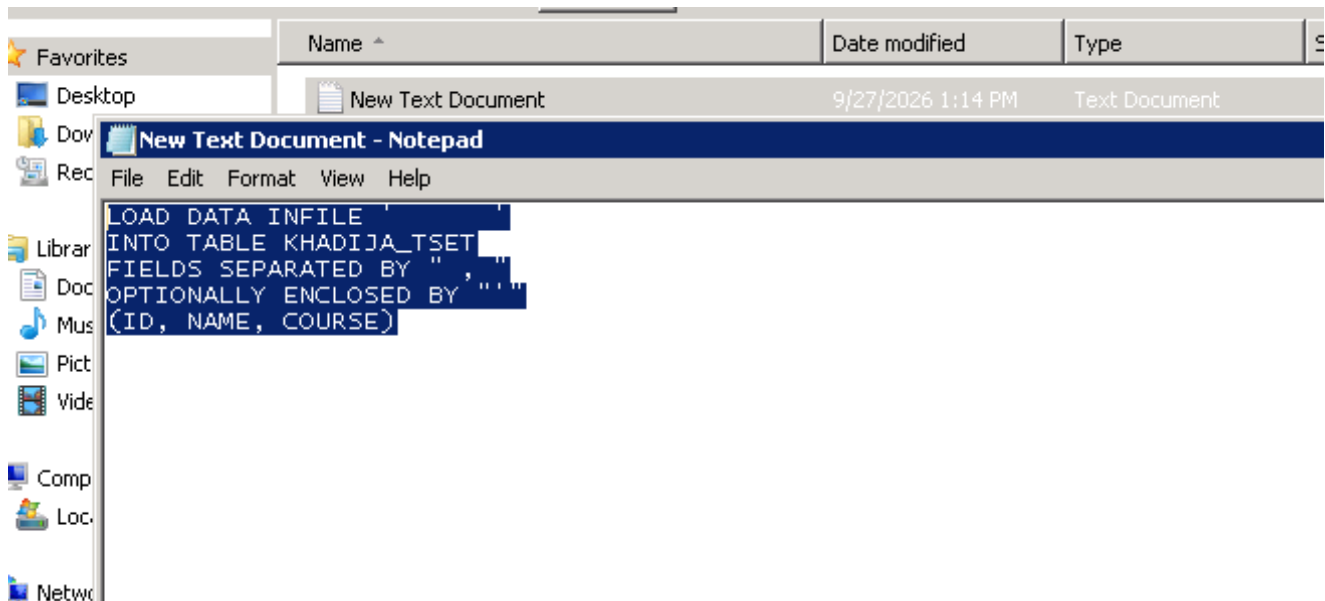

Step 3: Save the file as a .ctl control file


File, Save As. Set Save as type to All Files and name it KHADIJACONTROL.ctl.

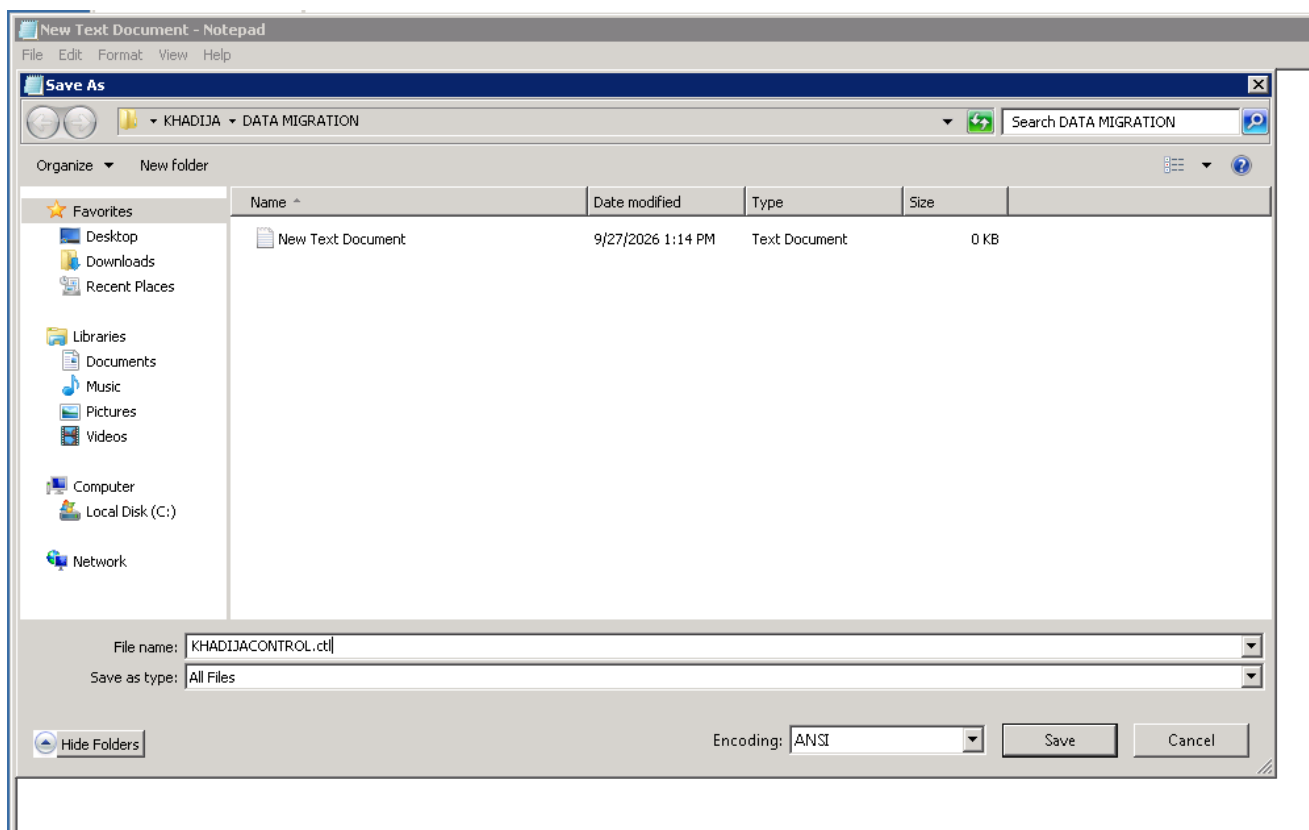

Step 4: Add the data file path inside the control file

Point INFILE to the location where the data file will sit on the EBS server (the reports/US folder). Save the control file again.


```
INFILE '/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJADATA.dat'
```

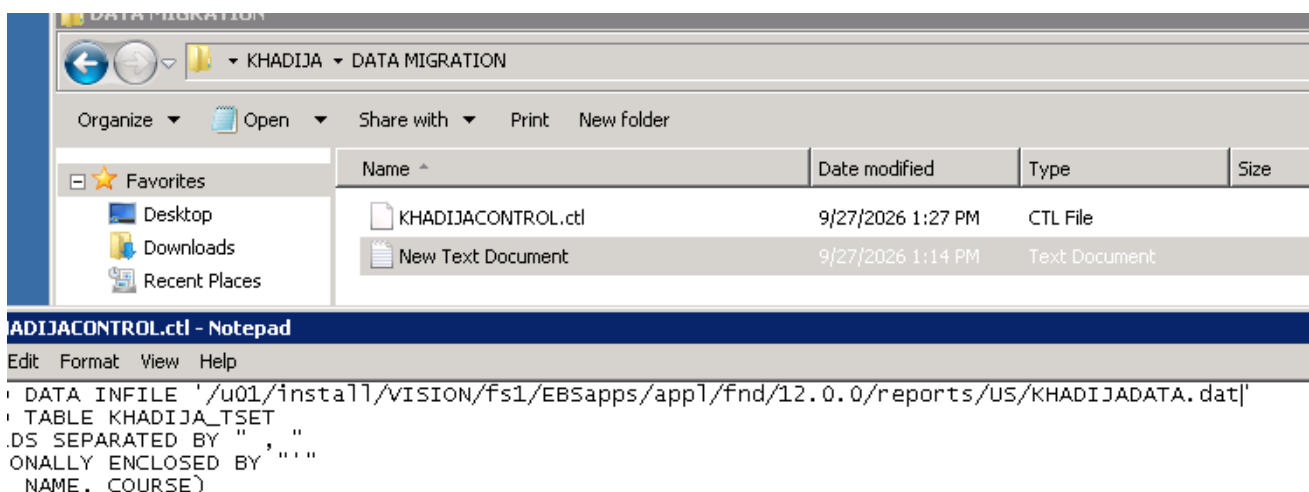

Step 5: Create the data file

Create another text document and type one record per line, with values separated by commas.

PRACTICE

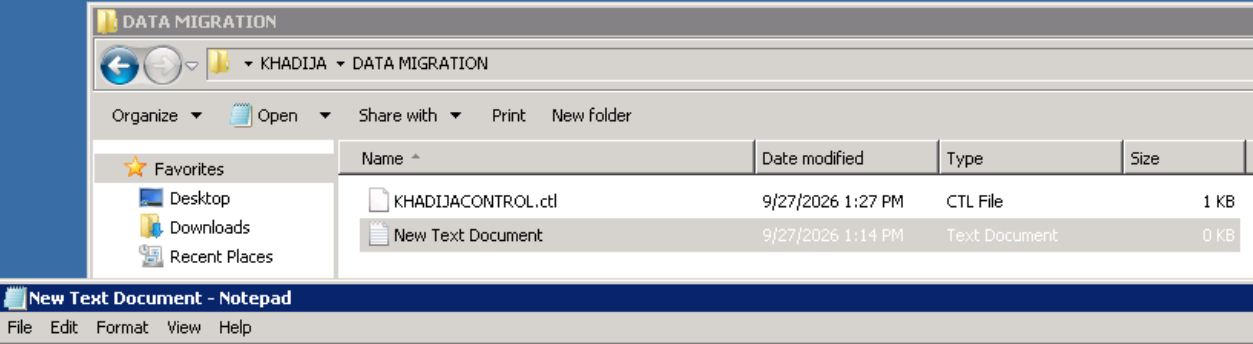

DATA MIGRATION

Organize Open Share with Print New folder

Favorites

- Desktop
- Downloads
- Recent Places

Name	Date modified	Type	Size
KHADIJACONTROL.ctl	9/27/2026 1:27 PM	CTL File	1 KB
New Text Document	9/27/2026 1:14 PM	Text Document	0 KB

New Text Document - Notepad


File Edit Format View Help

```
1,'KHADIJA','ORACLE'  
2,'ALI','C++'  
3,'JOHN','CYBERSECURITY'  
4,'SMITH','JAVA'  
5,'ANIL','FUSION'
```

Step 6: Save the file as a .dat data file

File, Save As, All Files, and name it with the .dat extension. The file name must match the name used in INFILE.


Note: The Save As screenshot uses KHADIJADATAFILE.dat, while INFILE and WinSCP use KHADIJADATA.dat. Use one name in both places.

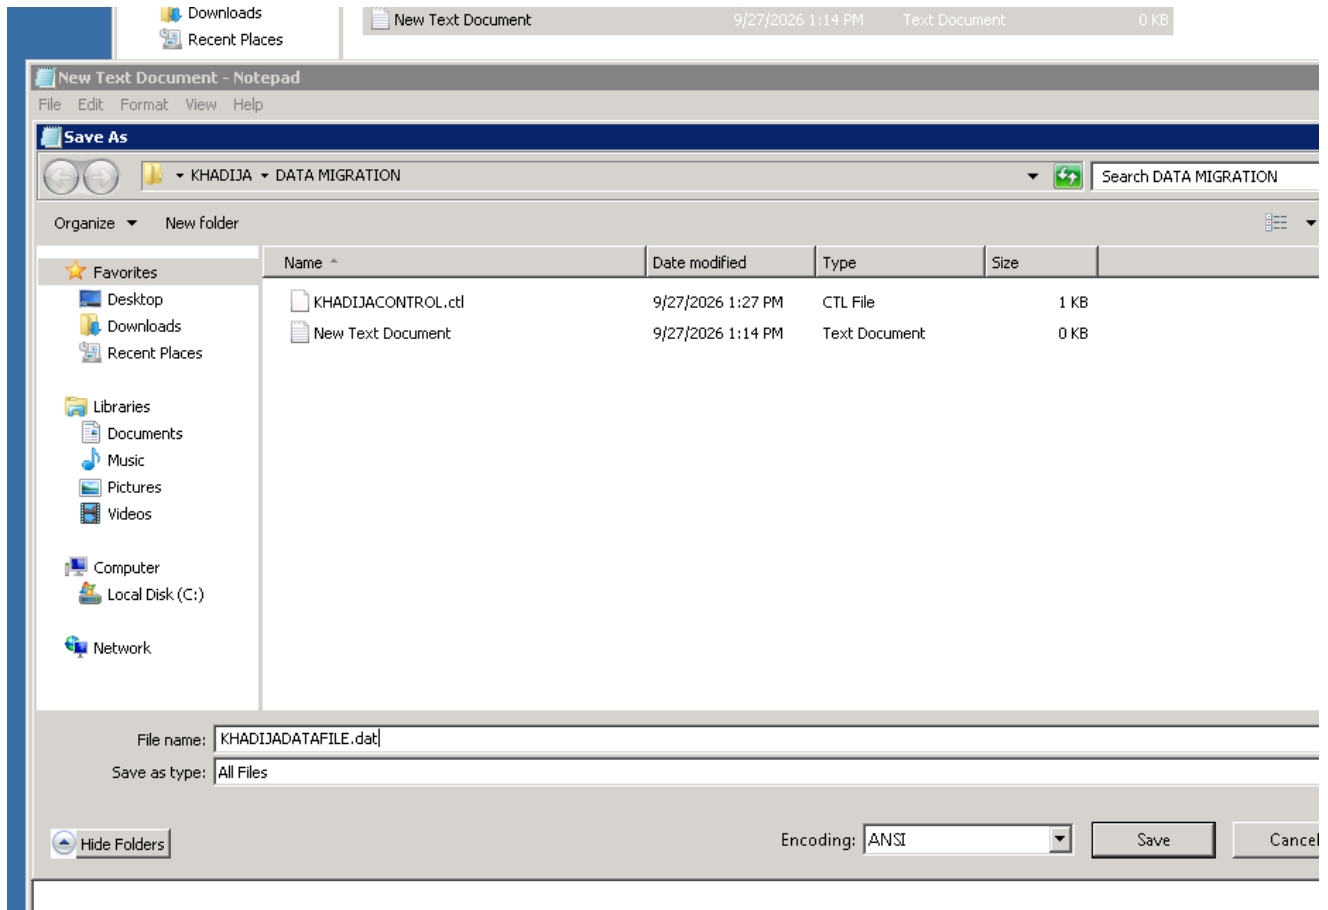

Step 7: Copy the server path in WinSCP


Connect to the EBS server with WinSCP. Press Ctrl+O (Open directory) and select the bookmark for the reports/US folder.

/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US

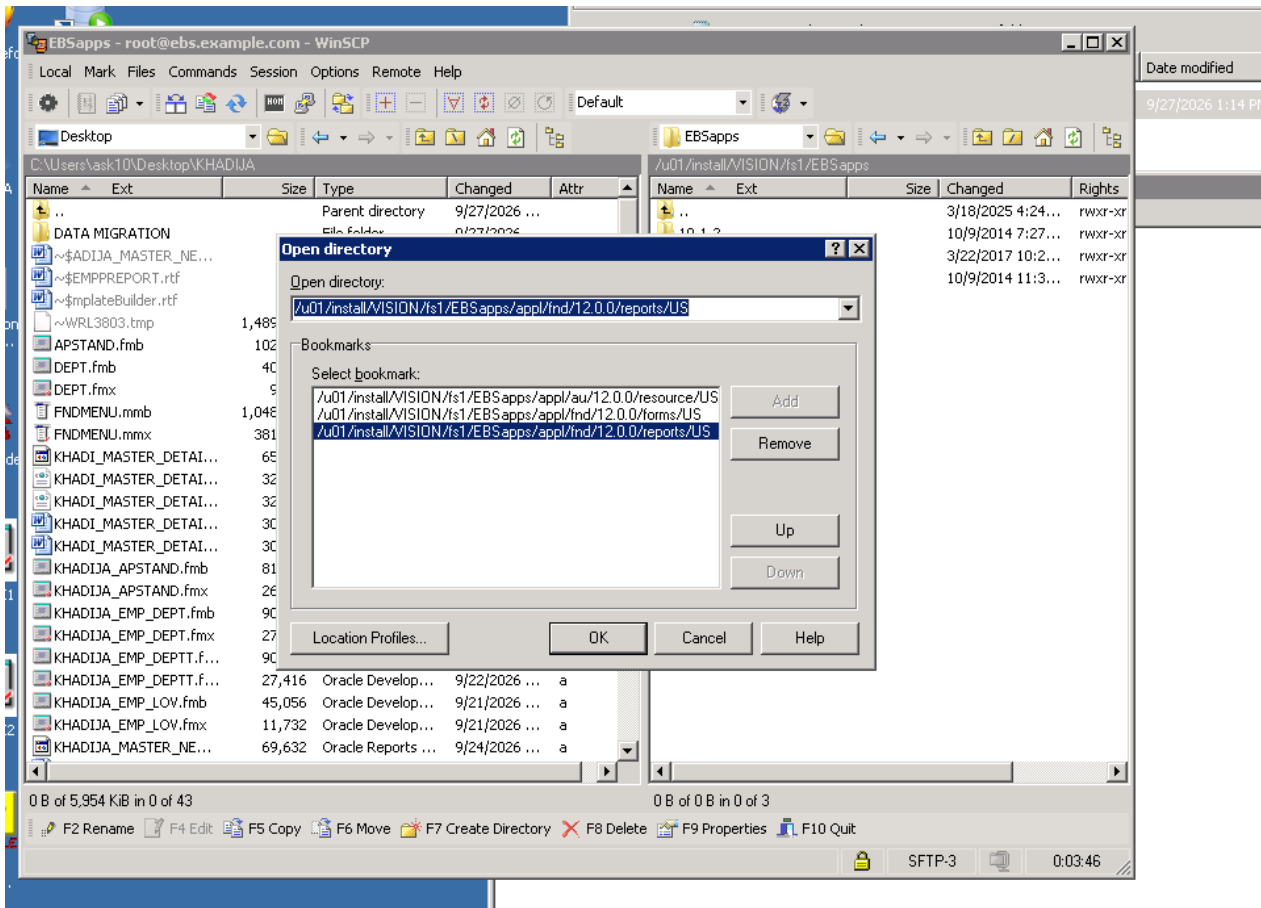

Step 8: Move both files to the EBS server

Select KHADIJACONTROL.ctl and KHADIJADATA.dat in the left panel, press F5 (Copy), and confirm the remote directory. Both files should now appear in the server folder.

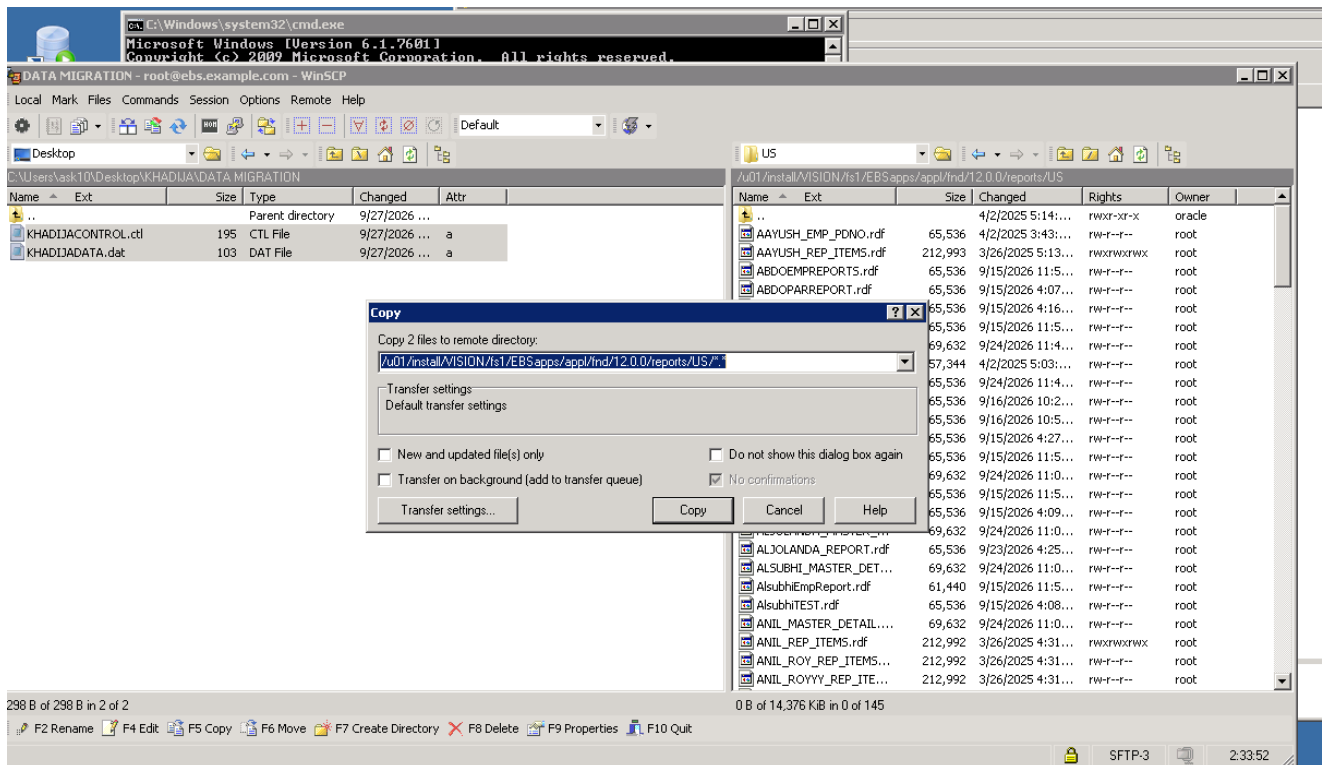

Step 9: Check the database environment

Log in to the EBS server as root and confirm the database is reachable and the environment variables are set before loading anything.

- Run `tnsping` to confirm the listener answers (result: OK).
- Check `echo $ORACLE_SID (EBSDB)` and `echo $ORACLE_HOME`.
- Confirm the database process is running: `ps -ef | grep pmon | grep -v grep`.
- If needed: `export ORACLE_SID=EBSDB`.

```
TNS Ping Utility for Linux: Version 11.2.0.4.0 - Production on 26-SEP-2026 08:43:06
Copyright (c) 1997, 2013, Oracle. All rights reserved.

Used parameter files:
/u01/install/VISION/fs1/inst/apps/EBSDB_ebs/ora/10.1.2/network/admin/sqlnet_ifile.ora

Used TNSNAMES adapter to resolve the alias
Attempting to contact (DESCRIPTION= (ADDRESS= (PROTOCOL=tcp) (HOST=ebs.example.com) (PORT=1521)) (CONNECT_DATA= (SERVICE_NAME=E
BSDB) (INSTANCE_NAME=EBSDB)))
OK (0 msec)
[root@ebs US]# echo $ORACLE_SID
EBSDB
[root@ebs US]# echo $ORACLE_SID
EBSDB
[root@ebs US]# echo $ORACLE_HOME
/u01/install/VISION/11.2.0
[root@ebs US]# ps -ef | grep pmon | grep -v grep
oracle      1390      1  0 Sep16 ?        00:03:06 ora_pmon_EBSDB
[root@ebs US]# export ORACLE_SID=EBSDB
[root@ebs US]# echo $ORACLE_SID
EBSDB
[root@ebs US]# sqldr apps/appscontrol=/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ct1
LRM-00101: unknown parameter name 'apps/appscontrol'

SQL*Loader: Release 11.2.0.4.0 - Production on Sat Sep 26 08:51:26 2026
Copyright (c) 1982, 2011, Oracle and/or its affiliates. All rights reserved.

SQL*Loader-100: Syntax error on command-line
[root@ebs US]# sqldr apps/apps control=/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ct1

SQL*Loader: Release 11.2.0.4.0 - Production on Sat Sep 26 08:53:27 2026
Copyright (c) 1982, 2011, Oracle and/or its affiliates. All rights reserved.
```

Step 10: Run SQL*Loader

On the server, go to the reports/US folder and run sqlldr with the apps login and the control file path.

```
sqlldr apps/apps control=/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ctl
```

Errors seen along the way and their fixes:

- **LRM-00101 / SQL*Loader-100:** the login was typed wrongly (apps/appscontrol=, or a space in apps control=). Write apps/apps, then a space, then control=.
- **SQL*Loader-509, no such file or directory:** the control file path is wrong or the file was not copied to the server.
- **SQL*Loader-350, syntax error at line 8:** fix the column list in the control file using vi and run again.

A successful run shows the commit point lines (logical record count 4 and 5).

```
root@ebs:/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US
SQL*Loader-509: System error: No such file or directory
[root@ebs US]# sqlldr apps/apps control=/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ctl

SQL*Loader: Release 11.2.0.4.0 - Production on Sat Sep 26 08:57:14 2026

Copyright (c) 1982, 2011, Oracle and/or its affiliates. All rights reserved.

SQL*Loader-350: Syntax error at line 8:
Illegal combination of non-alphanumeric characters
ID,
^
[root@ebs US]# vi /u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ctl
[root@ebs US]# vi /u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ctl
[root@ebs US]# sqlldr apps/apps control=/u01/install/VISION/fs1/EBSapps/appl/fnd/12.0.0/reports/US/KHADIJACONTROL.ctl

SQL*Loader: Release 11.2.0.4.0 - Production on Sat Sep 26 09:13:29 2026

Copyright (c) 1982, 2011, Oracle and/or its affiliates. All rights reserved.

Commit point reached - logical record count 4
Commit point reached - logical record count 5
[root@ebs US]# sqlplus apps/apps

SQL*Plus: Release 11.2.0.4.0 Production on Sat Sep 26 09:14:15 2026

Copyright (c) 1982, 2013, Oracle. All rights reserved.

Connected to:
Oracle Database 11g Enterprise Edition Release 11.2.0.4.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options

SQL> SELECT * FROM KHADIJA_TEST;

   ID NAME
-----
COURSE
-----
1 'KHADIJA'
'ORACLE'
2 'ALI'
'C++'
3 'JOHN'
'CYBERSECURITY'

   ID NAME
-----
COURSE
-----
4 'SMITH'
'JAVA'
5 'ANIL'
'FUSION'
```

Step 11: Verify the loaded data

Open SQL*Plus and query the table to confirm all five records loaded.

```
sqlplus apps/apps  
SELECT * FROM KHADIJA_TEST;
```

Note: The values show with quotes, for example 'KHADIJA'. The single quotes in the data file were loaded as part of the data, because the control file only strips double quotes. Remove the single quotes from the .dat file if you do not want them.

```
With the Partitioning, OLAP, Data Mining and Real Application Testing options  
SQL> SELECT * FROM KHADIJA_TEST;  
  
      ID NAME  
-----  
COURSE  
-----  
      1 'KHADIJA'  
'ORACLE'  
      2 'ALI'  
'C++'  
      3 'JOHN'  
'CYBERSECURITY'  
  
      ID NAME  
-----  
COURSE  
-----  
      4 'SMITH'  
'JAVA'  
      5 'ANIL'  
'FUSION'  
  
SQL> 
```