

Creating Other Schema Objects

Oracle for Base

Objectives

After completing this lesson, you should be able to do the following:

- Create simple and complex views
- Retrieve data from views
- Create, maintain, and use sequences
- Create and maintain indexes
- Create private and public synonyms

Lesson Stanford

- Overview of views:
 - Creating, modifying, and retrieving data from a view
 - Data manipulation language (DML) operations on a view
 - Dropping a view
- Overview of sequences:
 - Creating, using, and modifying a sequence
 - Cache sequence values
 - NEXTVAL and CURRVAL pseudocolumns
- Overview of indexes
 - Creating, dropping indexes
- Overview of synonyms
 - Creating, dropping synonyms

Database Objects


Object	Description
Table	Basic unit of storage; composed of rows
View	Logically represents subsets of data from one or more tables
Sequence	Generates numeric values
Index	Improves the performance of data retrieval queries
Synonym	Gives alternative names to objects

What Is a View?

EMPLOYEES table

EMPLOYEE_ID	FIRST_NAME	LAST_NAME	EMAIL	PHONE_NUMBER	HIRE_DATE	JOB_ID	SALARY
100	Steven	King	SKING	515.123.4567	17-JUN-87	AD_PRES	24000
101	Neena	Kochhar	NKOCHH...	515.123.4568	21-SEP-89	AD_VP	17000
102	Lex	De Haan	LDEHAAN	515.123.4569	13-JAN-93	AD_VP	17000
103	Alexander	Hunold	AHUNOLD	590.423.4567	03-JAN-90	IT_PROG	9000
104	Bruce	Ernst	BERNST	590.423.5666	17-AUG-97	MK_REP	6000
105	David	Turner	DTURNER	515.123.4565	17-SEP-87	AD_ASST	4400
106	Walter	Clark	WCLARK	515.123.4564	17-FEB-96	MK_MAN	13000
107	John	Smith	JSMITH	515.123.4563	17-SEP-87	AD_ASST	4400
108	Peter	Dutton	PDUTTON	515.123.4562	17-SEP-87	AD_ASST	4400
109	Janina	Barber	JBARBER	515.123.4561	17-SEP-87	AD_ASST	4400
110	Shelley	Higgins	SHIGGINS	515.123.8080	07-JUN-94	AC_MGR	12000
111	William	Gietz	WGIEZT	515.123.8181	07-JUN-94	AC_ACC...	8300

Advantages of Views

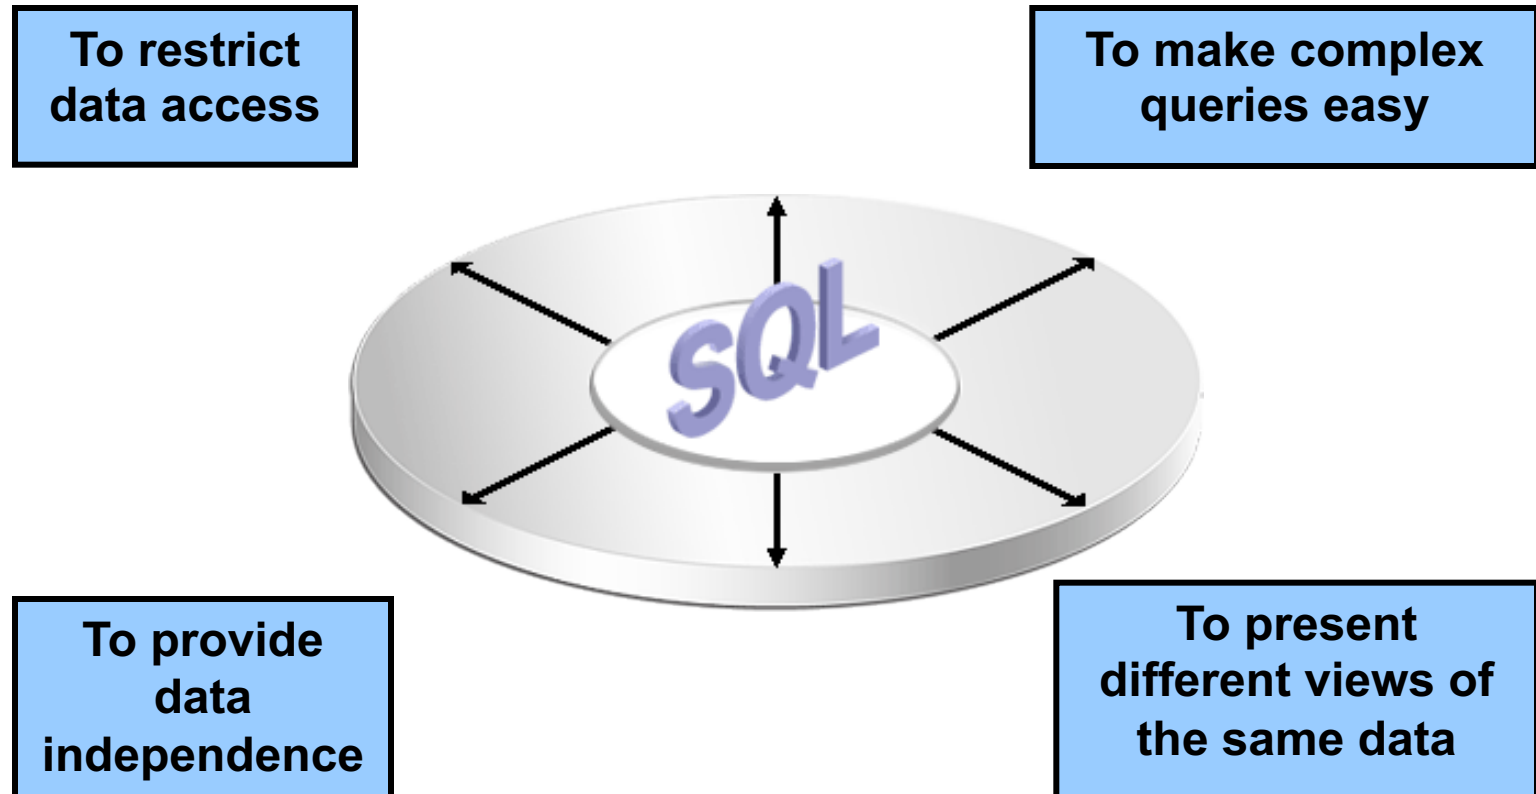

Simple Views and Complex Views

Feature	Simple Views	Complex Views
Number of tables	One	One or more
Contain functions	No	Yes
Contain groups of data	No	Yes
DML operations through a view	Yes	Not always

Creating a View

- You embed a subquery in the `CREATE VIEW` statement:

```
CREATE [OR REPLACE] [FORCE|NOFORCE] VIEW view
  [(alias[, alias]...)]
  AS subquery
  [WITH CHECK OPTION [CONSTRAINT constraint]]
  [WITH READ ONLY [CONSTRAINT constraint]];
```

- The subquery can contain complex `SELECT` syntax.

Creating a View

- Create the EMPVU80 view, which contains details of the employees in department 80:

```
CREATE VIEW empvu80
AS SELECT employee_id, last_name, salary
FROM employees
WHERE department_id = 80;
```

```
CREATE VIEW succeeded.
```

- Describe the structure of the view by using the *iSQL*Plus* DESCRIBE command:

```
DESCRIBE empvu80
```

Creating a View

- Create a view by using column aliases in the subquery:

```
CREATE VIEW    salvu50
  AS SELECT    employee_id ID_NUMBER, last_name NAME,
              salary*12 ANN_SALARY
    FROM      employees
    WHERE     department_id = 50;
CREATE VIEW succeeded.
```

- Select the columns from this view by the given alias names.

Retrieving Data from a View

```
SELECT *  
FROM salvu50;
```

	<small>R Z</small> ID_NUMBER	<small>R Z</small> NAME	<small>R Z</small> ANN_SALARY
1	124	Mourgos	69600
2	141	Rajs	42000
3	142	Davies	37200
4	143	Matos	31200
5	144	Vargas	30000

Modifying a View

- Modify the EMPVU80 view by using a CREATE OR REPLACE VIEW clause. Add an alias for each column name:

```
CREATE OR REPLACE VIEW empvu80
  (id_number, name, sal, department_id)
AS SELECT  employee_id, first_name || ' '
           || last_name, salary, department_id
  FROM      employees
  WHERE     department_id = 80;
```

```
CREATE OR REPLACE VIEW succeeded.
```

- Column aliases in the CREATE OR REPLACE VIEW clause are listed in the same order as the columns in the subquery.



Creating a Complex View

Create a complex view that contains group functions to display values from two tables:

```
CREATE OR REPLACE VIEW dept_sum_vu
  (name, minsal, maxsal, avgsal)
AS SELECT    d.department_name, MIN(e.salary),
             MAX(e.salary), AVG(e.salary)
  FROM      employees e JOIN departments d
  ON        (e.department_id = d.department_id)
  GROUP BY d.department_name;
```

```
CREATE OR REPLACE VIEW succeeded.
```

Rules for Performing DML Operations on a View

- You can usually perform DML operations on simple views. 
- You cannot remove a row if the view contains the following:
 - Group functions
 - A `GROUP BY` clause
 - The `DISTINCT` keyword
 - The pseudo column `ROWNUM` keyword

Rules for Performing DML Operations on a View

You cannot modify data in a view if it contains:

- Group functions
- A `GROUP BY` clause
- The `DISTINCT` keyword
- The pseudo column `ROWNUM` keyword
- Columns defined by expressions

Rules for Performing DML Operations on a View

You cannot add data through a view if the view includes:

- Group functions
- A `GROUP BY` clause
- The `DISTINCT` keyword
- The pseudo column `ROWNUM` keyword
- Columns defined by expressions
- `NOT NULL` columns in the base tables that are not selected by the view

Removing a View

You can remove a view without losing data because a view is based on underlying tables in the database.

```
DROP VIEW view;
```

```
DROP VIEW empvu80;
```

```
DROP VIEW empvu80 succeeded.
```

Practice 7: Overview

This practice covers the following topics:

- Creating a simple view
- Creating a complex view
- Creating a view with a check constraint
- Attempting to modify data in the view
- Removing views

Lesson Stanford

- Overview of views:
 - Creating, modifying, and retrieving data from a view
 - DML operations on a view
 - Dropping a view
- Overview of sequences:
 - Creating, using, and modifying a sequence
 - Cache sequence values
 - NEXTVAL and CURRVAL pseudocolumns
- Overview of indexes
 - Creating, dropping indexes
- Overview of synonyms
 - Creating, dropping synonyms


Sequences

Object	Description
Table	Basic unit of storage; composed of rows
View	Logically represents subsets of data from one or more tables
Sequence	Generates numeric values
Index	Improves the performance of some queries
Synonym	Gives alternative names to objects

Sequences

A sequence:

- Can automatically generate unique numbers
- Is a shareable object
- Can be used to create a primary key value
- Replaces application code
- Speeds up the efficiency of accessing sequence values when cached in memory

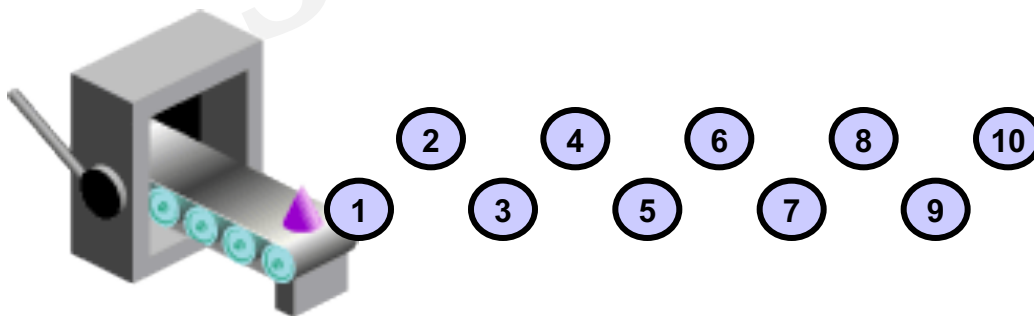

CREATE SEQUENCE Statement: Syntax

Define a sequence to generate sequential numbers automatically:

```
CREATE SEQUENCE sequence
  [INCREMENT BY n]
  [START WITH n]
  [{MAXVALUE n | NOMAXVALUE}]
  [{MINVALUE n | NOMINVALUE}]
  [{CYCLE | NOCYCLE}]
  [{CACHE n | NOCACHE}] ;
```

Creating a Sequence

- Create a sequence named `DEPT_DEPTID_SEQ` to be used for the primary key of the `DEPARTMENTS` table.
- Do not use the `CYCLE` option.

```
CREATE SEQUENCE dept_deptid_seq  
            INCREMENT BY 10  
            START WITH 120  
            MAXVALUE 9999  
            NOCACHE  
            NOCYCLE;
```

```
CREATE SEQUENCE succeeded.
```

NEXTVAL and CURRVAL Pseudocolumns

- NEXTVAL returns the next available sequence value. It returns a unique value every time it is referenced, even for different users.
- CURRVAL obtains the current sequence value.
- NEXTVAL must be issued for that sequence before CURRVAL contains a value.

Using a Sequence

- Insert a new department named “Support” in location ID 2500:

```
INSERT INTO departments (department_id,  
                        department_name, location_id)  
VALUES                (dept_deptid_seq.NEXTVAL,  
                        'Support', 2500);
```

```
1 rows inserted
```

- View the current value for the DEPT_DEPTID_SEQ sequence:

```
SELECT    dept_deptid_seq.CURRVAL  
FROM      dual;
```

Caching Sequence Values

- Caching sequence values in memory gives faster access to those values.
- Gaps in sequence values can occur when:
 - A rollback occurs
 - The system crashes
 - A sequence is used in another table

Stanford

Modifying a Sequence

Change the increment value, maximum value, minimum value, cycle option, or cache option:

```
ALTER SEQUENCE dept_deptid_seq  
          INCREMENT BY 20  
          MAXVALUE 999999  
          NOCACHE  
          NOCYCLE;
```

```
ALTER SEQUENCE dept_deptid_seq succeeded.
```

Guidelines for Modifying a Sequence

- You must be the owner or have the `ALTER` privilege for the sequence.
- Only future sequence numbers are affected.
- The sequence must be dropped and re-created to restart the sequence at a different number.
- Some validation is performed.
- To remove a sequence, use the `DROP` statement:

```
DROP SEQUENCE dept_deptid_seq;
```

```
DROP SEQUENCE dept_deptid_seq succeeded.
```

Lesson Stanford

- Overview of views:
 - Creating, modifying, and retrieving data from a view
 - DML operations on a view
 - Dropping a view
- Overview of sequences:
 - Creating, using, and modifying a sequence
 - Cache sequence values
 - NEXTVAL and CURRVAL pseudocolumns
- Overview of indexes
 - Creating, dropping indexes
- Overview of synonyms
 - Creating, dropping synonyms


Indexes

Object	Description
Table	Basic unit of storage; composed of rows
View	Logically represents subsets of data from one or more tables
Sequence	Generates numeric values
Index	Improves the performance of some queries
Synonym	Gives alternative names to objects

Indexes


An index:

- Is a schema object
- Can be used by the Oracle server to speed up the retrieval of rows by using a pointer
- Can reduce disk input/output (I/O) by using a rapid path access method to locate data quickly
- Is independent of the table that it indexes
- Is used and maintained automatically by the Oracle server



How Are Indexes Created?

- Automatically: A unique index is created automatically when you define a `PRIMARY KEY` or `UNIQUE` constraint in a table definition.



- Manually: Users can create nonunique indexes on columns to speed up access to the rows.



Creating an Index

- Create an index on one or more columns:

```
CREATE [UNIQUE][BITMAP]INDEX index  
ON table (column[, column]...);
```

- Improve the speed of query access to the `LAST_NAME` column in the `EMPLOYEES` table:

```
CREATE INDEX emp_last_name_idx  
ON          employees(last_name);
```

```
CREATE INDEX succeeded.
```

Index Creation Guidelines

Create an index when:

- | | |
|---|--|
| ✓ | A column contains a wide range of values |
| ✓ | A column contains a large number of null values |
| ✓ | One or more columns are frequently used together in a <code>WHERE</code> clause or a join condition |
| ✓ | The table is large and most queries are expected to retrieve less than 2% to 4% of the rows in the table |

Do not create an index when:

- | | |
|---|---|
| ✗ | The columns are not often used as a condition in the query |
| ✗ | The table is small or most queries are expected to retrieve more than 2% to 4% of the rows in the table |
| ✗ | The table is updated frequently |
| ✗ | The indexed columns are referenced as part of an expression |

Removing an Index

- Remove an index from the data dictionary by using the `DROP INDEX` command:

```
DROP INDEX index;
```

- Remove the `emp_last_name_idx` index from the data dictionary:

```
DROP INDEX emp_last_name_idx;
```

```
DROP INDEX emp_last_name_idx succeeded.
```

- To drop an index, you must be the owner of the index or have the `DROP ANY INDEX` privilege.

Lesson Stanford

- Overview of views:
 - Creating, modifying, and retrieving data from a view
 - DML operations on a view
 - Dropping a view
- Overview of sequences:
 - Creating, using, and modifying a sequence
 - Cache sequence values
 - NEXTVAL and CURRVAL pseudocolumns
- Overview of indexes
 - Creating, dropping indexes
- Overview of synonyms
 - Creating, dropping synonyms

Synonyms

Object	Description
Table	Basic unit of storage; composed of rows
View	Logically represents subsets of data from one or more tables
Sequence	Generates numeric values
Index	Improves the performance of some queries
Synonym	Gives alternative names to objects

Creating a Synonym for an Object

Simplify access to objects by creating a synonym (another name for an object). With synonyms, you can:

- Create an easier reference to a table that is owned by another user
- Shorten lengthy object names

```
CREATE [PUBLIC] SYNONYM synonym  
FOR    object;
```

Creating and Removing Synonyms

- Create a shortened name for the DEPT_SUM_VU view:

```
CREATE SYNONYM d_sum  
FOR dept_sum_vu;
```

```
CREATE SYNONYM succeeded.
```

- Drop a synonym:

```
DROP SYNONYM d_sum;
```

```
DROP SYNONYM d_sum succeeded.
```

Summary

In this lesson, you should have learned how to:

- Create, use, and remove views
- Automatically generate sequence numbers by using a sequence generator
- Create indexes to improve speed of query retrieval
- Use synonyms to provide alternative names for objects

Practice 7: Creating Other Schema Objects

This practice covers the following topics:

- Creating sequences
- Using sequences
- Creating nonunique indexes
- Creating synonyms

Stanford