Session 9-2

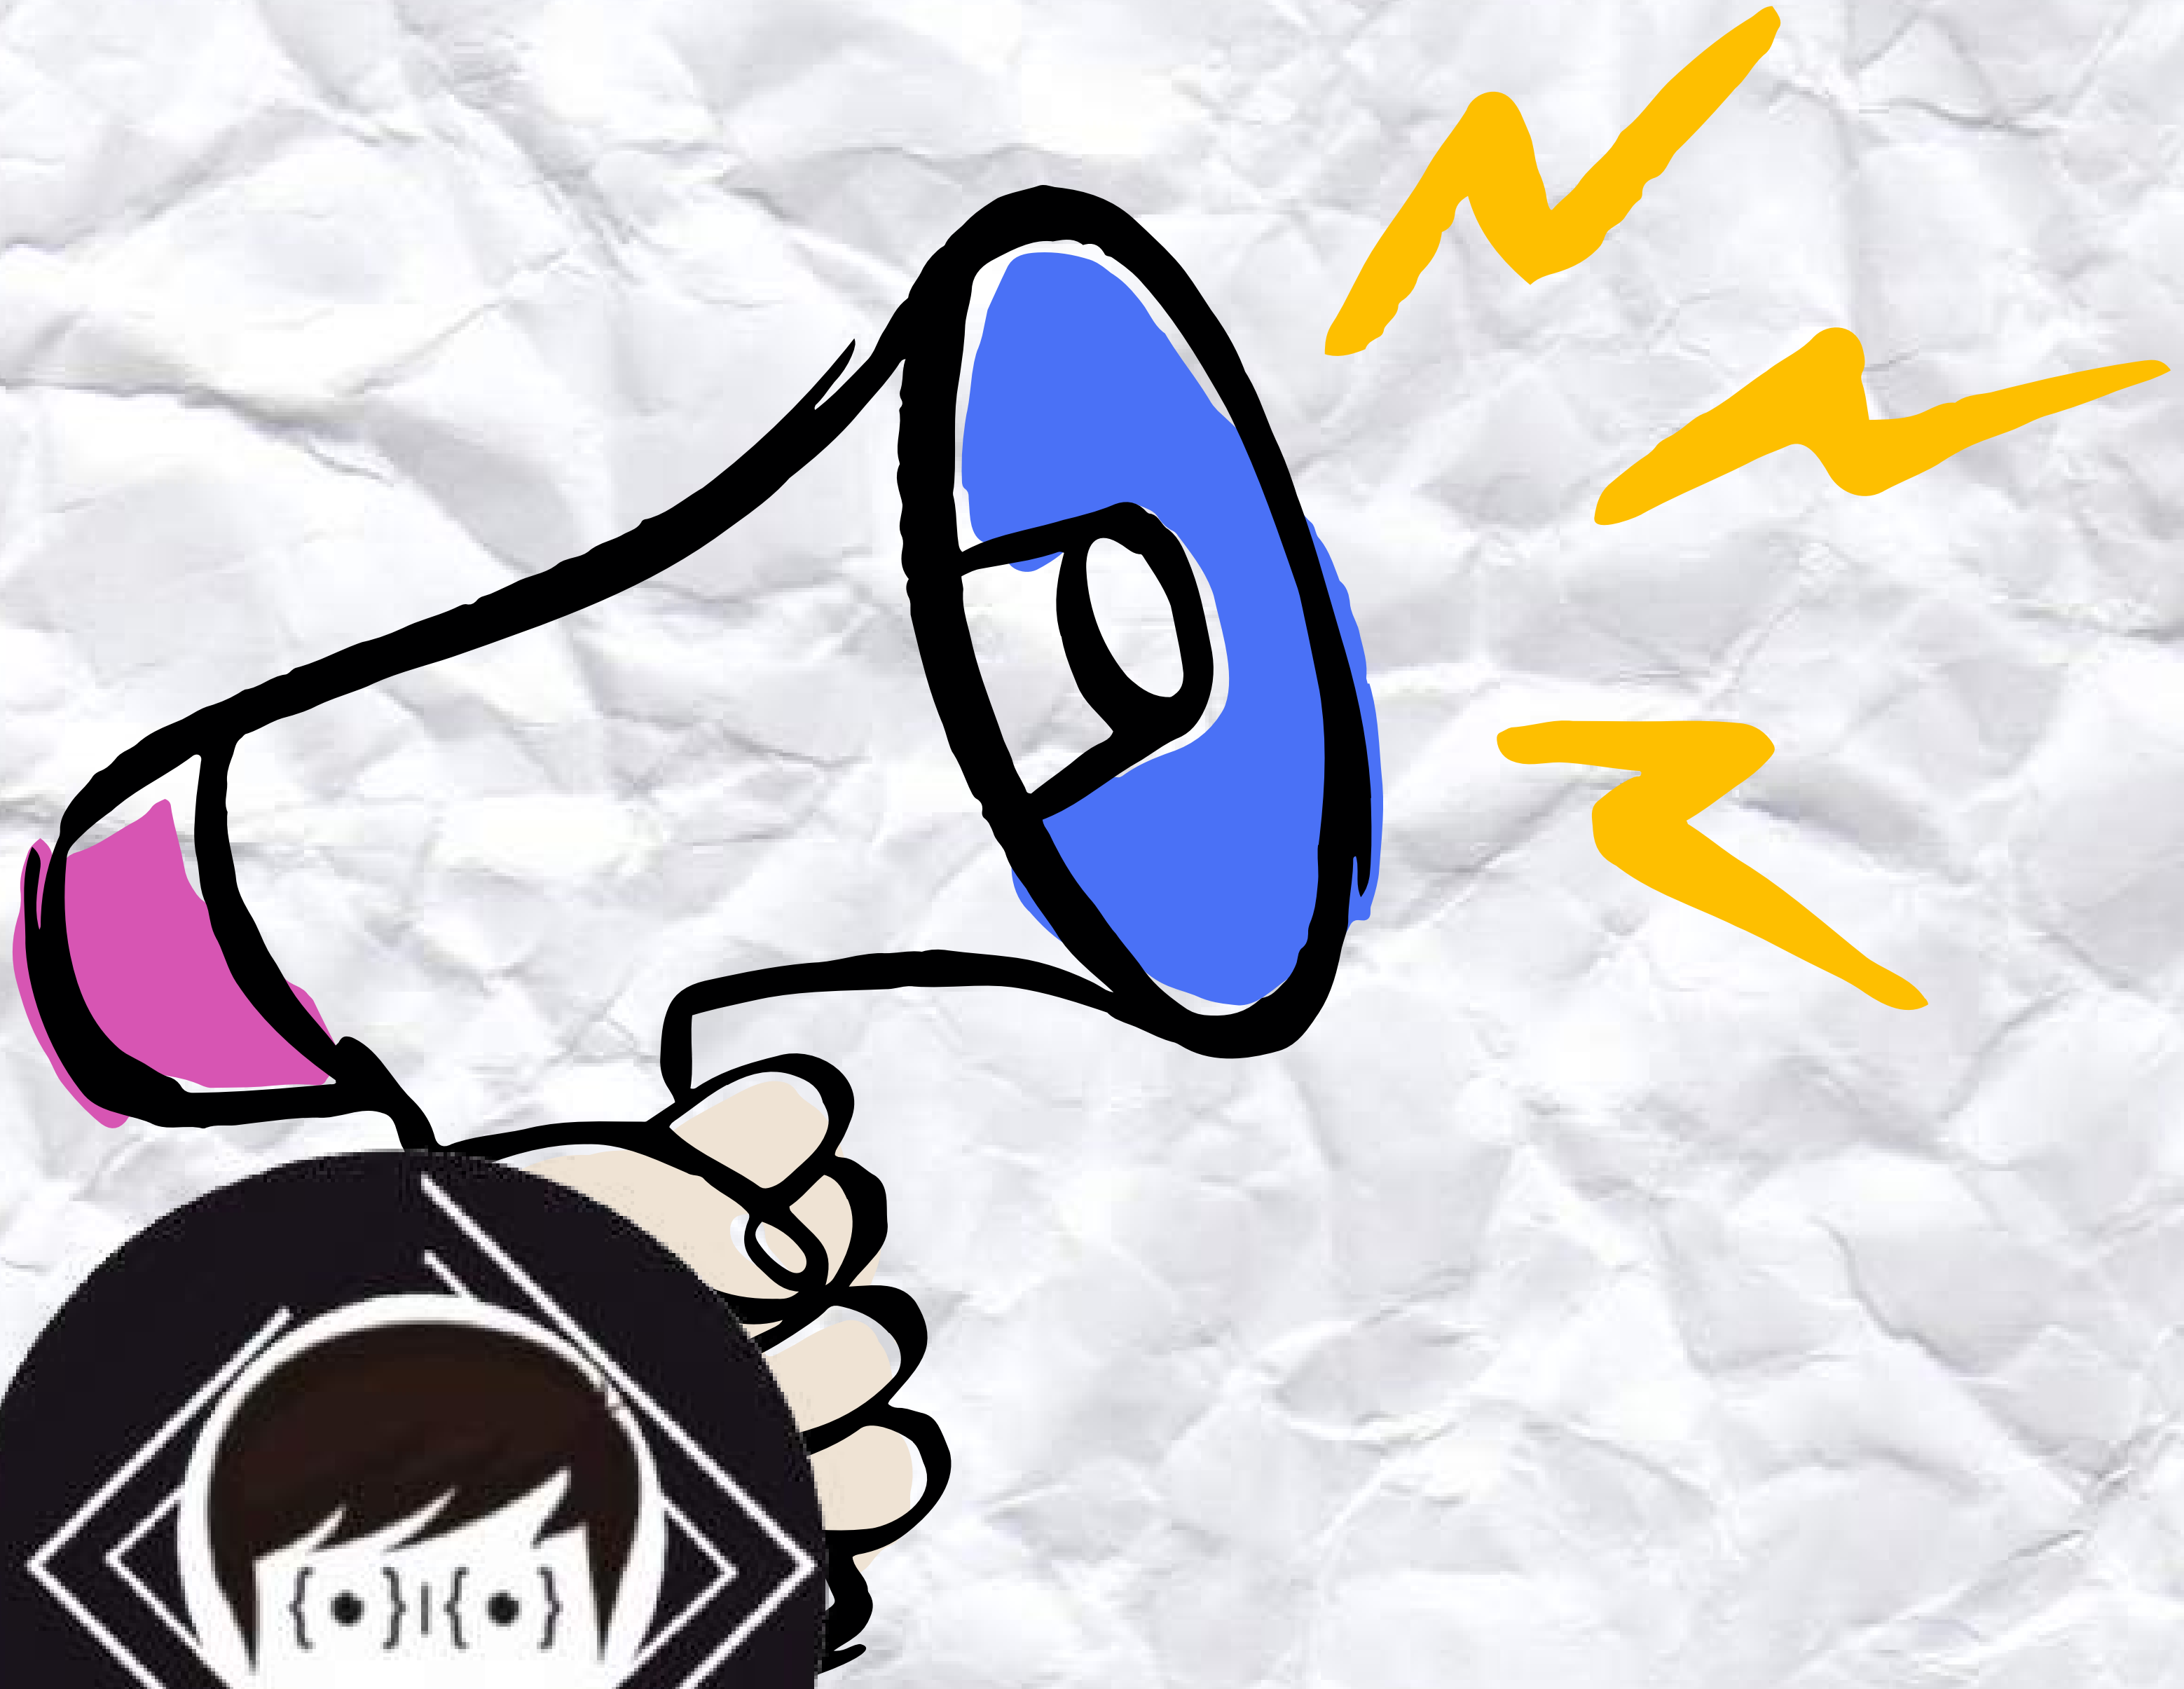

By: KolimNTCode

Mini Project

```
student_scores = {
    "Budi": 88,
    "Susanti": 78,
    "Bima": 95,
    "Draco": 75,
    "Karen": 60
}
```

Bisakah kamu membuat data dari nama siswa dan nilai siswa tersebut, jika:

1. diatas 91 = sangat bagus
2. diatas 81 = bagus
3. diatas 71 = baik
4. dibawah 71 = gagal

menggunakan else if statemet, for loop, dan membuat variable baru yang berisi dict kosong

KOLIM NT CODE

Solution

```python
student_scores = {
    "Budi": 88,
    "Susanti": 78,
    "Bima": 95,
    "Draco": 75,
    "Karen": 60
}

student_grades = {}

for student, scores in student_scores.items():
    if scores >= 91:
        grade = "Sangat Bagus"

    elif scores >= 81:
        grade = "Bagus"

    elif scores >= 71:
        grade = "Baik"

    else:
        grade = "Gagal"

    student_grades[student] = grade

print(student_grades)
```

Nested List

```
travel = {
    "Indonesia" : ["Jakarta", "Bali", "Tangerang"]
}
#memanggil Bali
print(travel["Indonesia"][1])
```

Jika kita ingin menambahkan value lebih dari 1, kita masukan value yang lebih dari 1 ke dalam list

```
nested_list = ["A", "B", ["C", "D"]]
```

Bisakah kamu mengprint D?

```python
travel = {
    "Indonesia" : {
        "Kota_dikunjung" : ["Tangerang", "Jakarta", "Bali"],
        "Berapa_kali" : 3
    },

    "Japan" : {
        "Kota_dikunjung" : ["Kyoto", "Tokyo"],
        "Berapa_kali" : 2
    }
}


print(travel["Japan"]["Berapa_kali"])
```

KOLIM NT CODE

PROJECT

```python
def find_highest_bidder(bidding_dictionary):  1 usage
    winner = ""
    highest_bid = 0


    for bidder in bidding_dictionary:
        bid_amount = bidding_dictionary[bidder]
        if bid_amount > highest_bid:
            highest_bid = bid_amount
            winner = bidder

    print(f"The winner is {winner} with a bid of ${highest_bid}.")

bids = {}
continue_bidding = True
while continue_bidding:
    name = input("What is your name?: ")
    price = int(input("What is your bid?: $"))
    bids[name] = price
    should_continue = input("Are there any other bidders? Type 'yes' or 'no'. \n").lower()
    if should_continue == "no":
        continue_bidding = False
        find_highest_bidder(bids)
        print("\n" * 20)
```