


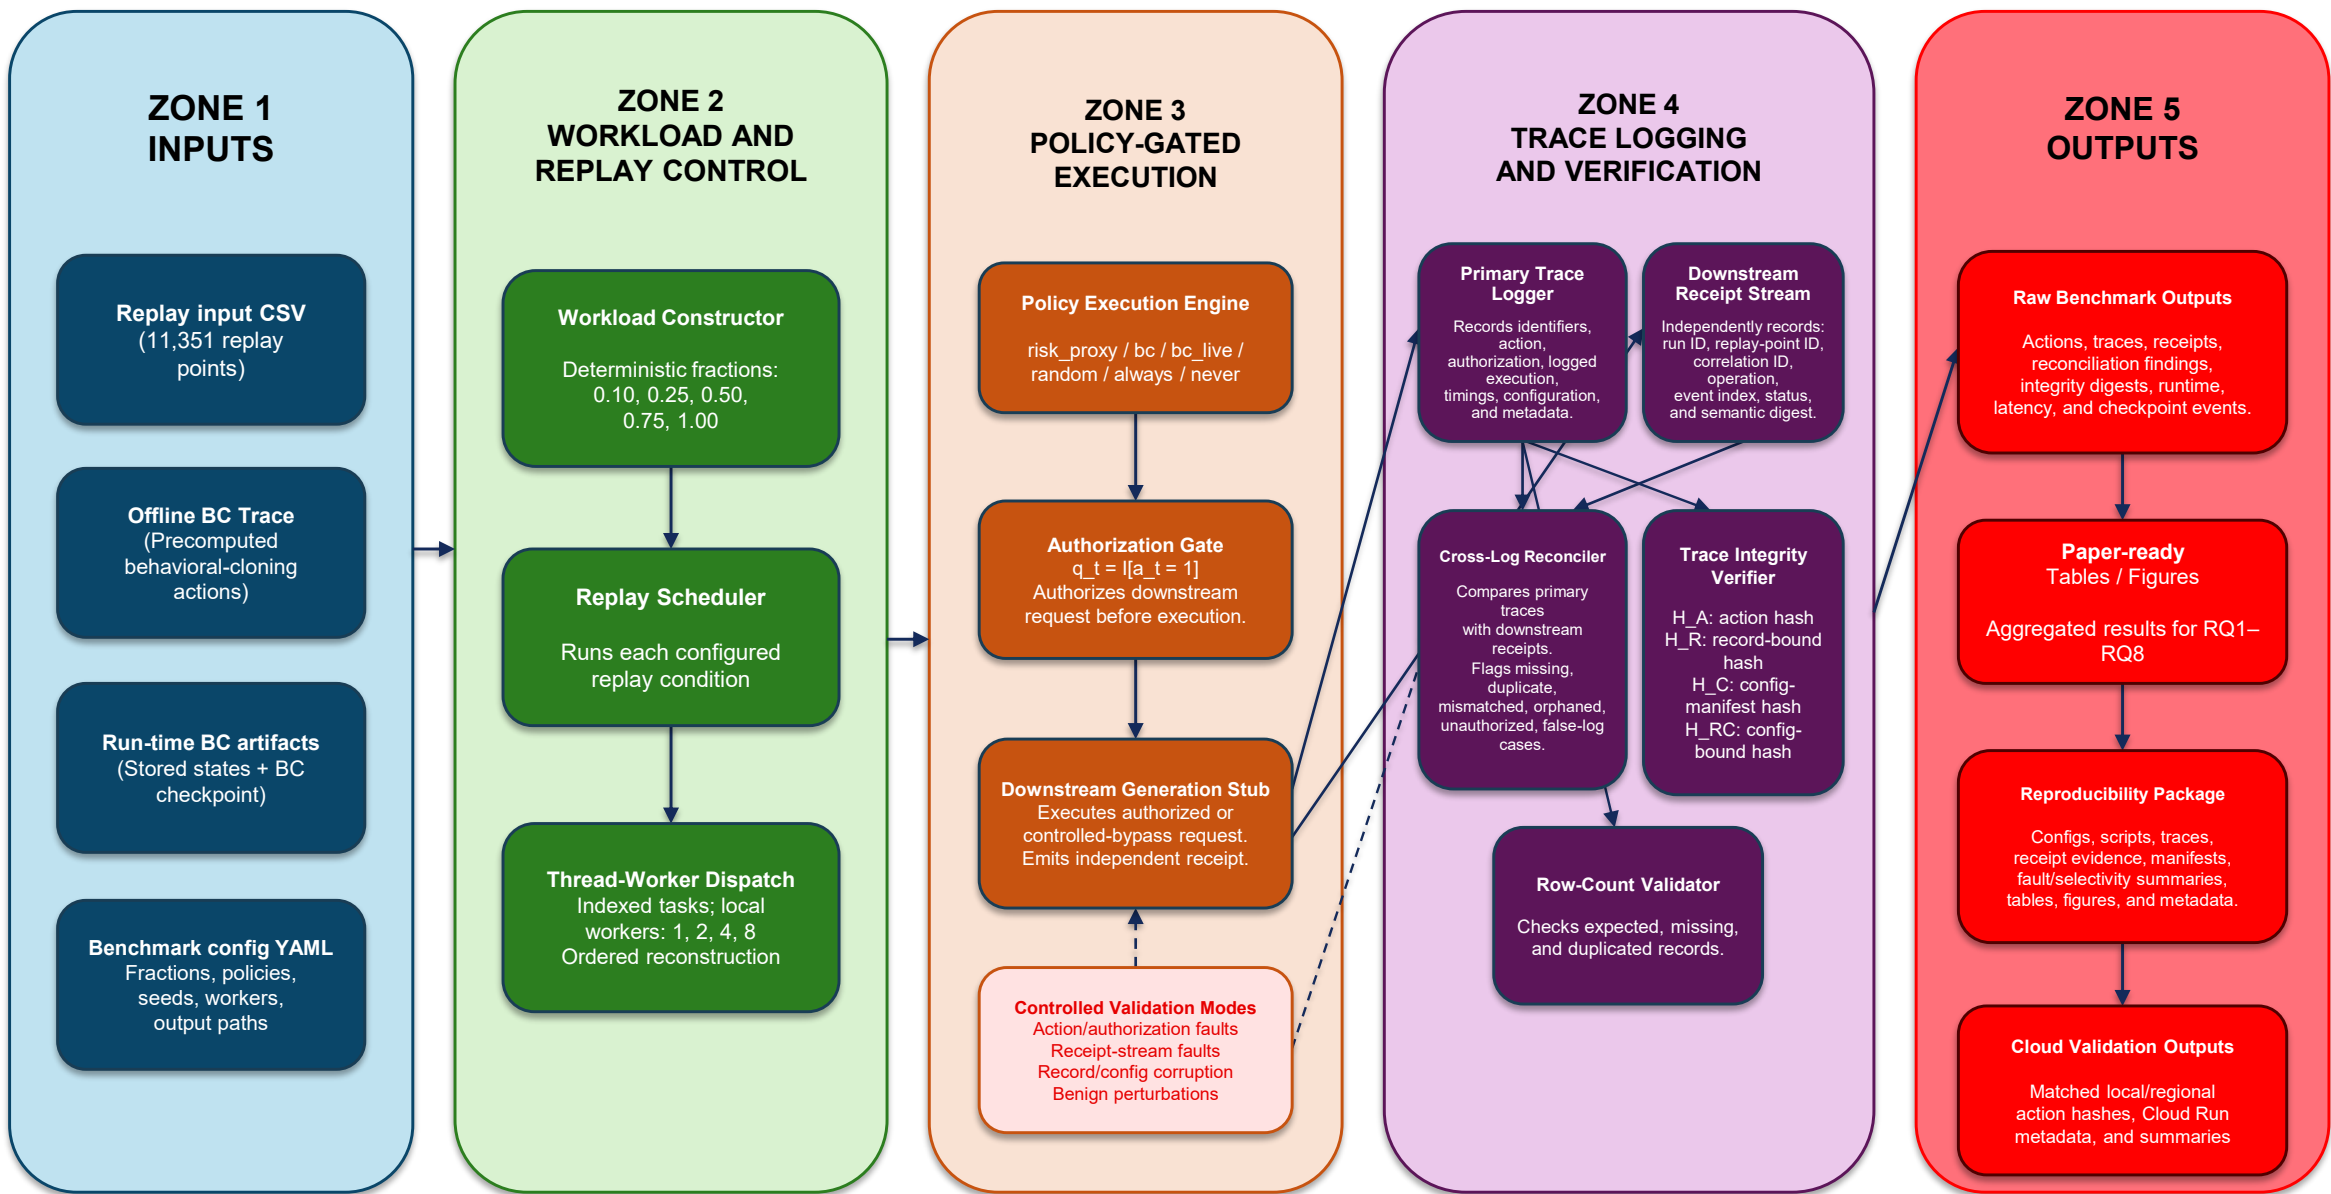

Authorization and primary execution logging are reconciled with independently emitted downstream receipts using run, replay-point, and correlation identifiers. H_A verifies ordered action equivalence; H_R binds record identity and execution state; H_C binds configuration identity; H_RC combines record and configuration integrity; row counts separately validate cardinality.