



2N Technologies



Backup and Restoration module for Prestashop



**Create your backup application
on Google Drive**



Go to the url: <https://console.cloud.google.com/projectcreate>

Fill in the project name (the module name for example) and click on “**create**”.

New Project

Project name *

NtBackupAndRestore ?

Project ID: ntbackupandrestore-430609. It cannot be changed later. [EDIT](#)

Location *

No organization [BROWSE](#)

Parent organization or folder

CREATE

CANCEL

At the top of your page, make sure that you are on the newly created project.

NtBackupAndRestore ▼

If not, select it.

Select a project NEW PROJECT

Search projects and folders

Q

RECENT

STARRED


ALL

	Name	ID
✓ ☆	NtBackupAndRestore ?	ntbackupandrestore






Then go to the API part of your project.

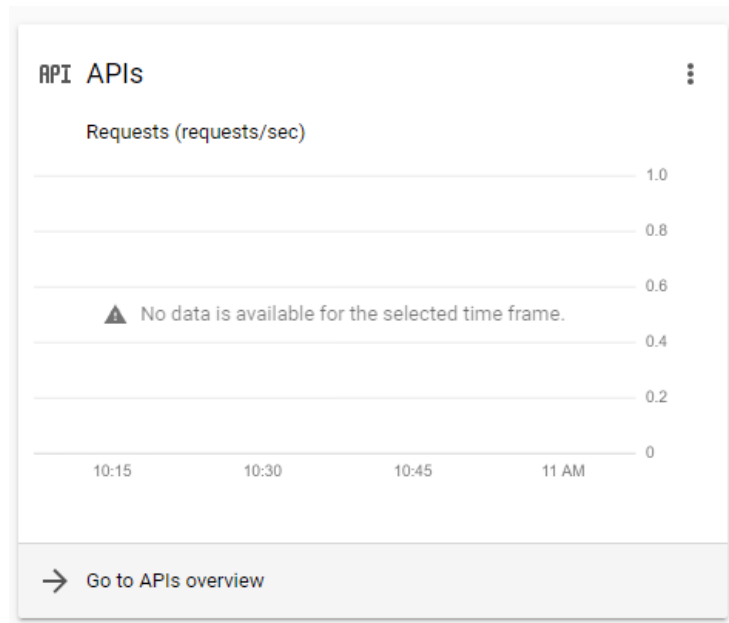

Then in “**Oauth consent screen**”.

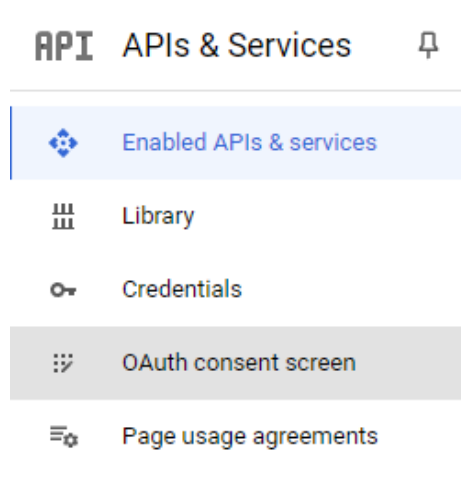



Choose “**External**” and click on “**Create**”

Choose how you want to configure and register your app, including your target users. You can only associate one app with your project.

User Type

☐ Internal 

Only available to users within your organization. You will not need to submit your app for verification. [Learn more about user type](#)

☒ External 

Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. [Learn more about user type](#)

CREATE

[Let us know what you think](#) about our OAuth experience

Fill in the application’s name and your email.

App information

This shows in the consent screen, and helps end users know who you are and contact you

App name *

NtBackupAndRestore

The name of the app asking for consent

User support email *

support@2n-tech.com

For users to contact you with questions about their consent. [Learn more](#)



Add the domain “**2n-tech.com**” to the domains authorized to authenticate you and add your email in the contact information.

Authorized domains

When a domain is used on the consent screen or in an OAuth client's configuration, it must be pre-registered here. If your app needs to go through verification, please go to the [Google Search Console](#) to check if your domains are authorized. [Learn more](#)  about the authorized domain limit.

Authorized domain 1 *

[+ ADD DOMAIN](#)

Developer contact information

Email addresses *

These email addresses are for Google to notify you about any changes to your project.

[SAVE AND CONTINUE](#)

[CANCEL](#)

Save and keep going until the step 3 “**Test users**”. Add your users (one for each of your Google Drive accounts).

 OAuth consent screen —  Scopes — ** 3 Test users** —  4 Summary

Test users

While publishing status is set to "Testing", only test users are able to access the app. Allowed user cap prior to app verification is 100, and is counted over the entire lifetime of the app. [Learn more](#) 

[+ ADD USERS](#)





Fill in your Google Drive account's email and click on **"Add"**. Add the e-mails of all the Google Drive accounts that will receive your backups.

✕ Add users

 While publishing status is set to "Testing", only test users are able to access the app. Allowed user cap prior to app verification is 100, and is counted over the entire lifetime of the app.
[LEARN MORE](#)



0 / 100

ADD

Save and keep going. Then go in **"Credentials"**.

API APIs & Services 

 Enabled APIs & services

 Library

 **Credentials**

 OAuth consent screen

 Page usage agreements

At the top of the page, click on **"Create credentials"**.

Credentials **+ CREATE CREDENTIALS**

Create credentials to access your enabled APIs. [Learn more](#)





Then in “**Oauth client ID**”.

[+ CREATE CREDENTIALS](#) [DELETE](#) [RESTORE DELETED CRI](#)

API key
Identifies your project using a simple API key to check quota and access
OAuth client ID
Requests user consent so your app can access the user's data
Service account
Enables server-to-server, app-level authentication using robot accounts
Help me choose
Asks a few questions to help you decide which type of credential to use

Choose “**Web application**” for the application type, give it a name and copy “https://oauth.2n-tech.com/get_oauth_code.php” in redirect URIs.

Application type *
Web application

Name *
NtBackupAndRestore

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

i The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#) [?](#).

Authorized JavaScript origins [?](#)

For use with requests from a browser

[+ ADD URI](#)

Authorized redirect URIs [?](#)


For use with requests from a web server

URIs 1 *
https://oauth.2n-tech.com/get_oauth_code.php




Save and keep a copy of the **client ID** and **client secret**. It is those that you will have to copy in the module.

Then go in “**Library**”.

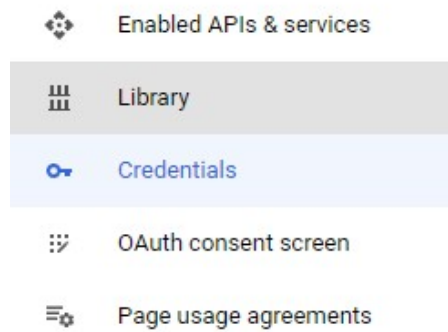

And fill in “**drive**” in the search bar

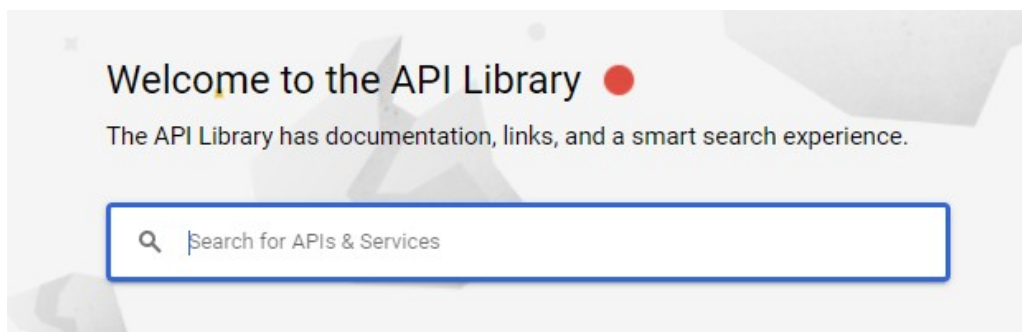

Select “**Google Drive API**”



10 results



Drive Labels API
Google

Use the Drive Labels API to define custom metadata taxonomies to organize, find, enforce policy, and support business processes on Google Drive files and folders.



Google Drive API
Google Enterprise API ⓘ

With the Google Drive API, you can access resources from Google Drive to create files, manage file sharing, search for files and folders, and more.





Enable the API.

[←](#) Product details



Google Drive API

[Google Enterprise API](#)

Create and manage resources in Google Drive.

ENABLE

TRY THIS API [↗](#)

Click to enable this API

Your application's configuration is done. It may take some time before it is working (from 5 min to 1 hour).

Now you can fill in your **client ID** and **client secret** in the module and then you can add your Google account in the module.

