



Chapter 3

Integer Linear Programming

Mathematical Modeling

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

Le Hong Trang, Nguyen An Khuong, Huynh Tuong Nguyen
Faculty of Computer Science and Engineering
HCMC University of Technology

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Contents

① Motivated Examples

Linear Classification Problem

Facility Location Problem

② Linear and Integer Linear Programs

③ Simplex Method for Solving LP

④ Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

⑤ Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

⑥ Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Outline

① Motivated Examples

Linear Classification Problem

Facility Location Problem

② Linear and Integer Linear Programs

③ Simplex Method for Solving LP

④ Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

⑤ Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

⑥ Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming


Software for ILP

Problems and Homeworks

Linear Classification

Statement

Given two sets of points in \mathbb{R}^n , denoted by $\{x_1, \dots, x_N\}$ and $\{y_1, \dots, y_M\}$, we need to classify the points.



Applications in Computer Science

- Machine learning,
- Pattern recognition,
- Data mining,
- ...



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Use a line (hyperplane in \mathbb{R}^n) $a^T x + b = 0$, hence the followings must be satisfied:

$$a^T x_i + b > 0, i = 1, \dots, N \text{ and } a^T y_j + b < 0, j = 1, \dots, M.$$

- Since the strict inequalities are homogeneous in a and b , they are feasible iff the set of nonstrict linear inequalities:

$$a^T x_i + b > 1, i = 1, \dots, N \text{ and } a^T y_j + b < -1, j = 1, \dots, M.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks


How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

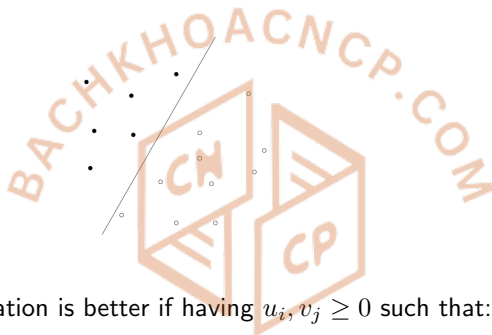

- The classification is better if having $u_i, v_j \geq 0$ such that:

$$a^T x_i + b > 1 - u_i \text{ and } a^T y_j + b < -1 + v_j,$$

where $i = 1, \dots, N$ and $j = 1, \dots, M$.

- The best one should be at minimizer of $\sum_{i=1}^N u_i + \sum_{j=1}^M v_j$.



Classification for inseparable sets (SVM form)

$$\begin{aligned} \min \quad & \sum_{i=1}^N u_i + \sum_{j=1}^M v_j \\ \text{s.t.} \quad & a^T x_i + b \geq 1 - u_i, i = 1, \dots, N, \\ & a^T y_j + b \leq -1 + v_j, j = 1, \dots, M, \\ & u_i, v_j \geq 0, i = 1, \dots, N \text{ and } j = 1, \dots, M. \end{aligned}$$

or, in vector form

$$\begin{aligned} \min \quad & \mathbf{1}^T \mathbf{u} + \mathbf{1}^T \mathbf{v} \\ \text{s.t.} \quad & \mathbf{x}^T \mathbf{a} + \mathbf{1}b \geq \mathbf{1} - \mathbf{u}, \\ & \mathbf{y}^T \mathbf{a} + \mathbf{1}b \leq -\mathbf{1} + \mathbf{v}, \\ & \mathbf{u}, \mathbf{v} \succeq \mathbf{0}. \end{aligned}$$

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Linear Classification: numerically solving

```
n = 2;
randn('state',2);
N = 50; M = 50;
Y = [1.5+0.9*randn(1,0.6*N), 1.5+0.7*randn(1,0.4*N);
      2*(randn(1,0.6*N)+1), 2*(randn(1,0.4*N)-1)];
X = [-1.5+0.9*randn(1,0.6*M), -1.5+0.7*randn(1,0.4*M);
      2*(randn(1,0.6*M)-1), 2*(randn(1,0.4*M)+1)];
T = [-1 1; 1 1];
Y = T*Y; X = T*X;

% Solution via CVX
cvx_begin
    variables a(n) b(1) u(N) v(M)
    minimize (ones(1,N)*u + ones(1,M)*v)
    X'*a + b >= 1 - u;
    Y'*a + b <= -(1 - v);
    u >= 0;
    v >= 0;
cvx_end
```



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Linear Classification: numerically solving

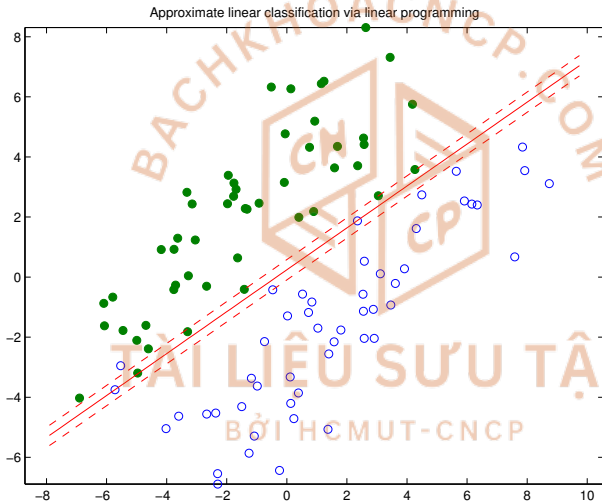

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Classification for inseparable sets (SVM form)

$$\begin{aligned} \min \quad & \mathbf{1}^T \mathbf{u} + \mathbf{1}^T \mathbf{v} \\ \text{s.t.} \quad & \mathbf{x}^T \mathbf{a} + \mathbf{1}b \geq 1 - \mathbf{u}, \\ & \mathbf{y}^T \mathbf{a} + \mathbf{1}b \geq -1 + \mathbf{v}, \\ & \mathbf{u}, \mathbf{v} \geq 0. \end{aligned}$$

Question: if $\mathbf{u} = 0$ and $\mathbf{v} = 0$?

$$\begin{aligned} \min \quad & 0 \\ \text{s.t.} \quad & \mathbf{x}^T \mathbf{a} + \mathbf{1}b \geq 0, \\ & \mathbf{y}^T \mathbf{a} + \mathbf{1}b \leq 0. \end{aligned}$$

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?


Rule of Fathoming

Software for ILP

Problems and Homeworks

Statement

Given a set of supermarket locations, denoted by I , let J be the set of candidate warehouse locations. The problem is to determine which locations among J should be used to construct a warehouses such that the total cost is minimum.



Network resource allocation

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Uncapacitated Facility Location: variables and objective

- A location $j \in J$ is decided by

$$x_j = \begin{cases} 1 & \text{if } j \text{ is chosen for a facility,} \\ 0 & \text{otherwise.} \end{cases}$$

- The cost associated with constructing each warehouse: f_j .
- The fraction of supply received by supermarket i from warehouse j : $y_{ij} \geq 0$.
- The cost of transportation between candidate warehouse site j and supermarket location i : c_{ij} .
- The total cost:

$$\sum_{j \in J} f_j x_j + \sum_{j \in J} \sum_{i \in I} c_{ij} y_{ij}.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Uncapacitated Facility Location: constraints

- The sum of fraction from each warehouse for each supermarket:

$$\sum_{j \in J} y_{ij} = 1, \forall i \in I.$$

- The warehouse works if it actually constructed:

$$y_{ij} \leq x_j, \forall i \in I, j \in J.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Uncapacitated Facility Location: model



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

$$\begin{aligned} \min_x \quad & \sum_{j \in J} f_j x_j + \sum_{j \in J} \sum_{i \in I} c_{ij} y_{ij} \\ \text{s.t.} \quad & \sum_{j \in J} y_{ij} = 1, \forall i \in I, \\ & y_{ij} \leq x_j, \forall i \in I, j \in J, \\ & y_{ij} \geq 0, \forall i \in I, j \in J, \\ & x_j \in \{0, 1\}. \end{aligned} \tag{1} \tag{2} \tag{3} \tag{4}$$

Uncapacitated Facility Location: numerically solving

```
% ILP model solved by CVX
cvx_begin
% variables
variable x(n) binary
variable y(m,n) binary
% model
minimize (buildingCost*x + sum(sum(servingCost.*y)))
subject to
    for i = 1:m
        sum(y(i,:)) == 1;
        for j = 1:n
            y(i,j) <= x(j);
        end
    end
end
cvx_end
```



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer
Linear Programs

Simplex Method

Branch & Bound
Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and
Homeworks

Uncapacitated Facility Location: numerically solving



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks



How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP


Problems and Homeworks



TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM

Uncapacitated Facility Location: numerically solving

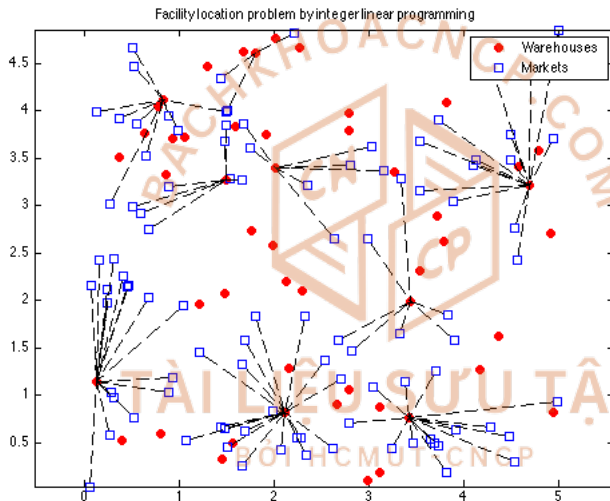

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

BACHKHOACNCP.COM

Outline

① Motivated Examples

Linear Classification Problem

Facility Location Problem

② Linear and Integer Linear Programs

③ Simplex Method for Solving LP

④ Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

⑤ Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

⑥ Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Linear Program (LP)

- Recall the standard form of LP:

$$\begin{aligned} \min_x \quad & c^T x \\ \text{s.t.} \quad & Ax = b, \\ & x \geq 0, \end{aligned} \quad \begin{aligned} (5) \\ (6) \end{aligned}$$

where $c \in \mathbb{R}^n$, A is an $m \times n$ matrix with full row rank, and $b \in \mathbb{R}^m$.

- A polyhedron is a set of the form $\{x \in \mathbb{R}^n | Bx \geq d\}$ for some matrix B .
- Let $P \in \mathbb{R}^n$ be a given polyhedron. A vector $x \in P$ is an extreme point of P if there does not exist $y, z \in P$, and $\lambda \in (0, 1)$ such that $x = \lambda y + (1 - \lambda)z$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Linear Program in General form

- General form of LP:

$$\begin{aligned} \min_{x} \quad & c^T x & (7) \\ \text{s.t.} \quad & Ax = b, & (8) \\ & Cx \leq d, & (9) \\ & x \geq 0. \end{aligned}$$

Question

Is there any way to transform a general form to standard one?



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Integer Linear Program (ILP)

- An integer linear program is a linear program where variables are constrained to be integers.

$$\min_x c^T x$$

s.t.

$$Ax = b, \quad (10)$$

$$x \geq 0 \text{ and } x \in \mathbb{Z}^n. \quad (11)$$

Question

Why do we consider the problem with only equality constraints but not inequality ones?

Remark

Often a mix is desired of integer and non-integer variables, called Mixed Integer Linear Programs (MILP).



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Let $S = \{x \in \mathbb{R}^n | Ax = b, x \geq 0\}$, the feasible set of LP. Since A is full row rank, if the feasible set is not empty, then we must $m \leq n$. Without loss of generality, we assume that $m < n$.
- Let $A = (B, N)$, where B is an $m \times m$ matrix with full rank, i.e., $\det(B) \neq 0$. Then, B is called a *basis*.
- Let $x = \begin{pmatrix} x_B \\ x_N \end{pmatrix}$. We have $Bx_B + Nx_N = b$. Setting $x_N = 0$ gives $x_B = B^{-1}b$. $x = \begin{pmatrix} B^{-1}b \\ 0 \end{pmatrix}$ is called a *basic solution*. x_B is called *basic variables*, x_N is called *nonbasic variables*.
- If the basic solution is also feasible, this is, $B^{-1}b \geq 0$, then $x = \begin{pmatrix} B^{-1}b \\ 0 \end{pmatrix}$ is said to be a *basic feasible solution*.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- $\hat{x} \in S$ is an extreme point of S if and only if \hat{x} is a basic feasible solution.
- Two extreme points are *adjacent* if they differ in only one basic variable.

Theorem (Basic theorem of LP)

Consider the linear program $\min\{c^T x \mid Ax = b, x \geq 0\}$. If S has at least one extreme point and there exists an optimal solution, then there exists an optimal solution that is an extreme point.

- The feasible set of standard form linear program has at least one extreme point.
- Therefore, we claim that the optimal value of a linear program is either $-\infty$, or is attained an extreme point (basic feasible solution) of the feasible set.

A Naive Algorithm for Solving Linear Program

- Let $\min\{c^T x \mid Ax = b, x \geq 0\}$ be a bounded linear program.
- Enumerate all bases $\mathcal{B} \in \{1, 2, \dots, n\}$, $\binom{m}{n} = O(n^m)$, too many.
- Compute associated basic solution $x = \begin{pmatrix} B^{-1}b \\ 0 \end{pmatrix}$.
- Return the one which has largest objective function value among the feasible basic solutions.
- Running time is $O(n^m \cdot m^3)$.

Question

Are there more efficient algorithms?



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Outline

1 Motivated Examples

Linear Classification Problem

Facility Location Problem

2 Linear and Integer Linear Programs

3 Simplex Method for Solving LP

4 Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

5 Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

6 Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Simplex Method

- Simplex method was invented by George Dantzig (1914–2005) (father of linear programming).
- Suppose we have a basic feasible solution $\hat{x} = \begin{pmatrix} B^{-1}b \\ 0 \end{pmatrix}$, $A = (B, N)$.
- Let $x \in S$ be any feasible solution of the LP. Let $x = \begin{pmatrix} x_B \\ x_N \end{pmatrix}$ and $c = \begin{pmatrix} c_B \\ c_N \end{pmatrix}$. Then, $Bx_B + Nx_N = b$ and $x_B = B^{-1}b - B^{-1}Nx_N$. We have
$$\begin{aligned} c^T x &= c_B^T x_B + c_N^T x_N \\ &= c_B^T B^{-1}b - c_B^T B^{-1}Nx_N + c_N^T x_N \\ &= c^T \hat{x} + (c_N^T - c_B^T B^{-1}N)x_N. \end{aligned}$$
- Let $r_N = (c_N^T - c_B^T B^{-1}N)$, called *reduced cost*. If $r_N \geq 0$, then $c^T x \geq c^T \hat{x}$ and the current extreme point \hat{x} is *optimal*.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Otherwise, there must exist an $r_i < 0$, we can let current nonbasic variable x_i become a basic one $x_i > 0$ (*entering variable*).
- Suitably choosing basic variable to become a nonbasic one (*leaving variable*), we can get a new basic feasible solution whose objective value is less than that of the current basic feasible solution \hat{x} .
- Geometrically, the simplex method moves from one extreme point to one of its *adjacent* extreme point.
- Since there are only a finite number of extreme points, the method terminates finitely at an *optimal solution* or detects that the problem is *infeasible* or it is *unbounded*.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Geometry of Simplex Method

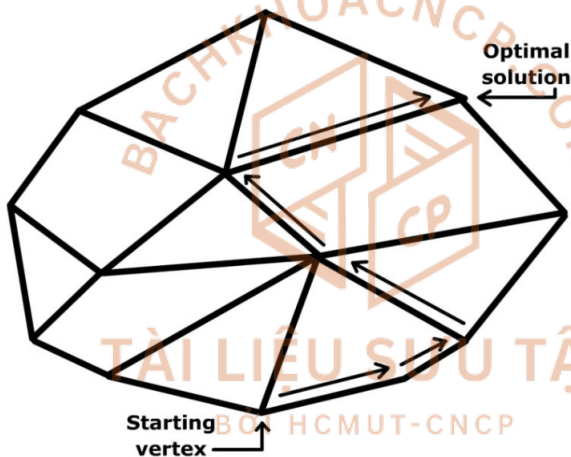

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Simplex Method

- Step 0: Compute an initial basis B and the basic feasible $B^{-1}b$ solution $x = \begin{pmatrix} B^{-1}b \\ 0 \end{pmatrix}$.
- Step 1: if $r_N = (c_N^T - c_B^T B^{-1}N) \geq 0$, **stop**, x is an optimal solution. Otherwise **goto** Step 2.
- Step 2: Choose j satisfying $c_i^T - c_B^T B^{-1}a_j < 0$, if $\bar{a}_j = B^{-1}a_j \leq 0$, **stop**, the LP is infeasible. Otherwise, **goto** Step 3.
- Step 3: compute the step size

$$\lambda = \min\left\{\frac{\bar{b}_i}{\bar{a}_{ij}} \mid \bar{a}_{ij} > 0\right\} = \frac{\bar{b}_r}{\bar{a}_{rj}}$$

Let $x := x + \lambda d_j$, where $d_j = \begin{pmatrix} B^{-1}a_j \\ e_j \end{pmatrix}$. **goto** Step 1.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Simplex Tableau

x_B	x_N	rhs
B	N	b
c_B^T	c_N^T	0

It implies that

x_B	x_N	rhs
I	$B^{-1}N$	$B^{-1}b$
0	$c_N^T - c_B^T B^{-1}N$	$-c_B^T B^{-1}b$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Simplex Method: An example

- Consider the following LP

$$\begin{array}{ll}\min_x & -7x_1 - 2x_2 \\ \text{s.t.} & \\ & -x_1 + 2x_2 + x_3 = 4, \\ & 5x_1 + x_2 + x_4 = 20, \\ & 2x_1 + 2x_2 - x_5 = 7, \\ & x \geq 0.\end{array}$$

- The initial tableau should be

x_1	x_2	x_3	x_4	x_5	rhs
-1	2	1	0	0	4
5	1	0	1	0	20
2	2	0	0	-1	7
-7	-2	0	0	0	0



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Simplex Method: example (cont.)

- Choose the initial basis to be $B = (a_1, a_3, a_4)$, we have basic $x_B = (x_1, x_3, x_4)^T$. The simplex tableau is then

x_1	x_2	x_3	x_4	x_5	rhs
0	3	1	0	$-\frac{1}{2}$	$7\frac{1}{2}$
0	-4	0	1	$2\frac{1}{2}$	$2\frac{1}{2}$
1	1	0	0	$-\frac{1}{2}$	$3\frac{1}{2}$
0	5	0	0	$-\frac{7}{2}$	$24\frac{1}{2}$

- The basic feasible solution is $x_B = (x_1, x_3, x_4)^T = (3\frac{1}{2}, 7\frac{1}{2}, 2\frac{1}{2})^T$.
- Since $r_5 = -\frac{7}{2} < 0$, x_5 is chosen entering variable.
 $\lambda = \frac{2\frac{1}{2}}{2\frac{1}{2}} = 1$, then x_4 is leaving variable. The new basic variable should be $x_B = (x_1, x_3, x_5)^T$. The new tableau is obtained as below.

x_1	x_2	x_3	x_4	x_5	rhs
0	$\frac{11}{5}$	1	$\frac{1}{5}$	0	8
0	$-\frac{8}{5}$	0	$\frac{2}{5}$	1	1
1	$\frac{1}{5}$	0	$\frac{1}{5}$	0	4
0	$-\frac{3}{5}$	0	$\frac{7}{5}$	0	28



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Simplex Method: example (cont.)

- Similarly, choose x_2 as the entering variable, then $\lambda = \min\{\frac{8}{11/5}, \frac{4}{1/5}\} = \frac{40}{11}$. Hence x_3 is leaving variable. Therefore, the tableau is

x_1	x_2	x_3	x_4	x_5	rhs
0	1	$\frac{5}{11}$	$\frac{1}{11}$	0	$\frac{40}{11}$
0	0	$\frac{8}{11}$	$\frac{6}{11}$	1	$\frac{75}{11}$
1	0	$-\frac{1}{11}$	$\frac{2}{11}$	0	$\frac{36}{11}$
0	0	$\frac{3}{11}$	$\frac{16}{11}$	0	$30\frac{2}{11}$

- Since $r_N = (\frac{3}{11}, \frac{16}{11}) \geq 0$, the current basic feasible solution $x = (\frac{36}{11}, \frac{40}{11}, 0, 0, \frac{75}{11})^T$ is optimal with the optimal value is $-30\frac{2}{11}$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Outline

① Motivated Examples

Linear Classification Problem

Facility Location Problem

② Linear and Integer Linear Programs

③ Simplex Method for Solving LP

④ Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

⑤ Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

⑥ Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- This is the *divide and conquer* method. We divide a large problem into a few smaller ones. This is the “*branch*” part.

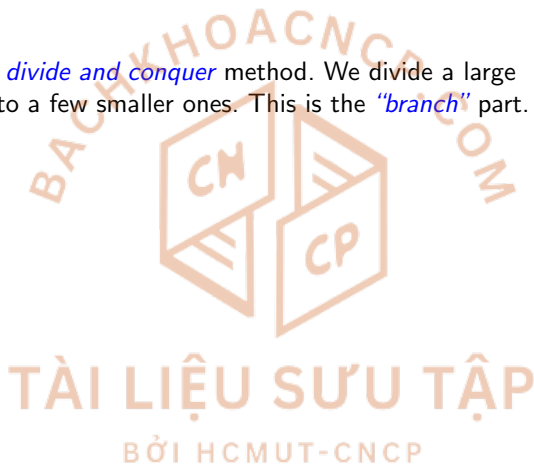

BACH KHOA CNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound Method – Introduction

- This is the *divide and conquer* method. We divide a large problem into a few smaller ones. This is the “*branch*” part.
- The *conquering* part is done by estimate how good a solution we can get for each smaller problems.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound Method – Introduction

- This is the *divide and conquer* method. We divide a large problem into a few smaller ones. This is the “*branch*” part.
- The *conquering* part is done by estimate how good a solution we can get for each smaller problems.
 - To do so, we may have to divide the problem further, until we get a problem that we can handle, that is the “*bound*” part.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound Method – Introduction

- This is the *divide and conquer* method. We divide a large problem into a few smaller ones. This is the “*branch*” part.
- The *conquering* part is done by estimate how good a solution we can get for each smaller problems.
 - To do so, we may have to divide the problem further, until we get a problem that we can handle, that is the “*bound*” part.
- We will use the *linear programming relaxation* to estimate the optimal solution of an integer programming.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound Method – Introduction

- This is the *divide and conquer* method. We divide a large problem into a few smaller ones. This is the “*branch*” part.
- The *conquering* part is done by estimate how good a solution we can get for each smaller problems.
 - To do so, we may have to divide the problem further, until we get a problem that we can handle, that is the “*bound*” part.
- We will use the *linear programming relaxation* to estimate the optimal solution of an integer programming.
- For an integer programming model \mathcal{P} , the linear programming model we get by dropping the requirement that all variables must be integers is called the linear programming relaxation of \mathcal{P} .



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1: Integer Programming



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Subject to

$$\max(Z = -x_1 + 4x_2) \quad (12)$$

$$-10x_1 + 20x_2 \leq 22 \quad (13)$$

$$5x_1 + 10x_2 \leq 49 \quad (14)$$

$$x_1 \leq 5 \quad (15)$$

$$x_i \geq 0, x_i \in \mathbb{Z} \quad \forall i \in \{1, 2\} \quad (16)$$

Numerical Example 1 (cont') : Linear programming relaxation

With linear programming relaxation, we drop $x_i \in \mathbb{Z}$.

$$\max(Z = -x_1 + 4x_2) \quad (17)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (18)$$

$$5x_1 + 10x_2 \leq 49 \quad (19)$$

$$x_1 \leq 5 \quad (20)$$

$$x_i \geq 0 \quad \forall i \in \{1, 2\} \quad (21)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont')

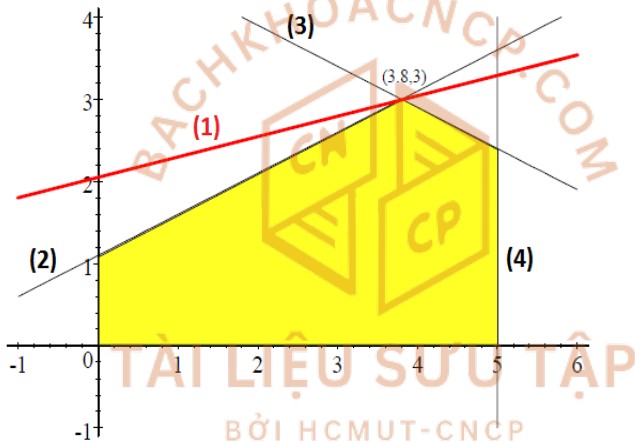

Optimal solution of relaxation is (3.8, 3) with $Z = 8.2$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont'): Linear programming relaxation

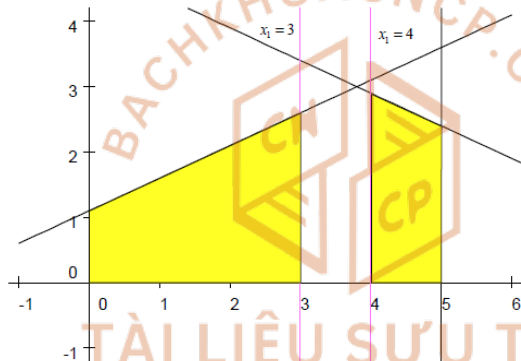

Since optimal solution of relaxation is $(3.8, 3)$, we consider two cases: $x_1 \geq 4$ and $x_1 \leq 3$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Example 1 (cont') – LP relaxation: $x_1 \geq 4$

Case $x_1 \geq 4$:

$$\max(Z = -x_1 + 4x_2) \quad (22)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (23)$$

$$5x_1 + 10x_2 \leq 49 \quad (24)$$

$$x_1 \leq 5 \quad (25)$$

$$x_1 \geq 4 \quad (26)$$

$$x_2 \geq 0 \quad (27)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \geq 4$

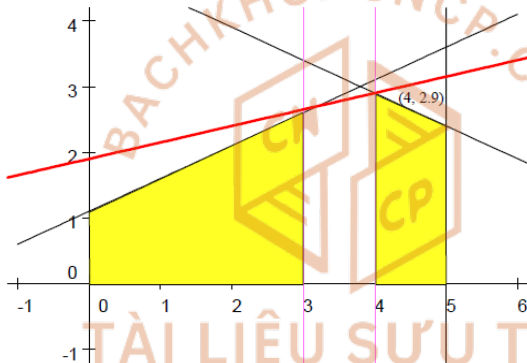

has optimal solution at $(4, 2.9)$ with $Z = 7.6$.

Then we consider two cases: $x_2 \geq 3$ and $x_2 \leq 2$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \geq 4, x_2 \geq 3$

Case $x_1 \geq 4, x_2 \geq 3$:

$$\max(Z = -x_1 + 4x_2) \quad (28)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (29)$$

$$5x_1 + 10x_2 \leq 49 \quad (30)$$

$$4 \leq x_1 \leq 5 \quad (31)$$

$$x_2 \geq 3 \quad (32)$$

has no feasible solution ($5x_1 + 10x_2 \geq 50$) so the IP has no feasible solution either.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \geq 4, x_2 \leq 2$

Case $x_1 \geq 4, x_2 \leq 2$:

$$\max(Z = -x_1 + 4x_2) \quad (33)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (34)$$

$$5x_1 + 10x_2 \leq 49 \quad (35)$$

$$4 \leq x_1 \leq 5 \quad (36)$$

$$0 \leq x_2 \leq 2 \quad (37)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: - $x_1 \geq 4, x_2 \leq 2$

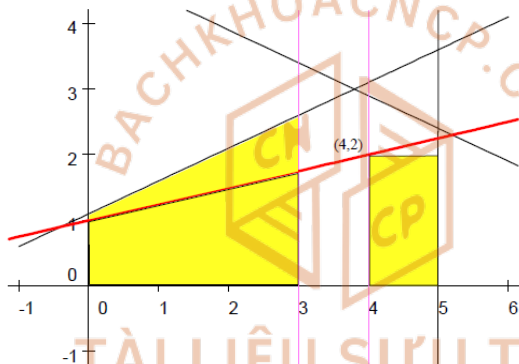

has an optimal solution at $(4, 2)$ with $Z = 4$.
This is the optimal solution of the IP as well. Currently, the best value of Z for the original IP is $Z = 4$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \leq 3$

Come back case $x_1 \leq 3$:

$$\max(Z = -x_1 + 4x_2) \quad (38)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (39)$$

$$5x_1 + 10x_2 \leq 49 \quad (40)$$

$$0 \leq x_1 \leq 3 \quad (41)$$

$$x_2 \geq 0 \quad (42)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont'): LP relaxation

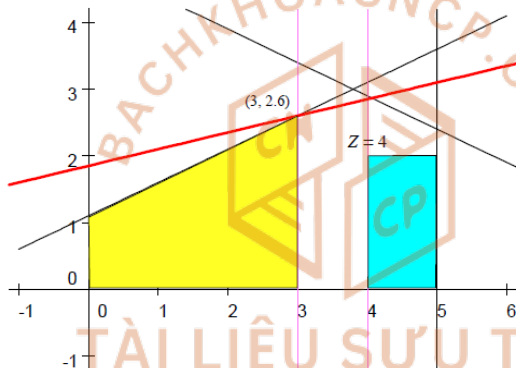

has an optimal solution at $(3, 2.6)$ with $Z = 7.4$.
We branch out further to two cases: $x_2 \geq 3$ and $x_2 \leq 2$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Example 1 (cont') – LP relaxation: $x_1 \leq 3, x_2 \geq 3$

Case $x_1 \leq 3, x_2 \geq 3$:

$$\max(Z = -x_1 + 4x_2) \quad (43)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (44)$$

$$5x_1 + 10x_2 \leq 49 \quad (45)$$

$$0 \leq x_1 \leq 3 \quad (46)$$

$$x_2 \geq 3 \quad (47)$$

has no feasible solution ($-10x_1 + 20x_2 \geq 30$).

The IP has no solution either.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: - $x_1 \leq 3, x_2 \leq 2$

Case $x_1 \leq 3, x_2 \leq 2$:

$$\max(Z = -x_1 + 4x_2) \quad (48)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (49)$$

$$5x_1 + 10x_2 \leq 49 \quad (50)$$

$$0 \leq x_1 \leq 3 \quad (51)$$

$$0 \leq x_2 \leq 2 \quad (52)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \leq 3, x_2 \leq 2$

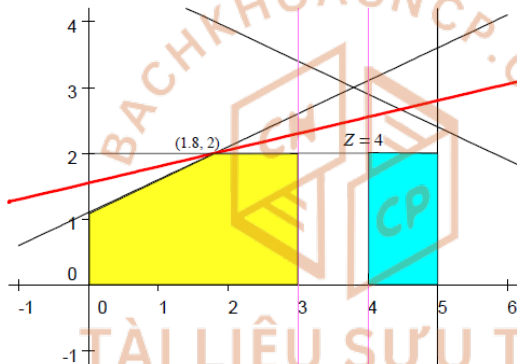

has an optimal at $(1.8, 2)$ with $Z = 6.2$.

We branch further with two cases: $x_1 \geq 2$ or $x_1 \leq 1$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \geq 2, x_2 \leq 2$

Case $x_1 \geq 2, x_2 \leq 2$:

$$\max(Z = -x_1 + 4x_2) \quad (53)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (54)$$

$$5x_1 + 10x_2 \leq 49 \quad (55)$$

$$2 \leq x_1 \leq 3 \quad (56)$$

$$0 \leq x_2 \leq 2 \quad (57)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \geq 2, x_2 \leq 2$

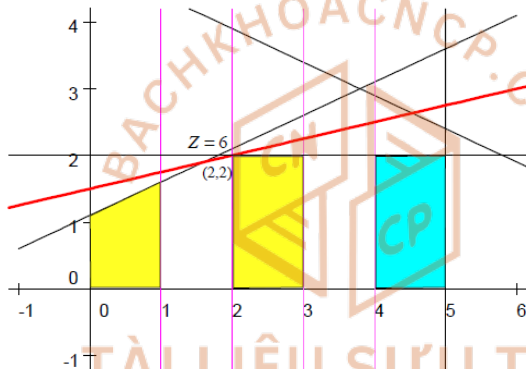

has an optimal at $(2, 2)$, with $Z = 6$.
Since this is better than the incumbent $Z = 4$ at $(4, 2)$, this new integer solution is our current best solution.

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \leq 1, x_2 \leq 2$

Case $x_1 \leq 1, x_2 \leq 2$:

$$\max(Z = -x_1 + 4x_2) \quad (58)$$

Subject to

$$-10x_1 + 20x_2 \leq 22 \quad (59)$$

$$5x_1 + 10x_2 \leq 49 \quad (60)$$

$$0 \leq x_1 \leq 1 \quad (61)$$

$$0 \leq x_2 \leq 2 \quad (62)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: $x_1 \leq 3, x_2 \leq 2$

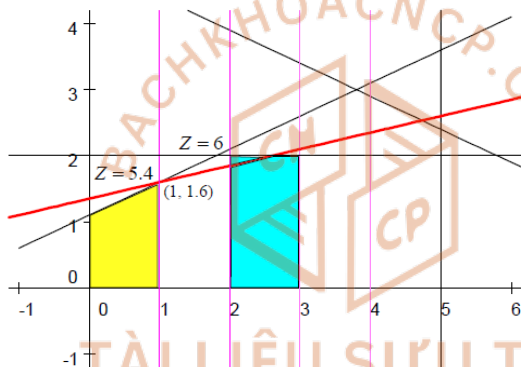

has an optimal at $(1, 1.6)$ with $Z = 5.4$.
Then any integer solution in this region can not give us a solution with the value of Z greater than 5.4. This branch is fathomed.

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 1 (cont') – LP relaxation: conclusion

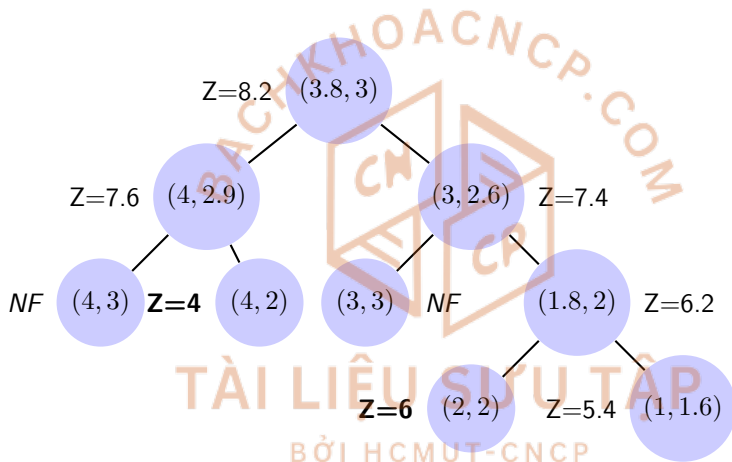

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – Binary IP Problem



Subject to

$$\max(Z = 9x_1 + 5x_2 + 6x_3 + 4x_4) \quad (63)$$

$$6x_1 + 3x_2 + 5x_3 + 2x_4 \leq 10 \quad (64)$$

$$x_3 + x_4 \leq 1 \quad (65)$$

$$-x_1 + x_3 \leq 0 \quad (66)$$

$$-x_2 + x_4 \leq 0 \quad (67)$$

$$x_i \in \{0, 1\}. \quad (68)$$

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2: LP Relaxation

$$\max(Z = 9x_1 + 5x_2 + 6x_3 + 4x_4) \quad (69)$$

Subject to

$$6x_1 + 3x_2 + 5x_3 + 2x_4 \leq 10 \quad (70)$$

$$x_3 + x_4 \leq 1 \quad (71)$$

$$-x_1 + x_3 \leq 0 \quad (72)$$

$$-x_2 + x_4 \leq 0 \quad (73)$$

$$x_i \leq 1, \text{ for } 1 \leq i \leq 4 \quad (74)$$

$$0 \leq x_i \quad (75)$$

has optimal solution at $(\frac{5}{6}, 1, 0, 1)$ (why?-HW on Simplex Method!) with $Z = 16.5$

Has two branch, $x_1 = 0$ or $x_1 = 1$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 0$

With $x_1 = 0$, problem becomes

$$\max(Z = 5x_2 + 4x_4) \quad (76)$$

Subject to

$$3x_2 + 2x_4 \leq 10$$

$$x_3 + x_4 \leq 1$$

$$-x_2 + x_4 \leq 0$$

$$x_i \in \{0, 1\}$$

has the optimal solution at $(0, 1, 0, 1)$ with $Z = 9$. (Current best solution)



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1$

With $x_1 = 1$, the LP relaxation

$$\max(Z = 9 + 5x_2 + 6x_3 + 4x_4) \quad (77)$$

Subject to

$$3x_2 + 5x_3 + 2x_4 \leq 4$$

$$x_3 + x_4 \leq 1$$

$$x_3 \leq 1$$

$$-x_2 + x_4 \leq 0$$

$$x_i \leq 1 \text{ for } 2 \leq i \leq 4$$

$$0 \leq x_i$$

has the optimal solution at $(1, 0.8, 0, 0.8)$ with $Z = 16.2$

Branch: $x_2 = 0$ or $x_2 = 1$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 0$

In this case, we have $x_4 = 0$ as well

$$\max(Z = 9 + 6x_3) \quad (78)$$

Subject to

$$5x_3 \leq 4$$

$$x_3 \leq 1$$

$$0 \leq x_3$$

has the optimal solution at $(1, 0, 0.8, 0)$ with $Z = 13.8$

Branch: $x_3 = 0$ or $x_3 = 1$

- With $x_3 = 0$ The optimal solution is $(1, 0, 0, 0)$ with $Z = 9$ (not better than current solution)



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 0$

In this case, we have $x_4 = 0$ as well

$$\max(Z = 9 + 6x_3) \quad (78)$$

Subject to

$$5x_3 \leq 4$$

$$x_3 \leq 1$$

$$0 \leq x_3$$

has the optimal solution at $(1, 0, 0.8, 0)$ with $Z = 13.8$

Branch: $x_3 = 0$ or $x_3 = 1$

- With $x_3 = 0$ The optimal solution is $(1, 0, 0, 0)$ with $Z = 9$ (not better than current solution)
- With $x_3 = 1$. Have no feasible solution



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 1$

With $x_1 = 0$, the LP relaxation

$$\max(Z = 14 + 6x_3 + 4x_4) \quad (79)$$

Subject to

$$5x_3 + 2x_4 \leq 1$$

$$x_3 + x_4 \leq 1$$

$$0 \leq x_3 \leq 1$$

$$0 \leq x_4 \leq 1$$

has the optimal solution at $(1, 1, 0, 0.5)$ with $Z = 16$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 1$

$$\max(Z = 14 + 6x_3 + 4x_4) \quad (80)$$

$$S.t. \quad 5x_3 + 2x_4 \leq 1$$

$$x_3 + x_4 \leq 1$$

$$0 \leq x_3 \leq 1$$

$$0 \leq x_4 \leq 1$$

- With $x_3 = 0$, $Z = 16$ is still feasible solution at $(1, 1, 0, 0.5)$

⇒ The current best solution $(1, 1, 0, 0)$ with $Z = 14$ is the optimal solution.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 1$

$$\max(Z = 14 + 6x_3 + 4x_4) \quad (80)$$

$$S.t. \quad 5x_3 + 2x_4 \leq 1$$

$$x_3 + x_4 \leq 1$$

$$0 \leq x_3 \leq 1$$

$$0 \leq x_4 \leq 1$$

- With $x_3 = 0$, $Z = 16$ is still feasible solution at $(1, 1, 0, 0.5)$
 - With $x_4 = 0$, $(1, 1, 0, 0)$, $Z = 14$ (new optimal solution)

⇒ The current best solution $(1, 1, 0, 0)$ with $Z = 14$ is the optimal solution.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 1$

$$\max(Z = 14 + 6x_3 + 4x_4) \quad (80)$$

$$S.t. \quad 5x_3 + 2x_4 \leq 1$$

$$x_3 + x_4 \leq 1$$

$$0 \leq x_3 \leq 1$$

$$0 \leq x_4 \leq 1$$

- With $x_3 = 0$, $Z = 16$ is still feasible solution at $(1, 1, 0, 0.5)$
 - With $x_4 = 0$, $(1, 1, 0, 0)$, $Z = 14$ (new optimal solution)
 - With $x_4 = 1$, $(1, 1, 0, 1)$ is not feasible

\Rightarrow The current best solution $(1, 1, 0, 0)$ with $Z = 14$ is the optimal solution.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 – LP Relaxation: $x_1 = 1, x_2 = 1$

$$\max(Z = 14 + 6x_3 + 4x_4) \quad (80)$$

$$S.t. \quad 5x_3 + 2x_4 \leq 1$$

$$x_3 + x_4 \leq 1$$

$$0 \leq x_3 \leq 1$$

$$0 \leq x_4 \leq 1$$

- With $x_3 = 0$, $Z = 16$ is still feasible solution at $(1, 1, 0, 0.5)$
 - With $x_4 = 0$, $(1, 1, 0, 0)$, $Z = 14$ (new optimal solution)
 - With $x_4 = 1$, $(1, 1, 0, 1)$ is not feasible
- With $x_3 = 1$, No feasible solution

\Rightarrow The current best solution $(1, 1, 0, 0)$ with $Z = 14$ is the optimal solution.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Numerical Example 2 (cont') – LP relaxation: conclusion

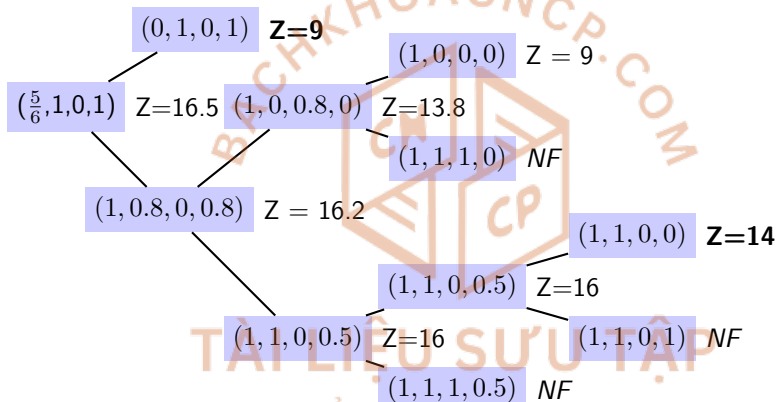

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.
- A node (subproblem) is not active when any of the following occurs:



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.
- A node (subproblem) is not active when any of the following occurs:
 - ① The node is being branched on;

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.
- A node (subproblem) is not active when any of the following occurs:
 - 1 The node is being branched on;
 - 2 The solution is integral;

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.
- A node (subproblem) is not active when any of the following occurs:
 - ① The node is being branched on;
 - ② The solution is integral;
 - ③ The subproblem is infeasible;

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.
- A node (subproblem) is not active when any of the following occurs:
 - ① The node is being branched on;
 - ② The solution is integral;
 - ③ The subproblem is infeasible;
 - ④ You can fathom the subproblem by a bounding argument.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Solve the linear relaxation of the problem. If the solution is integer, then we are done. Otherwise create two new subproblems by branching on a fractional variable.
- A node (subproblem) is not active when any of the following occurs:
 - 1 The node is being branched on;
 - 2 The solution is integral;
 - 3 The subproblem is infeasible;
 - 4 You can fathom the subproblem by a bounding argument.
- Choose an active node and branch on a fractional variable. Repeat until there are no active subproblems.

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
- Divide a problem into subproblems

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
- Divide a problem into subproblems
- Calculate the LP relaxation of a subproblem

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
- Divide a problem into subproblems
- Calculate the LP relaxation of a subproblem
 - The LP problem has no feasible solution, done;

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
- Divide a problem into subproblems
- Calculate the LP relaxation of a subproblem
 - The LP problem has no feasible solution, done;
 - The LP problem has an integer optimal solution; done.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
- Divide a problem into subproblems
- Calculate the LP relaxation of a subproblem
 - The LP problem has no feasible solution, done;
 - The LP problem has an integer optimal solution; done.
 - Compare the optimal solution with the best solution we know (the incumbent).

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Branch & Bound: Steps

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
 - Divide a problem into subproblems
 - Calculate the LP relaxation of a subproblem
 - The LP problem has no feasible solution, done;
 - The LP problem has an integer optimal solution; done.
 - Compare the optimal solution with the best solution we know (the incumbent).
 - The LP problem has an optimal solution that is worse than the incumbent, done.
- In all the cases above, we know all we need to know about that subproblem. We say that subproblem is fathomed.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Omitted the integrality constraints from the original problem in order to obtain a relaxation. Thus a LP problem is obtained and solve this LP problem.
- Divide a problem into subproblems
- Calculate the LP relaxation of a subproblem
 - The LP problem has no feasible solution, done;
 - The LP problem has an integer optimal solution; done.
 - Compare the optimal solution with the best solution we know (the incumbent).
 - The LP problem has an optimal solution that is worse than the incumbent, done.

In all the cases above, we know all we need to know about that subproblem. We say that subproblem is fathomed.

 - The LP problem has an optimal solution that are not all integer, better than the incumbent. In this case we would have to divide this subproblem further and repeat.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Exercise: An 0-1 Knapsack Problem Instance

- Consider the problem

$$\begin{aligned} \max_x \quad & 8x_1 + 11x_2 + 6x_3 + 4x_4 \\ \text{s.t.} \quad & 5x_1 + 7x_2 + 4x_3 + 3x_4 \leq 14, \\ & x \in \{0, 1\}^4. \end{aligned}$$

- The linear relaxation solution is $x = (1, 1, 0.5, 0)$ with a value of 22. The solution is **not integral**.
- Choose x_3 to branch. The next two subproblems will have $x_3 = 0$ and $x_3 = 1$, respectively.
- ...



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming


Software for ILP

Problems and Homeworks

Exercise: An 0-1 Knapsack Problem Instance



- The tree search:

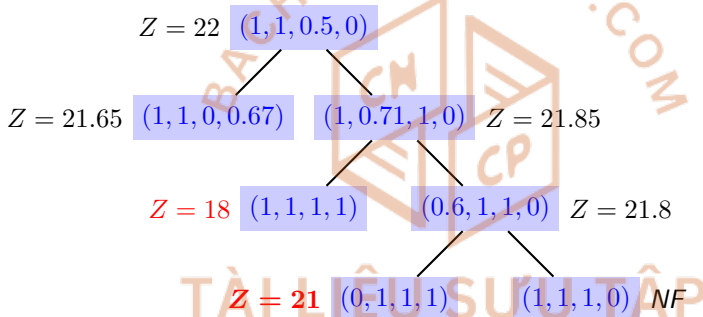

- The optimal solution is $x = (0, 1, 1, 1)$.

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Outline

① Motivated Examples

Linear Classification Problem

Facility Location Problem

② Linear and Integer Linear Programs

③ Simplex Method for Solving LP

④ Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

⑤ Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

⑥ Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

How to Branch?

- We want to divide the current problem into two or more subproblems that are easier than the original. A commonly used branching method:

$$x_i \leq \lfloor x_i^* \rfloor, x_i \geq \lceil x_i^* \rceil,$$

where x_i^* is a fractional variable.

- Which variable to branch? A commonly used branching rule: Branch the most fractional variable.
- We would like to choose the branching that minimizes the sum of the solution times of all the created subproblems.
- How do we know how long it will take to solve each subproblem?
 - Answer: We don't.
 - Idea: Try to predict the difficulty of a subproblem.
- A good branching rule: The value of the linear programming relaxation changes a lot.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Which Node to Select?

- An important choice in branch and bound is the strategy for selecting the next subproblem to be processed.
- Goals: (i) Minimizing overall solution time; (ii) Finding a good feasible solution quickly.
- Some commonly used search strategies:
 - Best First,
 - Depth-First.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

The Best First Approach

- One way to minimize overall solution time is to try to minimize the size of the search tree. We can achieve this by choosing the subproblem with the *best bound* (lowest lower bound if we are minimizing).
- *Drawbacks* of Best First
 - Doesn't necessarily find feasible solutions quickly since feasible solutions are "more likely" to be found deep in the tree.
 - Node setup costs are high. The linear program being solved may change quite a bit from one node evaluation to the next.
 - Memory usage is high. It can require a lot of memory to store the candidate list, since the tree can grow "broad".

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

The Depth-First Approach

- The depth first approach is to always choose the deepest node to process next. Just dive until you prune, then back up and go the other way.
- This avoids most of the problems with best first: The number of candidate nodes is minimized (saving memory). The node set-up costs are minimized.
- LPs change very little from one iteration to the next. Feasible solutions are usually found quickly.
- *Drawback*: If the initial lower bound is not very good, then we may end up processing lots of non-critical nodes.
- Hybrid Strategies: Go depth-first until you find a feasible solution, then do best-first search.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

A subproblem is fathomed when

- 1 The relaxation of the subproblem has an optimal solution with $z < z^*$ where z^* is the current best solution;
- 2 The relaxation of the subproblem has no feasible solution;
- 3 The relaxation of the subproblem has an optimal solution that has all integer values (or all binary if it is an BIP).

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM

- Matlab optimization toolbox: [bintprog](#) – a built-in function for mixed integer linear programming.
- Some of softwares which are proprietary but *free for academic use*:
 - [CPLEX](#): www-03.ibm.com/.../ibmilogcpleoptistud
 - [Gurobi](#): gurobi.com
 - [MOSEK](#): www.mosek.com
 - [SCIP](#): scip.zib.de

These softwares can also be used as solvers in some modeling tools.

- Many open-source solvers were developed in the literature.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



- CVX: cvxr.com/cvx
- YALMIP: yalmip.github.io
- TOMLAB: tomopt.com/tomlab

Questions

- What is a modeling tool?
- How does it work?
- How do we use it?

→ See the next slide for an example of the use of CVX.

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming


Software for ILP

Problems and Homeworks

Example: Solving the Linear Classification Problem using CVX

Statement

Given two sets of points in \mathbb{R}^n , denoted by $\{x_1, \dots, x_N\}$ and $\{y_1, \dots, y_M\}$, we need to classify the points.



TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Solving the Linear Classification Problem using CVX

Integer Linear
Programming



Classification for inseparable sets

$$\begin{aligned} \min \quad & \mathbf{1}^T u + \mathbf{1}^T v \\ \text{s.t.} \quad & a^T x_i + b \geq 1 - u_i, i = 1, \dots, N, \\ & a^T y_i + b \leq -1 + v_i, i = 1, \dots, M, \\ & u, v \succeq 0. \end{aligned}$$

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

BACHKHOACNCP.COM

Solving the Linear Classification Problem using CVX

```
n = 2;
randn('state',2);
N = 50; M = 50;
Y = [1.5+0.9*randn(1,0.6*N), 1.5+0.7*randn(1,0.4*N);
      2*(randn(1,0.6*N)+1), 2*(randn(1,0.4*N)-1)];
X = [-1.5+0.9*randn(1,0.6*M), -1.5+0.7*randn(1,0.4*M);
      2*(randn(1,0.6*M)-1), 2*(randn(1,0.4*M)+1)];
T = [-1 1; 1 1];
Y = T*Y; X = T*X;

% Solution via CVX
cvx_begin
    variables a(n) b(1) u(N) v(M)
    minimize (ones(1,N)*u + ones(1,M)*v)
    X'*a + b >= 1 - u;
    Y'*a + b <= -(1 - v);
    u >= 0;
    v >= 0;
cvx_end
```



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Solving the Linear Classification Problem using CVX

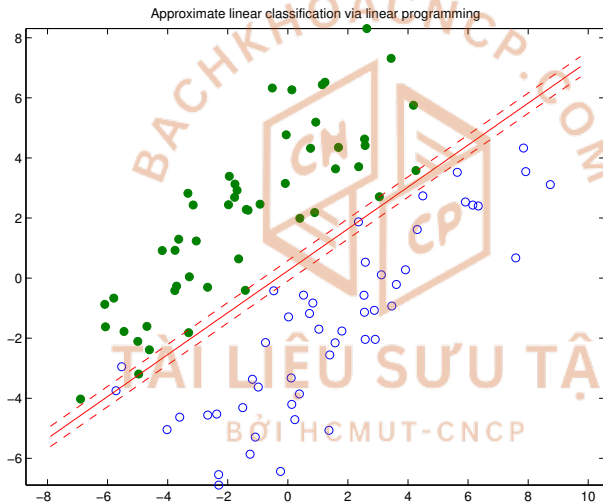

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Outline

① Motivated Examples

Linear Classification Problem

Facility Location Problem

② Linear and Integer Linear Programs

③ Simplex Method for Solving LP

④ Branch & Bound Method for Solving ILP

Numerical Example 1 – IP

Numerical Example 2 – Binary IP

Strategy and Steps

Exercise: 0-1 Knapsack Problem

⑤ Remarks on Branch & Bound Method

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for Integer Programming

⑥ Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Transportation Problem — Linear Programming Model

Statement of an instance

Suppose a company has 2 factories $\mathcal{F}_1, \mathcal{F}_2$ and 9 retail outlets $\mathcal{R}_1, \dots, \mathcal{R}_9$:

- the total supply of the product from each factory \mathcal{F}_1 is a_i ;
- the total demand for the product at each outlet \mathcal{R}_j is b_j ;
- The cost of sending one unit of the product from factory \mathcal{F}_i to outlet \mathcal{R}_j is equal to c_{ij} ,

where $i = 1, 2$ and $j = 1, 2, \dots, 9$.

The problem is to determine a transportation scheme between the factories and the outlets so as to minimize the total transportation cost, subject to the specified supply and demand constraints..



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Transportation Problem — Linear Programming Model

Statement of an instance

Suppose a company has 2 factories $\mathcal{F}_1, \mathcal{F}_2$ and 9 retail outlets $\mathcal{R}_1, \dots, \mathcal{R}_9$:

- the total supply of the product from each factory \mathcal{F}_1 is a_i ;
- the total demand for the product at each outlet \mathcal{R}_j is b_j ;
- The cost of sending one unit of the product from factory \mathcal{F}_i to outlet \mathcal{R}_j is equal to c_{ij} ,

where $i = 1, 2$ and $j = 1, 2, \dots, 9$.

The problem is to determine a transportation scheme between the factories and the outlets so as to minimize the total transportation cost, subject to the specified supply and demand constraints..

- **Objective:** minimum cost of transporting.
- **Constraint:** total supply of the factories and, total demand for the product of the outlets.
- **Variable:** the size of the shipment from \mathcal{F}_i to \mathcal{R}_j , where $i = 1, 2$ and $j = 1, 2, \dots, 9$.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Transportation Problem: Mathematical Formulation



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?


Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Variable: $x_{ij} \geq 0$.



Transportation Problem: Mathematical Formulation



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks


How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



- Variable: $x_{ij} \geq 0$.
- Objective
 - transportation cost from \mathcal{F}_i to \mathcal{R}_j : $c_{ij}x_{ij}$,
 - objective function: $\sum_{ij} c_{ij}x_{ij}$.

Transportation Problem: Mathematical Formulation



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks


How to Branch?

Which Node to Select?

Rule of Fathoming


Software for ILP

Problems and Homeworks



- Variable: $x_{ij} \geq 0$.
- Objective
 - transportation cost from \mathcal{F}_i to \mathcal{R}_j : $c_{ij}x_{ij}$,
 - objective function: $\sum_{ij} c_{ij}x_{ij}$.
- Constraints
 - total supply of \mathcal{F}_i :
$$\sum_{j=1}^9 x_{ij} \leq a_i,$$
 - total demand of \mathcal{R}_j :
$$\sum_{i=1}^2 x_{ij} \geq b_j.$$

Transportation Problem: Mathematical Formulation (cont.)



$$\min_x \sum_{ij} c_{ij} x_{ij}$$

subject to

$$\sum_{j=1}^9 x_{ij} \leq a_i, \quad i = 1, 2, \quad (81)$$

$$\sum_{i=1}^2 x_{ij} \geq b_j, \quad j = 1, \dots, 9, \quad (82)$$

$$x_{ij} \geq 0, \quad i = 1, 2, \quad j = 1, \dots, 9. \quad (83)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Steps

- 1 Define decision variables.
- 2 Determine the objective function.
- 3 Establish constraints.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM

Knapsack Problems — Integer Linear Programming Model

There are many different knapsack problems. The first and classical one is the binary knapsack problem.

Binary (0-1) knapsack problem

A tourist is planning a tour in the mountains. He has a lot of objects which may be useful during the tour. For example ice pick and can opener can be among the objects. We suppose that

- Each object has a positive value and a positive weight, the value is the degree of contribution of the object to the success of the tour;



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM

Knapsack Problems — Integer Linear Programming Model

There are many different knapsack problems. The first and classical one is the binary knapsack problem.

Binary (0-1) knapsack problem

A tourist is planning a tour in the mountains. He has a lot of objects which may be useful during the tour. For example ice pick and can opener can be among the objects. We suppose that

- Each object has a positive value and a positive weight, the value is the degree of contribution of the object to the success of the tour;
- The objects are independent from each other (e.g. can and can opener are not independent as any of them without the other one has limited value);



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Knapsack Problems — Integer Linear Programming Model

There are many different knapsack problems. The first and classical one is the binary knapsack problem.

Binary (0-1) knapsack problem

A tourist is planning a tour in the mountains. He has a lot of objects which may be useful during the tour. For example ice pick and can opener can be among the objects. We suppose that

- Each object has a positive value and a positive weight, the value is the degree of contribution of the object to the success of the tour;
- The objects are independent from each other (e.g. can and can opener are not independent as any of them without the other one has limited value);
- The knapsack of the tourist is strong and large enough to contain all possible objects;



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Knapsack Problems — Integer Linear Programming Model

There are many different knapsack problems. The first and classical one is the binary knapsack problem.

Binary (0-1) knapsack problem

A tourist is planning a tour in the mountains. He has a lot of objects which may be useful during the tour. For example ice pick and can opener can be among the objects. We suppose that

- Each object has a positive value and a positive weight, the value is the degree of contribution of the object to the success of the tour;
- The objects are independent from each other (e.g. can and can opener are not independent as any of them without the other one has limited value);
- The knapsack of the tourist is strong and large enough to contain all possible objects;
- The strength of the tourist makes possible to bring only a limited total weight;



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Knapsack Problems — Integer Linear Programming Model

There are many different knapsack problems. The first and classical one is the binary knapsack problem.

Binary (0-1) knapsack problem

A tourist is planning a tour in the mountains. He has a lot of objects which may be useful during the tour. For example ice pick and can opener can be among the objects. We suppose that

- Each object has a positive value and a positive weight, the value is the degree of contribution of the object to the success of the tour;
- The objects are independent from each other (e.g. can and can opener are not independent as any of them without the other one has limited value);
- The knapsack of the tourist is strong and large enough to contain all possible objects;
- The strength of the tourist makes possible to bring only a limited total weight;
- But within this weight limit the tourist want to achieve the maximal total value.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Mathematical Formulation

- The following notations are used to the mathematical formulation of the problem:

n the number of objects;
 j the index of the objects;
 w_j the weight of object j ;
 v_j the value of object j ;
 b the maximal weight what the tourist can bring.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Mathematical Formulation

- The following notations are used to the mathematical formulation of the problem:

n the number of objects;
 j the index of the objects;
 w_j the weight of object j ;
 v_j the value of object j ;
 b the maximal weight what the tourist can bring.

- For each object j a so-called *binary* or *zero-one* decision variable, say x_j , is introduced:

$$x_j = \begin{cases} 1 & \text{if object } j \text{ is present on the tour} \\ 0 & \text{if object } j \text{ isn't present on the tour.} \end{cases}$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Mathematical Formulation

- The following notations are used to the mathematical formulation of the problem:

n the number of objects;
 j the index of the objects;
 w_j the weight of object j ;
 v_j the value of object j ;
 b the maximal weight what the tourist can bring.

- For each object j a so-called *binary* or *zero-one* decision variable, say x_j , is introduced:

$$x_j = \begin{cases} 1 & \text{if object } j \text{ is present on the tour} \\ 0 & \text{if object } j \text{ isn't present on the tour.} \end{cases}$$

- Notice that

$$w_j x_j = \begin{cases} w_j & \text{if object } j \text{ is present on the tour,} \\ 0 & \text{if object } j \text{ isn't present on the tour} \end{cases}$$

is the weight of the object in the knapsack.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Mathematical Formulation (cont.)

- Similarly $v_j x_j$ is the value of the object on the tour. The total weight in the knapsack is

$$\sum_{j=1}^n v_j x_j$$

which may not exceed the weight limit.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Mathematical Formulation (cont.)

- Similarly $v_j x_j$ is the value of the object on the tour. The total weight in the knapsack is

$$\sum_{j=1}^n v_j x_j$$

which may not exceed the weight limit.

- Hence the mathematical form of the problem is as follows.

$$\max_x \sum_{j=1}^n v_j x_j \quad (84)$$

subject to

$$\sum_{j=1}^n w_j x_j \leq b, \quad (85)$$

$$x_j = 0 \text{ or } 1, \quad j = 1, \dots, n. \quad (86)$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Solving the problem in this case

- The difficulty of the problem is caused by the integrality requirement. If constraint (86) is substituted by the relaxed constraint, i.e. by

$$0 \leq x_j \leq 1, \quad j = 1, \dots, n, \quad (87)$$

then the Problem (84), (85), and (87) is a linear programming problem. (87) means that not only a complete object can be in the knapsack but any part of it.

Theorem

Suppose: v_j, w_j ($j = 1, \dots, n$)-all positive, and satisfies

$$\frac{v_1}{w_1} \geq \frac{v_2}{w_2} \geq \dots \geq \frac{v_n}{w_n}. \quad (88)$$

Then there is an index p ($1 \leq p \leq n$) and an optimal sol. \mathbf{x}^* s.t.

$$x_1^* = x_2^* = \dots = x_{p-1}^* = 1, \quad x_{p+1}^* = x_{p+2}^* = \dots = x_{p+1}^* = 0.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Solving the problem in this case

- The difficulty of the problem is caused by the integrality requirement. If constraint (86) is substituted by the relaxed constraint, i.e. by

$$0 \leq x_j \leq 1, \quad j = 1, \dots, n, \quad (87)$$

then the Problem (84), (85), and (87) is a linear programming problem. (87) means that not only a complete object can be in the knapsack but any part of it.

- Moreover in this special case, it is not necessary to apply the simplex method or any other LP algorithm to solve it, as its optimal solution is described by

Theorem

Suppose: v_j, w_j ($j = 1, \dots, n$)-all positive, and satisfies

$$\frac{v_1}{w_1} \geq \frac{v_2}{w_2} \geq \dots \geq \frac{v_n}{w_n}. \quad (88)$$

Then there is an index p ($1 \leq p \leq n$) and an optimal sol. \mathbf{x}^* s.t.

$$x_1^* = x_2^* = \dots = x_{p-1}^* = 1, \quad x_{p+1}^* = x_{p+2}^* = \dots = x_n^* = 0.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Remarks

- Notice that there is only at most one non-integer component in \mathbf{x}^* . This property will be used at the numerical calculations.



BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Remarks

- Notice that there is only at most one non-integer component in \mathbf{x}^* . This property will be used at the numerical calculations.
- From the point of view of B&B the relation of the Problems (84), (85), and (86) and (84), (85), and (87) is very important. Any feasible solution of the first one is also feasible in the second one. But the opposite statement is not true.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Remarks

- Notice that there is only at most one non-integer component in \mathbf{x}^* . This property will be used at the numerical calculations.
- From the point of view of B&B the relation of the Problems (84), (85), and (86) and (84), (85), and (87) is very important. Any feasible solution of the first one is also feasible in the second one. But the opposite statement is not true.
- In other words the set of feasible solutions of the first problem is a proper subset of the feasible solutions of the second one. This fact has two important consequences:

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Notice that there is only at most one non-integer component in \mathbf{x}^* . This property will be used at the numerical calculations.
- From the point of view of B&B the relation of the Problems (84), (85), and (86) and (84), (85), and (87) is very important. Any feasible solution of the first one is also feasible in the second one. But the opposite statement is not true.
- In other words the set of feasible solutions of the first problem is a proper subset of the feasible solutions of the second one. This fact has two important consequences:
 - The optimal value of the Problem (84), (85), and (87) is an upper bound of the optimal value of the Problem (84), (85), and (86).



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Notice that there is only at most one non-integer component in \mathbf{x}^* . This property will be used at the numerical calculations.
- From the point of view of B&B the relation of the Problems (84), (85), and (86) and (84), (85), and (87) is very important. Any feasible solution of the first one is also feasible in the second one. But the opposite statement is not true.
- In other words the set of feasible solutions of the first problem is a proper subset of the feasible solutions of the second one. This fact has two important consequences:
 - The optimal value of the Problem (84), (85), and (87) is an upper bound of the optimal value of the Problem (84), (85), and (86).
 - If the optimal solution of the Problem (84), (85), and (87) is feasible in the Problem (84), (85), and (86) then it is the optimal solution of the latter problem as well.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Notice that there is only at most one non-integer component in \mathbf{x}^* . This property will be used at the numerical calculations.
- From the point of view of B&B the relation of the Problems (84), (85), and (86) and (84), (85), and (87) is very important. Any feasible solution of the first one is also feasible in the second one. But the opposite statement is not true.
- In other words the set of feasible solutions of the first problem is a proper subset of the feasible solutions of the second one. This fact has two important consequences:
 - The optimal value of the Problem (84), (85), and (87) is an upper bound of the optimal value of the Problem (84), (85), and (86).
 - If the optimal solution of the Problem (84), (85), and (87) is feasible in the Problem (84), (85), and (86) then it is the optimal solution of the latter problem as well.
- These properties are used in the course of the branch and bound method intensively.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

5	3	4	6	7	8	9	1	2
6	7	2	1	9	5	3	4	8
1	9	8	3	4	2	5	6	7
8	5	9	7	6	1	4	2	3
4	2	6	8	5	3	7	9	1
7	1	3	9	2	4	8	5	6
9	6	1	5	3	7	2	8	4
2	8	7	4	1	9	6	3	5
3	4	5	2	8	6	1	7	9

Problem statement

Given a grid of 9×9 , the grid is divided into 9 subgrids of 3×3 . Some cells of subgrids are filled by digits in $\{1, 2, \dots, 9\}$. The objective is to fill remaining cells such that

- each column, each row, and each subgrid that compose the grid, contain all of the digits from 1 to 9.



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 ILP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Sudoku Game: Model

Variable $x_{ijk} = \begin{cases} 1 & \text{if cell } (i, j) \text{ contains } k; \\ 0 & \text{otherwise.} \end{cases}$

$$\min_x \mathbf{0}^T \mathbf{x}$$

subject to

$$\sum_{i=1}^9 x_{ijk} = 1, \quad j, k = 1, \dots, 9,$$

$$\sum_{j=1}^9 x_{ijk} = 1, \quad i, k = 1, \dots, 9,$$

$$\sum_{k=1}^9 x_{ijk} = 1, \quad i, j = 1, \dots, 9,$$

$$\sum_{j=3q+2}^{3q} \sum_{i=3p+2}^{3p} x_{ijk} = 1, \quad k = 1, \dots, 9; p, q = 1, 2, 3,$$

$$x_{ijk} \in \{0, 1\}, \quad x_{ijk} = 1, \quad \forall (i, j, k) \in G.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks


How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

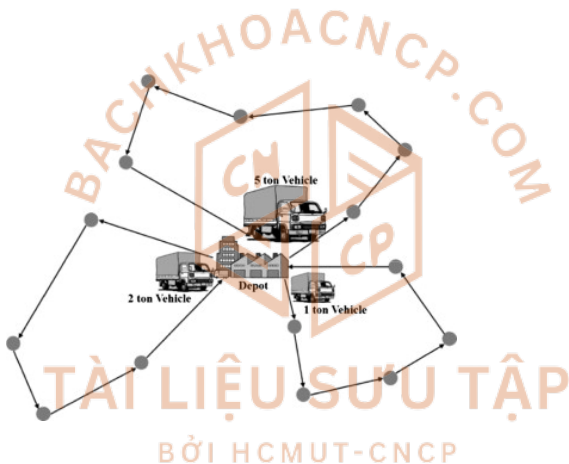

BACHKHOACNCP.COM



Problem statement

Let $G = (V, E)$ be a complete graph, where $V = 0, \dots, n$ is the set of vertices and E is the set of edges.

- We assume that vertex 0 denotes the depot, whereas vertex $i = 1, \dots, n$ is customer.
- A nonnegative value, denoted by c_{ij} , is the cost associated with each edge of G that connects vertex i and j .
- Let $S \subseteq V$, we denote by $r(S)$ the minimum number of vehicles required for all customers in S .

Given a positive integer number k , the capacitated vehicle routing problem is asked for seeking k simple routes that *minimizing a cost function of the sum of cost of edges of the routes*, and *satisfying simultaneously*:

- (i) each route starts at the depot vertex,
- (ii) each customer belongs exactly one route,
- (iii) the sum of demands of the vertices visited by a route is always lower than the capacity C of the vehicle.

Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

Vehicle Routing: Model

- We use $x_{ij} \in \{0, 1\}$ to indicate if the edge connecting vertex i and j , is an edge of the solution.

$$\min_x \sum_{i \in V} \sum_{j \in V} c_{ij} x_{ij}$$

subject to

$$\sum_{i \in V} x_{ij} = 1 \quad \text{for all } j \in V \setminus \{0\},$$

$$\sum_{j \in V} x_{ij} = 1 \quad \text{for all } i \in V \setminus \{0\},$$

$$\sum_{i \in V} x_{i0} = k,$$

$$\sum_{j \in V} x_{0j} = k,$$

$$\sum_{i \notin S} \sum_{j \in S} x_{ij} \geq r(S) \quad \text{for all } S \subseteq V \setminus \{0\}, S \neq \emptyset,$$

$$x_{ij} \in \{0, 1\} \quad \text{for all } i, j \in V.$$



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Simplex Method: details.



BACH KHOA CNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Simplex Method: details.
- Read carefully and do all Examples, Exercises in Chapter 7 of [4]: F.R. Giordano, W.P. Fox and S.B. Horton, A First Course in Mathematical Modeling, 5th ed., Cengage, 2014.

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM



Contents

Motivated Examples

Classification

Facility Location

Linear and Integer Linear Programs

Simplex Method

Branch & Bound Method

Numerical Example 1

Numerical Example 2

Strategy and Steps

Exercise: 0-1 KP

Remarks

How to Branch?

Which Node to Select?

Rule of Fathoming

Software for ILP

Problems and Homeworks

- Simplex Method: details.
- Read carefully and do all Examples, Exercises in Chapter 7 of [4]: F.R. Giordano, W.P. Fox and S.B. Horton, A First Course in Mathematical Modeling, 5th ed., Cengage, 2014.
- Do all Exercises in the file named "BT Chương 3.pdf".

TÀI LIỆU SƯU TẬP
BỞI HCMUT-CNCP

BACHKHOACNCP.COM