


F1.2 – Register Customer: Successful Registration

Endpoint: POST /api/auth/register

Access: Public

Scenario: Registering a new customer with valid data and a unique email.

Result: 200 OK – The customer account is created with the CUSTOMER role and ACTIVE status.

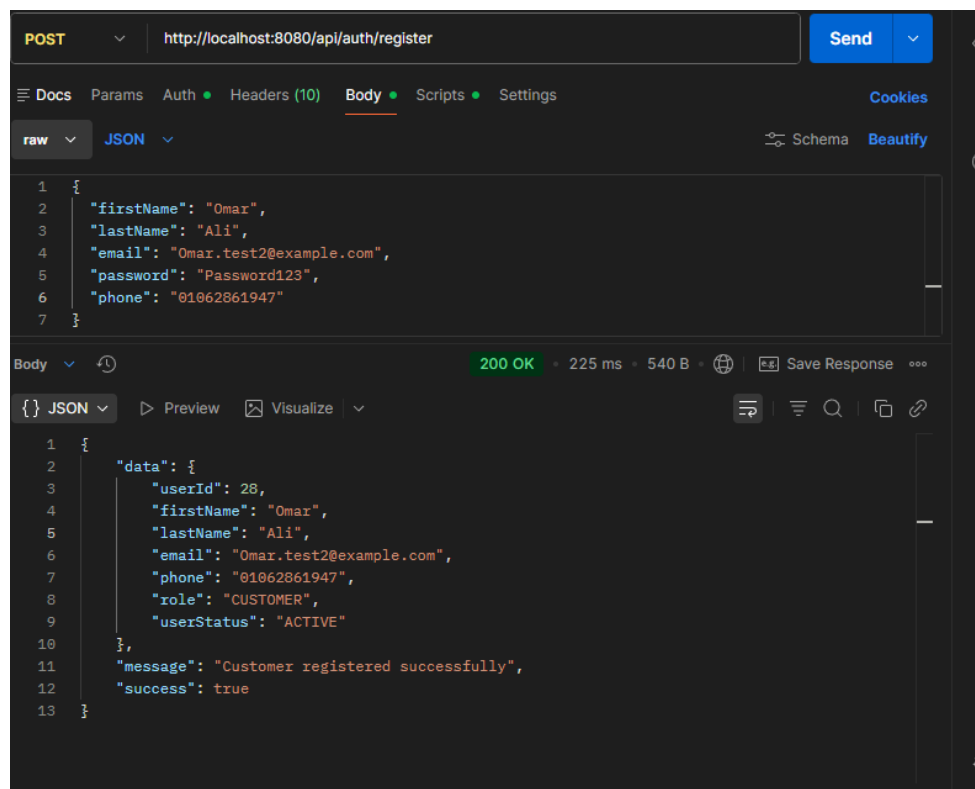


[F1.2 – Register Customer: Duplicate Email](#)

Endpoint: POST /api/auth/register

Access: Public

Scenario: Registering a customer using an email that already exists.

Result: 409 Conflict — The request is rejected with the DUPLICATE_EMAIL error code.

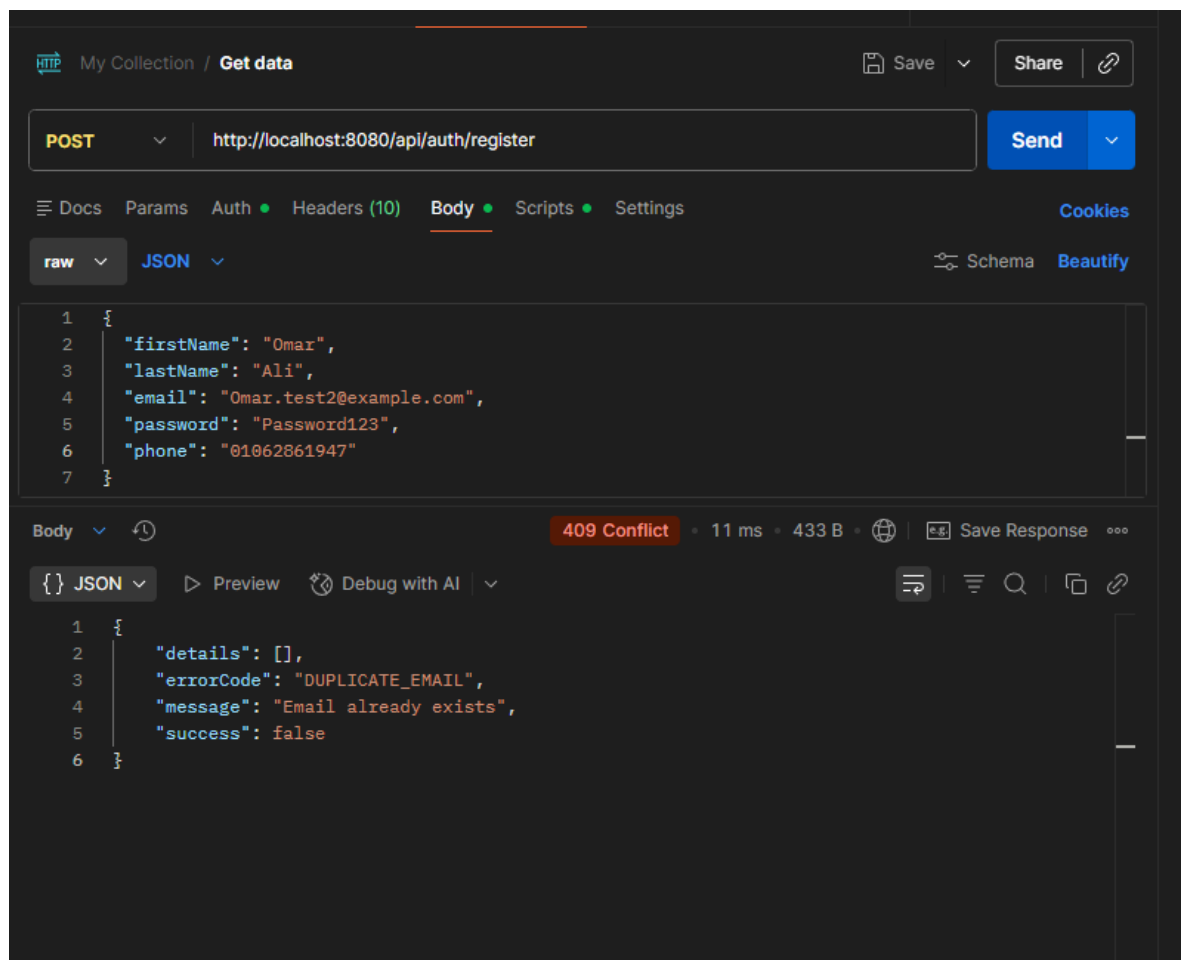

[F1.3 – Login: Successful Authentication](#)

Endpoint: POST /api/auth/login

Access: Public

Scenario: Logging in with a valid email and password.

Result: 200 OK — A JWT access token, Bearer token type, and authenticated user data are returned successfully.

The screenshot displays a REST client interface with the following details:

- Request:**
 - Method: POST
 - URL: http://localhost:8080/api/auth/login
 - Body (raw):

```
1 {
2   "email": "mohammed.login.test@example.com",
3   "password": "Test@12345"
4 }
```
- Response:**
 - Status: 200 OK
 - Time: 1.21 s
 - Size: 768 B
 - Body (JSON):

```
1 {
2   "data": {
3     "accessToken": "eyJhbGciOiJIUzI1NiJ9.eyJyY2x1Ijo1Q1VTE9NRViiLCJzdWIiOiJtb2hhbW11ZC5sb2dpci50ZXN0QGV4YW1wbGUyY29tIiwiaWF0IjoxNzgzMTMjYz0TIxLCJleHAiOjE3ODUyNjU3MjF9.
4     z4z0f6VReeCr815Un0p151zW2JvNwKu5KBSKXdwjKFI",
5     "tokenType": "Bearer",
6     "user": {
7       "userId": 61,
8       "firstName": "Mohammed",
9       "lastName": "Ali",
10      "email": "mohammed.login.test@example.com",
11      "role": "CUSTOMER",
12      "userStatus": "ACTIVE",
13      "airlineId": null
14     }
15   },
16   "message": "Login successful",
17   "success": true
18 }
```



[F1.3 – Login: Invalid Credentials](#)

Endpoint: POST /api/auth/login

Access: Public

Scenario: Logging in with an invalid email or password.

Result: 401 Unauthorized — The request is rejected with the INVALID_CREDENTIALS error code without revealing which credential is incorrect.

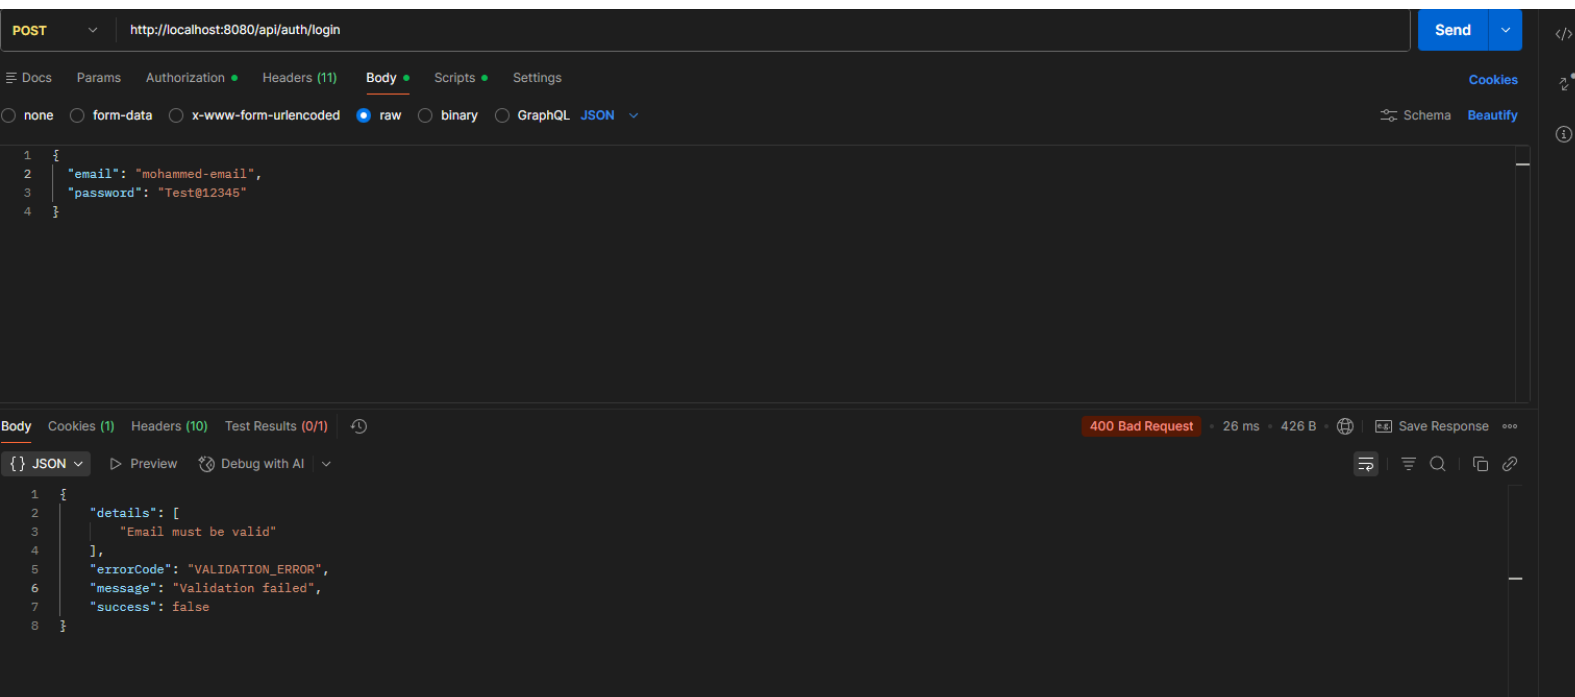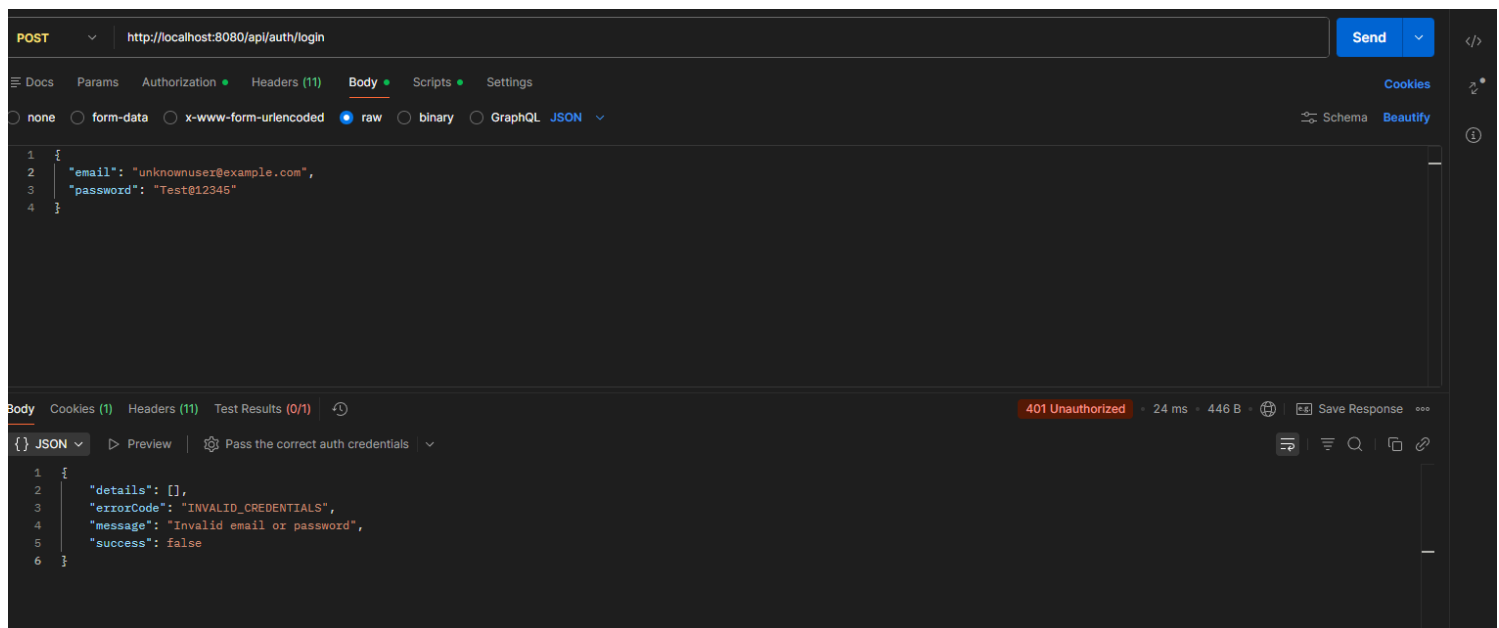

[F1.3 – Login: Deactivated Account](#)

Endpoint: POST /api/auth/login

Access: Public

Scenario: Logging in with valid credentials for a deactivated user account.

Result: 403 Forbidden — Login is rejected with the ACCOUNT_DEACTIVATED error code.

```
UPDATE USERS
SET USER_STATUS = 'DEACTIVATED'
WHERE EMAIL = 'mohammed.login.test@example.com';
```

The screenshot displays a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8080/api/auth/login
- Body:** A JSON object with the following fields:

```
{  "email": "mohammed.login.test@example.com",  "password": "Test@12345"}
```
- Response:** 403 Forbidden. The response body is a JSON object:

```
{  "details": [],  "errorCode": "ACCOUNT_DEACTIVATED",  "message": "Account is deactivated",  "success": false}
```
- Metadata:** The status bar indicates a response time of 119 ms and a body size of 440 B.

[F1.3 – Login: Blocked Account](#)

Endpoint: POST /api/auth/login

Access: Public

Scenario: Logging in with valid credentials for a blocked user account.

Result: 403 Forbidden — Login is rejected with the ACCOUNT_BLOCKED error code.

```
UPDATE USERS
SET USER_STATUS = 'BLOCKED'
WHERE EMAIL = 'mohammed.login.test@example.com';
```

The screenshot displays a REST client interface with the following details:

- Request:**
 - Method: POST
 - URL: http://localhost:8080/api/auth/login
 - Body (raw):

```
{
  "email": "mohammed.login.test@example.com",
  "password": "Test@12345"
}
```
- Response:**
 - Status: 403 Forbidden
 - Time: 123 ms
 - Size: 432 B
 - Body (JSON):

```
{
  "details": [],
  "errorCode": "ACCOUNT_BLOCKED",
  "message": "Account is blocked",
  "success": false
}
```

[F1.3 – Login: Missing Password Validation](#)

Endpoint: POST /api/auth/login

Access: Public

Scenario: Submitting a login request with an empty password or Email.

Result: 400 Bad Request – The request is rejected with the VALIDATION_ERROR code and the message “Password is required.”

The screenshot shows a REST client interface with a POST request to `http://localhost:8080/api/auth/login`. The request body is raw JSON: `{ "email": "mohammed.login.test@example.com", "password": "" }`. The response is a 400 Bad Request with a status bar indicating 8 ms and 427 B. The response body is JSON: `{ "details": [ { "message": "Password is required" } ], "errorCode": "VALIDATION_ERROR", "message": "Validation failed", "success": false }`.

The screenshot shows a REST client interface with a POST request to `http://localhost:8080/api/auth/login`. The request body is raw JSON: `{ "email": "", "password": "Test@12345" }`. The response is a 400 Bad Request with a status bar indicating 10 ms and 424 B. The response body is JSON: `{ "details": [ { "message": "Email is required" } ], "errorCode": "VALIDATION_ERROR", "message": "Validation failed", "success": false }`.

POST

http://localhost:8080/api/auth/login

Send

Docs

Params

Authorization

Headers (11)

Body

Scripts

Settings

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

JSON

Schema

Beautify

```
1 {
2
3 }
```

Body

Cookies (1)

Headers (10)

Test Results (0/1)

400 Bad Request

7 ms

447 B

Save Response

JSON

Preview

Debug with AI

```
1 {
2   "details": [
3     "Email is required",
4     "Password is required"
5   ],
6   "errorCode": "VALIDATION_ERROR",
7   "message": "Validation failed",
8   "success": false
9 }
```
