


F2.1 – Initial Super Admin: Secure Development

Setup Method: Customer Registration and Manual Oracle Role Update


Scenario: Creating test accounts through the existing registration endpoint to apply secure password hashing, then assigning the SUPER_ADMIN role manually in Oracle.

Result: The accounts are stored with securely hashed passwords, SUPER_ADMIN role, ACTIVE status, and no assigned airline.

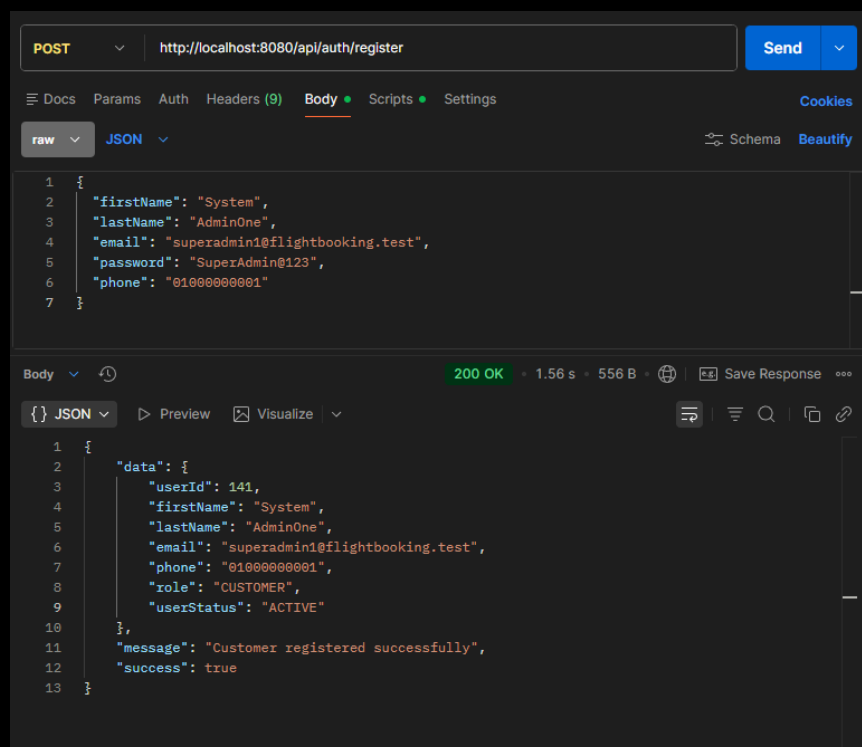

```
➤ UPDATE USERS
  SET USER_ROLE = 'SUPER_ADMIN',
      USER_STATUS = 'ACTIVE',
      AIRLINE_ID = NULL
  WHERE EMAIL IN (
    'superadmin1@flightbooking.test',
    'superadmin2@flightbooking.test',
    'superadmin3@flightbooking.test'
  );

COMMIT;
```

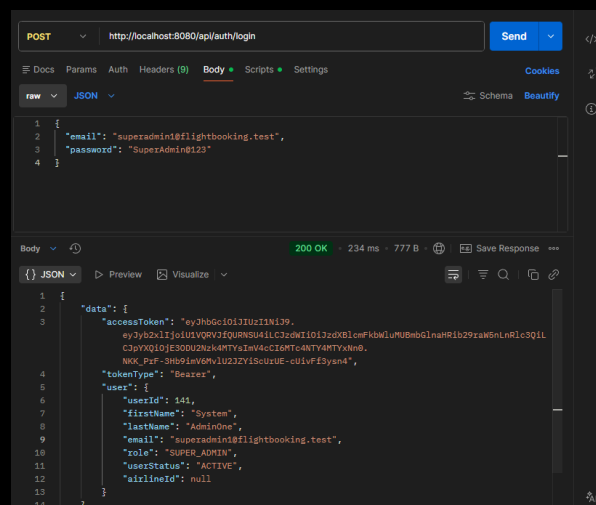

F2.2 – Airline Management: Successful Airline Creation

Endpoint: POST /api/airlines

Access: SUPER_ADMIN

Scenario: Creating a new airline using valid data and a unique airline name while authenticated with a valid SUPER_ADMIN JWT access token.

Result: 200 OK – The airline is created successfully with the provided information, and its status is assigned automatically as ACTIVE\

The screenshot displays a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8080/api/airlines
- Body (raw):**

```
1 {
2   "airlineName": "Alexandria Sky Airlines",
3   "contactNumber": "+20255501036",
4   "operatingRegion": "Egypt and Mediterranean"
5 }
```
- Status:** 200 OK (494 ms, 546 B)
- Response Body (JSON):**

```
1 {
2   "data": {
3     "airlineId": 41,
4     "airlineName": "Alexandria Sky Airlines",
5     "contactNumber": "+20255501036",
6     "operatingRegion": "Egypt and Mediterranean",
7     "airlineStatus": "ACTIVE"
8   },
9   "message": "Airline created successfully",
10  "success": true
11 }
```


F2.2 – Airline Management: Duplicate Airline Name

Endpoint: POST /api/airlines

Access: SUPER_ADMIN

Scenario: Attempting to create another airline using an airline name that already exists in the system.

Result: 409 Conflict – The request is rejected with the DUPLICATE_AIRLINE error code, and no additional airline record is created.

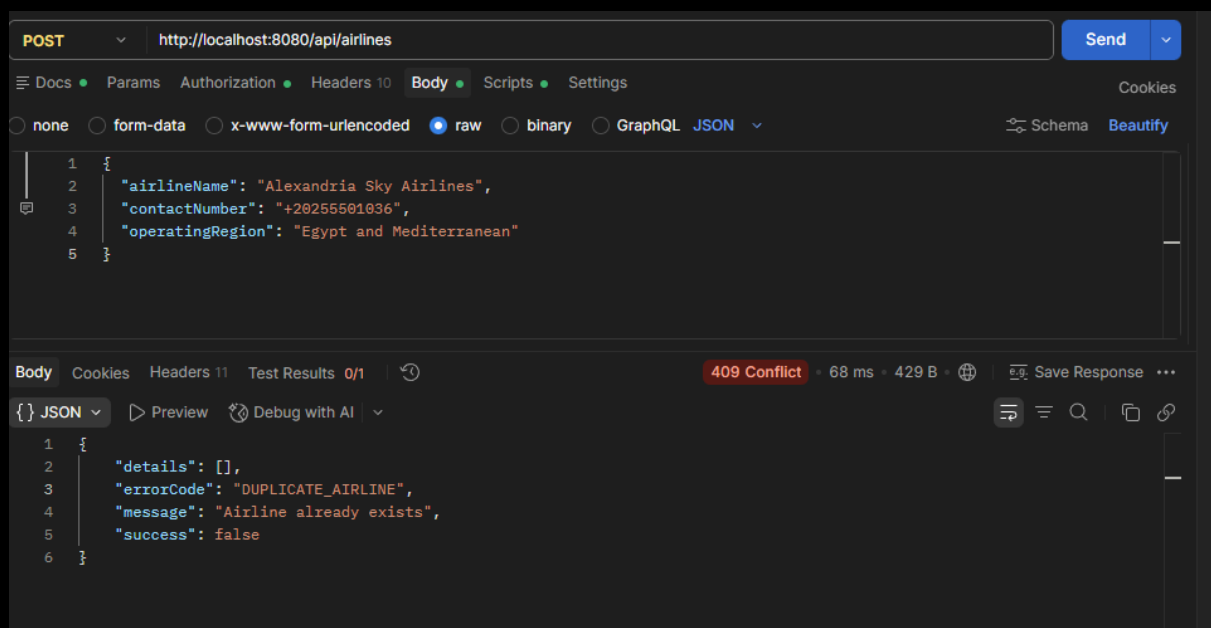

F2.2 – Airline Management: Successful Partial Airline Update

Endpoint: PATCH /api/airlines/{airlineId}

Access: SUPER_ADMIN

Scenario: Updating the contact number and operating region of an existing airline while authenticated with a valid SUPER_ADMIN JWT access token. Fields not included in the request remain unchanged.

Result: 200 OK – The provided airline fields are updated successfully, while the airline name and status remain unchanged.

The screenshot displays a REST client interface with the following details:

- Method:** PATCH
- URL:** http://localhost:8080/api/airlines/41
- Body (raw):**

```
1 {
2   "contactNumber": "+20255501999",
3   "operatingRegion": "Egypt, Middle East and Mediterranean"
4 }
```
- Status:** 200 OK (286 ms, 559 B)
- Response (JSON):**

```
1 {
2   "data": {
3     "airlineId": 41,
4     "airlineName": "Alexandria Sky Airlines",
5     "contactNumber": "+20255501999",
6     "operatingRegion": "Egypt, Middle East and Mediterranean",
7     "airlineStatus": "ACTIVE"
8   },
9   "message": "Airline updated successfully",
10  "success": true
11 }
```


F2.2 – Airline Management: Duplicate Airline Name During Update

Endpoint: PATCH /api/airlines/{airlineId}

Access: SUPER_ADMIN

Scenario: Attempting to update an existing airline using an airline name that already belongs to another airline while authenticated with a valid SUPER_ADMIN JWT access token.

Result: 409 Conflict – The update request is rejected with the DUPLICATE_AIRLINE error code, and the existing airline information remains unchanged.

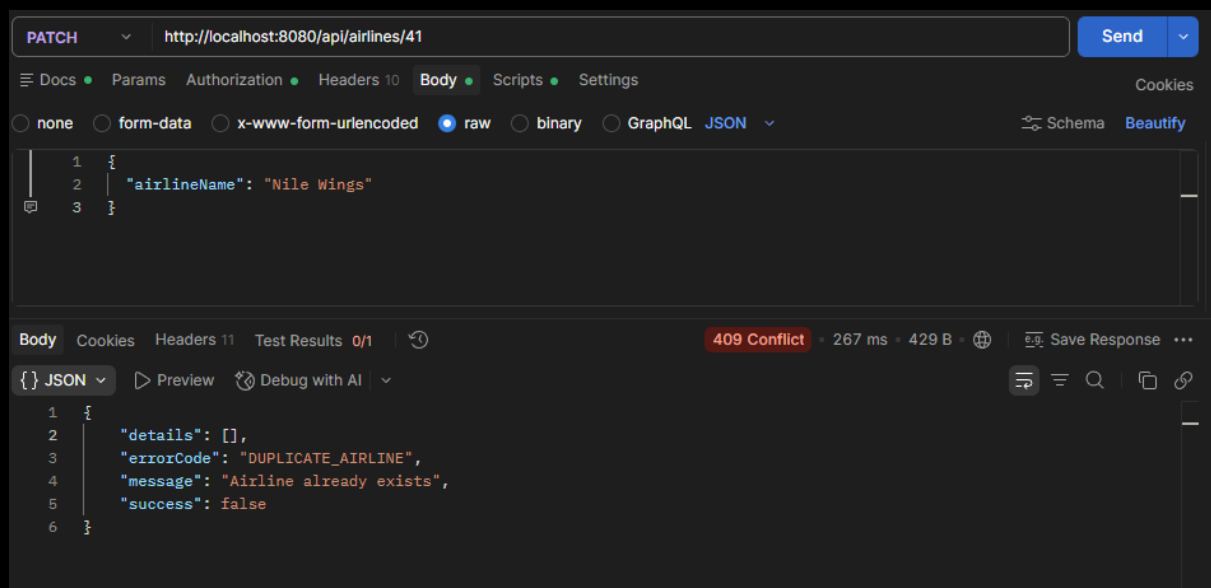


F2.2 – Airline Management: Airline Not Found During Update

Endpoint: PATCH /api/airlines/{airlineId}

Access: SUPER_ADMIN

Scenario: Attempting to update an airline using an airlineId that does not exist while authenticated with a valid SUPER_ADMIN JWT access token.

Result: 404 Not Found – The update request is rejected with the RESOURCE_NOT_FOUND error code because no airline exists with the provided airlineId, and no database record is modified.

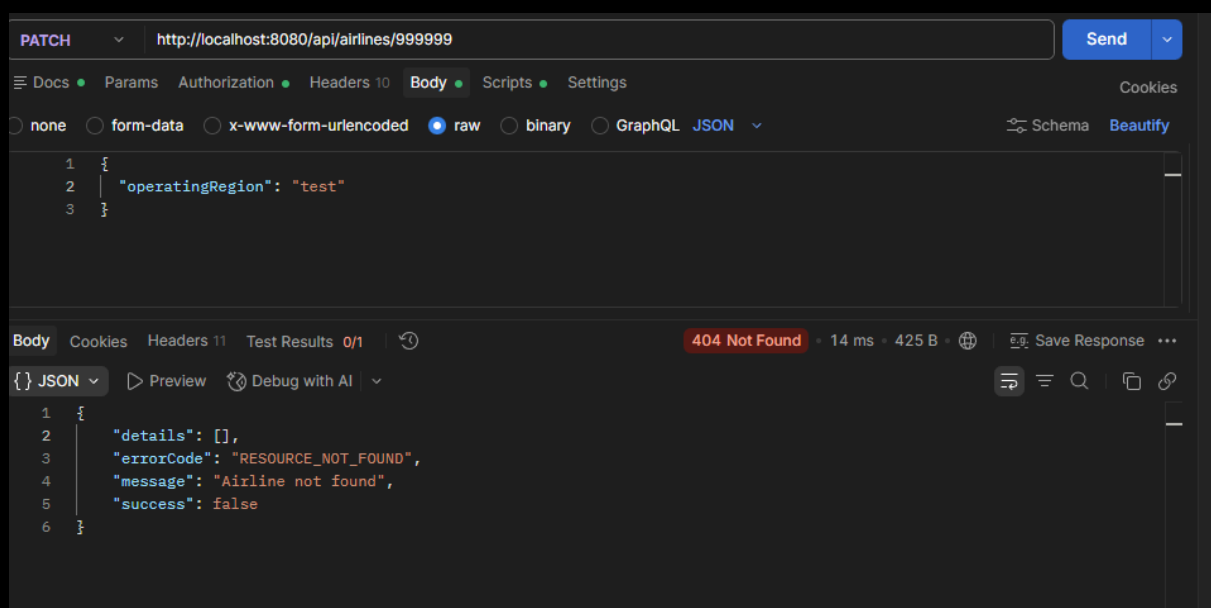


F2.2 – Airline Management: Successful Airline Deactivation

Endpoint: PATCH /api/airlines/{airlineId}/deactivate

Access: SUPER_ADMIN

Scenario: Deactivating an existing active airline while authenticated with a valid SUPER_ADMIN JWT access token.

Result: 200 OK – The airline is deactivated successfully, and its status is updated from ACTIVE to INACTIVE without deleting the airline or its historical records.

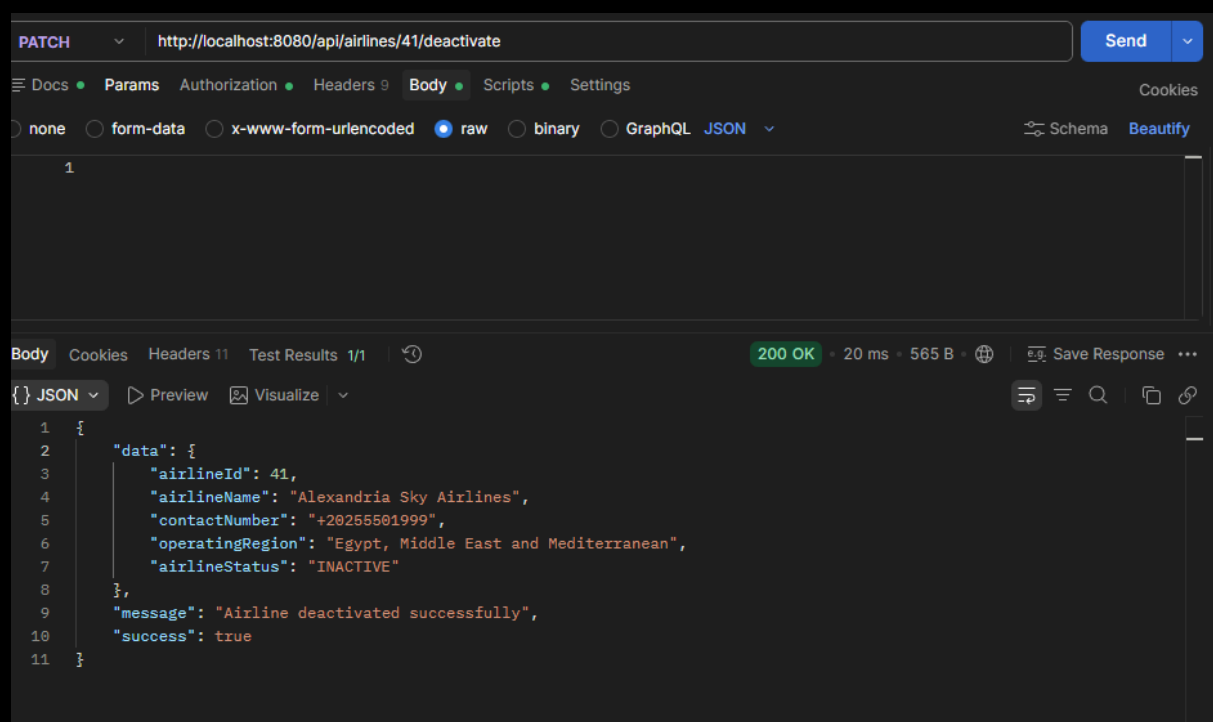

The screenshot displays a REST client interface with the following details:

- Method:** PATCH
- URL:** http://localhost:8080/api/airlines/41/deactivate
- Body:** The request body is empty.
- Response:** 200 OK, 20 ms, 565 B. The response body is a JSON object:

```
1 {
2   "data": {
3     "airlineId": 41,
4     "airlineName": "Alexandria Sky Airlines",
5     "contactNumber": "+20255501999",
6     "operatingRegion": "Egypt, Middle East and Mediterranean",
7     "airlineStatus": "INACTIVE"
8   },
9   "message": "Airline deactivated successfully",
10  "success": true
11 }
```


F2.2 – Airline Management: Airline Not Found During Deactivation

Endpoint: PATCH /api/airlines/{airlineId}/deactivate

Access: SUPER_ADMIN

Scenario: Attempting to deactivate an airline using an airlineId that does not exist while authenticated with a valid SUPER_ADMIN JWT access token.

Result: 404 Not Found – The deactivation request is rejected with the RESOURCE_NOT_FOUND error code because no airline exists with the provided airlineId, and no database record is modified.

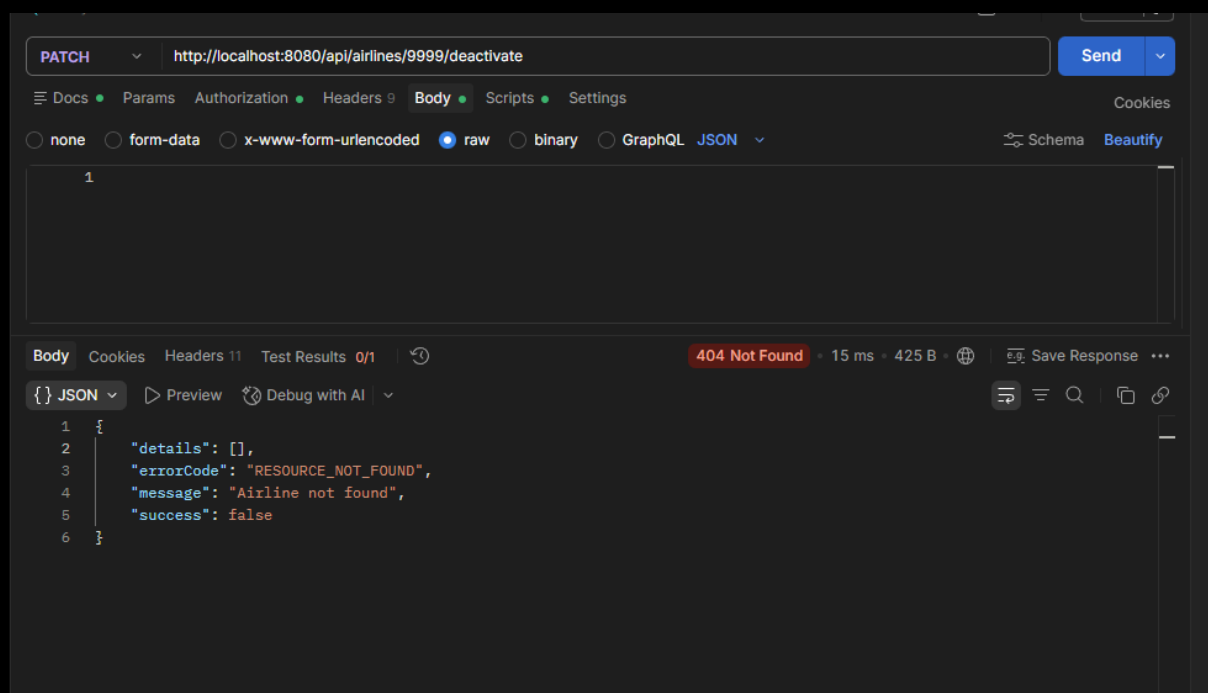

F2.2 – Airline Management: Successful Airline Listing and Filtering

Endpoint: GET /api/airlines

Access: SUPER_ADMIN

Scenario: Retrieving paginated airline data while authenticated with a valid SUPER_ADMIN JWT access token. The endpoint is tested without optional filters, with the ACTIVE status filter, with a keyword filter, and with both the status and keyword filters applied together.

Result: 200 OK – When no optional filters are provided, the endpoint returns a paginated list of all airlines. When the ACTIVE status filter is provided, only active airlines are returned. When a keyword is provided, the endpoint returns airlines whose name or operating region contains the keyword, regardless of uppercase or lowercase letters. When both filters are provided, the endpoint returns only airlines that match the selected status and whose name or operating region contains the supplied keyword. All responses include the pagination metadata: page, size, totalElements, and totalPages.

```
GET http://localhost:8080/api/airlines?page=0&size=10
200 OK · 181 ms · 906 B
{
  "data": {
    "content": [
      {
        "airlineId": 1,
        "airlineName": "EGYPTAIR",
        "contactNumber": "+20211112222",
        "operatingRegion": "Africa and Middle East",
        "airlineStatus": "INACTIVE"
      },
      {
        "airlineId": 21,
        "airlineName": "Nile Wings",
        "contactNumber": "+201891234567",
        "operatingRegion": "North Africa",
        "airlineStatus": "ACTIVE"
      },
      {
        "airlineId": 41,
        "airlineName": "Alexandria Sky Airlines",
        "contactNumber": "+201891234567",
        "operatingRegion": "Egypt, Middle East and Mediterranean",
        "airlineStatus": "INACTIVE"
      }
    ],
    "page": 0,
    "size": 10,
    "totalElements": 3,
    "totalPages": 1
  },
  "message": "Airlines retrieved successfully",
  "success": true
}
```

```
GET http://localhost:8080/api/airlines?page=0&size=10&status=ACTIVE
200 OK · 244 ms · 592 B
{
  "data": {
    "content": [
      {
        "airlineId": 21,
        "airlineName": "Nile Wings",
        "contactNumber": "+201891234567",
        "operatingRegion": "North Africa",
        "airlineStatus": "ACTIVE"
      }
    ],
    "page": 0,
    "size": 10,
    "totalElements": 1,
    "totalPages": 1
  },
  "message": "Airlines retrieved successfully",
  "success": true
}
```

```
GET http://localhost:8080/api/airlines?page=0&size=10&keyword=africa
200 OK · 176 ms · 734 B
{
  "data": {
    "content": [
      {
        "airlineId": 1,
        "airlineName": "EGYPTAIR",
        "contactNumber": "+20211112222",
        "operatingRegion": "Africa and Middle East",
        "airlineStatus": "INACTIVE"
      },
      {
        "airlineId": 21,
        "airlineName": "Nile Wings",
        "contactNumber": "+201891234567",
        "operatingRegion": "North Africa",
        "airlineStatus": "ACTIVE"
      }
    ],
    "page": 0,
    "size": 10,
    "totalElements": 2,
    "totalPages": 1
  },
  "message": "Airlines retrieved successfully",
  "success": true
}
```

```
GET http://localhost:8080/api/airlines?page=0&size=10&status=ACTIVE&keyword=africa
200 OK · 29 ms · 592 B
{
  "data": {
    "content": [
      {
        "airlineId": 21,
        "airlineName": "Nile Wings",
        "contactNumber": "+201891234567",
        "operatingRegion": "North Africa",
        "airlineStatus": "ACTIVE"
      }
    ],
    "page": 0,
    "size": 10,
    "totalElements": 1,
    "totalPages": 1
  },
  "message": "Airlines retrieved successfully",
  "success": true
}
```

