


Qs 1 . Satellite

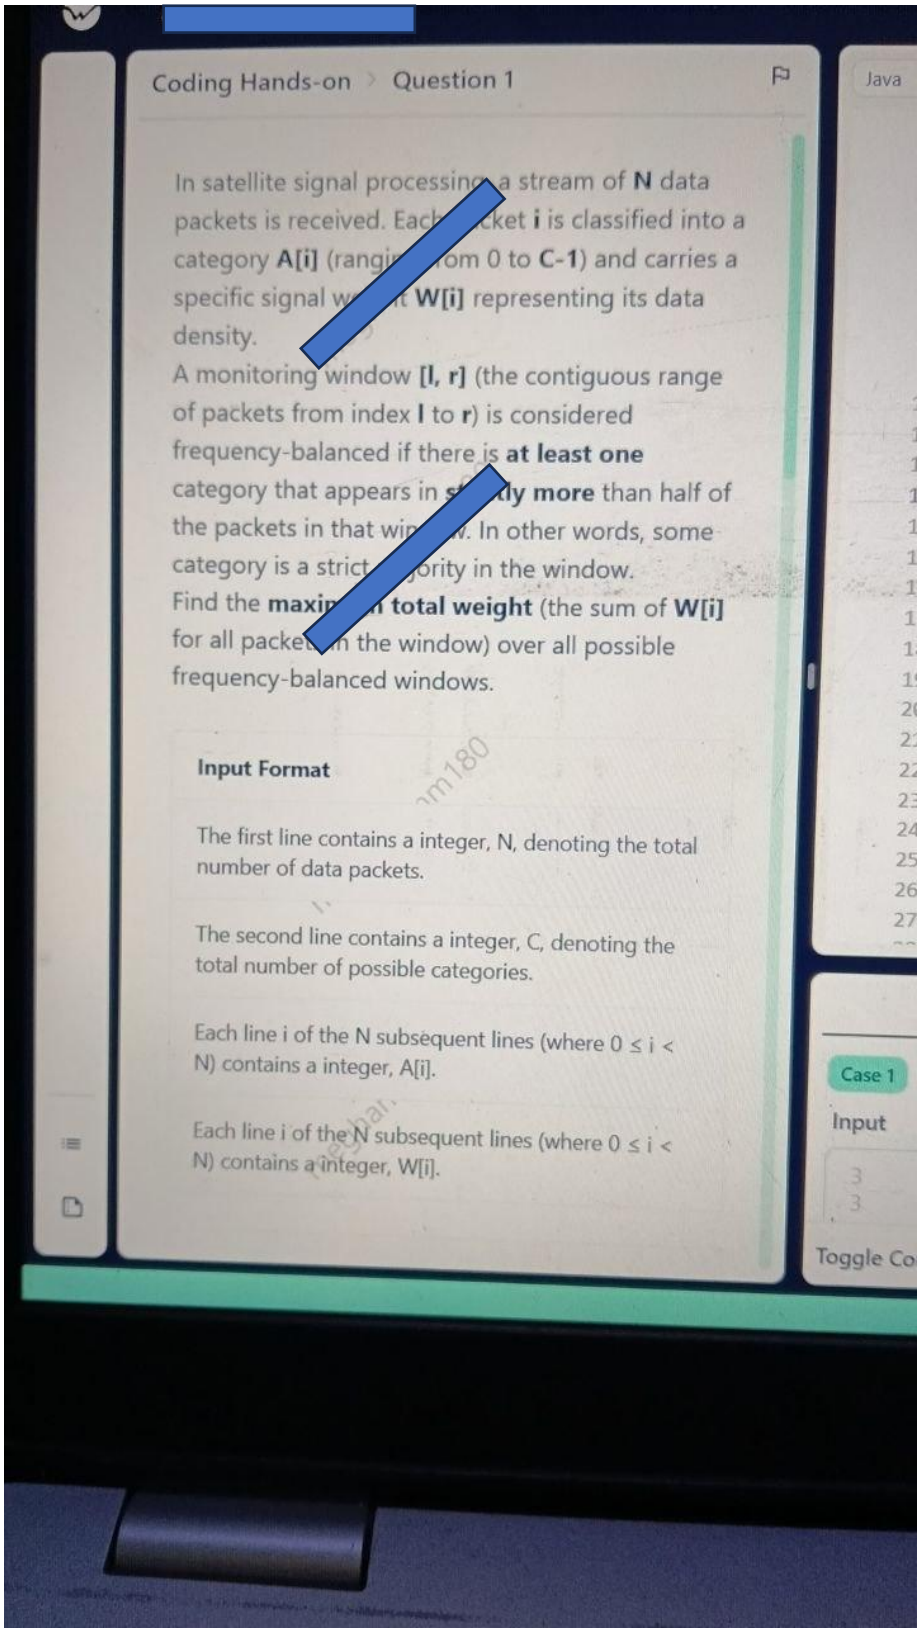

Material Copyrighted @KNACADEMY

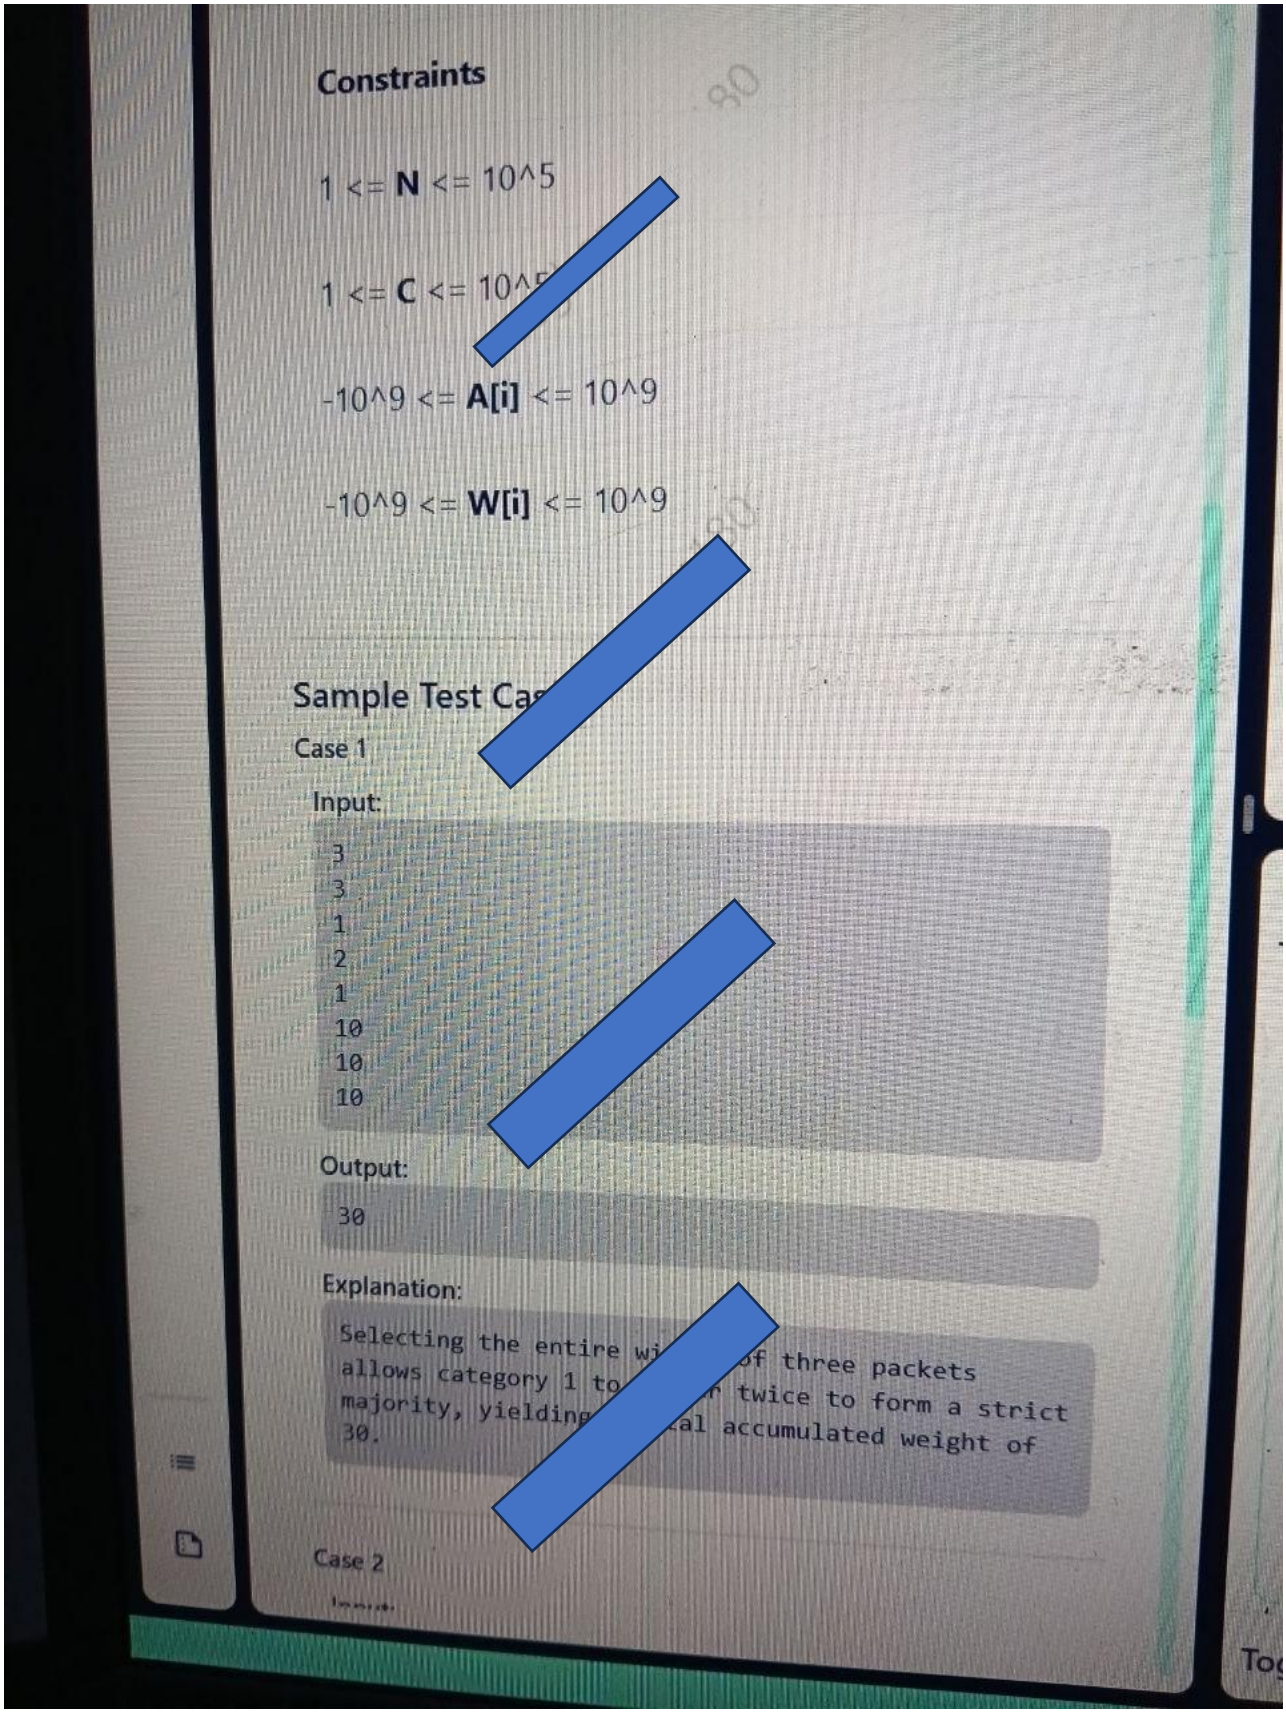


Material Copyrighted @KNACADEMY

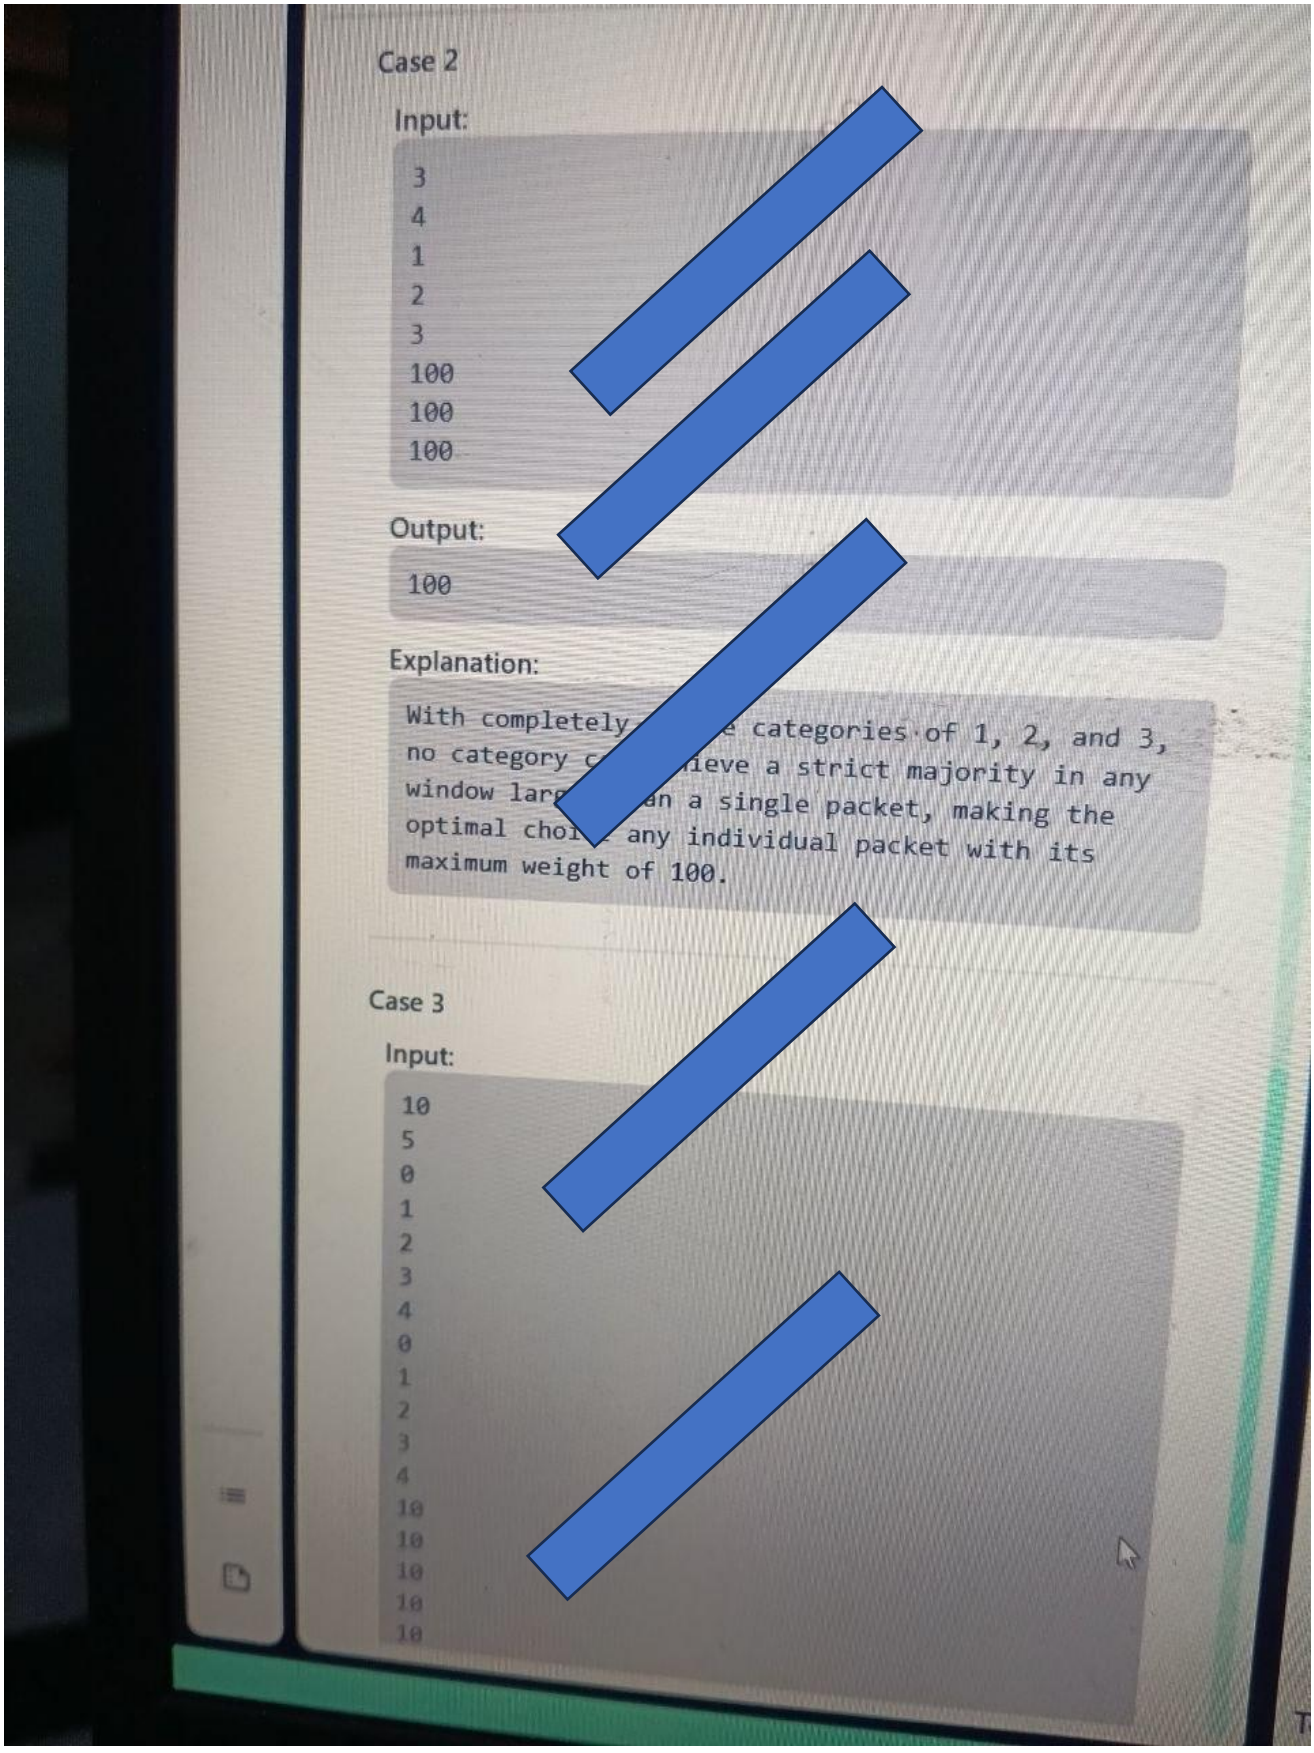

Material Copyrighted @KNACADEMY


Digits

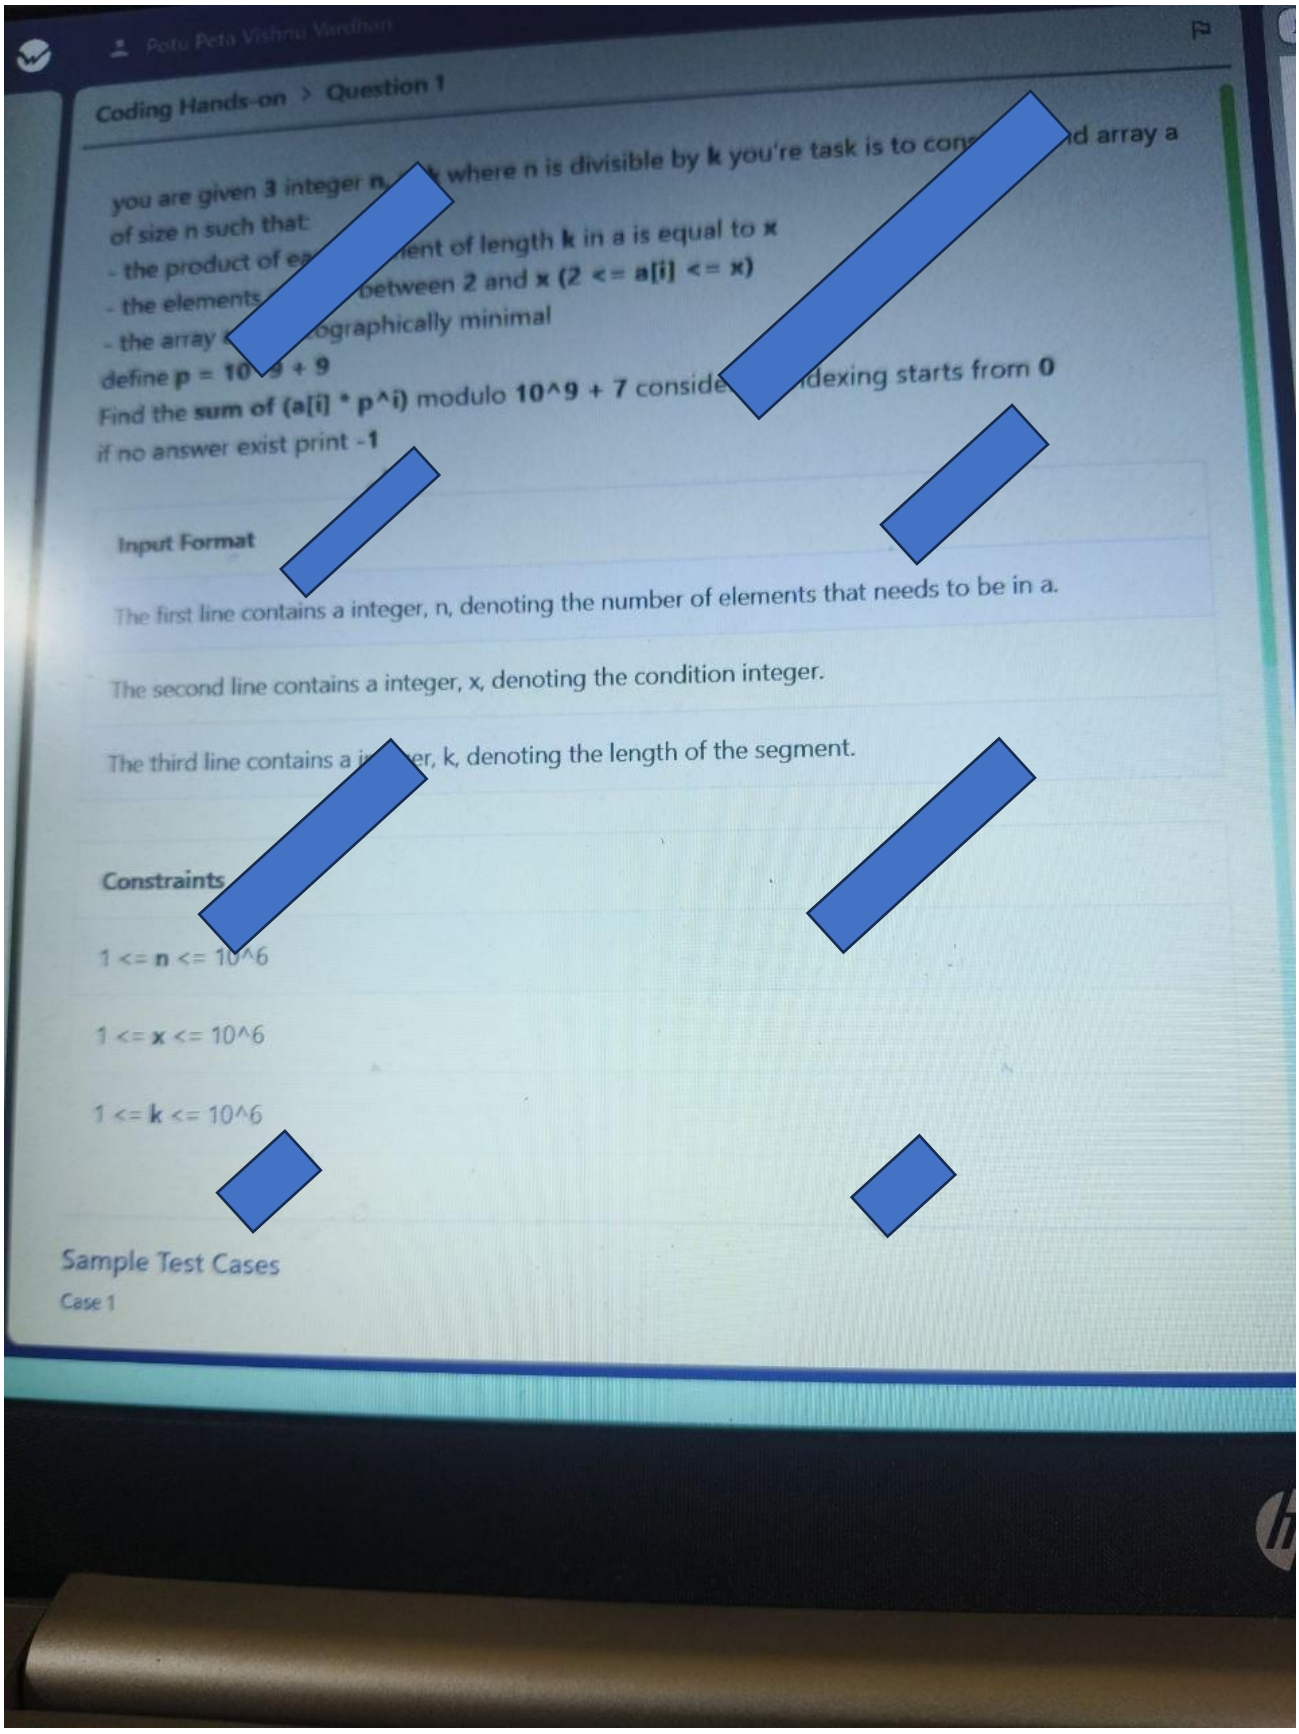



Material Copyrighted @KNACADEMY


Maths


Material Copyrighted @KNACADEMY

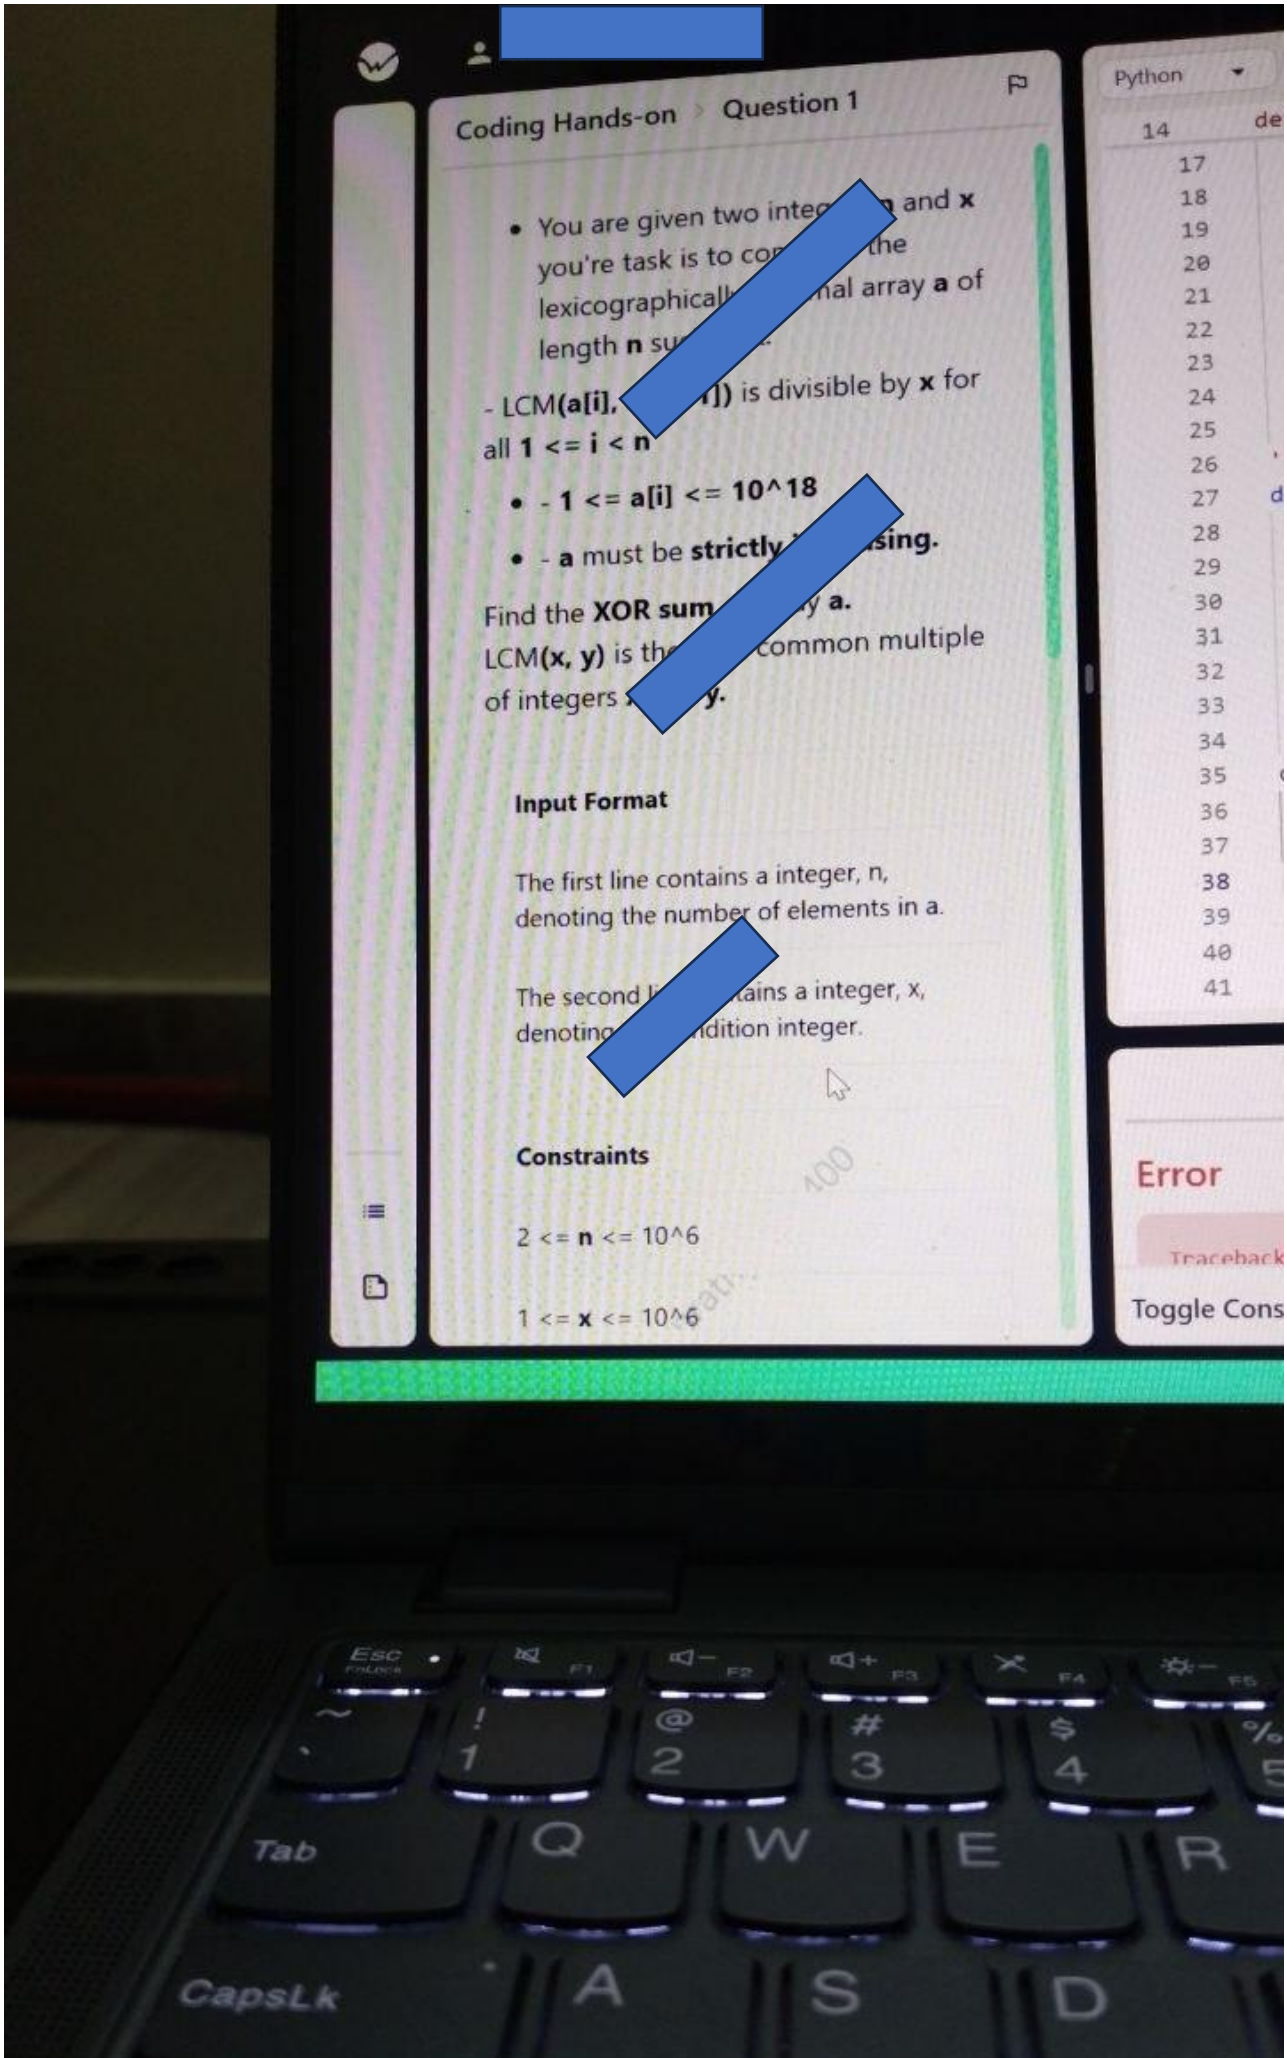
Coding Hands-on
Question 1
Python
Error
Toggle Cons

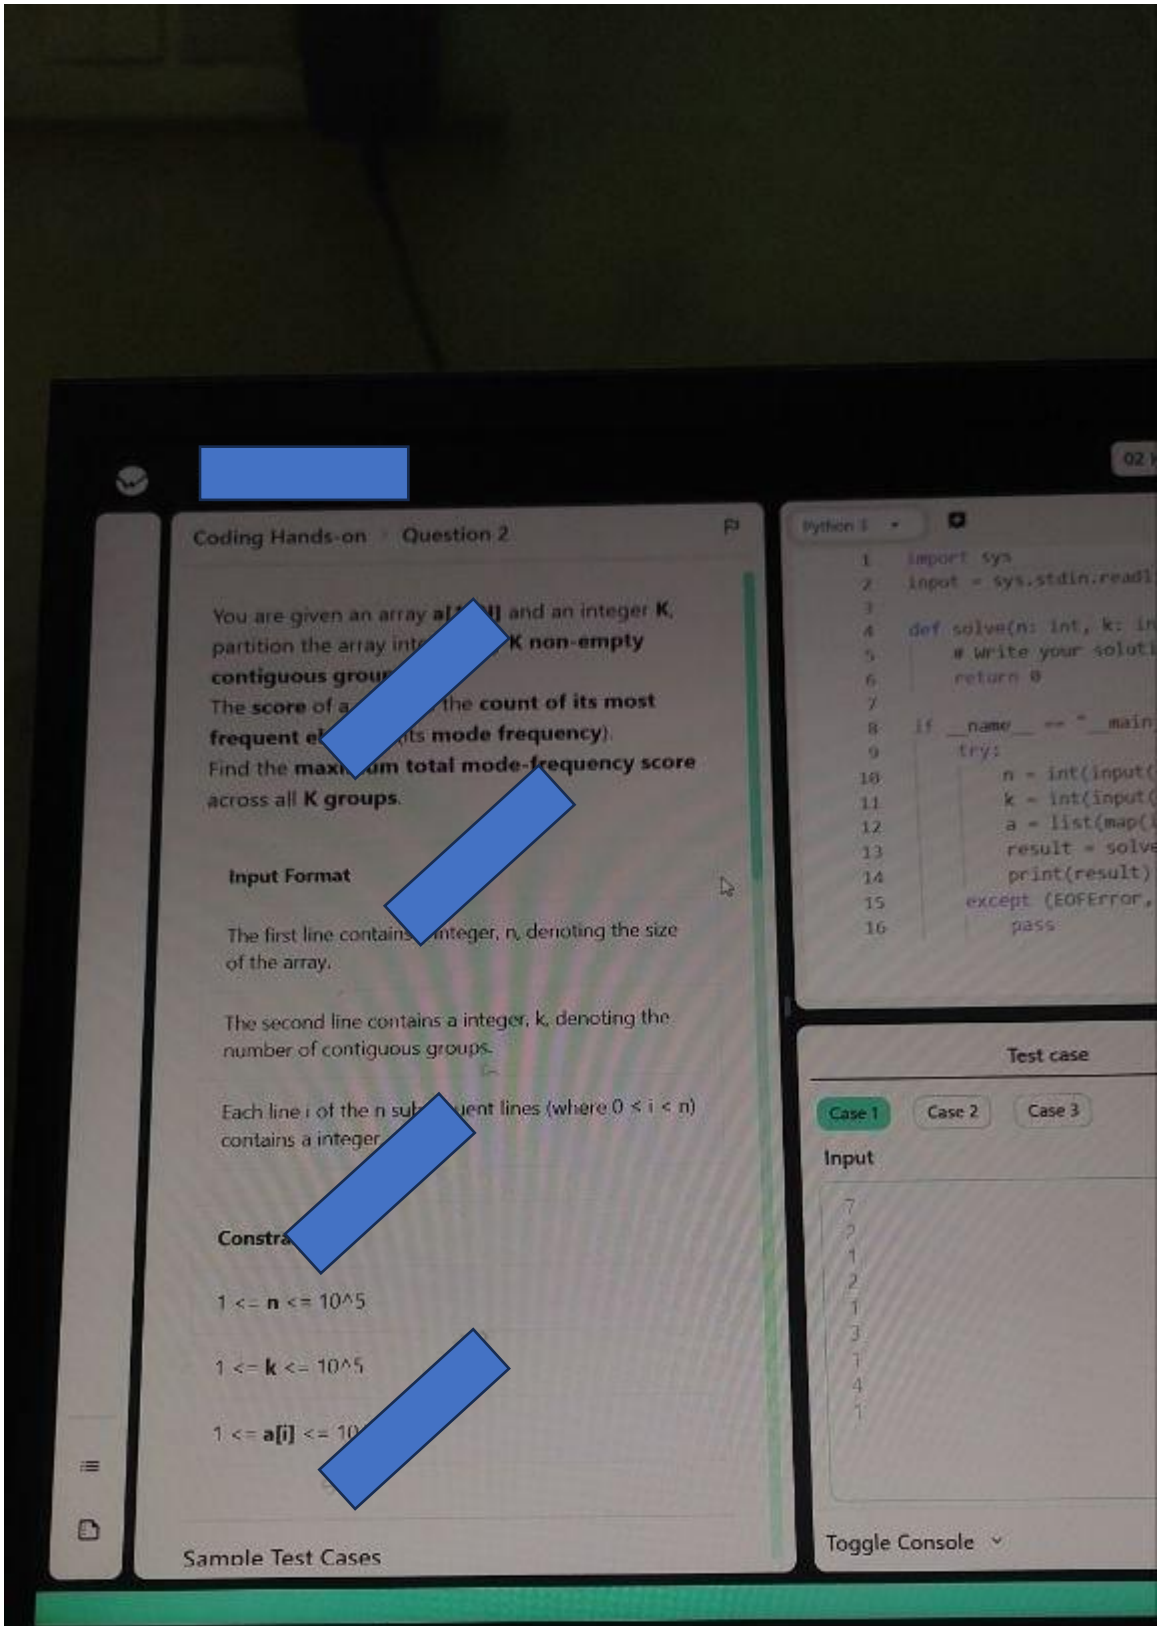

Coding Hands-on
Question 2
Input Format
Sample Test Cases
Test case
Case 1
Case 2
Case 3
Input
Toggle Console

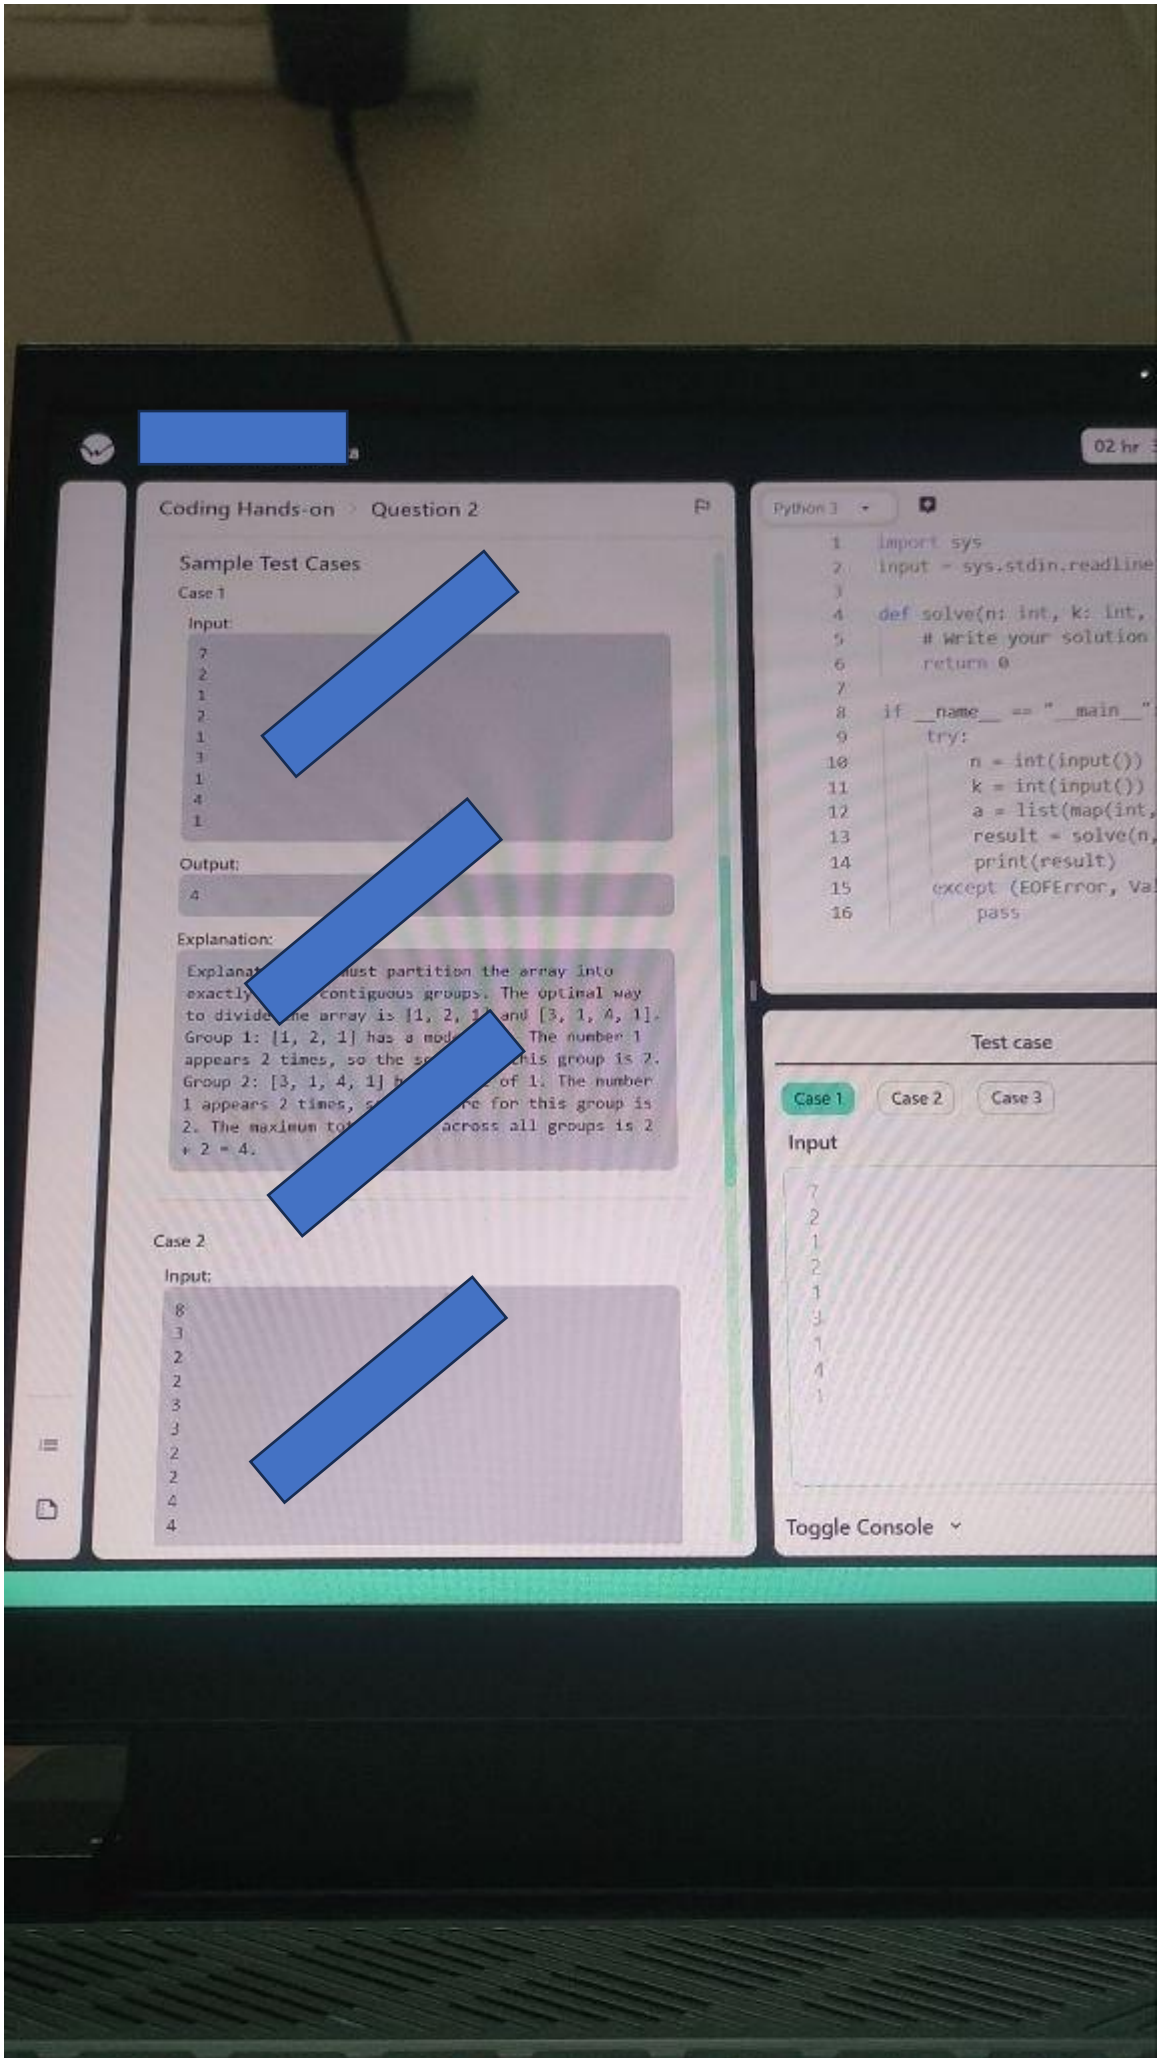
02 hr
Coding Hands-on
Question 2
Sample Test Cases
Case 1
Input:
7
2
1
2
1
3
1
4
1
Output:
4
Explanation:
Explanat must partition the array into
exactly contiguous groups. The optimal way
to divide the array is [1, 2, 1] and [3, 1, 4, 1].
Group 1: [1, 2, 1] has a mod The number 1
appears 2 times, so the sc this group is 2.
Group 2: [3, 1, 4, 1] h of 1. The number
1 appears 2 times, s re for this group is
2. The maximum to across all groups is 2
* 2 = 4.
Case 2
Input:
8
3
2
2
3
3
2
2
4
4
Python 3
1 import sys
2 input = sys.stdin.readline
3
4 def solve(n: int, k: int,
5 # Write your solution
6 return 0
7
8 if __name__ == "__main__"
9 try:
10 n = int(input())
11 k = int(input())
12 a = list(map(int,
13 result = solve(n,
14 print(result)
15 except (EOFError, Va
16 pass
Test case
Case 1
Case 2
Case 3
Input
7
2
1
2
1
3
1
4
1
Toggle Console

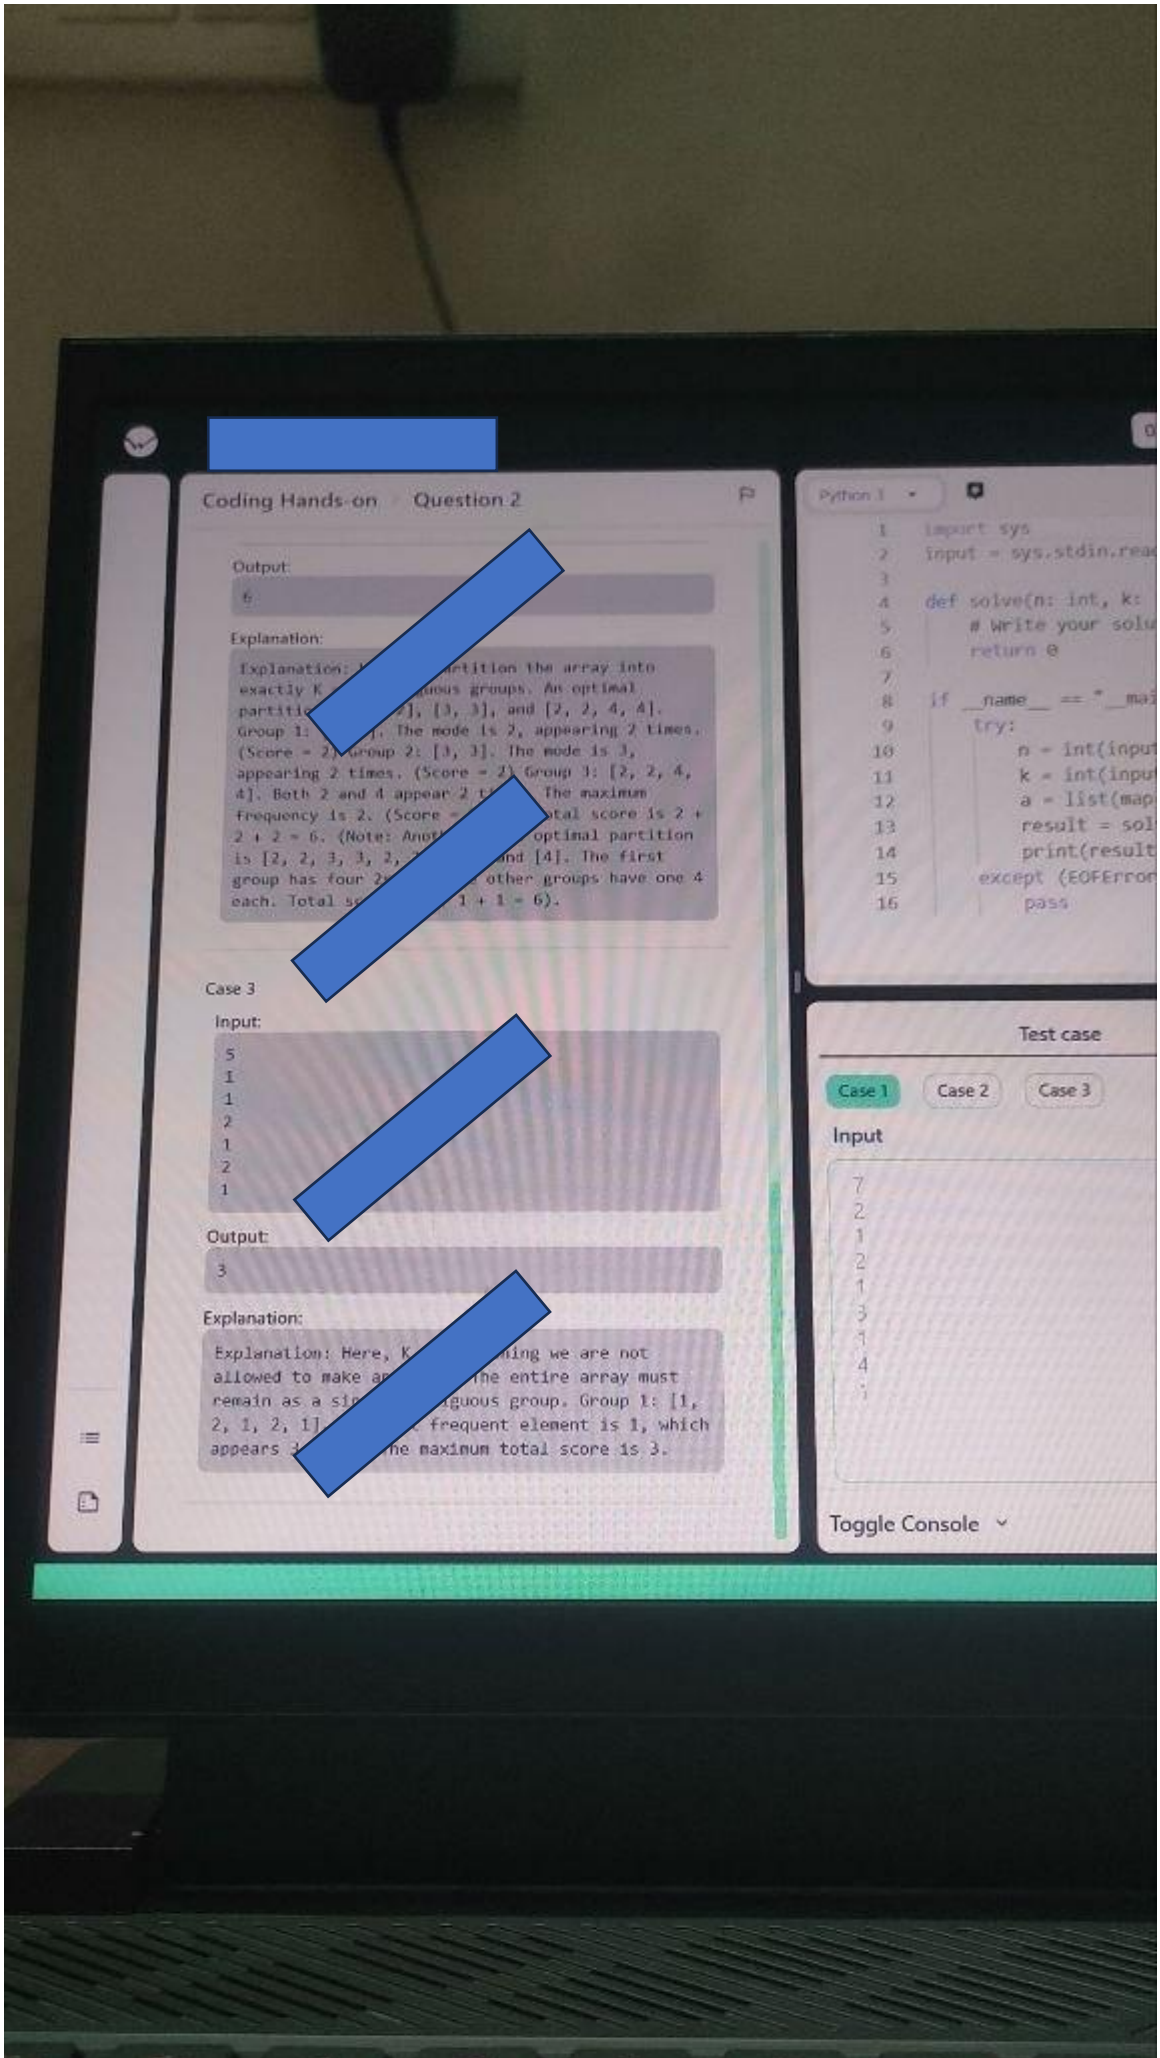
Coding Hands-on Question 2
Output:
6
Explanation:
Case 3
Input:
5
1
1
2
1
2
1
Output:
3
Explanation:
Explanation: Here, K
allowed to make a
remain as a si
2, 1, 2, 1]
appears
Python 3
1 import sys
2 input = sys.stdin.rea
3
4 def solve(n: int, k:
5 # Write your solu
6 return 0
7
8 if __name__ == "__mai
9 try:
10 n = int(input
11 k = int(input
12 a = list(map
13 result = sol
14 print(result
15 except (EOFError
16 pass
Test case
Case 1
Case 2
Case 3
Input
7
2
1
2
1
3
1
4
Toggle Console

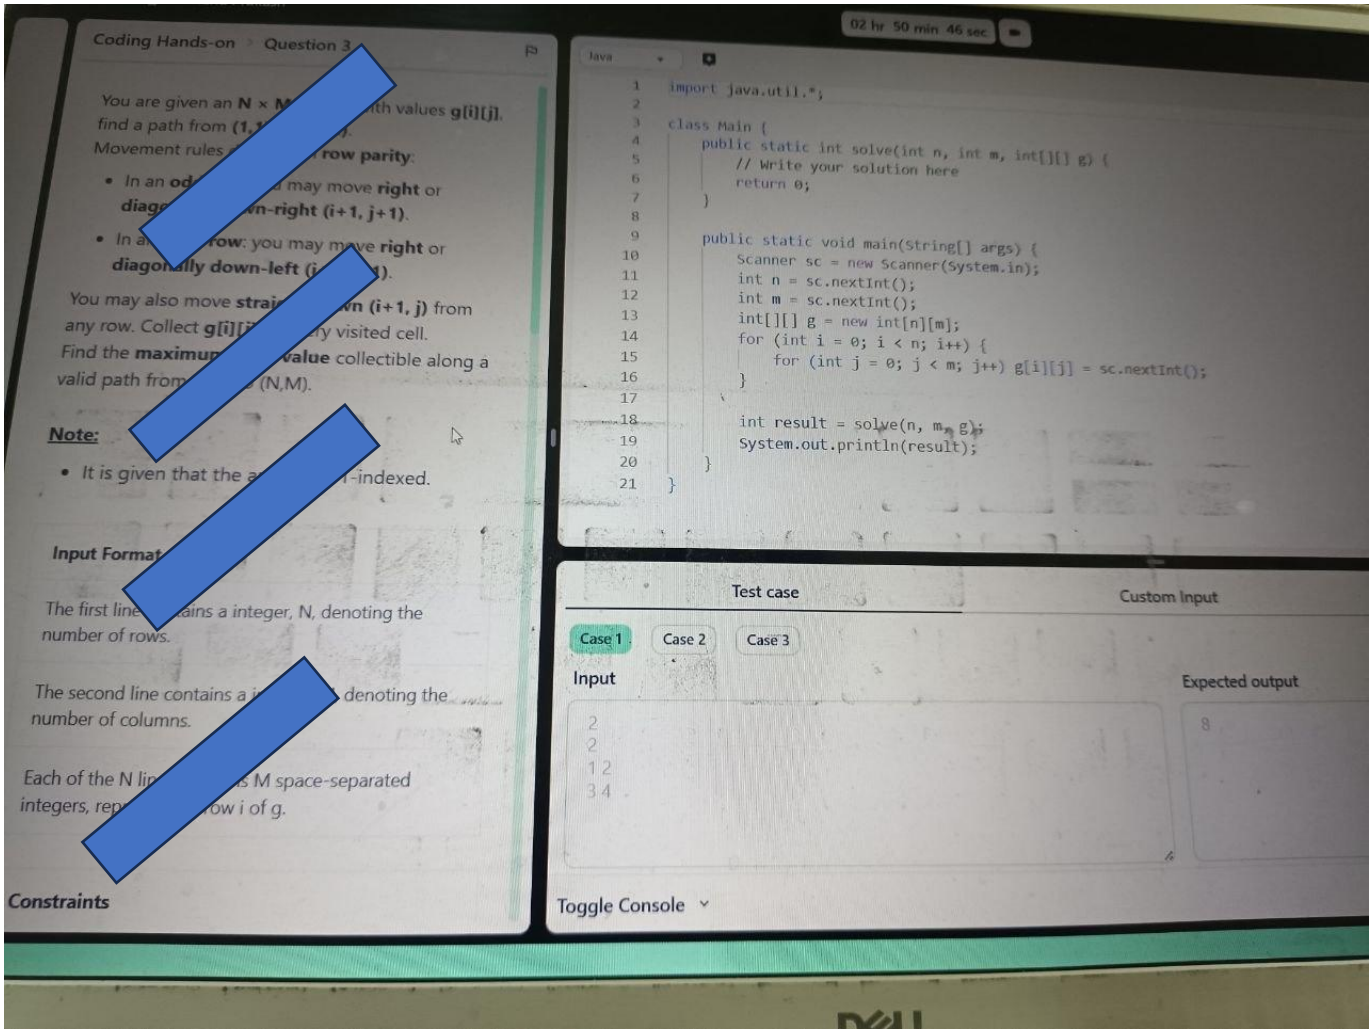

Material Copyrighted @KNACADEMY

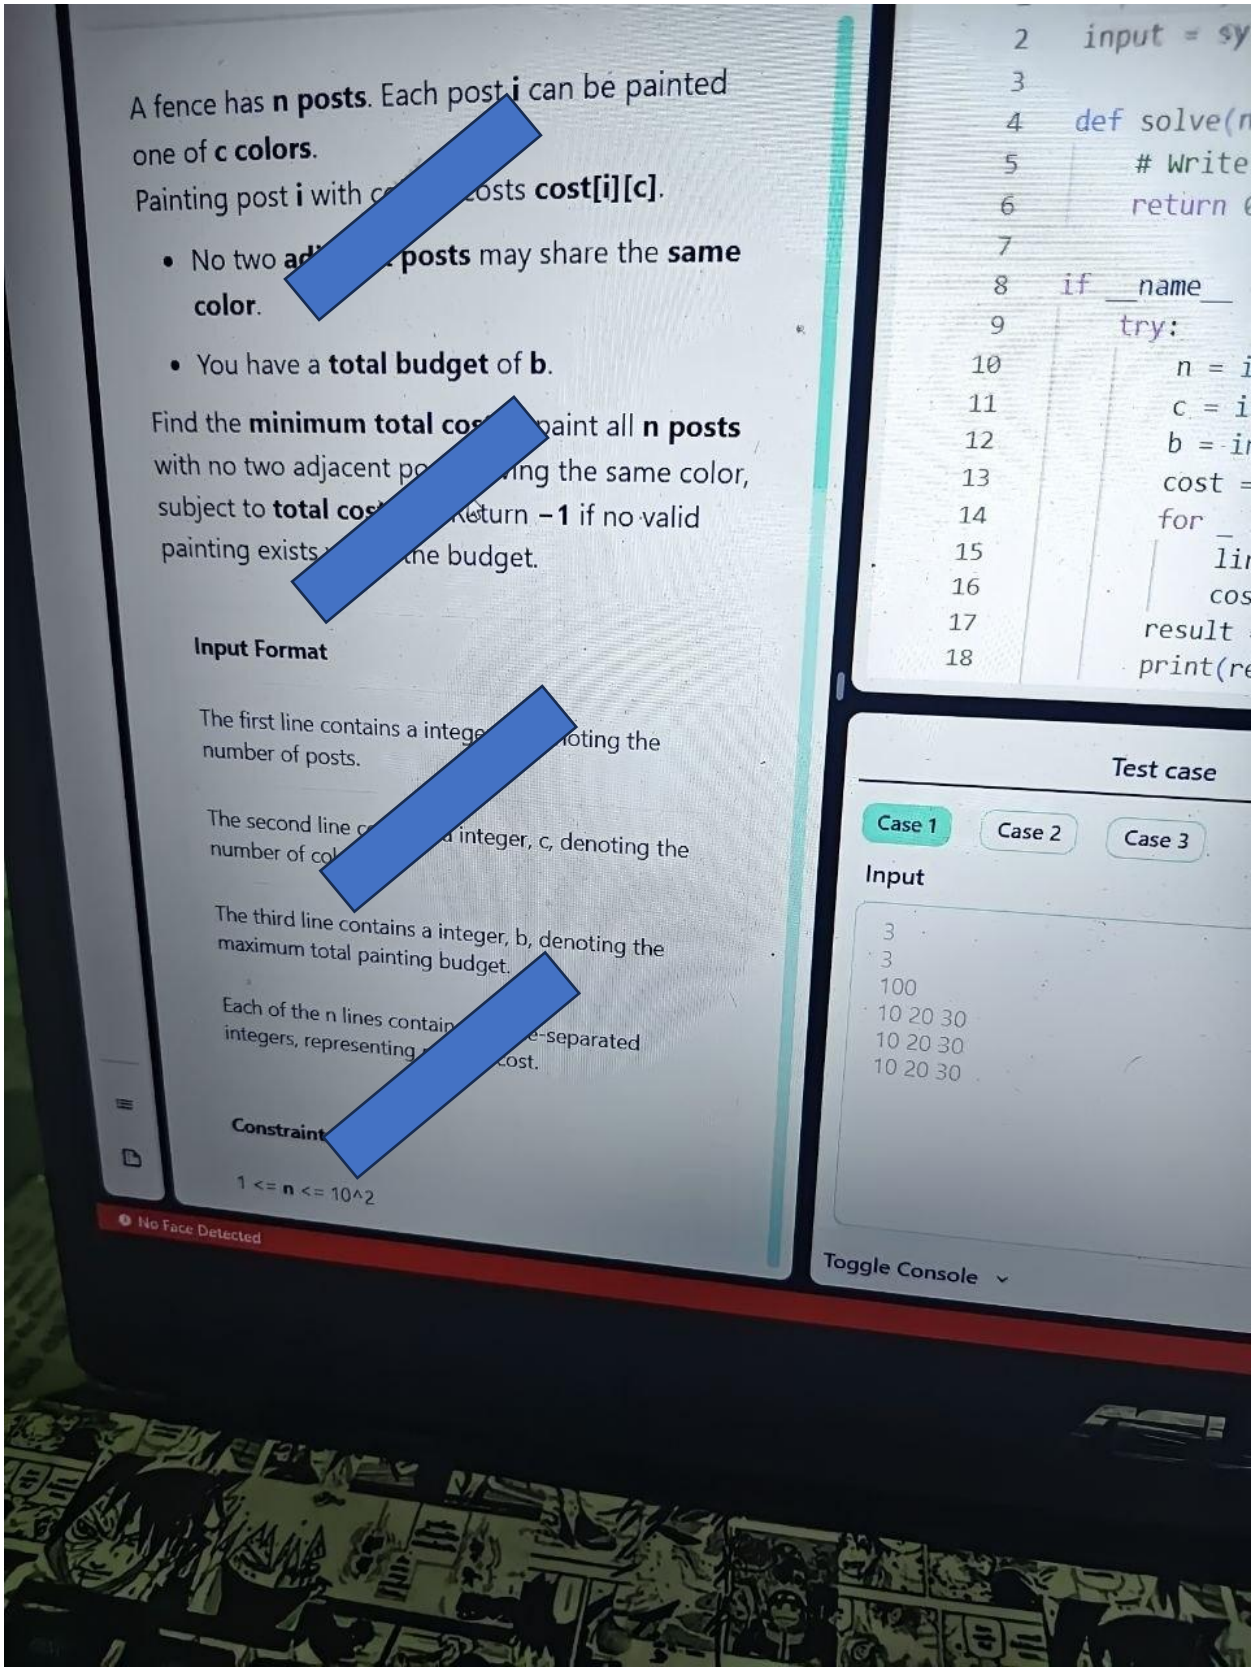

Material Copyrighted @KNACADEMY

[redacted]

Coding Hands-on > Question 1

You are given a binary string S consisting of '0's and '1's. Your task is to find the **minimum number of adjacent swaps required** to group all identical characters into a single contiguous block. You have two options:

1. Group all **'1's** into one contiguous block.
2. Group all **'0's** into one contiguous block.


Find the **minimum number of swaps** between the two options.

For example, if `S = "1001"`*, you could group the '1's into* `0110` *(1 swap) or group the '0's into* `1001` *(0 swaps). The minimum is 0.*

Input Format

The first line contains a binary string S.

No Face Detected

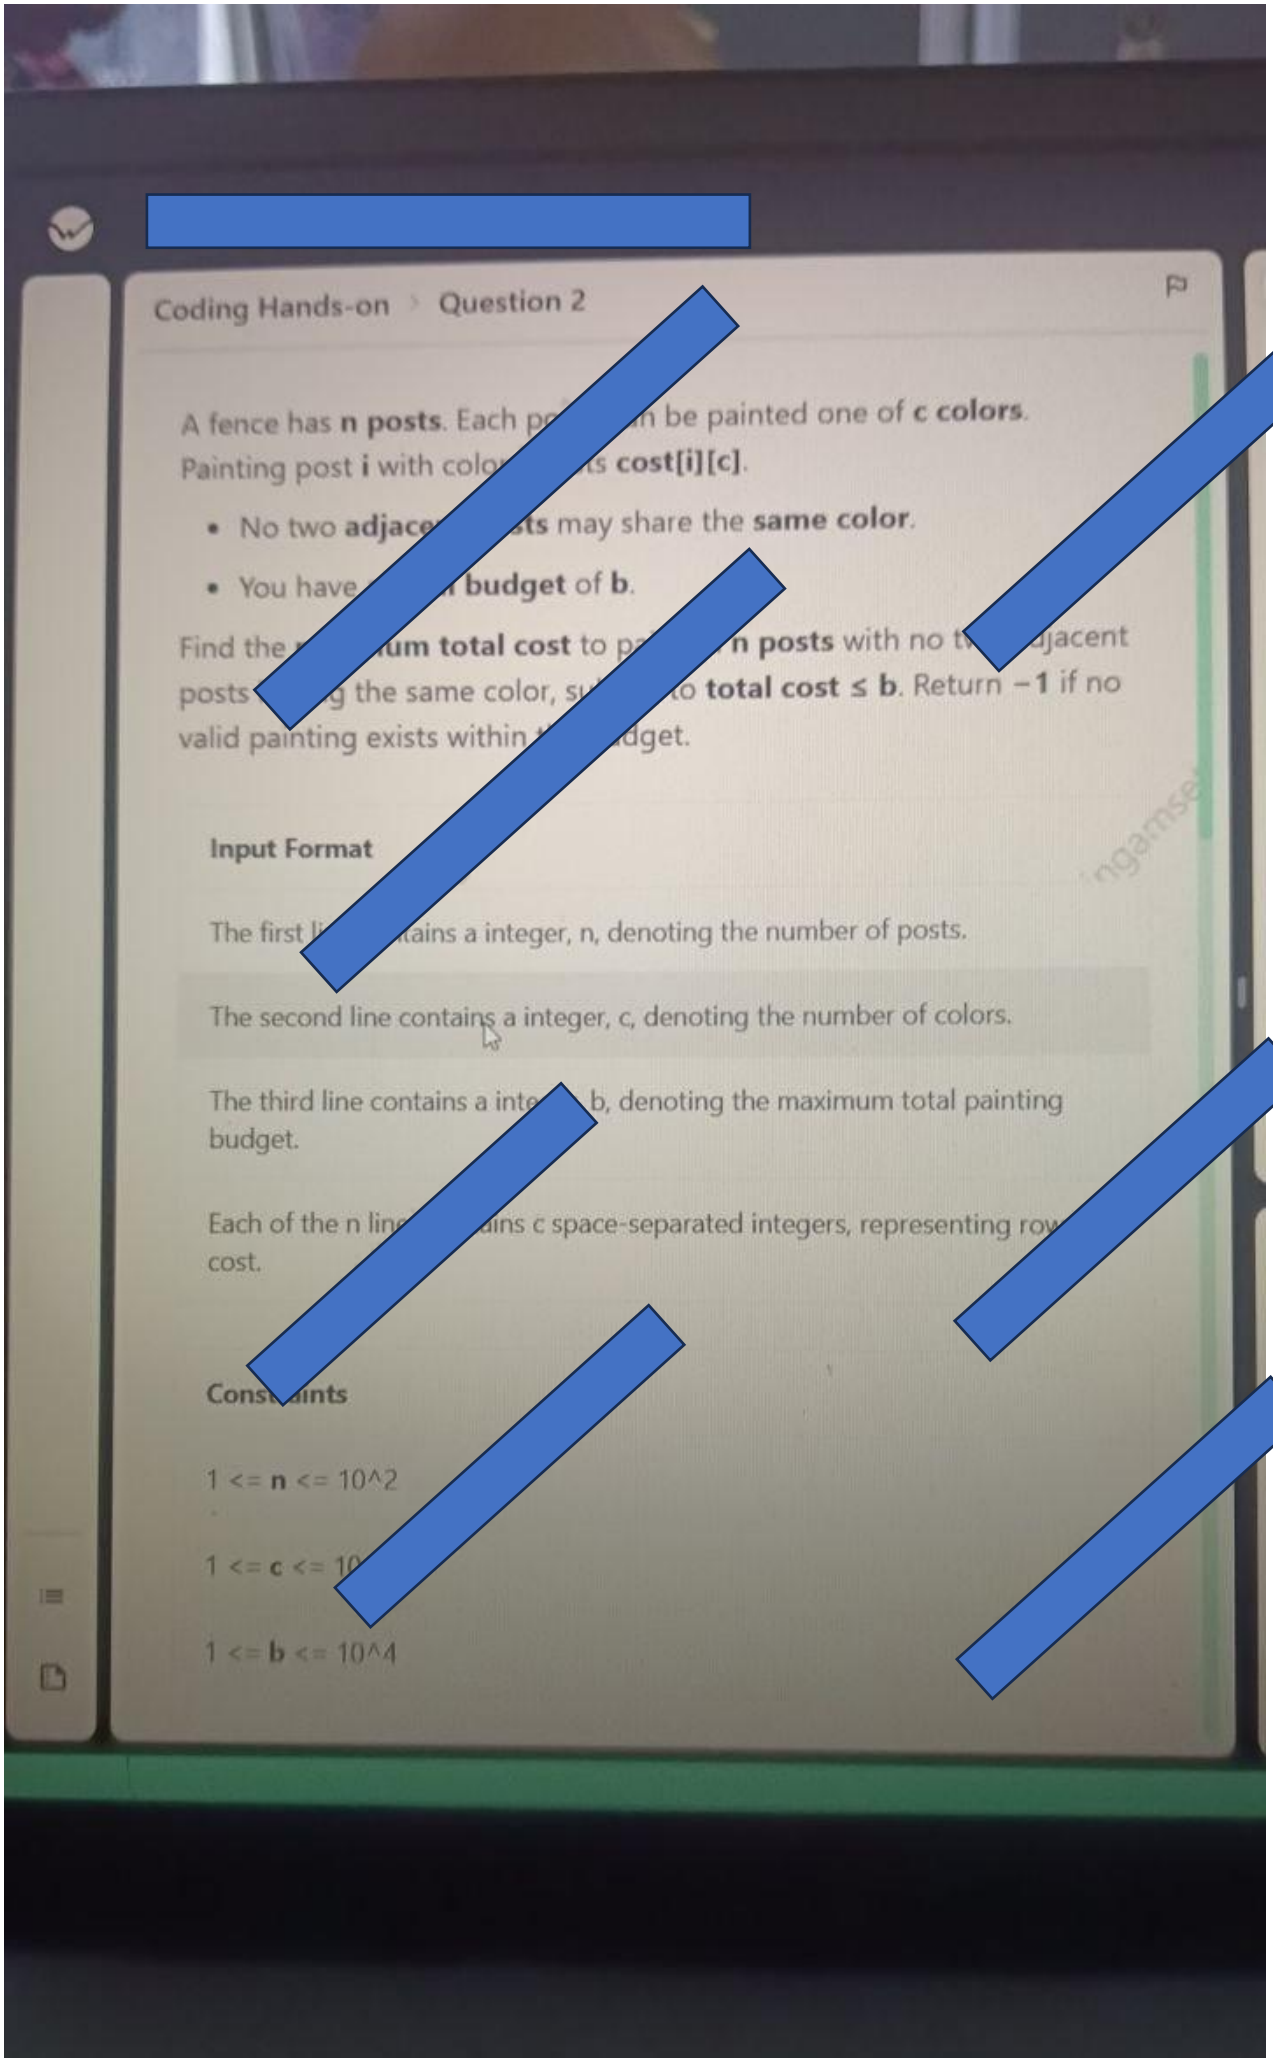

Coding Hands-on › Question 2

A fence has **n posts**. Each p… be painted one of **c colors**.
Painting post **i** with colo… **cost[i][c]**.

- No two **adjace… sts** may share the **same color**.
- You have… **budget** of **b**.

Find the … **um total cost** to p… **n posts** with no t… djacent posts … the same color, su… o **total cost ≤ b**. Return **−1** if no valid painting exists within t… dget.

Input Format

The first li… tains a integer, n, denoting the number of posts.

The second line contains a integer, c, denoting the number of colors.

The third line contains a inte… b, denoting the maximum total painting budget.

Each of the n lin… ains c space-separated integers, representing row… cost.

Const… ints

1 <= **n** <= 10^2

1 <= **c** <= 10…

1 <= **b** <= 10^4

Coding Hands-on > Question 3

You are given an **N** x **M** grid ere each cell (`i, j`) has a value `g[i][j]` goal is to collect values by moving fr ow 1 to row **N**. At each row, you must ch e exactly one cell to visit. When movin m a cell in column `c1` in row `i` to a cell in co n `c2` in row `i+1`, you incur movement costs:

- **Shift Cost**: If `c1 != c2` u pay `|c1 - c2| * shift_fee`.
- **Repeat Penal** `c1 == c2`, you pay an additional alty R. Note that if `c1 == c2`, the shi st `|c1 - c2| * ift_fee` is 0, so the total cost for stayi the same column is simply R.

Find the **maximum to collected** value **minus** the **total moveme** d repeat costs accumulated throughout the from row **1** to row **N**.

Input For at

The first line contains a integer, N, denoting the number of rows in the grid.

The second line contains a integer, M, denoting the number of columns in the grid.

The third line contains a integer, shift_fee, denoting the cost per unit column shift.

Material Copyrighted @KNACADEMY