

SHOW Users

→ Like

→ Limit

→ FROM

→ Table

→ Starts With

FUNCTIONS View in Acc Usage

→ Imports

→ Target Paths

→ Volatility

→ Deleted

Obj that can be cloned

→ Table

→ Schema

→ DB

→ Named File Formate

→ Users X

→ Shards X

→ Ext. Tables X

→ Internal Stages X

Securable obj

→ Table

→ WH

→ DB

→ file format

→ market place

→ listing

@% → Table stage

@~ → User stage

@ → Name stage

Copy into

→ File format (CSV, JSON, AVRO, ORC,
PARQUET)

Copy into : (loading)

Required parameter → Table Name
→ Stage Name

Optional → File Name

→ Pattern

→ File - Format (CSV, JSON,
AVRO, ORC, PARQUET)

Copy into: (unLoading)

Required parameter:

- INTO (Stage)
- FROM (Table)
- Encryption (File Format)

Optional : → Partition By
→ File - Format
→ Validation - Mode
→ Header

SF SQL API →

- Submit SQL statements for execution.
- Check the status of the execution of a statement.
- Cancel the execution of a statement.
- API Request are supported only from a single thread.

constraints supported by SF.

- Unique
- NOT Null
- Primary Key
- Foreign Key
- Index X
- Check X
- Informational constraints X

Obj → Replicated from one region to another

→ Transient Table

→ Views

→ Sequences

→ Permanent Tables

→ Pipes X

→ Streams X

→ Stages X

→ Tasks X

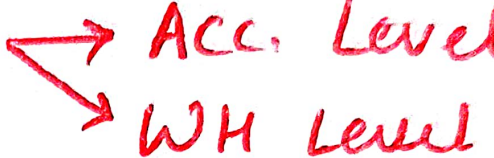
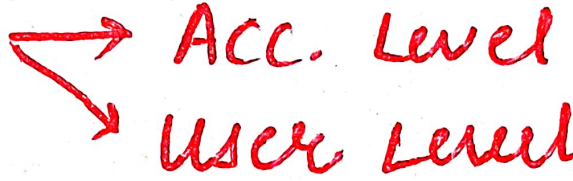
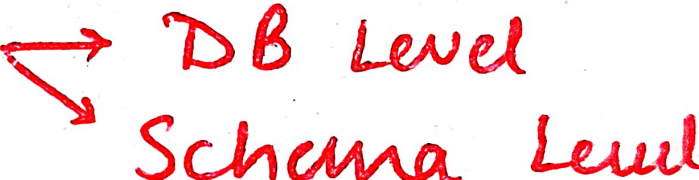
} preview.

Copy Options (Unloading)

- OVERWRITE → FALSE
- SINGLE → FALSE
- MAX_FILE_SIZE → 16 MB
- INCLUDE_QUERY_ID → FALSE
- DETAILED_OUTPUT → FALSE

Copy Options (Loading)

- ON_ERROR → Bulk Loading → Abort
- SNOWPIPE → SKIP_FILE
- SIZE_LIMIT → NULL
- PURGE → FALSE
- RETURN_FAILED_ONLY → FALSE
- MATCH_BY_COLUMN_NAME → NONE
- INCLUDE_METADATA → NULL
- ENFORCE_LENGTH → TRUE
- TRUNCATE_COLUMNS → FALSE
- FORCE → FALSE
- LOAD_UNCERTAIN_FILES → FALSE
- FILE_PROCESSOR → -
- LOAD_MODE → FULL_INGEST

- Resource Monitor 
 - Acc. Level
 - WH Level
- N/w Policy 
 - Acc. Level
 - User Level
- Future Grants 
 - DB Level
 - Schema Level

Format - Type - Options : (Loading)

- Compression
- Record - delimiter
- Skip - Header
- Date - Format
- Time - Stamp Format
- Binary - Format
- ESCAPE
- Null - if
- ERROR - ON - COLUMN - COUNT - MISMATCH
- REPLACE - INVALID - CHARACTERS
- Encoding

- Query History → 14 days
- Metadata Snarepipe → 14 days
- Obj Key Rotation → 30 days
- Load Meta Data → 64 days
- ReKeying → 365 days
- Retention of Historical Data
 - ↳ Info Schema → 7 to 6 months_{days}
 - ↳ Acc Usage → 1 year
- Latency of Data
 - ↳ Info Schema → 45 min - 3 hrs
 - ↳ Acc Usage → None.

NP → user
NP → ~~schema~~ account

Future grants → DB
Future grants → Schema

Resource Monitor → Acc. limit
Resource Monitor → WH limit

SHOW STREAMS →

→ Base - Tables

→ Source - Type

→ Owner

→ Created - on

SHOW Tags →

→ Name

→ Created - on

→ Owner

→ Comment

→ Allowed - Values

- USER | to Restore an obj
↳ Ownership + Create
- Pipe obj to pause OR Resume
↳ operate suspend.
- execute queries using a VIEW
↳ Usage
- USER | view & modify Resource Monitor
↳ Ownership, Monitor, Modify
- USER | To add, Remove SOS
↳ Ownership + ADD SEARCH OPTIMIZATION
on schema

Q. Info about table Tab1
that is clustered on col1.

→ select system & clustering -
info ('Tab1');

↳ average - overlaps

↳ The avg no. of micro-partitions
which contain overlapping value
Ranges.

Obj. that can be Replicated

- Schema
- Users & Roles
- Resource Monitor
- Ware House
- DB
- Network Policies
- Parameters (acc. level)
- Integrations
- Sequences

Using Business
critical or ++

Objects Can Not be Replicated

- Users
- Roles
- Resource Monitor
- Warehouse
- External Tables
- Temp Tables
- Append - only stream X