



Each wallet has a Behavior track, a Hot wallet and Cold wallet. The Hot wallet and The behavior track are used to compute the wallet's reputation.

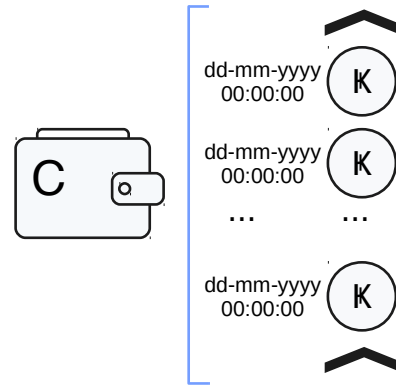

Each cold wallet consists of a FIFO buffer where staked coins are stored and given a coin age. The higher the coin age is, the higher its weight in the reputation is.

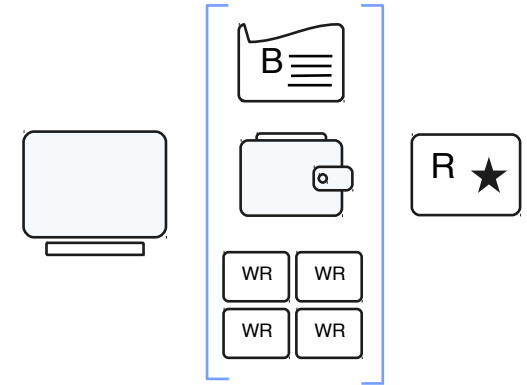

Each validator has a Behavior track, a wallet and an inherited reputation scores from the his delegator wallets. All this is used to compute his reputation