


Transmitter (active set $\mathcal{K}$, $|\mathcal{K}| = K \leq L$): one encoder, ordered symbols, load-dependent prefix and fixed WH masks



masks = disjoint rows of one orthonormal WH matrix $\mathbf{Q}$, $\sum_j b_j = L$

Per-user receivers (own masks and decoder only)

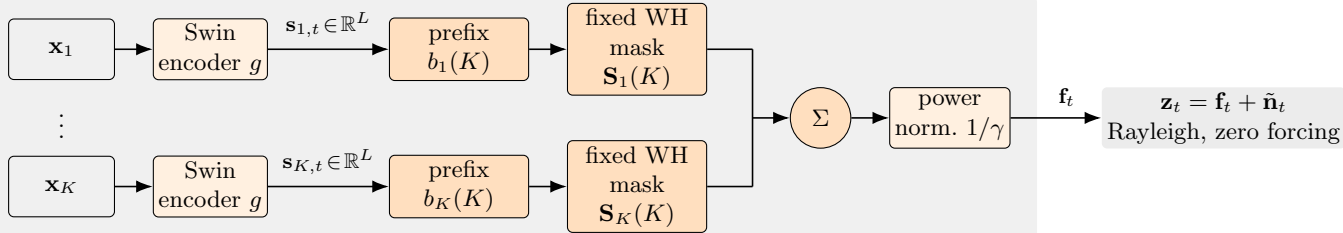