


Transmitter (active set $\mathcal{K}$, $|\mathcal{K}| = K \leq L$): one encoder, importance-ordered symbols, load-dependent prefix and codes



disjoint rows of one
orthonormal $\mathbf{Q}$, $\sum_j b_j = L$

Per-user receivers (own codes and decoder only)

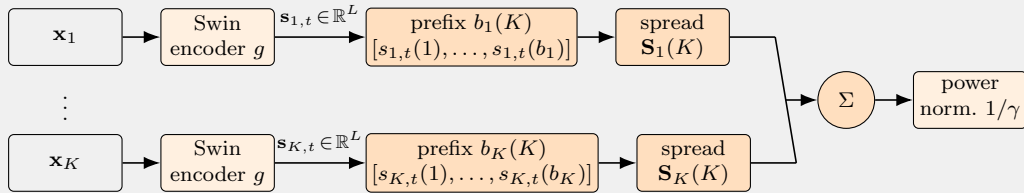