Understanding Variables in React

In React (and JavaScript in general), **variables** are used to store data that can be accessed and manipulated. Understanding how to declare, assign, and work with variables is essential to effectively building React applications.

1. What are Variables?

A variable is a container that holds data values. The data stored in a variable can be changed or updated throughout the life of the program. In React, variables help us store dynamic values like numbers, strings, or objects, which can be used to render or update the UI.

2. Declaring Variables in JavaScript (React)

In React, variables are declared using JavaScript. You can use var, let, or const to declare variables. The most commonly used are let and const.

- **let**: Used when the value of the variable is expected to change.
- **const**: Used when the value of the variable will not change after being assigned.

Example

```
let message = “I Love Programming”;       // The value can change later.
const age = "John"; // The value cannot be changed.
```

In React, const is often preferred for defining variables, as it avoids accidental reassignment of values.

3. Using Variables in React Components

Variables can be used in React components to hold information that is rendered in the UI. These variables can be either **local variables** (declared inside a component) or **state variables** (used to manage the component's dynamic data).


In below code, the **binding of the number variable** inside the JSX is done using curly braces {}.

Explanation of number Binding:

- **Curly Braces {}**: In JSX, curly braces are used to insert JavaScript expressions into the rendered output. Any valid JavaScript expression, like variables, functions, or calculations, can be placed inside these curly braces.

Example of a Local Variable and Binding in JSX

In components Folder Create a New component named **SecondComponent.js**

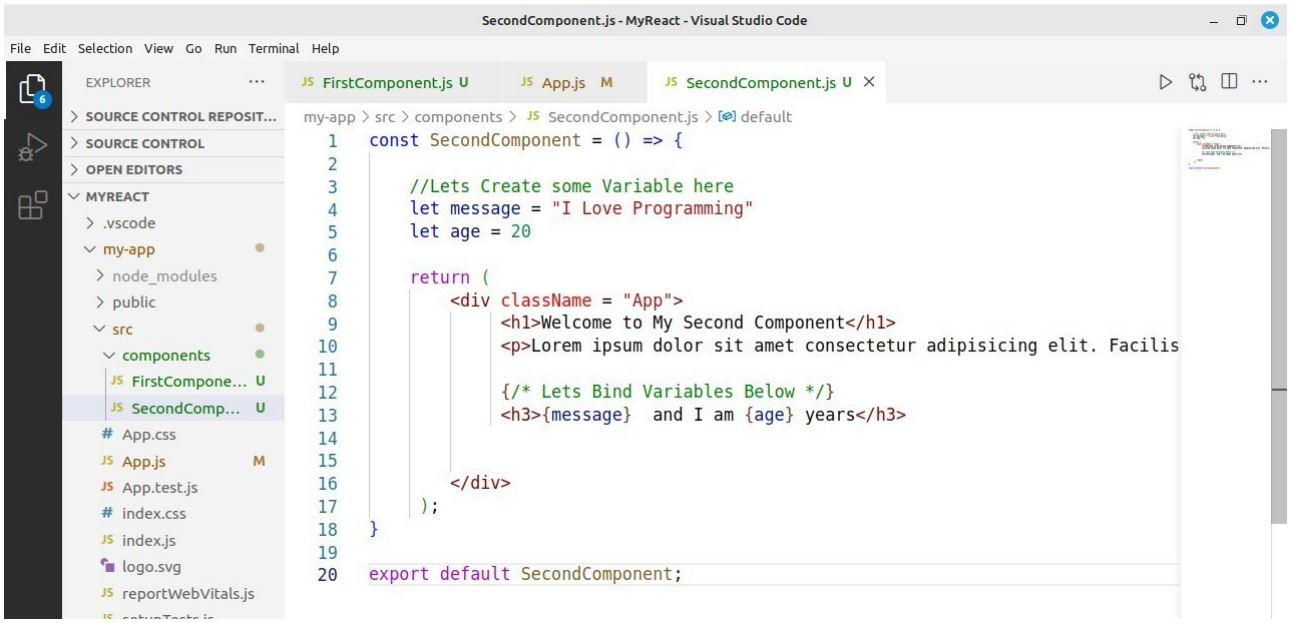


Explanation of variable binding in the provided code:

1. **Variable Declaration**:
    - let message = "I Love Programming" binds the variable message to the string "I Love Programming".
    - let age = 20 binds the variable age to the number 20.
2. **Variable Binding in JSX**:
    - In the JSX part of the return statement, {message} and {age} are used to bind the values of message and age to the rendered HTML content.
3. **Rendering**:
    - The values of message and age are dynamically inserted into the JSX, displaying "I Love Programming and I am 20 years".

In short, **variable binding** connects variables (message, age) to their respective values and outputs them in the JSX.

Render this Component in App.js as shown below

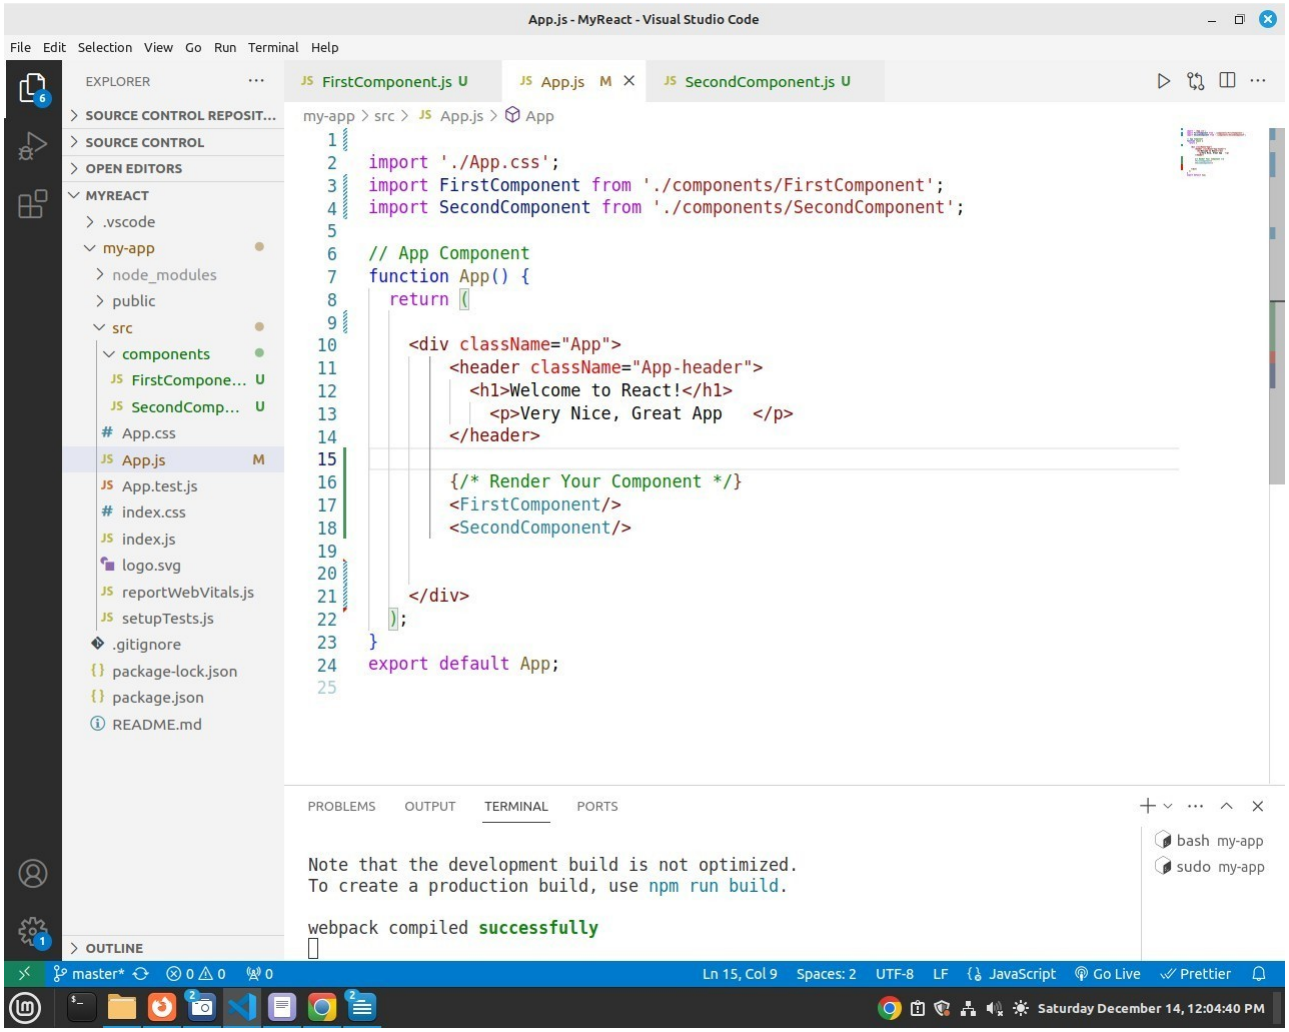

TODO: Create a variable holding your Country and County.
Bind the variable you created above in JSX - run your app.