

Passive Reconnaissance Scan Report

Scan target: [Halisans.com](https://halisans.com) (66.29.153.49)

Date of recon: 20 Oct. 2025

Cybersecurity Analyst
Kifayah Oladejo

Scope: halisans.com and publicly resolvable
subdomains only (passive OSINT).

Out-of-scope: Active vulnerability exploitation,
authenticated access and service disruption,
rate-aggressive crawling.

Executive Summary

- The target domain resolves and serves a public website with recent content.
- This report enumerates: WHOIS/RDAP, authoritative DNS data, HTTPS surface (at a high level), presence of a WAF/CDN (fingerprinted passively) and open-source footprint across common OSINT sources.
- No intrusive scans were performed; all findings are from passive lookups and single-request fetches of public pages.

Methodology (Passive Only)


Tools & Modes

- **whois / RDAP:** Registration & registrar metadata
- **dig, host, dnsrecon:** Passive DNS lookups (A/AAAA, NS, MX, TXT/SOA/CAA where present) via public resolvers.
- **wafw00f:** Single HTTP(S) request fingerprint (headers/body markers) to infer WAF/CDN; *no evasion, no burst.*
- **SpiderFoot (SF):** *Passive modules only* (DNS, CT logs, WHOIS, netblocks, leak/site mentions, social).
- **Wapiti:** *Listing only* and passive banner/headers check.
- **OSINT Framework:** As a directory to guide passive pivoting, CT logs, public paste sites, reputation lists, search operators.
- **Recon-ng**
- **Recon-web**
-

Findings

Public Web Presence (Landing Page)

Site reachable: <https://halisans.com/> returns content; homepage shows recent posts.

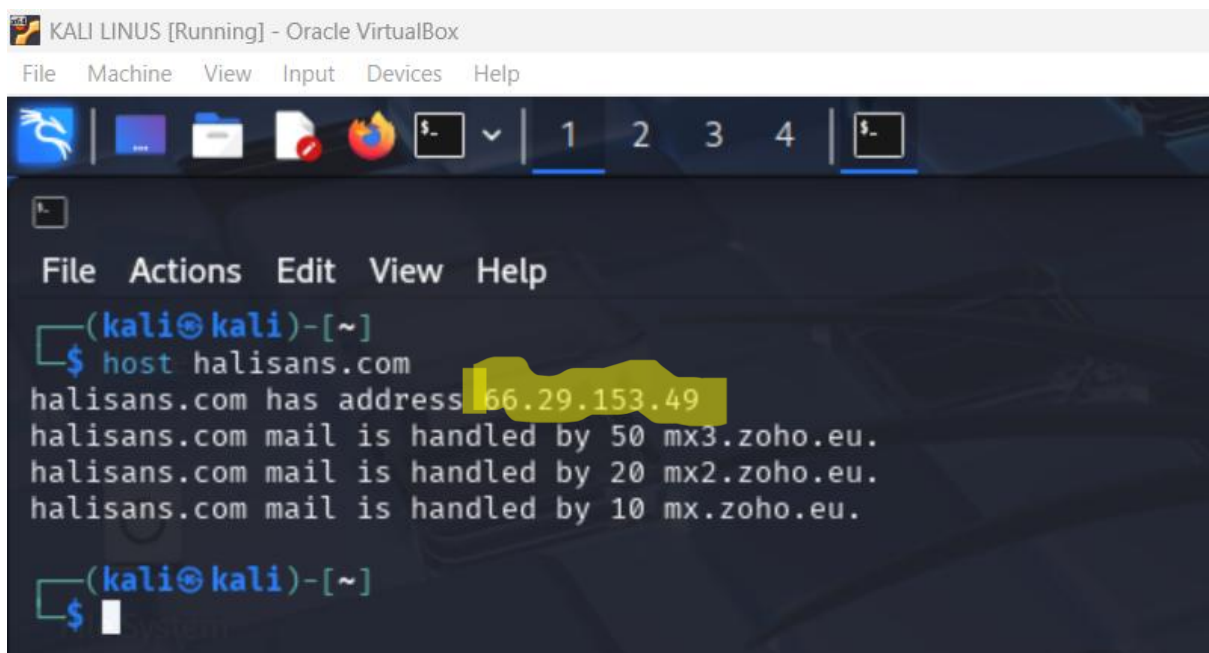

```
KALI LINUX [Running] - Oracle VirtualBox
File Machine View Input Devices Help

File Actions Edit View Help
(kali@kali)-[~]
$ host halisans.com
halisans.com has address 66.29.153.49
halisans.com mail is handled by 50 mx3.zoho.eu.
halisans.com mail is handled by 20 mx2.zoho.eu.
halisans.com mail is handled by 10 mx.zoho.eu.
(kali@kali)-[~]
$
```

Name servers: Capture NS from RDAP and confirm against **dig NS**.

```
(kali㉿kali)-[~]
$ dig halisans.com

; <<>> DiG 9.20.4-4-Debian <<>> halisans.com
;; global options: +cmd
;; Got answer:
;; ->HEADER<- opcode: QUERY, status: NOERROR, id: 11508
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 1220
;; QUESTION SECTION:
;halisans.com.                IN      A

;; ANSWER SECTION:
halisans.com.                1252    IN      A      66.29.153.49

;; Query time: 20 msec
;; SERVER: 192.168.0.1#53(192.168.0.1) (UDP)
;; WHEN: Fri Sep 19 07:38:23 EDT 2025
;; MSG SIZE rcvd: 57
```

DNS Surface (A/AAAA, NS, MX, TXT, SOA, CAA)

Records collected passively:

- A/AAAA for apex and **www**.
- NS to identify hosting/DNS provider.
- MX for mail handling (and whether any third-party service is used).
- TXT for SPF/DMARC/DKIM indicators.
- SOA for primary NS and serial.

```
(kali㉿kali)-[~]
$ dnsrecon -d halisans.com
[*] std: Performing General Enumeration against: halisans.com...
[-] DNSSEC is not configured for halisans.com
[*] SOA dns1.registrar-servers.com 156.154.132.200
[*] SOA dns1.registrar-servers.com 2610:a1:1024::200
[*] NS dns1.registrar-servers.com 156.154.132.200
[*] Bind Version for 156.154.132.200 Nameserver"
[*] NS dns1.registrar-servers.com 2610:a1:1024::200
[*] Bind Version for 2610:a1:1024::200 Nameserver"
[*] NS dns2.registrar-servers.com 156.154.133.200
[*] Bind Version for 156.154.133.200 Nameserver"
[*] NS dns2.registrar-servers.com 2610:a1:1025::200
[*] Bind Version for 2610:a1:1025::200 Nameserver"
[*] MX mx3.zoho.eu 185.230.212.166
[*] MX mx2.zoho.eu 89.36.170.166
[*] MX mx.zoho.eu 185.230.212.166
[*] A halisans.com 66.29.153.49
[*] TXT halisans.com v=spf1 include:zohomail.eu ~all
[*] TXT halisans.com zoho-verification=zb01879578.zmverify.zoho.eu
[*] Enumerating SRV Records
[-] No SRV Records Found for halisans.com
```

Registration (WHOIS)

Registrar / Dates: Use ICANN RDAP as the primary source of truth (GDPR-redacted where applicable). Query via ICANN Lookup and registrar RDAP.

```
KALI LINUX [Running] - Oracle VirtualBox
File Machine View Input Devices Help

(kali@kali)-[~]
$ whois halisans.com
Domain Name: HALISANS.COM
Registry Domain ID: 2917253114_DOMAIN_COM-VRSN
Registrar WHOIS Server: whois.namecheap.com
Registrar URL: http://www.namecheap.com
Updated Date: 2025-08-24T11:14:13Z
Creation Date: 2024-09-16T04:57:11Z
Registry Expiry Date: 2026-09-16T04:57:11Z
Registrar: NameCheap, Inc.
Registrar IANA ID: 1068
Registrar Abuse Contact Email: abuse@namecheap.com
Registrar Abuse Contact Phone: +1.6613102107
Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited
Name Server: DNS1.REGISTRAR-SERVERS.COM
Name Server: DNS2.REGISTRAR-SERVERS.COM
DNSSEC: unsigned
URL of the ICANN Whois Inaccuracy Complaint Form: https://www.icann.org/wicf/
>>> Last update of whois database: 2025-10-21T08:17:35Z <<<
```

Gather information about Web Application Firewall

- Passive approach:

```
(kali@kali)-[~]
$ wafw00f halisans.com

? ??
( ) ; ???
/ , _ / \
\\ \ \

~ WAFW00F : v2.3.1 ~
~ Sniffing Web Application Firewalls since 2014 ~

[*] Checking https://halisans.com
[+] The site https://halisans.com is behind LiteSpeed (LiteSpeed Technologies) WA
[~] Number of requests: 2
```

Wapiti: Assess vulnerabilities in Web Application

Passive approach

```
(kali@kali)-[~]
$ wapiti -u https://www.halisan.com

Wapiti-3.0.4 (wapiti.sourceforge.io)
[*] Be careful! New moon tonight.
[*] Saving scan state, please wait ...

Note
-----
We can't connect to the server at www.halisan.com_folder_aedf8af8.db
This scan has been saved in the file /home/kali/.wapiti/scans/www.halisan.com_folder_aedf8af8.db
[*] Wapiti found 1 URLs and forms during the scan. If right address, you can:
[*] Loading modules:
    backup, blindsql, brute_login_form, buster, cookieflags, crlf, csp, csrf, exec, file, htaccess, http_headers, methods, nikto, permanentxss, redire
ct, shellshock, sql, ssrf, wapp, xss, xxe
Problem with local wapp database.      * Try again later
Downloading from the web...           * Check your network connection
[*] Launching module csp                * Check that Firefox has permission to access the web (you might be connected but behind a firewall)
CSP is not set

[*] Launching module http_headers
Checking X-Frame-Options :
X-Frame-Options is not set
Checking X-XSS-Protection :
X-XSS-Protection is not set
```

```
[*] Launching module http_headers
Checking X-Frame-Options :
X-Frame-Options is not set
Checking X-XSS-Protection :
X-XSS-Protection is not set
Checking X-Content-Type-Options :
X-Content-Type-Options is not set
Checking Strict-Transport-Security :
Strict-Transport-Security is not set

[*] Launching module cookieflags
Checking cookie : site_version_phase
HttpOnly flag is not set in the cookie : site_version_phase
Secure flag is not set in the cookie : site_version_phase
Checking cookie : site_version
HttpOnly flag is not set in the cookie : site_version
Secure flag is not set in the cookie : site_version

[*] Launching module exec
[*] Launching module file
[*] Launching module sql
[*] Launching module xss
[*] Launching module ssrf
```

```
[*] Launching module ssrf
[*] Asking endpoint URL https://wapiti3.ovh/get_ssrf.php?id=v1n5ar for results, please wait ...

[*] Launching module redirect
[*] Launching module blindsql
[*] Launching module permanentxss

Report
-----
A report has been generated in the file /home/kali/.wapiti/generated_report
Open /home/kali/.wapiti/generated_report/www.halisan.com_10222025_0658.html with a browser to see this report.
```

```
(kali@kali)-[~/wapiti]
$ firefox /home/kali/.wapiti/generated_report/www.halisan.com_10222025_0658.html
```

Wapiti vulnerability report

Target: <https://www.halisan.com/>

Date of the scan: Wed, 22 Oct 2025 06:58:32 +0000. Scope of the scan: folder

Summary

Category	Number of vulnerabilities found
Backup file	0
Blind SQL Injection	0
Weak credentials	0
CRLF Injection	0
Content Security Policy Configuration	1
Cross Site Request Forgery	0
Potentially dangerous file	0
Command execution	0
Path Traversal	0
Htaccess Bypass	0

Highlighted Vulnerabilities in yellow can be further investigated

HTTP Secure Headers	4
HttpOnly flag cookie	2
Open Redirect	0
Secure flag cookie	2
SQL Injection	0
Server Side Request Forgery	0
Cross Site Scripting	0
XML External Entity	0
Internal Server Error	0
Resource consumption	0
Fingerprint web technology	0

Content Security Policy Configuration

Description

Content Security Policy (CSP) is an added layer of security that helps to detect and mitigate certain types of attacks, including Cross Site Scripting (XSS) and data Injection attacks.

Vulnerability found in /

Description	HTTP Request	cURL command line
CSP is not set		

Solutions

Configuring Content Security Policy involves adding the Content-Security-Policy HTTP header to a web page and giving it values to control what resources the user agent is allowed to load for that page.

References

- [Mozilla: Content Security Policy \(CSP\)](#)
- [OWASP: Content Security Policy Cheat Sheet](#)
- [OWASP: How to do Content Security Policy \(PDF\)](#)

HTTP Secure Headers

Description

HTTP security headers tell the browser how to behave when handling the website's content.

Vulnerability found in /

Description	HTTP Request	cURL command line
X-Frame-Options is not set		

Vulnerability found in /

Description	HTTP Request	cURL command line
X-XSS-Protection is not set		

Vulnerability found in /

Description	HTTP Request	cURL command line
-------------	--------------	-------------------

Vulnerability found in /

Description	HTTP Request	cURL command line
Strict-Transport-Security is not set		

Solutions

Use the recommendations for hardening your HTTP Security Headers.

References

- [NetSparker: HTTP Security Headers: An Easy Way to Harden Your Web Applications](#)
- [KeyCDN: Hardening Your HTTP Security Headers](#)
- [OWASP: HTTP SECURITY HEADERS \(Protection For Browsers\) \(PDF\)](#)

HttpOnly Flag cookie

Description

HttpOnly is an additional flag included in a Set-Cookie HTTP response header. Using the HttpOnly flag when generating a cookie helps mitigate the risk of client side script accessing the protected cookie (if the browser supports it).

Vulnerability found in /

Description	HTTP Request	cURL command line
HttpOnly flag is not set in the cookie : site_version_phase		

Vulnerability found in /

Description	HTTP Request	cURL command line
-------------	--------------	-------------------

HttpOnly flag is not set in the cookie : site_version

Solutions

While creation of the cookie, make sure to set the HttpOnly Flag to True.

References

- [OWASP: Testing for Cookies Attributes](#)
- [OWASP: HttpOnly](#)

Secure Flag cookie

Description

The secure flag is an option that can be set by the application server when sending a new cookie to the user within an HTTP Response. The purpose of the secure flag is to prevent cookies from being observed by unauthorized parties due to the transmission of a the cookie in clear text.

Vulnerability found in /

Description	HTTP Request	cURL command line
-------------	--------------	-------------------

Secure flag is not set in the cookie : site_version_phase

Vulnerability found in /

Description	HTTP Request	cURL command line
-------------	--------------	-------------------

Secure flag is not set in the cookie : site_version

Solutions

When generating the cookie, make sure to set the Secure Flag to True.

References


- [OWASP: Testing for Cookies Attributes](#)
- [OWASP: Secure Cookie Attribute](#)

OSINT: Mentions, Accounts, and Exposure

- SpiderFoot (passive modules):

```
(kali@kali)-[~]
$ spiderfoot -l 127.0.0.1:5000
2025-10-21 05:51:25,838 [INFO] sf : Starting web server at 127.0.0.1:5000...more info
2025-10-21 05:51:25,847 [WARNING] sf :
*****
Warning: passwd file contains no passwords. Authentication disabled.
Please consider adding authentication to protect this instance!
Refer to https://www.spiderfoot.net/documentation/#security.
*****
*****
As much information will be gathered without touching the target or their affiliate
*****
Use SpiderFoot by starting your web browser of choice and
browse to http://127.0.0.1:5000/
*****
```

DNS/Hosts: Passive resolution of subdomains from CT/DNS.

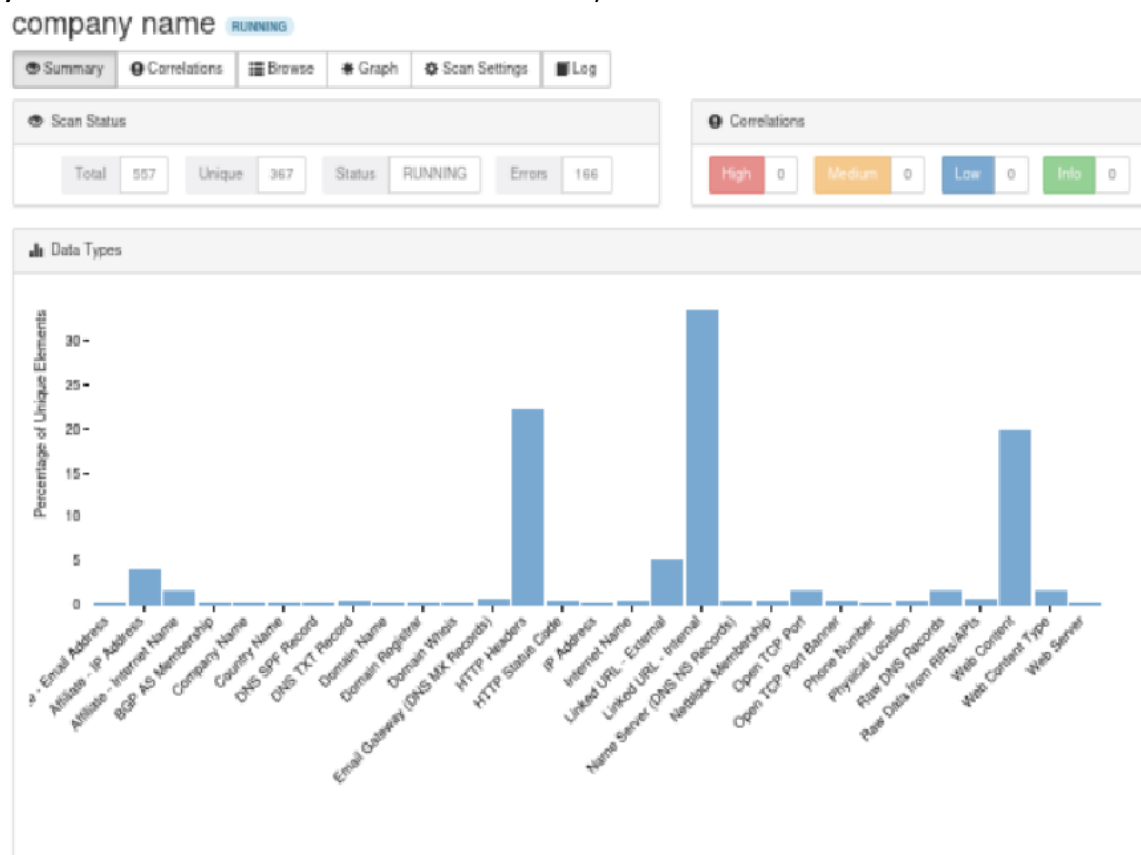

company name RUNNING

Summary

Correlations

Browse

Graph

Scan Settings

Log

Search...

Browse / Company Name

☐	Data Element	Source Data Element	Source Module	Identified
☐	NameCheap, Inc.	Domain Name: HALISANS.COM Registry Domain ID: 2917253114_DOMAIN_COM-VRSN Registrar WHOIS Server: whois.namecheap.com Registrar URL: http://www.namecheap.com Updated Date: 2025-08-24T11:14:13Z Creation Date: 2024-09-16T04:57:11Z Registry Expiry Date: 2026-09-16T04:57:11Z Registrar: NameCheap, Inc. Registrar IANA ID: 1068 Registrar Abuse Contact Email: abuse@namecheap.com Registrar Abuse Contact Phone: +1.6613182187 Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited Name Server: DNS1.REGISTRAR-SERVERS.COM Name Server: DNS2.REGISTRAR-SERVERS.COM DNSSEC: unsigned URL of the ICANN Whois Inaccuracy Complaint Form: https://www.icann.org/wicf//>>> Last update of whois database: 2025-10-21T16:17:10Z <<< For more information on Whois status codes, please visit https://icann.org/epp NOTICE: The expiration date displayed in this record is the date the registrar's sponsorship of the domain name registration in the re	sfp_company	2025-10-21 12:24:10

Recommendations (Based on Passive Posture Only)

HTTP Security Headers: Verify presence of [Strict-Transport-Security](#), [Content-Security-Policy](#), [X-Content-Type-Options](#), [Referrer-Policy](#), and [Permissions-Policy](#)

OSINT FRAMEWORK: Information gathering using OpenSource Intelligence


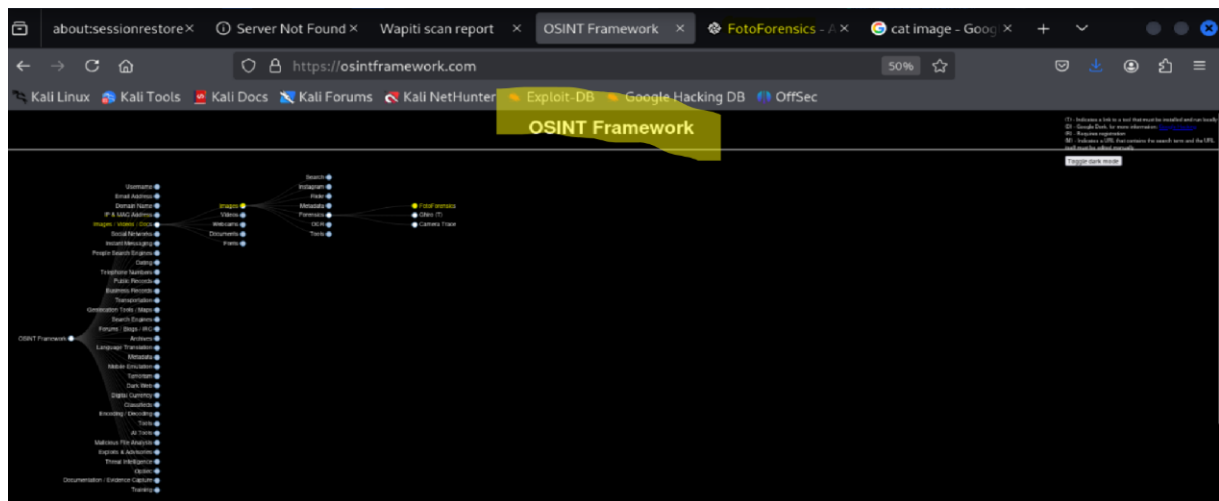


Image: **Cat** sourced: **internet** (save and upload)

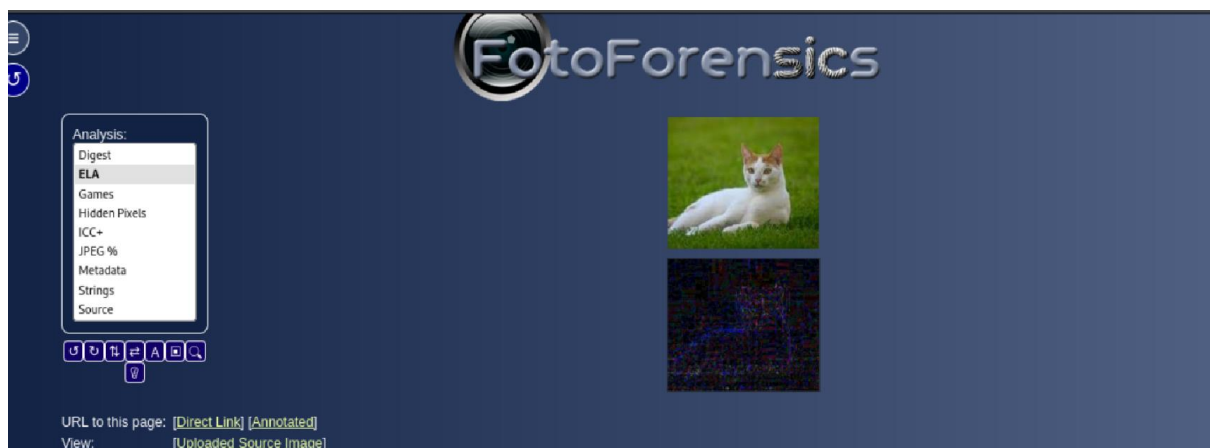

Recon-ng (passive modules):

```
(kali@kali)-[~]
$ recon-ng
[*] Version check disabled.

Sponsored by ...

BLACK HILLS
www.blackhillsinfosec.com

PRACTISESEC
www.practisec.com

[recon-ng v5.1.2, Tim Tomes (@lanmaster53)]

[*] No modules enabled/installed.

[recon-ng][default] > marketplace install all
[*] Module installed: discovery/info_disclosure/cache_snoop
[*] Module installed: discovery/info_disclosure/interesting_files
[*] Module installed: exploitation/injection/command_injector
[*] Module installed: exploitation/injection/xpath_bruter
```

```
[recon-ng][Halisans] > workspaces list

+-----+-----+
| Workspaces | Modified |
+-----+-----+
| Halisans   | 2025-10-22 16:37:40 |
| KIFKIM     | 2025-10-22 16:34:28 |
| default    | 2025-10-22 06:59:32 |
+-----+-----+

[recon-ng][Halisans] > marketplace
Interfaces with the module marketplace

Usage: marketplace <info|install|refresh|remove|search> [ ... ]

[recon-ng][Halisans] > marketplace search

+-----+-----+-----+-----+-----+-----+-----+
| Path | Version | Status | Updated | D | K |
+-----+-----+-----+-----+-----+-----+-----+
| discovery/info_disclosure/cache_snoop | 1.1 | installed | 2020-10-13 | | |
| discovery/info_disclosure/interesting_files | 1.2 | installed | 2021-10-04 | | |
| exploitation/injection/command_injector | 1.0 | installed | 2019-06-24 | | |
| exploitation/injection/xpath_bruter | 1.2 | installed | 2019-10-08 | | |
| import/csv_file | 1.1 | installed | 2019-08-09 | | |
| import/list | 1.1 | installed | 2019-06-24 | | |
| import/masscan | 1.0 | installed | 2020-04-07 | | |
| import/nmap | 1.1 | installed | 2020-10-06 | | |
| recon/companies-contacts/bing_linkedin_cache | 1.0 | installed | 2019-06-24 | | *
| recon/companies-contacts/censys_email_address | 2.1 | installed | 2022-01-31 | * | *
```

```
| recon/companies-contacts/censys_email_address | 2.1 | installed | 2022-01-31 | * | *
| recon/companies-contacts/pen | 1.1 | installed | 2019-10-15 | | |
| recon/companies-domains/censys_subdomains | 2.1 | disabled | 2022-01-31 | * | *
| recon/companies-domains/pen | 1.1 | installed | 2019-10-15 | | |
| recon/companies-domains/viewdns_reverse_whois | 1.1 | installed | 2021-08-24 | | |
| recon/companies-domains/whoxy_dns | 1.1 | installed | 2020-06-17 | | *
| recon/companies-multi/censys_org | 2.1 | installed | 2022-01-31 | * | *
| recon/companies-multi/censys_tls_subjects | 2.1 | installed | 2022-01-31 | * | *
| recon/companies-multi/github_miner | 1.1 | installed | 2020-05-15 | | *
| recon/companies-multi/shodan_org | 1.1 | installed | 2020-07-01 | * | *
| recon/companies-multi/whois_miner | 1.1 | installed | 2019-10-15 | | |
| recon/contacts-contacts/abc | 1.0 | installed | 2019-10-11 | * | |
| recon/contacts-contacts/mailtester | 1.0 | installed | 2019-06-24 | | |
| recon/contacts-contacts/mangle | 1.0 | installed | 2019-06-24 | | |
| recon/contacts-contacts/unmangle | 1.1 | installed | 2019-10-27 | | |
| recon/contacts-credentials/hibp_breach | 1.2 | installed | 2019-09-10 | | *
| recon/contacts-credentials/hibp_paste | 1.1 | installed | 2019-09-10 | | *
| recon/contacts-domains/censys_email_to_domains | 2.1 | installed | 2022-01-31 | * | *
| recon/contacts-domains/migrate_contacts | 1.1 | installed | 2020-05-17 | | |
| recon/contacts-profiles/fullcontact | 1.1 | installed | 2019-07-24 | | *
| recon/credentials-credentials/adobe | 1.0 | installed | 2019-06-24 | | |
| recon/credentials-credentials/bozocrack | 1.0 | installed | 2019-06-24 | | |
| recon/credentials-credentials/hashtes_org | 1.0 | installed | 2019-06-24 | | *
| recon/domains-companies/censys_companies | 2.1 | installed | 2022-01-31 | * | *
| recon/domains-companies/pen | 1.1 | installed | 2019-10-15 | | |
| recon/domains-companies/whoxy_whois | 1.1 | installed | 2020-06-24 | | *
| recon/domains-contacts/hunter_io | 1.3 | installed | 2020-04-14 | | *
| recon/domains-contacts/metacrawler | 1.1 | disabled | 2019-06-24 | * | |
| recon/domains-contacts/pen | 1.1 | installed | 2019-10-15 | | |
| recon/domains-contacts/pgp_search | 1.4 | installed | 2019-10-16 | | |
| recon/domains-contacts/whois_pocs | 1.0 | installed | 2019-06-24 | | |
| recon/domains-contacts/wikileaks | 1.0 | installed | 2020-04-08 | | |
```

recon/domains-domains/brute_suffix	1.1	installed	2020-05-17			
recon/domains-hosts/binaryedge	1.2	installed	2020-06-18		*	*
recon/domains-hosts/bing_domain_api	1.0	installed	2019-06-24			*
recon/domains-hosts/bing_domain_web	1.1	installed	2019-07-04			
recon/domains-hosts/brute_hosts	1.0	installed	2019-06-24			
recon/domains-hosts/builtwith	1.1	installed	2021-08-24			*
recon/domains-hosts/censys_domain	2.1	installed	2022-01-31	*	*	*
recon/domains-hosts/certificate_transparency	1.3	installed	2019-09-16			
recon/domains-hosts/google_site_web	1.0	installed	2019-06-24			
recon/domains-hosts/hackertarget	1.1	installed	2020-05-17			
recon/domains-hosts/mx_spf_ip	1.0	installed	2019-06-24			
recon/domains-hosts/netcraft	1.1	installed	2020-02-05			
recon/domains-hosts/shodan_hostname	1.1	installed	2020-07-01	*	*	*
recon/domains-hosts/spyse_subdomains	1.1	installed	2021-08-24		*	*
recon/domains-hosts/ssl_san	1.0	installed	2019-06-24			
recon/domains-hosts/threatcrowd	1.0	installed	2019-06-24			
recon/domains-hosts/threatminer	1.0	installed	2019-06-24			
recon/domains-vulnerabilities/ghdb	1.1	installed	2019-06-26			
recon/domains-vulnerabilities/xssed	1.1	installed	2020-10-18			
recon/hosts-domains/migrate_hosts	1.1	installed	2020-05-17			
recon/hosts-hosts/bing_ip	1.0	installed	2019-06-24		*	*
recon/hosts-hosts/censys_hostname	2.1	installed	2022-01-31	*	*	*
recon/hosts-hosts/censys_ip	2.1	installed	2022-01-31	*	*	*
recon/hosts-hosts/censys_query	2.1	installed	2022-01-31	*	*	*
recon/hosts-hosts/ipinfodb	1.2	installed	2021-08-24			*
recon/hosts-hosts/ipstack	1.0	installed	2019-06-24			*
recon/hosts-hosts/resolve	1.0	installed	2019-06-24			
recon/hosts-hosts/reverse_resolve	1.0	installed	2019-06-24			
recon/hosts-hosts/ssltools	1.0	installed	2019-06-24			
recon/hosts-hosts/virustotal	1.0	installed	2019-06-24			*

recon/hosts-locations/migrate_hosts	1.0	installed	2019-06-24			*
recon/hosts-ports/binaryedge	1.0	installed	2019-06-24			*
recon/hosts-ports/shodan_ip	1.2	installed	2020-07-01	*	*	*
recon/locations-locations/geocode	1.0	installed	2019-06-24			*
recon/locations-locations/reverse_geocode	1.0	installed	2019-06-24		*	*
recon/locations-pushpins/flickr	1.0	installed	2019-06-24		*	*
recon/locations-pushpins/shodan	1.1	installed	2020-07-07	*	*	*
recon/locations-pushpins/twitter	1.1	installed	2019-10-17		*	*
recon/locations-pushpins/youtube	1.2	installed	2020-09-02		*	*
recon/netblocks-companies/censys_netblock_company	2.1	installed	2022-01-31	*	*	*
recon/netblocks-companies/whois_orgs	1.0	installed	2019-06-24			
recon/netblocks-hosts/censys_netblock	2.1	installed	2022-01-31	*	*	*
recon/netblocks-hosts/reverse_resolve	1.0	installed	2019-06-24			
recon/netblocks-hosts/shodan_net	1.2	installed	2020-07-21	*	*	*
recon/netblocks-hosts/virustotal	1.0	installed	2019-06-24			*
recon/netblocks-ports/census_2012	1.0	installed	2019-06-24			*
recon/netblocks-ports/censysio	1.0	installed	2019-06-24			*
recon/ports-hosts/migrate_ports	1.0	installed	2019-06-24			
recon/ports-hosts/ssl_scan	1.1	installed	2021-08-24			
recon/profiles-contacts/bing_linkedin_contacts	1.2	installed	2021-08-24		*	*
recon/profiles-contacts/dev_diver	1.1	installed	2020-05-15			
recon/profiles-contacts/github_users	1.0	installed	2019-06-24		*	*
recon/profiles-profiles/namechk	1.0	installed	2019-06-24		*	*
recon/profiles-profiles/profiler	1.2	installed	2023-12-30			
recon/profiles-profiles/twitter_mentioned	1.0	installed	2019-06-24		*	*
recon/profiles-profiles/twitter_mentions	1.0	installed	2019-06-24		*	*
recon/profiles-repositories/github_repos	1.1	installed	2020-05-15		*	*
recon/repositories-profiles/github_commits	1.0	installed	2019-06-24		*	*
recon/repositories-vulnerabilities/gists_search	1.0	installed	2019-06-24			*
recon/repositories-vulnerabilities/github_dorks	1.0	installed	2019-06-24		*	*

reporting/csv	1.0	installed	2019-06-24			
reporting/html	1.0	installed	2019-06-24			
reporting/json	1.0	installed	2019-06-24			
reporting/list	1.0	installed	2019-06-24			
reporting/proxifier	1.0	installed	2019-06-24			
reporting/pushpin	1.0	installed	2019-06-24		*	*
reporting/xlsx	1.0	installed	2019-06-24			
reporting/xml	1.1	installed	2019-06-24			

D = Has dependencies. See info for details.
K = Requires keys. See info for details.

```
[recon-ng][Halisans] > modules load recon/domains-contacts/whois_pocs
[recon-ng][Halisans][whois_pocs] > info
```

Name: Whois POC Harvester
Author: Tim Tomes (@lanmaster53)
Version: 1.0

Description:

Uses the ARIN Whois RWS to harvest POC data from whois queries for the given domain. Updates the 'contacts' table with the results.

Options:

Name	Current Value	Required	Description
SOURCE	default	yes	source of input (see 'info' for details)


```
Source Options:
default      SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
<string>     string representing a single input
<path>       path to a file containing a list of inputs
query <sql>  database query returning one column of inputs

[recon-ng][Halisans][whois_pocs] > source set to kifkimcorporateservices.co.uk
```

```
File Actions Edit View Help
default      SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
<string>     string representing a single input
<path>       path to a file containing a list of inputs
query <sql>  database query returning one column of inputs

[recon-ng][Halisans][hackertarget] > run

WWW.KIFKIM.COM

[!] Error invalid host.
[recon-ng][Halisans][hackertarget] > modules load recon/domains-hosts/hackertarget
[recon-ng][Halisans][hackertarget] > info

Name: HackerTarget Lookup
Author: Michael Henriksen (@michenriksen)
Version: 1.1

Description: Search Whois-RWS
Uses the HackerTarget.com API to find host names. Updates the 'hosts' table with the results.

Options:
Name      Current Value  Required  Description
SOURCE    www.kifkim.com    yes       source of input (see 'info' for details)

Source Options:
default      SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
<string>     string representing a single input
<path>       path to a file containing a list of inputs
query <sql>  database query returning one column of inputs
```

```
[recon-ng][Halisans][hackertarget] > options set SOURCE www.halisans.com
SOURCE => www.halisans.com
[recon-ng][Halisans][hackertarget] > run

WWW.HALISANS.COM

[*] Country: None
[*] Host: www.halisans.com
[*] Ip Address: 66.29.153.49
[*] Latitude: None
[*] Longitude: None
[*] Notes: None
[*] Region: None
[*]

SUMMARY
Search Whois-RWS
Q&A Search

[*] 1 total (1 new) hosts found.
[recon-ng][Halisans][hackertarget] > show
Shows various framework items

Usage: show <companies|contacts|credentials|domains|hosts|leaks|locations|netblocks|ports|profiles|pushpins|repositories|vulnerabilities>

[recon-ng][Halisans][hackertarget] > show host
Shows various framework items

Usage: show <companies|contacts|credentials|domains|hosts|leaks|locations|netblocks|ports|profiles|pushpins|repositories|vulnerabilities>

[recon-ng][Halisans][hackertarget] >
```

```
[recon-ng][Halisans][hackertarget] > show hosts

+-----+
| rowid | host          | ip_address | region | country | latitude | longitude | notes | module |
+-----+
| 1     | www.halisans.com | 66.29.153.49 |      |          |          |          |      |          |
+-----+

[*] 1 rows returned
[recon-ng][Halisans][hackertarget] >
```

Recon-web: web interface- drag & drop (passive modules)

```
(kali㉿kali)-[~]
└─$ recon-web
*****
* Welcome to Recon-web, the analytics and reporting engine for Recon-ng!
* This is a web-based user interface. Open the URL below in your browser to begin.
* Recon-web includes the Recon-API, which can be accessed via the '/api/' URL.
*****
[*] Marketplace disabled.
[!] 'github_api' key not set. github_commits module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_netblock_company module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_netblock_company module will likely fail at runtime. See 'keys add'.
[!] 'hibp_api' key not set. hibp_breach module will likely fail at runtime. See 'keys add'.
[!] 'hibp_api' key not set. hibp_paste module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_domain module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_domain module will likely fail at runtime. See 'keys add'.
[!] 'builtwith_api' key not set. builtwith module will likely fail at runtime. See 'keys add'.
[!] 'spyse_api' key not set. spyse_subdomains module will likely fail at runtime. See 'keys add'.
[!] 'shodan_api' key not set. shodan_hostname module will likely fail at runtime. See 'keys add'.
[!] 'binaryedge_api' key not set. binaryedge module will likely fail at runtime. See 'keys add'.
[!] 'bing_api' key not set. bing_domain module will likely fail at runtime. See 'keys add'.
[!] 'github_api' key not set. github_miner module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_org module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_org module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_tls_subjects module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_tls_subjects module will likely fail at runtime. See 'keys add'.
[!] 'shodan_api' key not set. shodan_org module will likely fail at runtime. See 'keys add'.
[!] 'binaryedge_api' key not set. binaryedge module will likely fail at runtime. See 'keys add'.
[!] 'shodan_api' key not set. shodan_ip module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_hostname module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_hostname module will likely fail at runtime. See 'keys add'.
[!] 'ipstack_api' key not set. ipstack module will likely fail at runtime. See 'keys add'.

[!] 'github_api' key not set. github_borks module will likely fail at runtime. See 'keys add'.
[!] 'fullcontact_api' key not set. fullcontact module will likely fail at runtime. See 'keys add'.
[!] 'github_api' key not set. github_repos module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_email_address module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_email_address module will likely fail at runtime. See 'keys add'.
home/kali/.recon-ng/modules/recon/companies-contacts/bing_linkedin_cache.py:59: SyntaxWarning: invalid escape sequence '\d'
  if fname is None or 'linkedin' in fullname or 'profiles' in name.lower() or re.search('\d+$', fname):
home/kali/.recon-ng/modules/recon/companies-contacts/bing_linkedin_cache.py:99: SyntaxWarning: invalid escape sequence '\.'
  m = re.search('\.{3} (?<title>.+?) at ', snippet)
[!] 'bing_api' key not set. bing_linkedin_cache module will likely fail at runtime. See 'keys add'.
[!] 'twitter_api' key not set. twitter_mentions module will likely fail at runtime. See 'keys add'.
[!] 'twitter_secret' key not set. twitter_mentions module will likely fail at runtime. See 'keys add'.
[!] 'namechk_api' key not set. namechk module will likely fail at runtime. See 'keys add'.
[!] 'twitter_api' key not set. twitter_mentioned module will likely fail at runtime. See 'keys add'.
[!] 'twitter_secret' key not set. twitter_mentioned module will likely fail at runtime. See 'keys add'.
home/kali/.recon-ng/modules/recon/domains-contacts/wileaker.py:49: SyntaxWarning: invalid escape sequence '\.'
  emails = re.findall("email:\xa0([a-zA-Z0-9_+]+)@[a-zA-Z0-9-]+\.[a-zA-Z0-9-]+)",
[!] 'hunter_io' key not set. hunter_io module will likely fail at runtime. See 'keys add'.
[!] Module 'recon/domains-contacts/metacrawler' disabled. Dependency required: 'PyPDF3'.
[!] 'shodan_api' key not set. shodan_net module will likely fail at runtime. See 'keys add'.
[!] 'virustotal_api' key not set. virustotal module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_netblock module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_netblock module will likely fail at runtime. See 'keys add'.
[!] 'whoxy_api' key not set. whoxy_dns module will likely fail at runtime. See 'keys add'.
[!] Module 'recon/companies-domains/censys_subdomains' disabled. Dependency required: 'se 'CensysCertificates' from 'censys.search' (/usr/lib/python3/dist-p
kages/censys/search/_init_.py)'.
[!] 'censysio_id' key not set. censys_email_to_domains module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_email_to_domains module will likely fail at runtime. See 'keys add'.
home/kali/.recon-ng/modules/recon/contacts-contacts/mangle.py:35: SyntaxWarning: invalid escape sequence '\s'
  sub_pattern = '\s)'
[!] 'google_api' key not set. youtube module will likely fail at runtime. See 'keys add'.
[!] 'shodan_api' key not set. shodan module will likely fail at runtime. See 'keys add'.

[!] 'github_api' key not set. github_users module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. geocode module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. reverse_geocode module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. pushpin module will likely fail at runtime. See 'keys add'.
[*] Version check disabled.
* Workspace initialized: default
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET / HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /recon.js HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /jquery.min.js HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /sorttable.js HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /recon.css HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /normalize.css HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /skeleton.css HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /favicon.ico HTTP/1.1" 404 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /api/reports/ HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "PATCH /api/workspaces/default HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /api/tables/ HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:51:20] "GET /api/dashboard HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:53:04] "GET /api/tables/ HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:53:04] "GET /api/reports/ HTTP/1.1" 200 -
27.0.0.1 - - [22/Oct/2025 17:53:04] "GET /api/dashboard HTTP/1.1" 200 -
[!] 'github_api' key not set. github_commits module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_netblock_company module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_netblock_company module will likely fail at runtime. See 'keys add'.
[!] 'hibp_api' key not set. hibp_breach module will likely fail at runtime. See 'keys add'.
[!] 'hibp_api' key not set. hibp_paste module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_domain module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_domain module will likely fail at runtime. See 'keys add'.
[!] 'builtwith_api' key not set. builtwith module will likely fail at runtime. See 'keys add'.
```



```
Module 'recon/companies_domains/censys_subdomains' disabled: dependency required: the 'censyssecret' module is not installed (see 'modules/packages/censys/search/__init__.py').
[!] 'censysio_id' key not set. censys_email_to_domains module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_email_to_domains module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. youtube module will likely fail at runtime. See 'keys add'.
[!] 'shodan_api' key not set. shodan module will likely fail at runtime. See 'keys add'.
[!] 'flickr_api' key not set. flickr module will likely fail at runtime. See 'keys add'.
[!] 'twitter_api' key not set. twitter module will likely fail at runtime. See 'keys add'.
[!] 'twitter_secret' key not set. twitter module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censysio module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censysio module will likely fail at runtime. See 'keys add'.
[!] 'whoxy_api' key not set. whoxy_whois module will likely fail at runtime. See 'keys add'.
[!] 'censysio_id' key not set. censys_companies module will likely fail at runtime. See 'keys add'.
[!] 'censysio_secret' key not set. censys_companies module will likely fail at runtime. See 'keys add'.
[!] 'hashes_api' key not set. hashes_org module will likely fail at runtime. See 'keys add'.
[!] 'bing_api' key not set. bing_linkedin_contacts module will likely fail at runtime. See 'keys add'.
[!] 'github_api' key not set. github_users module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. geocode module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. reverse_geocode module will likely fail at runtime. See 'keys add'.
[!] 'google_api' key not set. pushpin module will likely fail at runtime. See 'keys add'.
* Workspace initialized: Halisans
27.0.0.1 - - [22/Oct/2025 17:55:03] "PATCH /api/workspaces/Halisans HTTP/1.1" 200 -
```